

JT Industrial Application Package

Edition 3

JT file format specification

Version 3.0, 10.06.2021

Status: Final



Document History

Version	Date	Author	Description
1.0	15.04.2016	Beckers, Raphael Pfouga, Dr. Alain Potthoff, Jens Zink, Mike	
2.0	24.06.2016	Beckers, Raphael Pfouga, Dr. Alain Potthoff, Jens Zink, Mike	
2.0.1	10.11.2016	Beckers, Raphael Vettermann, Dr. Steven	Remarks with regard to ISO JT (ISO 14306)
3	10.06.2021	Beckers, Raphael Staudt, Sebastian Zink, Mike	

Disclaimer

prostep ivip Recommendations (PSI Recommendations) are recommendations that are available for anyone to use. Anyone using these recommendations is responsible for ensuring that they are used correctly.

This PSI Recommendation gives due consideration to the prevailing state-of-the-art at the time of publication. Anyone using PSI Recommendations must assume responsibility for his or her actions and acts at their own risk. The prostep ivip Association and the parties involved in drawing up the PSI Recommendation assume no liability whatsoever.

We request that anyone encountering an error or the possibility of an incorrect interpretation when using the PSI Recommendation contact the prostep ivip Association (psi-issues@prostep.org) immediately so that any errors can be rectified.

Copyright

- I. All rights on this PSI Recommendation, in particular the copyright rights of use and sale such as the right to duplicate, distribute or publish this PSI Recommendation remain exclusively with the prostep ivip Association and its members.
- II. This PSI Recommendation may be duplicated and distributed unchanged, for instance for use in the context of creating software or services.
- III. It is not permitted to change or edit this PSI Recommendation.
- IV. A suitable notice indicating the copyright owner and the restrictions on use must always appear.

Content

Content	iv
Introduction	xxi
1 Scope	2
2 Normative references	3
3 Terms, definitions and abbreviated terms	4
3.1 Terms and definitions	4
3.2 Abbreviated terms	7
4 Notational conventions	8
4.1 Diagrams and field descriptions	8
4.2 Data Types	11
4.3 Empty field	14
5 File Format	15
5.1 File Structure	15
5.1.1 File Header	15
5.1.2 TOC Segment	17
5.1.3 Data Segment	18
5.2 Data Segments	23
6 LSG Segment	25
6.1 Node Elements	25
6.1.1 Base Node Element	26
6.1.2 Partition Node Element	27
6.1.3 Group Node Element	29
6.1.4 Instance Node Element	30
6.1.5 Part Node Element	30
6.1.6 Meta Data Node Element	31
6.1.7 LOD Node Element	32
6.1.8 Range LOD Node Element	33
6.1.9 Switch Node Element	34
6.1.10 Base Shape Node Element	34
6.1.11 Vertex Shape Node Element	37
6.1.12 Tri-Strip Set Shape Node Element	38
6.1.13 Polyline Set Shape Node Element	38
6.1.14 Point Set Shape Node Element	39
6.1.15 Polygon Set Shape Node Element	40
6.1.16 NULL Shape Node Element	41
6.1.17 Primitive Set Shape Node Element	41
6.2 Attribute Elements	43
6.2.1 Material Attribute Element	45

6.2.2 Texture Image Attribute Element	48
6.2.3 Draw Style Attribute Element	60
6.2.4 Light Set Attribute Element	61
6.2.5 Linestyle Attribute Element	62
6.2.6 Pointstyle Attribute Element	64
6.2.7 Geometric Transform Attribute Element.....	65
6.2.8 Palette Map Attribute Element	67
6.2.9 Sabot V104 Attribute Element	68
6.2.10 Infinite Light Attribute Element.....	68
6.2.11 Point Light Attribute Element.....	71
6.2.12 Mapping Plane Element	73
6.2.13 Mapping Cylinder Element	74
6.2.14 Mapping Sphere Element	76
6.2.15 Mapping TriPlanar Element	77
6.3 Property Atom Elements	78
6.3.1 Base Property Atom Element	78
6.3.2 String Property Atom Element	78
6.3.3 Integer Property Atom Element	79
6.3.4 Floating Point Property Atom Element	80
6.3.5 JT Object Reference Property Atom Element	80
6.3.6 Date Property Atom Element.....	81
6.3.7 Late Loaded Property Atom Element	83
6.3.8 Vector4f Property Atom Element	84
6.4 Property Table	85
7 Shape LOD Segment	87
7.1 Shape LOD Element	87
7.1.1 Tri-Strip Set Shape LOD Element	87
7.1.2 Polyline Set Shape LOD Element.....	88
7.1.3 Point Set Shape LOD Element	88
7.1.4 Polygon Set LOD Element	89
7.1.5 Null Shape LOD Element	101
7.1.6 Primitive Set Shape Element.....	101
8 Geometry Segments.....	109
8.1 XT B-Rep Segment	109
8.2 STEP B-Rep Segment	109
8.3 JT ULP Segment	109
8.4 JT Smart Topology Table (STT) Segment	109
8.5 JT LWPA Segment.....	110
8.6 Wireframe Segment.....	110

8.7 JT B-Rep Element (deprecated)	110
9 Meta Data Segment	111
9.1 Property Proxy Meta Data Element	111
9.2 PMI Manager Meta Data Element	114
9.2.1 PMI Design Group Entities	115
9.2.2 PMI Associations	117
9.2.3 PMI User Attributes	119
9.2.4 PMI String Table	120
9.2.5 PMI Model Views	120
9.2.6 Generic PMI Entities	123
9.2.7 PMI CAD Tag Data	133
9.2.8 PMI Polygon Data	134
9.2.9 PMI Properties	137
9.2.10 PMI Model View Sort Orders	137
9.2.11 V102 PMI Association Properties	138
9.2.12 V102 Generic PMI Additions	139
10 Info Segment	143
10.1 Info Segment Data Element	143
11 Data Compression and Encoding	145
11.1 Common Compression Data Collection Formats	145
11.1.1 Int32 Compressed Data Packet	145
11.1.2 Int64 Compressed Data Packet	150
11.1.3 Compressed Vertex Coordinate Array	153
11.1.4 Compressed Vertex Normal Array	154
11.1.5 Compressed Vertex Texture Coordinate Array	156
11.1.6 Compressed Vertex Colour Array	157
11.1.7 Compressed Vertex Flag Array	159
11.1.8 Compressed Auxiliary Fields Array	159
11.1.9 Point Quantizer Data	163
11.1.10 Texture Quantizer Data	163
11.1.11 Colour Quantizer Data	164
11.1.12 Uniform Quantizer Data	165
11.1.13 Compressed Entity List for Non-Trivial Knot Vector	165
11.1.14 Compressed Control Point Weights Data	169
11.1.15 Compressed Curve Data	170
11.1.16 Compressed CAD Tag Data	172
11.2 Encoding Algorithms	174
11.2.1 Uniform Data Quantization	174
11.2.2 Bitlength CODEC	174

11.2.3 Arithmetic CODEC	175
11.2.4 Deering Normal CODEC	180
11.3 LZMA compression	181
12 Conformance requirements	183
12.1 Conformance Classes	183
12.1.1 Visualization (CC0x)	183
12.1.2 Engineering, Production & Long-Term Data Retention (CC1x)	183
13 Common Data Conventions and Constructs	185
13.1 Late-Loading Data	185
13.2 TOC Segment Location	185
13.3 Bit Fields	185
13.4 Empty Field	185
13.5 Local version numbers	185
13.5.1 Version numbers	186
13.6 Hash Value	186
13.7 Scene graph construction	186
13.8 Metadata Conventions	187
13.8.1 Property Key Naming Conventions	187
13.8.2 PMI Properties	188
13.8.3 CAD Properties	188
13.8.4 Tessellation Properties	190
13.8.5 Miscellaneous Properties	191
13.8.6 The SUBNODE property and Reference Sets	192
13.9 LSG Attribute Accumulation Semantics	196
13.10 LSG Part Structure	196
13.11 Range LOD Node Alternative Rep Selection	197
13.12 B-Rep Face Group Associations	197
13.13 Watermark Image	198
13.14 State Flags	199
Annex A Object Type Identifiers	200
Annex B STEP B-Rep	203
Annex C STEP schema	206
Annex D Coding Algorithms – An Implementation	207
Annex E Hashing – An Implementation	231
Annex F Polygon Mesh Topology Coder	234
Annex G Per Face Group Attributes	253
Annex H XT B- Rep data segment	257
Annex I JT ULP Segment	331
Annex J JT Smart Topology Table (STT) Segment	378

J.1 JT STT Element	378
Annex K JT LWPA Segment	403
Annex L Wireframe Segment	407
Annex M (deprecated) JT B-Rep Segment	410
Annex N (deprecated) PMI Data Segment	433
Annex O Mapping table JT to STEP	434
Annex P Procedural Geometry – Evaluation and Approximation	439
Annex Q (informative) JT PMI Properties	471
Q.1 PMI Properties Syntax	481
Q.2 PMI Properties General	482
Q.3 PMI Properties “A”	512
Q.4 PMI Properties “C”	526
Q.5 PMI Properties “D”	575
Q.6 PMI Properties “F”	644
Q.7 PMI Properties “G”	989
Q.8 PMI Properties “J-L”	1014
Q.9 PMI Properties “N”	1052
Q.10 PMI Properties “O”	1091
Q.11 PMI Properties “P”	1111
Q.12 PMI Properties “R”	1408
Q.13 PMI Properties “S”	1436
Q.14 PMI Properties “U”	1780
Q.15 PMI Properties “V”	1819
Q.16 PMI Properties “JtTk”	1833
Annex R Change History	1835
R.1 High Level Summary of changes from JTIAP Edition 2	1835
R.2 Detailed Format changes	1836
Bibliography	1985

Figures

Figure 1 — rectangle box diagram.....	8
Figure 2 — folder diagram.....	8
Figure 3 — rectangle box with lines at left and right sides diagram.....	8
Figure 4 — rectangle box with clipped right side corners.....	9
Figure 5 — compressed data packet diagram.....	9
Figure 6 — data type : field name diagram.....	10
Figure 7 — data filed dependency example	10
Figure 8 — loop construct example.....	11
Figure 9 — loop construct with iterations example	11
Figure 10 — JT File Structure.....	15
Figure 11 — File Header data collection.....	16
Figure 12 — TOC Segment data collection.....	17
Figure 13 — TOC Entry data collection	18
Figure 14 — Data Segment data collection	19
Figure 15 — Segment Header data collection	19
Figure 16 — Data collection	21
Figure 17 — Logical Element Header data collection	21
Figure 18 — Element Header data collection	21
Figure 19 — Logical Element Header Compressed data collection.....	22
Figure 20 — LSG Segment data collection.....	25
Figure 21 — Base Node Element data collection	26
Figure 22 — Base Node Data collection	26
Figure 23 — Partition Node Element data collection	27
Figure 24 — Vertex Count Range data collection	28
Figure 25 — Group Node Element data collection	29
Figure 26 — Group Node Data collection	29
Figure 27 — Instance Node Element data collection	30
Figure 28 — Part Node Element data collection.....	31
Figure 29 — Meta Data Node Element data collection.....	31
Figure 30 — Meta Data Node Data collection	32
Figure 31 — LOD Node Element data collection	32
Figure 32 — LOD Node Data collection	32
Figure 33 — Range LOD Node Element data collection	33
Figure 34 — Switch Node Element data collection	34
Figure 35 — Base Shape Node Element data collection.....	35
Figure 36 — Base Shape Data collection.....	35
Figure 37 — Vertex Count Range data collection	36
Figure 38 — Vertex Shape Node Element data collection	37
Figure 39 — Vertex Shape Data collection	38
Figure 40 — Polyline Set Shape Node Element data collection	39
Figure 41 — Point Set Shape Node Element data collection.....	40
Figure 42 — Polygon Set Shape Node Element data collection.....	40
Figure 43 — NULL Shape Node Element data collection.....	41
Figure 44 — Primitive Set Shape Node Element data collection.....	42
Figure 45 — Primitive Set Quantization Parameters data collection	43
Figure 46 — Base Attribute Data collection	44
Figure 47 — Base Attribute Data Fields V1	44
Figure 48 — Base Attribute Data Fields V2	45
Figure 49 — Material Attribute Element data collection	46
Figure 50 — Texture Image Attribute Element data collection.....	49
Figure 51 — Texture Vers-1 Data collection	50
Figure 52 — Texture Environment data collection.....	53
Figure 53 — Texture Coord Generation Parameters data collection	56
Figure 54 — Inline Texture Image Data collection	57
Figure 55 — Image Format Description data collection.....	58
Figure 56 — Draw Style Attribute Element data collection.....	60
Figure 57 — Light Set Attribute Element data collection.....	62
Figure 58 — Linestyle Attribute Element data collection	63
Figure 59 — Pointstyle Attribute Element data collection.....	64
Figure 60 — Geometric Transform Attribute Element data collection	66
Figure 61 — PaletteMap Attribute Element data collection	67
Figure 62 — Sabot V104 Attribute Element	68
Figure 63 — Infinite Light Attribute Element data collection.....	69
Figure 64 — Base Light Data collection	70
Figure 65 — Point Light Attribute Element data collection	72
Figure 66 — Spread Angle value with respect to the light cone	73
Figure 67 — Attenuation Coefficients data collection	73
Figure 68 — Mapping Plane Element data collection	74
Figure 69 — Mapping Cylinder Element data collection.....	75
Figure 70 — Mapping Sphere Element data collection.....	76
Figure 71 — Mapping TriPlanar Element data collection.....	77

Figure 72 — Base Property Atom Element data collection	78
Figure 73 — Base Property Atom Data collection.....	78
Figure 74 — String Property Atom Element data collection.....	79
Figure 75 — Integer Property Atom Element data collection	79
Figure 76 — Floating Point Property Atom Element data collection	80
Figure 77 — JT Object Reference Property Atom Element data collection	81
Figure 78 — Date Property Atom Element data collection	82
Figure 79 — Late Loaded Property Atom Element data collection	83
Figure 80 — Vector4f Property Atom Element data collection.....	84
Figure 81 — Property Table data collection	85
Figure 82 — Element Property Table data collection.....	86
Figure 83 — Shape LOD Segment data collection	87
Figure 84 — Tri-Strip Set Shape LOD Element data collection	87
Figure 85 — Polyline Set Shape LOD Element data collection	88
Figure 86 — Point Set Shape LOD Element data collection	88
Figure 87 — Polygon Set LOD Element data collection.....	89
Figure 88 — Vertex Shape LOD Data collection.....	90
Figure 89 — Base Shape LOD Data collection	92
Figure 90 — TopoMesh Compressed LOD Data collection	92
Figure 91 — TopoMesh LOD Data collection	92
Figure 92 — TopoMesh Compressed Rep Data data collection.....	93
Figure 93 — Quantization Parameters data collection	95
Figure 94 — TopoMesh Topologically Compressed LOD Data collection.....	96
Figure 95 — Topologically Compressed Rep Data Collection	97
Figure 96 — Topologically Compressed Vertex Records data collection	100
Figure 97 — Null Shape LOD Element data collection.....	101
Figure 98 — Primitive Set Shape Element data collection	102
Figure 99 — Lossless Compressed Primitive Set Data collection	103
Figure 100 — Lossy Quantized Primitive Set Data collection	105
Figure 101 — Compressed params1 data collection	106
Figure 102 — Meta Data Segment data collection.....	111
Figure 103 — Property Proxy Meta Data Element data collection.....	112
Figure 104 — Date Property Value data collection.....	113
Figure 105 — PMI Manager Meta Data Element data collection	114
Figure 106 — PMI Design Group Entities data collection.....	115
Figure 107 — Design Group Attribute data collection	116
Figure 108 — PMI Associations data collection.....	117
Figure 109 — PMI User Attributes data collection	119
Figure 110 — PMI String Table data collection	120
Figure 111 — PMI Model Views data collection.....	121
Figure 112 — PMI Property data collection	123
Figure 113 — Key PMI Property Atom data collection.....	123
Figure 114 — Generic PMI Entity data collection.....	124
Figure 115 — PMI 2D Data collection.....	127
Figure 116 — PMI Base Data collection.....	127
Figure 117— 2D-Reference Frame data collection.....	128
Figure 118 — 2D Text Data collection.....	128
Figure 119 — Text Box data collection	129
Figure 120 — Constructing Text Polylines from data arrays.....	130
Figure 121 — Text Polyline Data collection.....	131
Figure 122 — Constructing Non-Text Polylines from packed 2D data arrays	132
Figure 123 — Non-Text Polyline Data collection.....	132
Figure 124 — PMI CAD Tag Data collection	133
Figure 125 — PMI Polygon Data Collection.....	135
Figure 126 — PMI Model View Sort Orders data collection	137
Figure 127 — V102 Association Properties data collection	138
Figure 128 — V102 Generic PMI Entity data collection.....	139
Figure 129 — Constructing Text Polylines Attribute data arrays.....	140
Figure 130 — V102 2D Text Data collection.....	141
Figure 131 — Info Segment data collection.....	143
Figure 132 — Property Proxy Meta Data Element data collection.....	143
Figure 133 — Int32 Compressed Data Packet data collection.....	147
Figure 134 — Int32 Probability Context data collection.....	149
Figure 135 — Int32 Probability Context Table Entry data collection	150
Figure 136 — Int64 Compressed Data Packet data collection.....	151
Figure 137 — Int64 Probability Context data collection.....	152
Figure 138 — Int64 Probability Context Table Entry data collection	153
Figure 139 — Compressed Vertex Coordinate Array data collection	153
Figure 140 — Compressed Vertex Normal Array data collection.....	155
Figure 141 — Compressed Vertex Texture Coordinate Array data collection.....	156
Figure 142 — Compressed Vertex Colour Array data collection	158
Figure 143 — Compressed Vertex Flag Array data collection.....	159
Figure 144 — Compressed Auxiliary Fields Array data collection.....	160
Figure 145 — Point Quantizer Data collection.....	163

Figure 146 — Texture Quantizer Data collection.....	163
Figure 147 — Colour Quantizer Data collection.....	164
Figure 148 — Uniform Quantizer Data collection.....	165
Figure 149 — Compressed Entity List for Non-Trivial Knot Vector data collection.....	167
Figure 150 — Compressed Control Point Weights Data collection	169
Figure 151 — Compressed Curve Data collection	170
Figure 152 — Non-Trivial Knot Vector NURBS Curve Indices data collection	172
Figure 153 — NURBS Curve Control Point Weights data collection.....	172
Figure 154 — NURBS Curve Control Points data collection	172
Figure 155 — Compressed CAD Tag Data collection	173
Figure 156 — Sextant Coding on the Sphere	181
Figure 157 — Assembly node with SUBNODE.....	192
Figure 158 — Assembly node without SUBNODE.....	193
Figure 159 — Displaying Nodes that have SUBNODE properties.....	193
Figure 160 — CAD Component with Reference sets	194
Figure 161 — JT Format Convention for Modeling each Part in LSG	197

Tables

Table 1 — Symbols	8
Table 2 — Predictor Type	9
Table 3 — Basic Data Types	11
Table 4 — Composite Data Types	12
Table 5 — Segment attributes	18
Table 6 — Segment Types	19
Table 7 — Object Base Types	22
Table 8 — Compression flag values	23
Table 9 — Compression algorithm values	23
Table 10 — Node Flag values	26
Table 11 — Partition flag bits	28
Table 12 — Compression level values	37
Table 13 — Texture Coord Gen Type values	42
Table 14 — Version Number values	43
Table 15 — State Flag values	44
Table 16 — Material Attribute data field inhibit values	45
Table 17 — Material Attribute Version number value	46
Table 18 — Material Attribute Data Flag values	47
Table 19 — Texture Image Attribute data field inhibit values	48
Table 20 — Texture Image Version Number values	49
Table 21 — Texture Vers-1 Texture Type values	51
Table 22 — Texture Vers-1 Inline Image Storage Flag values	52
Table 23 — Texture Vers-1 Texture Environment Border Mode values	53
Table 24 — Texture Vers-1 Texture Environment Mipmap Magnification Filter values	54
Table 25 — Texture Vers-1 Texture Environment Mipmap Minification Filter values	54
Table 26 — Texture Vers-1 Texture Environment S-Dimen Wrap Mode values	54
Table 27 — Texture Vers-1 Texture Environment Blend Type values	55
Table 28 — Texture Vers-1 Texture Environment Internal Compression Level values	55
Table 29 — Texture Vers-1 Texture Coord Generation Gen Mode values	56
Table 30 — Texture Vers-1 Image Format Description Pixel Format values	58
Table 31 — Texture Vers-1 Image Format Description Pixel Data values	59
Table 32 — Texture Vers-1 Image Format Description Dimensionality values	59
Table 33 — Texture Vers-1 Image Format Description Shared Image Flag values	60
Table 34 — Draw Style Attribute Field Inhibit flag values	60
Table 35 — Draw Style Attribute Data Flag values	61
Table 36 — Linestyle Attribute Data Flag values	63
Table 37 — Pointstyle Attribute Data Flag values	65
Table 38 — Geometric Transform Attribute Stored Value Mask individual bit-flag values	66
Table 39 — Light Set Attribute Version Number values	69
Table 40 — Base Light Data Coord System values	71
Table 41 — Base Light Data Shadow Caster Flag values	71
Table 42 — Point Light Attribute Version Number values	72
Table 43 — Point Light Attribute Spread Angle values	72
Table 44 — Mapping Plane Matrix Coordinate System values	74
Table 45 — Mapping Cylinder Matrix Coordinate System values	75
Table 46 — Mapping Sphere Matrix Coordinate System values	76
Table 47 — Mapping TriPlanar Matrix Coordinate System values	77
Table 48 — Vertex Shape LOD Bindings values	90
Table 49 — Primitive Set Shape Version Number values	103
Table 50 — Primitive Set Shape Texture Coord Gen Type values	103
Table 51 — Lossless Compressed Primitive Set Data Field values	104
Table 52 — Primitive Set “params#” Data Fields Interpretation	104
Table 53 — Property Proxy Meta Data Property Value Type values	113
Table 54 — PMI Design Group Attribute Type values	116
Table 55 — PMI Associations Source Data values	118
Table 56 — PMI Associations Reason Code values	118
Table 57 — PMI Model Views Active Flag values	122
Table 58 — PMI Property Atom Hidden Flag values	123
Table 59 — Generic PMI Entity Type values	125
Table 60 — Generic PMI User Flag values	126
Table 61 — PMI 2D Base Data Font values	129
Table 62 — PMI 2D Non-Text Polyline Type values	133
Table 63 — V102 PMI Associations Source Data values	138
Table 64 — V102 PMI Attribute Bindings	140
Table 65 — Polyline Styles	141
Table 66 — Supported Values	142
Table 67 — Int32 Probability Contexts CODEC Type values	148
Table 68 — TopoMesh Compressed Rep Data V2 Field Type values	161
Table 69 — Colour Quantizer values	164
Table 70 — Colour Quantizer HSV Flag values	164
Table 71 — Knot Type Exist Flag values	168
Table 72 — Compressed Curve Base Type values	171

Table 73 — NURB UV Curve entity dimensionality values	171
Table 74 — NURB XYZ Curve entity dimensionality values	171
Table 75 — Compressed CAD Tag Type values.....	173
Table 76 — Example assigned probability values	177
Table 77 — Example “probability line” values	177
Table 78 — Example input integer sequence values	177
Table 79 — Example integer number sequence values	178
Table 80 — CAD Properties	189
Table 81 — Tessellation Property values	190
Table 82 — Miscellaneous Property values.....	191
Table 83 — SUBNODE Property	193
Table 84 — Reference Set Properties	194
Table 85 — Properties related to the use of Reference Sets	195
Table 86 — REFSET_CURRENT property.....	196
Table 87 — Texture watermark properties.....	198

Annex A Tables

Table A 1: Object Type Identifiers	200
--	-----

Annex B Figures

Figure B 1: — STEP B-Rep Element data collection	203
--	-----

Annex G Tables

Table G 1 — N3: Tristrip Set Accumulation	254
Table G 2 — N3: Tristrip Set Accumulation Updated	254
Table G 3 — N2 Accumulation Updated	255

Annex H Figures

Figure H 1— XT B-Rep Element data collection.....	257
Figure H 2 — Integer Attribute Data collection.....	259
Figure H 3 — MultiXT B-Rep Element data collection.....	260
Figure H 4 — Split a face	329
Figure H 5 — Merge faces.....	329

Annex H Tables

Table H 1 — Object Nodes.....	262
Table H 2 — Field types in order one by one.....	263
Table H 3 — Entity Matrix relations.....	269
Table H 4 — Curve node common fields	272
Table H 5 — Line Fields	272
Table H 6 — Circle fields	273
Table H 7 — Ellipse fields.....	274
Table H 8 — NURB curve fields.....	276
Table H 9 — Trimmed curve fields	283
Table H 10 — SP curve fields	284
Table H 11 — Surface node fields	284
Table H 12 — Plane fields.....	285
Table H 13 — Cylinder fields	286
Table H 14 — Cone fields	287
Table H 15 — Sphere fields	288
Table H 16 — Torus fields.....	289
Table H 17 — Blended edge fields	290
Table H 18 — Blend boundary surface fields	291
Table H 19 — Offset surface fields.....	291
Table H 20 — B-Surface fields.....	292
Table H 21 — NURB Surface fields	293
Table H 22 — Swept surface fields	296
Table H 23 — Spun surface fields	297
Table H 24 — Point fields	297
Table H 25 — Transform fields.....	298
Table H 26 — Transform action fields.....	298
Table H 27 — Geometry owner fields.....	299
Table H 28 — World topology fields.....	300
Table H 29 — Assembly fields.....	300
Table H 30 — Instance fields	302
Table H 31 — Body fields	302
Table H 32 — Geometry to Topology attachment	304
Table H 33 — Region fields	305
Table H 34 — Shell fields	305
Table H 35 — Face fields	306
Table H 36 — Loop fields.....	307
Table H 37 — Fin fields	307
Table H 38 — Vertex fields.....	308
Table H 39 — Edge fields.....	308
Table H 40 — Associated List	309
Table H 41 — Pointer List Block.....	310
Table H 42 — Attribute Definition ID	310
Table H 43 — Field Names.....	311
Table H 44 — Attribut definition	311
Table H 45 — Attribute definition action fields.....	312
Table H 46 — Corresponding attribute classes.....	312
Table H 47 — Attribute fields.....	313

Table H 48 — Integer values.....	315
Table H 49 — Real values.....	315
Table H 50 — Character values.....	315
Table H 51 — Unicode values.....	315
Table H 52 — Point values.....	315
Table H 53 — Vector values.....	316
Table H 54 — Direction values.....	316
Table H 55 — Axis values.....	316
Table H 56 — Tag values.....	316
Table H 57 — Group fields.....	317
Table H 58 — Group member fields.....	318
Table H 59 — Node types.....	318
Table H 60 — Node classes.....	320
Table H 61 — Hatching.....	320
Table H 62 — Planar Hatch.....	321
Table H 63 — Radial Hatch.....	321
Table H 64 — Parametric Hatch.....	322
Table H 65 — Body Density.....	322
Table H 66 — Region Density.....	322
Table H 67 — Face Density.....	323
Table H 68 — Edge Density.....	323
Table H 69 — Vertex Density.....	323
Table H 70 — Region.....	324
Table H 71 — Colour.....	324
Table H 72 — Reflectivity.....	324
Table H 73 — Translucency.....	325
Table H 74 — Name.....	325
Table H 75 — Incremental faceting.....	325
Table H 76 — Transparency.....	325
Table H 77 — Non-mergable edges.....	326
Table H 78 — Group merge behaviour.....	326
Table H 79 — Unicode name.....	326
Table H 80 — Moniker attribute use example.....	328
Table H 81 — MONIKER/GUID_TABLE_ATTRIB and MONIKER/MONIKER_DATA_ATTRIB.....	330
Table H 82 — MONIKER/BODY_ID_ATTRIB.....	330

Annex I Figures

Figure I 1 — JT ULP Segment data collection.....	331
Figure I 2 — JT ULP Element data collection.....	332
Figure I 3 — Topology Data collection.....	333
Figure I 4 — Topological Entity Counts data collection.....	334
Figure I 5 — Combined Predictor Type data collection.....	335
Figure I 6 — Regions Topology Data collection.....	336
Figure I 7 — Shells Topology Data collection.....	337
Figure I 8 — Faces Topology Data collection.....	338
Figure I 9 — Loops Topology Data collection.....	340
Figure I 10 — CoEdges Topology Data collection.....	342
Figure I 11 — Sample Model with Randomly Assigned Edge Indices.....	343
Figure I 12 — Sample Model with Sequentially Assigned Edge Indices.....	343
Figure I 13 — Surface Domain Classification.....	345
Figure I 14 — Edges Topology Data collection.....	347
Figure I 15 — Geometric Data collection.....	349
Figure I 16 — Geometric Entity Counts.....	350
Figure I 17 — Degree Table data collection.....	350
Figure I 18 — Recover Nurbs Degree.....	351
Figure I 19 — Number of Control Points Table data collection.....	352
Figure I 20 — Recover Number of Control Points.....	353
Figure I 21 — Dimension Table data collection.....	354
Figure I 22 — Recover Dimension.....	355
Figure I 23 — 3D Unit Vector Table data collection.....	356
Figure I 24 — Recover Dimension.....	357
Figure I 25 — 2D Unit Vector Table data collection.....	357
Figure I 26 — Recover 2D Unit Vector.....	358
Figure I 27 — 3D MCS Point Table data collection.....	359
Figure I 28 — Recover 3D MCS Points.....	361
Figure I 29 — Knot Vector Table data collection.....	362
Figure I 30 — Recover Knot Vectors.....	363
Figure I 31 — 1D MCS Table data collection.....	365
Figure I 32 — Recover 1D MCS Table.....	367
Figure I 33 — PCS Value Table data collection.....	368
Figure I 34 — Recover PCS Value Table.....	369
Figure I 35 — Radian Table data collection.....	369

Figure I 36 — Recover Radian Table.....	370
Figure I 37 — Weight Table data collection	371
Figure I 38 — Recover Weight Table.....	372
Figure I 39 — Material Attribute Element Properties.....	373
Figure I 40 — Information Recovery	374
Figure I 41 — PCS Curve Recovery from Surface Domain	375
Figure I 42 — MCS Curve Recovery	376
Figure I 43 — MCS Curve Recovery from Surface Geometry	377

Annex I Tables

Table I 1 — JT ULP Shell Anti-Hole Flag values.....	337
Table I 2 — JT ULP Flag Bit Array Look Index values	339
Table I 3 — JT ULP Supported Surface Type values	339
Table I 4 JT ULP Supported Knot Type Values	340
Table I 5 — JT ULP Face Reverse Normal Flag values	340
Table I 6 —JT ULP Loops Topology Flag Bit Array values.....	341
Table I 7 — JT ULP Loops Topology Reverse Normal Flag values.....	341
Table I 8 — JT ULP Recover Edge Indices Flag Bit Array values	344
Table I 9 — JT ULP Recover Edge Indices PCS curve type values.....	345
Table I 10 — JT ULP PCS Curve Type values.....	345
Table I 11 — JT ULP PCS Curve Type XYZ Reversed Flag values.....	346
Table I 12 — JT ULP PCS Curve Type isUVInc Flag values.....	346
Table I 13 — JT ULP Edges Topology Recover MCS Curve Indices Flag Bit Array values	348
Table I 14 — JT ULP Edges Topology Recover MCS Curve Type values	348
Table I 15 — Parameter Domain.....	366

Annex J Figures

Figure J 1 — JT STT Segment data collection	378
Figure J 2 — JT STT Element data collection.....	378
Figure J 3 — Topology Data collection.....	379
Figure J 4 — Topological Entity Counts data collection	380
Figure J 5 — Body Topology Data collection	381
Figure J 6 — Region Topology Data collection.....	382
Figure J 7 — Shell Topology Data collection	382
Figure J 8 — Face Topology Data collection.....	384
Figure J 9 — Loop Topology Data collection	385
Figure J 10 — CoEdge Topology Data collection	385
Figure J 11 — Edge Topology Data collection	386
Figure J 12 — Geometric Data collection	387
Figure J 13 — Geometric Entity Counts	387
Figure J 14 — Surface Geometric Data collection	388
Figure J 15 — Surface Geometry Recovery	390
Figure J 16 — Curve Geometric Data collection	391
Figure J 17 — Curve Geometry Recovery	392
Figure J 18 — Point Geometric Data collection	393
Figure J 19 — Point Geometry Recovery.....	394
Figure J 20 — Attribute Data Collection	394
Figure J 21 — Bodies Attribute Data collection	395
Figure J 22 — MonikerGuidTable Data collection.....	396
Figure J 23 — Body ID Attribute Data	397
Figure J 24 — Face Attribute Data collection.....	397
Figure J 25 — MONIKER/MONIKER_DATA_ATTRIB Data collection	398
Figure J 26 — Edge Attribute Data collection	399
Figure J 27 — EdgeMonikerTable Data collection	400
Figure J 28 — Fin Attribute Data collection.....	401
Figure J 29 — Version Data	401

Annex J Tables

Table J 1 — Body Type Values.....	381
Table J 2 — Solid Region Flag Values	382
Table J 3 — Shell Types	383
Table J 4 — JT STT Shell Signs	383
Table J 5 — Face Orientation Flag Values.....	384
Table J 6 — Face Normal Reversed Flag values	384
Table J 7 — Loop Types	385
Table J 8 — CoEdge Sense Flag Values	386
Table J 9 — Edge Sense Flag Values.....	386
Table J 10 — Represented Surface Types.....	389
Table J 11 — JT STT Analytical Curve Types.....	391

Annex K Figures

Figure K 1 — JT LWPA data collection.....	403
Figure K 2 — JT LWPA Element data collection.....	404
Figure K 3 — Analytic Surface Geometry data collection.....	405
Figure K 4 — Analytic Surface Creation.....	406

Annex L Figures

Figure L 1 — Wireframe Segment data collection.....	407
Figure L 2 — Wireframe Rep Element data collection.....	408
Figure L 3 — Wireframe MCS Curves Geometric Data collection.....	409
Figure L 4 — Wireframe Rep CAD Tag Data collection.....	409

Annex M Figures

Figure M 1 — JT B-Rep Segment data collection.....	410
Figure M 2 — JT B-Rep Element data collection.....	411
Figure M 3 — Topological Entity Counts data collection.....	412
Figure M 4 — Geometric Entity Counts data collection.....	413
Figure M 5 — Topology Data collection.....	414
Figure M 6 — Regions Topology Data collection.....	415
Figure M 7 — Shells Topology Data collection.....	415
Figure M 8 — Trim Loop example in parameter Space - One Face with 2 Holes.....	417
Figure M 9 — Faces Topology Data collection.....	417
Figure M 10 — Loops Topology Data collection.....	418
Figure M 11 — CoEdges Topology Data collection.....	419
Figure M 12 — Edges Topology Data collection.....	420
Figure M 13 — Vertices Topology Data collection.....	421
Figure M 14 — Geometric Data collection.....	422
Figure M 15 — Surfaces Geometric Data collection.....	423
Figure M 16 — Non-Trivial Knot Vector NURBS Surface Indices data collection.....	424
Figure M 17 — NURBS Surface Degree data collection.....	424
Figure M 18 — NURBS Surface Control Point Counts data collection.....	425
Figure M 19 — NURBS Surface Control Point Weights data collection.....	425
Figure M 20 — NURBS Surface Control Points data collection.....	426
Figure M 21 — NURBS Surface Knot Vectors data collection.....	426
Figure M 22 — PCS Curves Geometric Data collection.....	427
Figure M 23 — Trivial PCS Curves data collection.....	428
Figure M 24 — Equality of corresponding curve end coordinates of opposite sides of the box.....	429
Figure M 25 — MCS Curves Geometric Data collection.....	430
Figure M 26 — Point Geometric Data collection.....	430
Figure M 27 — Topological Entity Tag Counters data collection.....	431
Figure M 28 — B-Rep CAD Tag Data collection.....	432

Annex M Tables

Table M 1 — JT B-Rep Shell Topology Anti-Hole Flag values.....	416
Table M 2 — JT B-Rep Face Reverse Normal Flag values.....	418
Table M 3 — JT B-Rep Loops Topology Data Anti-Hole Flag values.....	419
Table M 4 — JT B-Rep MCS Curve Reversed Flag values.....	420
Table M 5 — JT B-Rep Surface Base Type value.....	423
Table M 6 — JT B-Rep NURBS Surface Control Point Dimensionality values.....	424
Table M 7 — Trivial Domain Loops Exist Flag values.....	428
Table M 8 — Trivial Box Loops Exist Flag values.....	429
Table M 9 — Trivial Domain UV Curves Exist Flag values.....	429
Table M 10 — Trivial UV Curve Para Domain Side Codes values.....	430

Annex R Figures

Figure R 1 — Data Segment data collection.....	1837
Figure R 2 — Segment Header data collection.....	1837
Figure R 3 — Data collection.....	1839
Figure R 4 — Logical Element Header data collection.....	1839
Figure R 5 — Element Header data collection.....	1839
Figure R 6 — Logical Element Header ZLIB data collection.....	1840
Figure R 7 — Base Node Element data collection.....	1841
Figure R 8 — Base Node Data collection.....	1842
Figure R 9 — Partition Node Element data collection.....	1843

Figure R 10 — Vertex Count Range data collection.....	1844
Figure R 11 — Group Node Element data collection	1845
Figure R 12 — Group Node Data collection.....	1845
Figure R 13 — Instance Node Element data collection.....	1846
Figure R 14 — Part Node Element data collection	1847
Figure R 15 — Meta Data Node Element data collection	1847
Figure R 16 — Meta Data Node Data collection.....	1848
Figure R 17 — LOD Node Element data collection.....	1848
Figure R 18 — LOD Node Data collection.....	1849
Figure R 19 — Range LOD Node Element data collection.....	1849
Figure R 20 — Switch Node Element data collection.....	1850
Figure R 21 — Base Shape Node Element data collection	1851
Figure R 22 — Base Shape Data collection	1852
Figure R 23 — Vertex Count Range data collection.....	1853
Figure R 24 — Vertex Shape Node Element data collection.....	1854
Figure R 25 — Vertex Shape Data collection.....	1854
Figure R 26 — Quantization Parameters data collection	1855
Figure R 27 — Tri-Strip Set Shape Node Element data collection	1856
Figure R 28 — Polyline Set Shape Node Element data collection.....	1856
Figure R 29 — Point Set Shape Node Element data collection	1857
Figure R 30 — Polygon Set Shape Node Element data collection	1858
Figure R 31 — NULL Shape Node Element data collection	1858
Figure R 32 — Primitive Set Shape Node Element data collection	1859
Figure R 33 — Primitive Set Quantization Parameters data collection.....	1860
Figure R 34 — Base Attribute Data collection.....	1861
Figure R 35 — Material Attribute Element data collection.....	1863
Figure R 36 — Texture Image Attribute Element data collection	1866
Figure R 37 — Texture Vers-1 Data collection.....	1867
Figure R 38 — Texture Environment data collection	1869
Figure R 39 — Texture Coord Generation Parameters data collection.....	1872
Figure R 40 — Inline Texture Image Data collection	1873
Figure R 41 — Image Format Description data collection	1874
Figure R 42 — Texture Vers-2 Data collection.....	1877
Figure R 43 — Texture Vers-3 Data collection.....	1879
Figure R 44 — Draw Style Attribute Element data collection	1881
Figure R 45 — Light Set Attribute Element data collection	1883
Figure R 46 — Infinite Light Attribute Element data collection	1884
Figure R 47 — Base Light Data collection	1885
Figure R 48 — Shadow Parameters data collection.....	1886
Figure R 49 — Point Light Attribute Element data collection.....	1887
Figure R 50 — Spread Angle value with respect to the light cone.....	1888
Figure R 51 — Attenuation Coefficients data collection.....	1888
Figure R 52 — Linestyle Attribute Element data collection.....	1889
Figure R 53 — Pointstyle Attribute Element data collection	1890
Figure R 54 — Geometric Transform Attribute Element data collection	1891
Figure R 55 — Shader Effects Attribute Element data collection	1892
Figure R 56 — Texture Coordinate Generator Attribute Element data collection	1894
Figure R 57 — Mapping Plane Element data collection	1895
Figure R 58 — Mapping Cylinder Element data collection	1896
Figure R 59 — Mapping Sphere Element data collection	1897
Figure R 60 — Mapping TriPlanar Element data collection	1898
Figure R 61 — Base Property Atom Element data collection.....	1899
Figure R 62 — Base Property Atom Data collection	1899
Figure R 63 — String Property Atom Element data collection	1900
Figure R 64 — Integer Property Atom Element data collection.....	1900
Figure R 65 — Floating Point Property Atom Element data collection.....	1901
Figure R 66 — JT Object Reference Property Atom Element data collection	1902
Figure R 67 — Date Property Atom Element data collection.....	1903
Figure R 68 — Late Loaded Property Atom Element data collection.....	1904
Figure R 69 — Vector4f Property Atom Element data collection	1905
Figure R 70 — Property Table data collection.....	1906
Figure R 71 — Element Property Table data collection	1907
Figure R 72 — Vertex Shape LOD Data collection	1908
Figure R 73 — TopoMesh Compressed LOD Datacollection.....	1910
Figure R 74 — TopoMesh LOD Data collection	1910
Figure R 75 — TopoMesh Compressed Rep Data V1 data collection	1911
Figure R 76 — TopoMesh Compressed Rep Data V2 data collection	1913
Figure R 77 — TopoMesh Topologically Compressed LOD Data collection	1916
Figure R 78 — Tri-Strip Set Shape LOD Element data collection.....	1916
Figure R 79 — Polyline Set Shape LOD Element data collection.....	1917
Figure R 80 — Point Set Shape LOD Element data collection.....	1917
Figure R 81 — Polygon Set LOD Element data collection	1918
Figure R 82 — Null Shape LOD Element data collection	1919
Figure R 83 — Primitive Set Shape Element data collection	1920

Figure R 84 — Wireframe Rep Element data collection	1922
Figure R 85 — Wireframe MCS Curves Geometric Data collection	1923
Figure R 86 — Wireframe Rep CAD Tag Datacollection	1923
Figure R 87 — Meta Data Segment data collection	1924
Figure R 88 — Meta Data Segment data collection	1925
Figure R 89 — Date Property Value data collection	1926
Figure R 90 — PMI Manager Meta Data Element data collection.....	1928
Figure R 91 — PMI Entities data collection	1930
Figure R 92 — PMI Dimension Entities data collection	1930
Figure R 93 — PMI 2D Data collection	1931
Figure R 94 — PMI Base Data collection	1931
Figure R 95 — 2D-Reference Frame data collection	1932
Figure R 96 — 2D Text Data collection	1933
Figure R 97 — Text Box data collection	1934
Figure R 98 — Constructing Text Polylines from data arrays	1935
Figure R 99 — Text Polyline Data collection	1936
Figure R 100 — Constructing Non-Text Polylines from packed 2D data arrays.....	1937
Figure R 101 — Non-Text Polyline Data collection	1938
Figure R 102 — PMI Note Entities data collection.....	1939
Figure R 103 — PMI Datum Feature Symbol Entities data collection	1940
Figure R 104 — PMI Datum Target Entities data collection.....	1940
Figure R 105 — PMI Feature Control Frame Entities data collection	1941
Figure R 106 — PMI Line Weld Entities data collection	1941
Figure R 107 — PMI Spot Weld Entities data collection	1942
Figure R 108 — PMI 3D Data collection	1943
Figure R 109 — PMI Surface Finish Entities data collection	1944
Figure R 110 — PMI Measurement Point Entities data collection	1945
Figure R 111 — PMI Locator Entities data collection.....	1946
Figure R 112 — PMI Reference Geometry Entities data collection	1946
Figure R 113 — PMI Design Group Entities data collection	1947
Figure R 114 — PMI Associations data collection	1948
Figure R 115 — PMI Model Views data collection	1951
Figure R 116 — Generic PMI Entities data collection	1953
Figure R 117 — PMI Property data collection.....	1955
Figure R 118 — Key PMI Property Atom data collection	1957
Figure R 119 — PMI CAD Tag Data collection.....	1957
Figure R 120 — Int32 Compressed Data Packet data collection	1960
Figure R 121 — Int32 Probability Contexts data collection	1962
Figure R 122 — Int32 Probability Context Table Entry data collection	1963
Figure R 123 — Int32 Compressed Data Packet Mk. 2 data collection	1965
Figure R 124 — Int32 Probability Context data collection	1967
Figure R 125 — Int32 Probability Context Table Entry data collection.....	1968
Figure R 126 — Float64 Compressed Data Packet data collection	1970
Figure R 127 — Float64 Probability Contexts data collection	1972
Figure R 128 — Float64 Probability Context Table Entry data collection	1972
Figure R 129 — Compressed Vertex Coordinate Array data collection.....	1973
Figure R 130 — Compressed Vertex Normal Array data collection	1975
Figure R 131 — Compressed Vertex Texture Coordinate Array data collection	1977
Figure R 132 — Compressed Vertex Colour Array data collection	1979
Figure R 133 — Compressed Vertex Flag Array data collection	1981
Figure R 134 — Compressed CAD Tag Data collection	1982
Figure R 135 — Compressed CAD Tag Type-2 Data collection.....	1983

Annex R Tables

Table R 1 — Segment Types	1837
Table R 2 — Object Base Types	1840
Table R 3 — Compression flag values	1841
Table R 4 — Compression algorithm values	1841
Table R 5 — Node Flag values.....	1842
Table R 6 — Partition flag bits.....	1843
Table R 7 — Compression level values	1853
Table R 8 — Texture Coord Binding values	1860
Table R 9 — Version Number values	1860
Table R 10 — Texture Coord Gen Type values.....	1860
Table R 11 — State Flag values.....	1861
Table R 12 — Material Attribute data field inhibit values.....	1862
Table R 13 — Material Attribute Version number value.....	1863
Table R 14 — Material Attribute Data Flag values.....	1864
Table R 15 — Texture Image Attribute data field inhibit values	1865
Table R 16 — Texture Image Version Number values.....	1866
Table R 17 — Texture Vers-1 type values.....	1868
Table R 18 — Texture Vers-1 Inline Image Storage Flag values.....	1868

Table R 19 — Texture Vers-1 Texture Environment Border Mode values	1869
Table R 20 — Texture Vers-1 Texture Environment Mipmap Magnification Filter values.....	1870
Table R 21 — Texture Vers-1 Texture Environment Mipmap Minification Filter values.....	1870
Table R 22 — Texture Vers-1 Texture Environment S-Dimen Wrap Mode values.....	1870
Table R 23 — Texture Vers-1 Texture Environment Blend Type values	1871
Table R 24 — Texture Vers-1 Texture Environment Internal Compression Level values	1871
Table R 25 — Texture Vers-1 Texture Coord Generation Gen Mode values.....	1872
Table R 26 — Texture Vers-1 Image Format Description Pixel Format values.....	1874
Table R 27 — Texture Vers-1 Image Format Description Pixel Data values	1875
Table R 28 — Texture Vers-1 Image Format Description Dimensionality values.....	1875
Table R 29 — Texture Vers-1 Image Format Description Shared Image Flag values.....	1876
Table R 30 — Texture Vers-2 Texture Type values	1877
Table R 31 — Texture Vers-2 Inline Image Storage Flag values.....	1878
Table R 32 — Texture Vers-3 Texture Type values	1880
Table R 33 — Texture Vers-3 Inline Image Storage Flag values.....	1881
Table R 34 — Draw Style Attribute Field Inhibit flag values	1881
Table R 35 — Draw Style Attribute Data Flag values	1882
Table R 36 — Light Set Attribute Version Number values.....	1884
Table R 37 — Base Light Data Cood System values.....	1885
Table R 38 — Base Light Data Shadow Caster Flag values	1886
Table R 39 — Point Light Attribute Version Number values.....	1887
Table R 40 — Point Light Attribute Spread Angle values	1888
Table R 41 — Linestyle Attribute Data Flag values.....	1889
Table R 42 — Pointstyle Attribute Data Flag values	1890
Table R 43 — Geometric Transform Attribute Stored Value Mask individual bit-flag values	1892
Table R 44 — Shader Effects Attribute Enable Flag values.....	1893
Table R 45 — Shader Effects Attribute Phong Shading Flag values	1893
Table R 46 — Mapping Plane Matrix Coordinate System values	1895
Table R 47 — Mapping Cylinder Matrix Coordinate System values.....	1896
Table R 48 — Mapping Sphere Matrix Coordinate System values	1897
Table R 49 — Mapping TriPlanar Matrix Coordinate System values.....	1898
Table R 50 — Vertex Shape LOD Bindings values.....	1908
Table R 51 — TopoMesh Compressed Rep Data V2 Field Type values.....	1914
Table R 52 — Primitive Set Shape Texture Coord Binding values.....	1920
Table R 53 — Primitive Set Shape Version Number values.....	1921
Table R 54 — Primitive Set Shape Texture Coord Gen Type values.....	1921
Table R 55 — Property Proxy Meta Data Property Value Type values.....	1926
Table R 56 — PMI Manager Meta Data Version Number values	1929
Table R 57 — PMI 2D Base Data Font values	1933
Table R 58 — PMI 2D Non-Text Polyline Type values	1938
Table R 59 — PMI 3D Data Polyline Dimensionality values.....	1943
Table R 60 — PMI Reference Geometry Entity values	1946
Table R 61 — PMI Associations Source Data values	1948
Table R 62 — PMI Associations Reason Code values	1949
Table R 63 — PMI Model Views Active Flag values.....	1952
Table R 64 — Generic PMI Entity Type values	1954
Table R 65 — Generic PMI User Flag values	1955
Table R 66 — Common Property Keys and Their Value Encoding formats.....	1955
Table R 67 — PMI Property Atom Hidden Flag values.....	1957
Table R 68 — Common Compression CODEC Type values.....	1960
Table R 69 — Int32 Probability Contexts CODEC Type values	1966
Table R 70 — Float64 Compressed Data Packet CODEC Type values	1970
Table R 71 — Compressed CAD Tag Type values	1983

Introduction

The JT format is an industry focused, high-performance, lightweight, flexible file format for capturing and repurposing 3D product definition data for visualization to enable collaboration and validation throughout the extended enterprise. The JT format is streamable and contains compression for compact and efficient representation.

Some of the highlights of the JT format include:

- built-in support for assemblies, sub-assemblies and part constructs;
- a flexible partitioning scheme, supporting single or multiple files;
- b-rep solid shape representations to provide precision to the light-weight viewing processes;
- product manufacturing information in support of paperless manufacturing initiatives;
- precise and imprecise wireframe shape representations;
- discrete purpose-built levels of detail;
- triangle sets, polygon sets, point sets, line sets and implicit primitive sets (such as cylinder, cone and sphere);
- a full array of visual attributes such as for materials, textures, lights;
- hierarchical bounding box and bounding spheres;
- data compression that allows producers of JT files to fine tune the trade-off between compression ratio and fidelity of the data.

Beyond the data contents description of the JT format, the overall physical structure/organization of the format is also designed to support operations such as:

- offline optimizations of the data contents, i.e. file granularity and flexibility optimized to meet the needs of enterprise data translation solutions;
- asynchronous streaming of content, i.e. viewing optimizations such as view frustum and
- occlusion culling and fixed-framerate display modes;
- layers, and layer filters.

NOTE This document is based on the JT Open version 10.5 specification.

Remarks with regard to ISO JT (ISO 14306)

JTIAP defines the syntax and semantics of the JT file format and is compatible to the JT file format specification in ISO 14306 (in its version from 2012 and successors) as well as to the essential implementations currently available to the market. Thereby, JTIAP comes along with enhanced functionalities required by the prostep ivip JT Workflow Forum and prostep ivip JT Implementor Forum.

In industry, JT is broadly used e.g. for:

- visualization,
- data exchange between partners and/or CAD systems and
- long-term data retention.

When implementing ISO 14306, for supporting use cases that require the representation of 3D exact geometry, the usage of XT B-Rep shall be treated as normative and the usage is mandatory.

Addition: For e.g. complex kinematic simulations or complex assembly structures, the combined application of JT together with STEP AP 242 XML (ISO 10303-242) offers a comprehensive solution. Both formats are harmonized with each other. This especially offers solutions to industrial players which have set up highly complex process chains, and therefore need effective standards.

**Siemens PLM Software
JT Data Format Reference Patent Clarification Notice**

Siemens Product Lifecycle Management Software Inc. (SPLM) owns or holds exclusive rights to one or more patents covering technology that is disclosed and documented in the JT File Format Specification and in ISO standard 14306 JT file format specification for 3D visualization, version 9.5 and later. SPLM desires to promote the use of JT Data Format for information interchange among diverse products and applications.

Accordingly, the following patents are licensed on a royalty-free, non-exclusive basis for the term of each patent and for the sole purpose of developing software that produces, consumes, and interprets JT Data files that are compliant with the specification, and the distribution and use thereof:

U.S. Patent Number: USA 20110199382, 8019788
and its corresponding patents in foreign jurisdictions.

The above license is limited to only those rights required to implement the JT Data Format and no others. SPLM grants only those rights in the above-referenced patent(s) necessarily practiced in the implementation, and subsequent distribution or utilization of such implementation, of the above named specifications, and does not grant any rights not required to implement the above named specifications. The license does not grant the right to practice any patent covering other technologies, such as implementation techniques that are not explicitly disclosed in the above named specifications, nor does it allow the use of any patented feature for any purpose other than as set forth in the applicable license grant. SPLM has other patents in various fields, none of which are hereby licensed.

Industrial automation systems and integration — JT file format specification for 3D visualization

1 Scope

The JT file format specification for 3D visualization specifies the sequential order of bytes that comprise the segments of data required to represent a JT file. The JT format is uniquely compressed to minimize file size.

The JT file format specification for 3D visualization includes data descriptions that can represent the following data in binary format.

- facet information (triangles), stored with geometry compression techniques;
- visual attributes such as lights, textures and materials;
- product manufacturing information (PMI);
- boundary representation (b-rep) solid model shape representation based on ISO 10303 and associated metadata;
- boundary representation (b-rep) solid model shape representation XT b-rep and associated metadata;
- configuration representations; and
- delivery methods such as asynchronous streaming of content.

The JT file format specification for 3D visualization does not specify the implementation of, or definition of a run-time architecture for viewing and/or processing JT data.

2 Normative references

ISO 10303-1:1994, Industrial automation systems and integration — Product data representation and exchange — Part 1: Overview and fundamental principles.

ISO 10303-11:2004, Industrial automation systems and integration — Product data representation and exchange — Part 11: The EXPRESS language reference manual.

ISO 10303-21:2014, Industrial automation systems and integration — Product data representation and exchange — Part 21: Implementation methods: Clear text encoding of the exchange structure.

ISO 10303-41:2014, Industrial automation systems and integration -- Product data representation and exchange -- Part 41: Integrated generic resource: Fundamentals of product description and support.

ISO 10303-42:2014, Industrial automation systems and integration – Product data representation and exchange – Part 42: Integrated generic resource: geometric and topological representation.

ISO 10303-43:2011, Industrial automation systems and integration -- Product data representation and exchange -- Part 43: Integrated generic resource: Representation structures.

ISO 10303-44:2014, Industrial automation systems and integration -- Product data representation and exchange -- Part 44: Integrated generic resource: Product structure configuration.

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms apply.

3.1.1

Assembly

A related collection of model parts, represented in a JT format logical scene graph as a logical graph branch.

3.1.2

Attribute

Objects associated with nodes in a logical scene graph and specifying one of several appearances, positioning, or visual characteristics of a shape

3.1.3

Boundary representation

Solid model representation where the solid volume is specified by its surface boundary (both its geometric and topological boundaries)

3.1.4

Code text

Collection of data in encoded form

3.1.5

Coordinate system

A system which uses one or more numbers, or coordinates, to uniquely determine the position of a point or other geometric element

NOTE 1 If not otherwise specified in a data field's description, it is assumed that the data is defined in Local Coordinate System.

3.1.6

Directed acyclic graph

Graph that consists of a set of nodes and a set of edges that connect the nodes in a tree like structure

NOTE 1 A directed graph is one in which every edge has a direction such that edge (u,v), connecting node-u with node-v, is different from edge (v,u).

NOTE 2 A directed acyclic graph is a directed graph with no cycles, where a cycle is a path (sequence of edges) from a node to itself.

NOTE 3 With a directed acyclic graph, there is no path that can be followed within the graph such that the first node in the path is the same as the last node in the path.

3.1.7

JT enabled application

Application which supports reading and/or writing reference compliant JT format files

3.1.8

Level of detail

LOD

Alternative graphical representation for some model component such as part

3.1.9

Local coordinate system

LCS

Coordinate system that is used to specify the raw data of the shape geometry with no transforms applied

3.1.10

Logical scene graph

LSG

Scene graph representing the logical organization of a model

NOTE A scene graph contains shapes and attributes representing the model's physical components, properties identifying arbitrary metadata (e.g. names, semantic roles) of those components, and a hierarchical structure expressing the component relationships.

3.1.11

Mipmap

Reduced resolution version of a texture map

NOTE Mipmaps are used to texture a geometric primitive whose screen resolution differs from the resolution of the source texture map originally applied to the primitive.

3.1.12

Model

Representation, in JT format, of a physical or virtual product, part, assembly; or collections of such objects

3.1.13

Model coordinate system

MCS

Local coordinates transformed by any transforms specified as attributes at or above the node

3.1.14

Product and manufacturing information

PMI

Collection of information created on a 3D/2D CAD model to completely document the product with respect to design, manufacturing, inspection, etc.

NOTE This can include data such as:

- dimensions (tolerances for each dimension);
- geometric tolerances of feature (datums, feature control frames);
- manufacturing information (surface finish, welding notations);
- inspection information (key locations points);
- assembly instructions;
- product information (materials, suppliers, part numbers).

3.1.15

Property

Object associated with a logical scene graph node and identifying arbitrary application or enterprise specific information (meta-data) related to that node

3.1.16

Quantize

Constrain something to a discrete set of values, such as an integer or integral multiplier of a common factor, rather than a continuous set of values, such as a real number

3.1.17

Scene graph

Directed acyclic graph that arranges the logical and often (but not necessarily) spatial representation of a graphical scene

3.1.18

Streaming

Loading from disk based medium only the portions of data that are required by the user to perform the tasks at hand

NOTE 1 The motivation for streaming is to more efficiently manage system memory.

NOTE 2 Transfer of data in a stream of packets, over the internet on an on-demand basis, where the data is interpreted in real-time by the application as the data packets arrive.

NOTE 3 The motivation for streaming is that the user can begin using or interacting with the data almost immediately - no waiting for the entire data file(s) to be transferred before beginning.

NOTE 4 The desired end result of streaming is to deliver only the JT data that the user needs, where the user needs it, when the user needs it.

3.1.19

Shape

Logical scene graph leaf node containing or referencing the geometric shape definition data (such as vertices, polygons and normals) of a model component

3.1.20

Texture channel

Texture unit plus the texture environment.

NOTE The JT format meaning for texture channel is the same as in OpenGL [1].

3.1.21

Texture object

Named cache that stores texture data, such as the image array, associated mipmaps, and associated texture parameter values: width, height, border width, internal format, resolution of components, minification and magnification filters, wrapping modes, border colour, and texture priority

NOTE The JT format meaning for texture object is the same as in OpenGL [1].

3.1.22

Texture unit

A hardware unit used to sample and filter a texture image.

NOTE The JT format meaning for texture unit is the same as in OpenGL [1].

3.1.23

View coordinate system

World coordinates transformed by a view matrix

3.1.24

World coordinate system

WCS

Node coordinates transformed by transforms inherited from a node's parent (i.e. the coordinate system at the root of the graph)

3.2 Abbreviated terms

For the purposes of this document, the following abbreviated terms apply.

Abs	Absolute Value
Bbox	Bounding Box
B-Rep	Boundary Representation
CAD	Computer Aided Design
CODEC	Coder-Decoder
GD&T	Geometric Dimensioning and Tolerancing
GUID	Globally Unique Identifier
HSV	Hue, Saturation, Value
LsbFirst	Least Significant Byte First
Max	Maximum
Min	Minimum
MsbFirst	Most Significant Byte First
N/A	Not Applicable
PCS	Parameter Coordinate Space
PLM	Product Lifecycle Management
RGB	Red, Green, Blue
RGBA	Red, Green, Blue, Alpha
TOC	Table of Contents
VPCS	Viewpoint Coordinate System
URL	Uniform Resource Locator

4 Notational conventions

4.1 Diagrams and field descriptions

Symbolic diagrams are used to describe the structure of the JT file. The symbols used in these diagrams have the following meaning:

Table 1 — Symbols

Symbol	Description
	Rectangles represent a data field of one of the standard data types.
	Folders represent a logical collection of one or more of the standard data types. This information is grouped for clarity and the basic data types that compose the group are detailed in following sections of the document.
	Rectangles with extra lines at left and the right sides corners clipped off represent information logical steps that has been compressed.
	Rectangles with the right side corners clipped off represent information that has been compressed.
	Arrows convey the ordering of the information.

The format used to title the diagram symbols is dependent upon the symbol type as follows:

Diagram “rectangle box” (i.e. standard data types) symbols are titled using a format of “Data_Type : Field_Name.” The Data_Type is an abbreviated data type symbol as defined in 3.2 Data Types. In the example below the Data_Type is “l32” (a signed 32 bit integer) and Field_Name is “Count.”



Figure 1 — rectangle box diagram

Diagram “folder” (i.e. logical data collections) symbols are simply titled with a collection name. In the example below the collection name is “Graph Elements.”



Figure 2 — folder diagram

Diagram “rectangle box with lines at left and right sides” are simply titled with a logic step name. In the example below the logic step name is “Recover First Shell Indices”.



Figure 3 — rectangle box with lines at left and right sides diagram

Diagram “rectangle box with clipped right side corners” (i.e. compressed/encoded data fields) are titled using one of the following three formats:

Data Type; followed by open brace “{“, number of bits used to store value, closed brace “}”, and a colon “:”; followed by the Field Name. This format for titling the diagram symbol indicates that the data is compressed but not encoded. The compression is achieved by using only a portion of the total bit range of the data type to store the value (e.g. if a count value can never be larger than the value “63” then only 6 bits are needed to store all possible count values). In the example below the Data Type is “U32”, “6” bits are used to store the value, and Field Name is “Count”




Figure 4 — rectangle box with clipped right side corners

Data Type followed by open brace “{“, compressed data packet type, “,“, Predictor Type, closed brace “}”, and a colon “:”; followed by the field name. This format for titling the diagram indicates that a vector of “Data Type” data (i.e. *primal* values) is ran through “Predictor Type” algorithm and the resulting output array of *residual* values is then compressed and encoded into a series of symbols using one of the two supported compressed data packet types.

The two supported compressed data packet types are:

Int32CDP – The Int32CDP (i.e. Int32 Compressed Data Packet) represents a third-generation format used to encode/compress a collection of data into a series of Int32 based symbols. This version of the Int32CDP supersedes the two similarly-named ones from the Version 9 JT Specification, and should not be confused with either of its predecessors. A complete description for Int32 Compressed Data Packet can be found in Int32 Compressed Data Packet.

The Int32 Compressed Data Packet type is used for compressing/encoding both “integer” and “float” (through quantization) data.

In the example below the Data Type is “VecU32”, Int32 Compressed Data Packet type is used, Lag1 Predictor Type is used, and Field Name is “First Shell Index.”




Figure 5 — compressed data packet diagram

As mentioned above (with Predictor Type algorithm), the *primal* input data values are NOT always what is encoded/compressed. This is because the *primal* input data is first run through a Predictor Type algorithm, which produces an output array of residual values (i.e. difference from the predicted value), and this resulting output array of *residual* values is the data which is actually encoded/compressed. The JT format supports several Predictor Type algorithms and each use of Int32CDP specifies, using the above described notation format, what Predictor Type algorithm is being used on the data. The JT format supported Predictor Type algorithms are as follows (note that a sample implementation of decoding the predictor *residual* values back into the primal values can be found in Annex C.

Table 2 — Predictor Type

Predictor Type	Description
Lag1	Predicts as last value
Xor1	Predict as last, but use XOR instead of subtract to compute residual
NULL	No prediction applied

Each predictor type can be combined with additional processing steps, and in such case the predictor type is prefixed with “Combined:”. For example, “Combined:Lag1” means that predictor type “Lag1” is

combined with additional preprocessing steps. Additional description about the processing steps is provided whenever such combined predictor is used.

“Data Type : Field Name” . This format for titling the diagram symbol indicates that the data is both compressed and encoded. The Data_Type is an abbreviated data type symbol as defined in [Data Types](#) and usually represent a vector/array of data. How the data is compressed and encoded into the Data Type is indicated by a CODEC type and other information stored before the particular data in the file. In the example below the Data_Type is “VecU32” and Field_Name is “CodeText.”

VecU32 : CodeText

Figure 6 — data type : field name diagram

Note that for some JT file [Segment Types](#) there is LZMA compression also applied to all bytes of element data stored in the segment. This LZMA compression applied to all the segment’s data is not indicated in the diagrams through the use of “rectangle box with clipped right side corners”. Instead, one shall examine information stored with the first Element in the file segment to determine if LZMA compression is applied to all data in the segment. A complete description of the JT format data compression and encoding can be found in [Data Segment and Data Compression and Encoding](#).

Following each data collection diagram is detailed descriptions for each entry in the data diagram.

For rectangles this detail includes the abbreviated data type symbol, field name, verbal data description, and compression technique/algorithm where appropriate. If the data field is documented as a collection of flags, then the field is to be treated as a bit mask where the bit mask is formed by combining the flags using the binary OR operator. Each bits usage is documented, and bit ON indicates flag value is TRUE and bit OFF indicates flag value is FALSE. All bits fields that are not defined as in use should be set to “0”.

For folders (i.e. data collections), if the collection is not detailed under a sub-section of the particular document section referencing the data collection, then a comment is included following the diagram indicating where in the document the particular data collection is detailed.

If an arrow appears with a branch in its shaft, then there are two or more options for data to be stored in the file. Which data is stored will depend on information previously read from the file. The following example shows data field A followed by (depending on value of A) either data field B, C, or D.

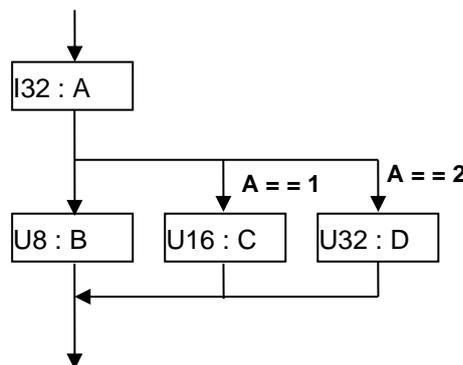


Figure 7 — data filed dependency example

In cases where the same data type repeats, a loop construct is used where the number of iterations appears next to the loop line. There are two forms of this loop construct. The first form is used when the number of iterations is not controlled by some previous read count value. Instead the number of iterations is either a hard coded count (e.g. always 80 characters) or is indicated by some end-of-list marker in the data itself (thus the count is always minimum of 1). This first form of the loop construct looks as follows:




Figure 8 — loop construct example

The second form of this loop construct is used when the number of iterations is based on data (e.g. count) previously read from the file. In this case it is valid for there to be zero data iterations (zero count). This second form of the loop construct looks as follows (data field D is repeated C value times).




Figure 9 — loop construct with iterations example

4.2 Data Types

The data types that can occur in the JT binary files are listed in the following two tables.









Table 3 — Basic Data Types lists the basic/standard data types which can occur in JT file.









Table 3 — Basic Data Types



Type	Description
UChar	An unsigned 8-bit byte.
U8	An unsigned 8-bit integer value.
U16	An unsigned 16-bit integer value.
U32	An unsigned 32-bit integer value.
U64	An unsigned 64-bit integer value.
I16	A signed two's complement 16-bit integer value.
I32	A signed two's complement 32-bit integer value.
I64	A signed two's complement 64-bit integer value.
F32	An IEEE 32-bit floating point number.
F64	An IEEE 64-bit double precision floating point number

Table 4 — Composite Data lists some composite data types which are used to represent some frequently occurring groupings of the basic data types (e.g. Vector, RGBA colour). The composite data types are defined in this reference simply for convenience/brevity in describing the JT file contents.

Table 4 — Composite Data Types

Type	Description	Symbolic Diagram
BBoxF32	The BBoxF32 type defines a bounding box using two CoordF32 types to store the XYZ coordinates for the bounding box minimum and maximum corner points.	
CoordF32	The CoordF32 type defines X, Y, Z coordinate values. So a CoordF32 is made up of three F32 base types.	
DirF32	The DirF32 type defines X, Y, Z components of a direction vector. So a DirF32 is made up of three F32 base types.	
GUID	The GUID type is a 16 byte (128-bit) number. GUID is stored/written to the JT file using a four-byte word (U32), 2 two-byte words (U16), and 8 one-byte words (U8) such as: {3F2504E0-4F89-11D3-9A-0C-03-05-E8-2C-33-01} In the JT format GUIDs are used as unique identifiers (e.g. Data Segment ID, Object Type ID, etc.)	
MbString	The MbString type starts with an I32 that defines the number of characters (NumChar) the string contains. The number of bytes of character data is "2 * NumChar" (i.e. the strings are written out as multi-byte characters where each character is UTF16 size).	
Mx4F32	Defines a 4-by-4 matrix of F32 values for a total of 16 F32 values. The values are stored in row major order (right most subscript, column varies fastest), that is, the first 4 elements form the first row of the matrix.	
Mx4F64	Defines a 4-by-4 matrix of F64 values for a total of 16 F64 values. The values are stored in row major order (right most subscript, column varies fastest), that is, the first 4 elements form the first row of the matrix.	
PlaneF32	The PlaneF32 type defines a geometric Plane using the General Form of the plane equation ($Ax + By + Cz + D = 0$). The PlaneF32 type is made up of four F32 base types where the first three F32 define the plane unit normal vector (A, B, C) and the last F32 defines the negated perpendicular distance (D), along normal vector, from the origin to the plane.	

Type	Description	Symbolic Diagram
Quaternion	The Quaternion type defines a 3-dimensional orientation (no translation) in quaternion linear combination form ($a + bi + cj + dk$) where the four scalar values (a, b, c, d) are associated with the 4 dimensions of a quaternion (1 real dimension, and 3 imaginary dimensions). So the Quaternion type is made up of four F32 base types.	
RGB	The RGB type defines a colour composed of Red, Green, Blue components, each of which is a F32. So a RGB type is made up of three F32 base types. The Red, Green, Blue colour values typically range from 0.0 to 1.0.	
RGBA	The RGBA type defines a colour composed of Red, Green, Blue, Alpha components, each of which is a F32. So a RGBA type is made up of four F32 base types. The Red, Green, Blue colour values typically range from 0.0 to 1.0. The Alpha value ranges from 0.0 to 1.0 where 1.0 indicates completely opaque.	
String	The String type starts with an I32 that defines the number of characters (NumChar) the string contains. The number of bytes of character data is "NumChar" (i.e. the strings are written out as single-byte characters where each character is U8 size).	
VecF32	The VecF32 type defines a vector/array of F32 base type. The type starts with an I32 that defines the count of following F32 base type data. So a VecF32 is made up of one I32 followed by that number of F32. Note that it is valid for the I32 count number to be equal to "0", indicating no following F32.	
VecF64	The VecF64 type defines a vector/array of F64 base type. The type starts with an I32 that defines the count of following F64 base type data. So a VecF64 is made up of one I32 followed by that number of F64. Note that it is valid for the I32 count number to be equal to "0", indicating no following F64.	
VecI16	The VecI16 type defines a vector/array of I16 base type. The type starts with an I32 that defines the count of following I16 base type data. So a VecI16 is made up of one I32 followed by that number of I16. Note that it is valid for the I32 count number to be equal to "0", indicating no following I16.	
VecU16	The VecU16 type defines a vector/array of U16 base type. The type starts with an I32 that defines the count of following U16 base type data. So a VecU16 is made up of one I32 followed by that number of U16. Note that it is valid for the I32 count number to be equal to "0", indicating no following U16.	

Type	Description	Symbolic Diagram
VecI32	The VecI32 type defines a vector/array of I32 base type. The type starts with an I32 that defines the count of following I32 base type data. So a VecI32 is made up of one I32 followed by that number of I32. Note that it is valid for the I32 count number to be equal to "0", indicating no following I32.	
VecU32	The VecU32 type defines a vector/array of U32 base type. The type starts with an I32 that defines the count of following U32 base type data. So a VecU32 is made up of one I32 followed by that number of U32. Note that it is valid for the I32 count number to be equal to "0", indicating no following U32.	

4.3 Empty field

When writing a JT file whose data did not originate from reading a previous JT file, an empty field should be set to a value of "0".

When writing a JT file whose data originated from reading a previous JT file (i.e. rewriting a JT File), empty fields should be written with the same value that was read from the originating JT file.

Refer to Empty Field guidelines in the Common Data Conventions and Constructs section

5 File Format

All objects represented in the JT format are assigned an “object identifier” (e.g. see Base Node Data, or Base Attribute Data Base Attribute Data) and all references from one object to another object are represented in the JT format using the referenced object’s “object identifier”. It is the responsibility of JT format readers/writers to maintain the integrity of these object references by doing appropriate pointer unswizzling/swizzling as JT format data is read into memory or written out to disk. Where “pointer swizzling” refers to the process of converting references based on object identifiers into direct memory pointer references and “pointer unswizzling” is the reverse operation (i.e. replacing references based on memory pointers with object identifier references).

5.1 File Structure

A JT file is structured as a sequence of blocks/segments. The File Header block is always the first block of data in the file. The File Header is followed (in no particular order) by a TOC Segment and a series of other Data Segments. The one Data Segment which shall always exist to have a reference compliant JT file is the LSG Segment. The TOC Segment is located within the file using data stored in the File Header. Within the TOC Segment is information that locates all other Data Segments within the file.

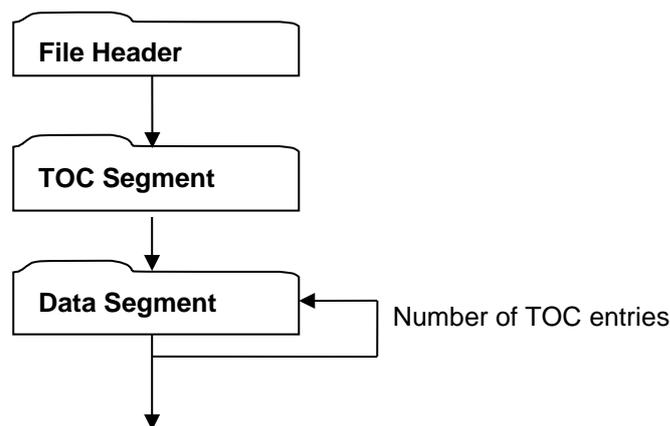


Figure 10 — JT File Structure

5.1.1 File Header

The File Header is always the first block of data in a JT file. The File Header contains information about the JT file version and TOC location, which Loaders use to determine how to read the file. The exact contents of the File Header are as follows:

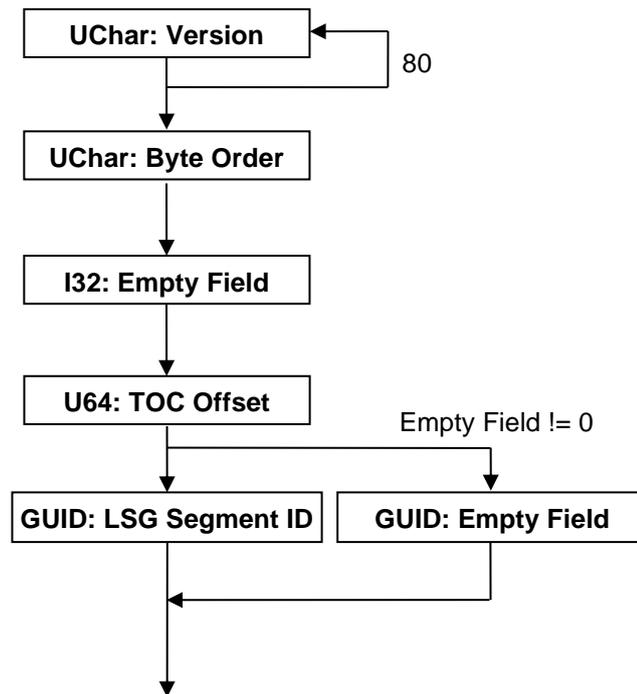


Figure 11 — File Header data collection

UChar: Version

An 80-character version string defining the version of the file format used to write this file. The Version string has the following format:

Version *M*.*n* *Comment*

Where *M* is replaced by the major version number, *n* is replaced by the minor version number, and *Comment* provides other information.

The major.minor version description for JTIAP Edition 3 files is 10.5

The version string is padded with spaces to a length of 75 ASCII characters and then the final five characters shall be filled with the following linefeed and carriage return character combination (shown using c-style syntax):

```

Version[75] = ' '
Version[76] = '\n'
Version[77] = '\r'
Version[78] = '\n'
Version[79] = ' '
  
```

These final 5 characters (shown above and referred to as ASCII/binary translation detection bytes) can be used by JT file readers to validate that the JT files has not been corrupted by ASCII mode FTP transfers.

As an example, for an JTIAP Edition 3 file this string will look as follows:

“Version 10.5 \n\r\n”

UChar: Byte Order

Defines the file byte order and thus can be used by the loader to determine if there is a mismatch (thus byte swapping required) between the file byte order and the machine (on which the loader is being run) byte order. Valid values for Byte Order are:

0 – Least Significant byte first (LsbFirst)

1 – Most Significant byte first (MsbFirst)

I32: Empty Field

Refer to Common Data Conventions and Constructs Empty Field description.

U64: TOC Offset

Defines the byte offset from the top of the file to the start of the TOC Segment.

GUID: LSG Segment ID

LSG Segment ID specifies the globally unique identifier for the Logical Scene Graph Data Segment in the file. This ID along with the information in the TOC Segment can be used to locate the start of LSG Data Segment in the file. This ID is needed because without it a loader would have no way of knowing the location of the root LSG Data Segment. All other Data Segments shall be accessible from the root LSG Data Segment.

GUID: Empty Field

Refer to Common Data Conventions and Constructs Empty Field description.

5.1.2 TOC Segment

The TOC Segment contains information identifying and locating all individually addressable Data Segments within the file. A TOC Segment is always required to exist somewhere within a JT file. The actual location of the TOC Segment within the file is specified by the File Header segment's "TOC Offset" field. The TOC Segment contains one TOC Entry for each individually addressable Data Segment in the file.

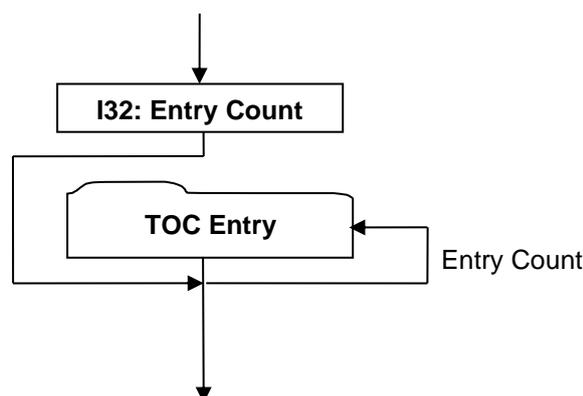


Figure 12 — TOC Segment data collection

I32: Entry Count

Entry Count is the number of entries in the TOC.

TOC Entry

Each TOC Entry represents a Data Segment within the JT File. The essential function of a TOC Entry is to map a Segment ID to an absolute byte offset within the file.

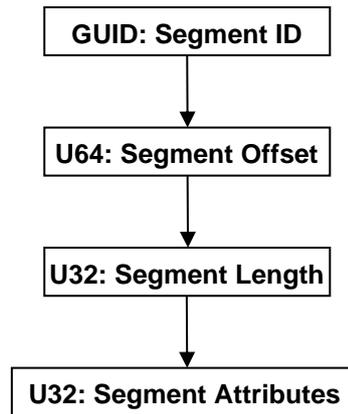


Figure 13 — TOC Entry data collection

GUID: Segment ID

Segment ID is the globally unique identifier for the segment.

U64: Segment Offset

Segment Offset defines the byte offset from the top of the file to start of the segment.

U32: Segment Length

Segment Length is the total size of the segment in bytes.

U32: Segment Attributes

Segment Attributes is a collection of segment information encoded within a single U32 using the following bit allocation.

Table 5 — Segment attributes

Bits 0 - 23	Reserved for future use.
Bits 24 - 31	Segment type. Complete list of Segment types can be found in Table 6— Segment Types.

5.1.3 Data Segment

All data stored in a JT file shall be defined within a Data Segment. Data Segments are “typed” based on the general classification of data they contain. See Segment Type field description below for a complete list of the segment types.

Beyond specific data field compression/encoding, some Data Segment types also have compression conditionally applied to all the Data bytes of information persisted within the segment. Whether this compression is conditionally applied to a segment’s Data bytes of information is indicated by information stored with the first “Element” in the segment. Also, Table 6 Segment Types has a column indicating whether the Segment Type may have compression applied to its Data bytes.

All Data Segments have the same basic structure.




Figure 14 — Data Segment data collection

Segment Header

Segment Header contains information that determines how the remainder of the Segment is interpreted by the loader.




Figure 15 — Segment Header data collection

GUID: Segment ID

Global Unique Identifier for the segment.

I32: Segment Type

Segment Type defines a broad classification of the segment contents. For example, a Segment Type of “1” denotes that the segment contains Logical Scene Graph material; “2” denotes contents of a B-Rep, etc.

The complete list of segment and whether or not they support compression on all Data bytes in the payload is as follows: payload is as follows:

Table 6 — Segment Types

Type	Data Contents	Compression
1	Logical Scene Graph	Yes
2	JT B-Rep	Yes
3	PMI Data	Yes
4	Meta Data	Yes
6	Shape	No
7	Shape LOD0	No
8	Shape LOD1	No
9	Shape LOD2	No
10	Shape LOD3	No
11	Shape LOD4	No
12	Shape LOD5	No
13	Shape LOD6	No
14	Shape LOD7	No
15	Shape LOD8	No
16	Shape LOD9	No

Type	Data Contents	Compression
17	XT B-Rep	Yes
18	Wireframe Representation	Yes
20	ULP	Yes
23	STT	Yes
24	LWPA	Yes
30	MultiXT B-Rep	Yes
31	InfoSegment	Yes
32	AEC Shape	Yes
33	STEP B-rep	Yes

NOTE 1 Segment Types 7-16 all identify the contents as LOD Shape data, where the increasing type number is intended to convey some notion of how high an LOD the specific shape segment represents. The lower the type in this 7-16 range the more detailed the Shape LOD (i.e. Segment Type 7 is the most detailed Shape LOD Segment). For the rare case when there are more than 10 LODs, LOD9 and greater are all assigned Segment Type 16.

NOTE 2 The more generic Shape Segment type (i.e. Segment Type 6) is used when the Shape Segment has one or more of the following characteristics:

- not a descendant of an LOD node;
- is referenced by (i.e. is a child of) more than one LOD node;
- Shape has its own built-in LODs;
- no way to determine what LOD a Shape Segment represents.

I32: Segment Length

Segment Length is the total size of the segment in bytes. This length value includes all segment Data bytes plus the Segment Header bytes (i.e. it is the size of the complete segment) and should be equal to the length value stored with this segment's TOC Entry.

Data

The interpretation of the Data section depends on the Segment Type. See Data Segments for complete description for all Data Segments that may be contained in a JT file.

Although the Data section is Segment Type dependent there is a common structure which often occurs within the Data section. This structure is a list or multiple lists of Elements where each Element has the same basic structure which consists of some fixed length header information describing the type of object contained in the Element, followed by some variable length object type specific data.

Individual data fields of an Element data collection (and its children data collections) may have advanced compression/encoding applied to them as indicated through compression related data values stored as part of the particular Element's storage format. In addition, another level of compression (i.e. LZMA compression) may be conditionally applied to all bytes of information stored for all Elements within a particular Segment. Not all Segment types support compression on all Segment data as indicated Table 8 — Segment Types If a particular file Segment is of the type which supports compression on all the Segment data, whether this compression is applied or not is indicated by data values stored in the Logical Element Header Compressed data collection of the first Element within the Segment. An in-depth description of JT file compression/encoding techniques can be found in this document.

For Segment Types that do NOT support compression on all Segment Data.
 (See Table 6 — Segment Types.)

For Segment Types that do support compression on all Segment Data.
 (See Table 6 — Segment Types.)

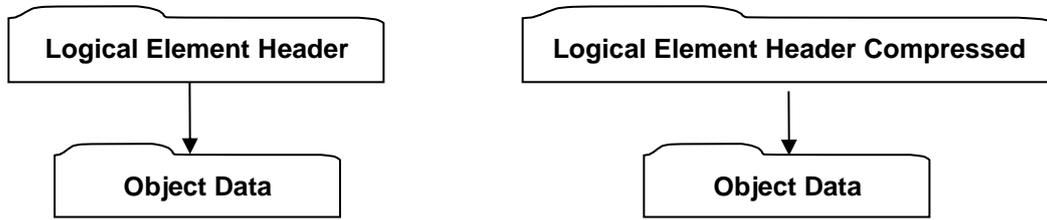


Figure 16 — Data collection

Logical Element Header

Logical Element Header contains data defining the length in bytes of the Element along with the Element Header.




Figure 17 — Logical Element Header data collection

Complete description for Logical Element Header can be found in the Element Header.

I32: Element Length

Element Length is the total length in bytes of the element Object Data.

Element Header

Element Header contains data describing the object type contained in the Element.




Figure 18 — Element Header data collection

GUID: Object Type ID

Object Type ID is the globally unique identifier for the object type. A complete list of the assigned GUID for all object types stored in a JT file can be found in Annex A. If the GUID is not found in Annex A, the reader should skip Element Length + 1 number of bytes.

UChar: Object Base Type

Object Base Type identifies the base object type. If the Object Base Type is not present in Object Base Types table then the loader should simply skip (read pass) Element Length number of bytes.

Valid Object Base Types include the following:

Table 7 — Object Base Types

Base Type	Description	Base Type's Data Format
255	None	None
0	Base Graph Node Object	Base Node Data
1	Group Graph Node Object	Group Node Data
2	Shape Graph Node Object	Base Shape Data
3	Base Attribute Object	Base Attribute Data
4	Shape LOD	None
5	Base Property Object	Base Property Atom Data
6	JT Object Reference Object	JT Object Reference Property Atom Element without the Logical Element Header Compressed data collection.
8	JT Late Loaded Property Object	Late Loaded Property Atom Element without the Logical Element Header Compressed data collection.
9	JtBase (none)	None

I32: Object ID

Object ID is the identifier for this Object. Other objects referencing this particular object do so using the Object ID.

Object Data

The interpretation of the Object Data section depends upon the Object Type ID stored in the Logical Element Header (see Logical Element Header).

Logical Element Header Compressed

Logical Element Header Compressed data collection is the format of Element Header data used by all Elements within Segment Types that support compression on all data in the Segment. See the Segment Types table for information on whether a particular Segment Type supports compression on all data in the Segment.

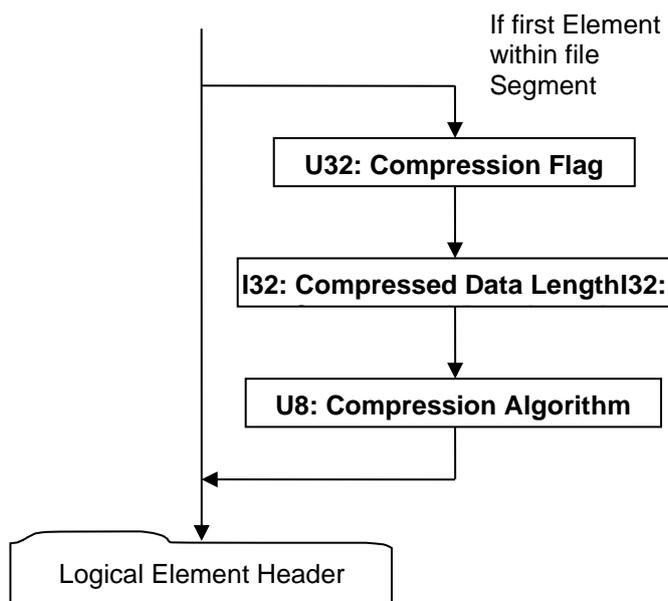


Figure 19 — Logical Element Header Compressed data collection

Complete description for Logical Element Header can be found in Logical Element Header. Note that if Compression Flag indicates that compression is ON for all element data in the Segment, then the Logical Element Header data collection is also compressed accordingly.

U32: Compression Flag

Compression Flag is a flag indicating whether compression is ON/OFF for all data elements in the file Segment. Valid values include the following:

Table 8 — Compression flag values

= 3	LZMA compression is ON
!= 3	LZMA No Compression

I32: Compressed Data Length

Compressed Data Length specifies the compressed data length in number of bytes. Note that data field Compression Algorithm is included in this count.

U8: Compression Algorithm

Compression Algorithm specifies the compression algorithm applied to all data in the Segment. Valid values include the following:

Table 9 — Compression algorithm values

= 1	No compression
= 3	LZMA compression

Logical Element Header

Object Data

The interpretation of the Object Data section depends upon the Object Type ID stored in the Logical Element Header (see Logical Element Header).

5.2 Data Segments

A JT file may consists of the following segments of data:

- LSG segment contains a collection of objects (i.e. elements) connected through directed references to form a directed acyclic graph structure (i.e. the LSG). The LSG is the graphical description of the model and contains graphics shapes and attributes representing the model's physical components, properties identifying arbitrary metadata (e.g. names, semantic roles) of those components, and a hierarchical structure expressing the component relationships.
- Meta Data Segment is used to store large collections of meta-data in separate addressable segments of the JT File, including PMI. Storing meta-data in a separate addressable segment allows references (from within the JT file) to these segments to be constructed such that the meta-data can be late-loaded.
- Shape LOD segment contains an element that defines the geometric shape definition data (e.g. vertices, polygons, normals, etc) for a particular shape level of detail or alternative representation.
- XT B-Rep Segment contains an element that defines the recommended precise geometric boundary representation data for a particular part in boundary representation format.
- Wireframe Segment contains an element that defines the precise 3D wireframe data for a particular part.
- JT ULP Segment contains an element that defines the semi-precise geometric boundary representation data for a particular part in JT ULP format.
- JT LWPA Segment contains an element that defines light weight precise analytic data for a particular part. More specifically LWPA contains the collection of analytic surfaces in the b-rep definition of the part.
- Multi XT B-Rep Segment contains an element that defines the precise geometric boundary representation data for one or more parts in boundary representation format.

- STEP B-Rep segment contains an element that defines the precise geometric boundary representation data for a particular part in normative STEP Part 42 (ISO 10303-42) boundary representation format as a part 21 compressed file (ISO 10303-21).
- Info Segment : contains text strings with authoring information for the JT file it exists in.
- STT Segment JT Smart Topology Table (hereafter referred to as STT) Segment contains an Element that defines the lightweight B-Rep description for a particular Part.

The following segments are deprecated as of this specification description; they are included here for completeness but should be considered to be read only for legacy purposes:

- JT B-Rep Segment containing an element that defines the precise geometric boundary representation data for a particular Part in JT B-Rep format;
- The PMI manager meta data element can sometimes also be represented in a PMI data segment. This can occur when a pre JT 8 version file is migrated to JT 9.5 version file. So from a parsing point of view a PMI data segment should be treated exactly the same as a meta data segment.

For completed information on all the segments of a JT file see the segment descriptions for each segment in their specific sections in this document.

6 LSG Segment

LSG Segment contains a collection of objects (i.e. Elements) connected through directed references to form a directed acyclic graph structure (i.e. the LSG). The LSG is the graphical description of the model and contains graphics shapes and attributes representing the model's physical components, properties identifying arbitrary metadata (e.g. names, semantic roles) of those components, and a hierarchical structure expressing the component relationships. The "directed" nature of the LSG references implies that there is by default "state/attribute" inheritance from ancestor to descendant (i.e. predecessor to successor).

The first Graph Element in a LSG Segment should always be a Partition Node. The LSG Segment type supports compression on all element data, so all elements in LSG Segment use the Logical Element Header Compressed form of element header data. i.e this means the 3 compression related fields in the Logical Element Header Compressed appear in the first graph element only.

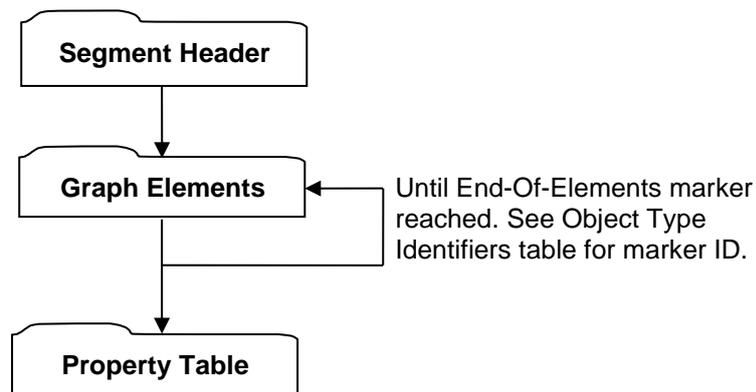


Figure 20 — LSG Segment data collection

Complete description for Segment Header can be found in the Segment Header description.

Graph Elements

Graph Elements form the backbone of the LSG directed acyclic graph structure and in doing so serve as the JT model's fundamental description. There are two general classifications of Graph elements, Node Elements and Attribute Elements.

Node Elements are nodes in the LSG and in general can be categorized as either an internal or leaf node. The leaf nodes are typically shape nodes used to represent a model's physical components and as such either contain or reference some graphical representation or geometry. The internal nodes define the hierarchical organization of the leaf nodes, forming both spatial and logical model relationships, and often contain or reference information (e.g. Attribute Elements) that is inherited down the LSG to all descendant nodes.

Attribute Elements represent graphical data (like appearance characteristics (e.g. colour), or positional transformations) that can be attached to a node, and inherit down the LSG.

Each of these general Graph Element classifications (i.e. Node/Attribute Elements) is sub-typed into specific/concrete types based on data content and implied specialized behaviour. The following sub-sections describe each of the Node and Attribute Element types.

6.1 Node Elements

Node Elements represent the relationships of a model's components. The model's component hierarchy is formed via certain types of Node Elements containing collections of references to other Node Elements who in turn may reference other collections of Node Elements. Node Elements are also the holders (either directly or indirectly) of geometric shape, properties, and other information defining a model's components and representations.

6.1.1 Base Node Element

Object Type ID: 0x10dd1035, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Base Node Element represents the simplest form of a node that can exist within the LSG. The Base Node Element has no implied LSG semantic behaviour nor can it contain any children nodes.

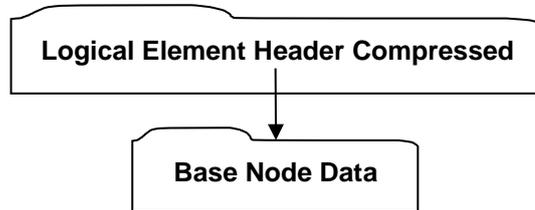


Figure 21 — Base Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data

Base Node Data

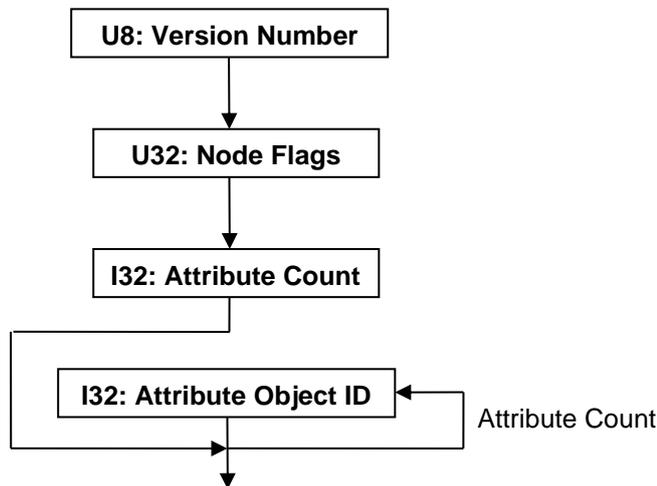


Figure 22 — Base Node Data collection

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U32: Node Flags

Node Flags is a collection of flags. The flags are combined using the binary OR operator. These flags store various state information of the node object. All bits fields that are not defined as in use should be set to “0”.

Table 10 — Node Flag values

0x00000001	Ignore Flag = 0 – Algorithms traversing the LSG structure should include/process this node. = 1 – Algorithms traversing the LSG structure should skip the whole subgraph rooted at this node. Essentially the traversal should be pruned.
------------	---

I32: Attribute Count

Attribute Count indicates the number of Attribute Objects referenced by this Node Object. A node may have zero Attribute Object references.

I32: Attribute Object ID

Attribute Object ID is the identifier for a referenced Attribute Object.

6.1.2 Partition Node Element

Object Type ID: 0x10dd103e, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A partition in a JT file must always be either the root or leaf node. A leaf partition node represents an external JT file reference and provides a means to partition a model into multiple physical JT files (e.g. separate JT file per part in an assembly).

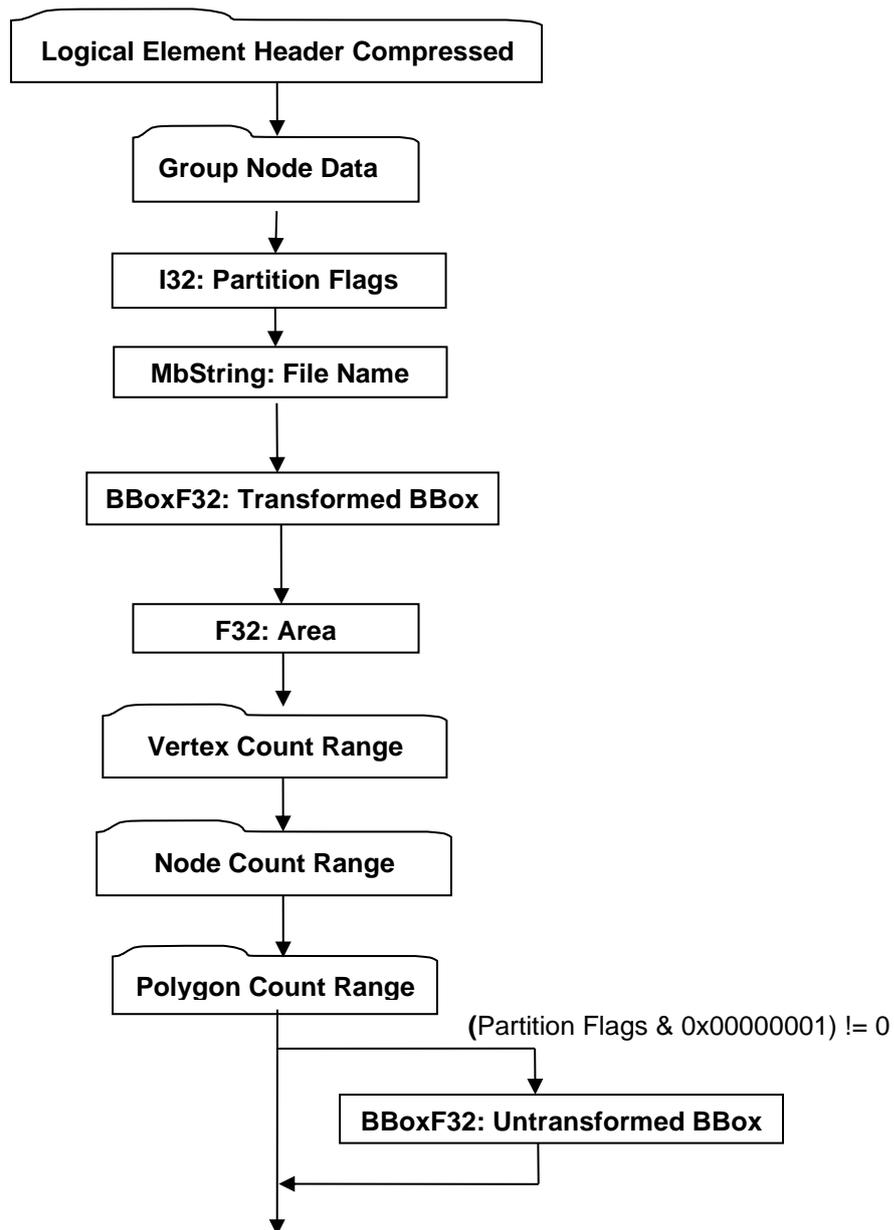


Figure 23 — Partition Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data

Complete description for Group Node Data can be found in Group Node Data.

I32: Partition Flags

Partition Flags is a collection of flags. The flags are combined using the binary OR operator. These flags store various state information of the Partition Node Object such as indicating the presence of optional data. All bits fields that are not defined as in use should be set to “0”.

Table 11 — Partition flag bits

0x00000001	Untransformed bounding box is written.

MbString: File Name

File Name is the relative path portion of the Partition’s file location. Where “relative path” should be interpreted to mean the string contains the file name along with any additional path information that locates the partition JT file relative to the location of the referencing JT file.

BBoxF32: Transformed BBox

The Transformed BBox is an MCS axis aligned bounding box and represents the transformed geometry extents for all geometry contained in the Partition Node. This bounding box information may be used by a renderer of JT data to determine whether to load the data contained within the Partition node (i.e. is any part of the bounding box within the view frustum).

F32: Area

Area is the total surface area for this node and all of its descendants. This value is stored in MCS coordinate space (i.e. values scaled by MCS scaling).

Vertex Count Range

Vertex Count Range is the aggregate minimum and maximum vertex count for all descendants of the Partition Node. There is a minimum and maximum value to accommodate descendant branches having LOD nodes, which encompass a range of count values within the branch, and to accommodate nodes that can themselves generate varying representations. The minimum value represents the least vertex count that can be achieved by the Partition Node’s descendants. The maximum value represents the greatest vertex count that can be achieved by the Partition Node’s descendants.




Figure 24 — Vertex Count Range data collection

I32: Min Count

Min Count is the least vertex count that can be achieved by the Partition Node’s descendants.

I32: Max Count

Max Count is the maximum vertex count that can be achieved by the Partition Node’s descendants.

Node Count Range

Node Count Range is the aggregate minimum and maximum count of all node descendants of the Partition Node. There is a minimum and maximum value to accommodate descendant branches having LOD nodes, which encompass a range of descendant node count values within the branch. The minimum value represents the least node count that can be achieved by the Partition Node’s descendants. The maximum value represents the greatest node count that can be achieved by the Partition Node’s descendants.

The data format for Node Count Range is the same as that described in Vertex Count Range.

Polygon Count Range

Polygon Count Range is the aggregate minimum and maximum polygon count for all descendants of the Partition Node. There is a minimum and maximum value to accommodate descendant branches having LOD nodes, which encompass a range of count values within the branch, and to accommodate nodes that can themselves generate varying representations. The minimum value represents the least polygon count that can be achieved by the Partition Node's descendants. The maximum value represents the greatest polygon count that can be achieved by the Partition Node's descendants.

The data format for Polygon Count Range is the same as that described in Vertex Count Range.

BBoxF32: Untransformed BBox

The Untransformed BBox is only present if Bit 0x00000001 of Partition Flags data field is ON. The Untransformed BBox is an LCS axis-aligned bounding box and represents the untransformed geometry extents for all geometry contained in the Partition Node. This bounding box information may be used by a renderer of JT data to determine whether to load the data contained within the Partition node (i.e. is any part of the bounding box within the view frustum).

6.1.3 Group Node Element

Object Type ID: 0x10dd101b, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Group Nodes contain an ordered list of references to other nodes, called the group's *children*. Group nodes may contain zero or more children; the children may be of any node type. Group nodes may not contain references to themselves or their ancestors.

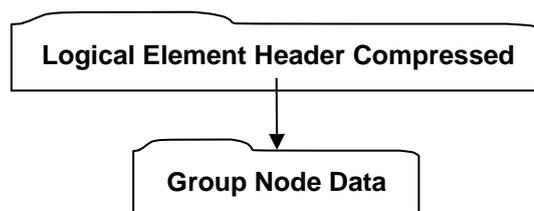


Figure 25 — Group Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data

Group Node Data

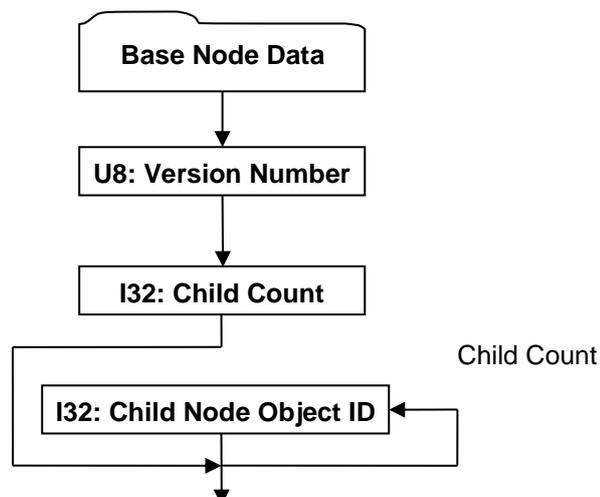


Figure 26 — Group Node Data collection

A complete description of Base Node Data can be found in the LSG Segment section of this document under Base Node Elements in the logical collection describing Base Node Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

I32: Child Count

Child Count indicates the number of child nodes for this Group Node Object. A node may have zero children.

I32: Child Node Object ID

Child Node Object ID is the identifier for the referenced Node Object.

6.1.4 Instance Node Element

Object Type ID: 0x10dd102a, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

An Instance Node contains a single reference to another node. Their purpose is to allow sharing of nodes and assignment of instance-specific attributes for the instanced node. Instance Nodes may not contain references to themselves or their ancestors.

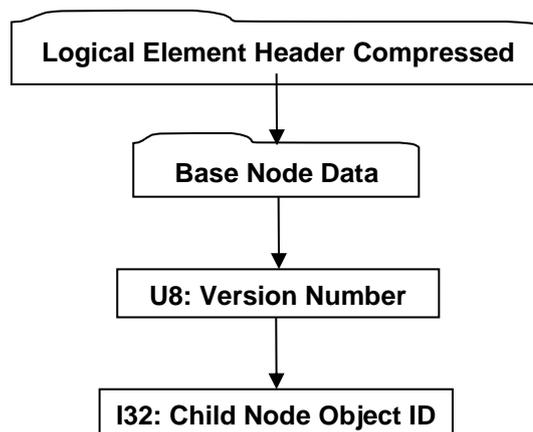


Figure 27 — Instance Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data

A complete description of Base Node Data can be found in the LSG Segment section of this document under Base Node Elements in the logical collection describing Base Node Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

I32: Child Node Object ID

Child Node Object ID is the identifier for the instanced Node Object.

6.1.5 Part Node Element

Object Type ID: 0xce357244, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1

A Part Node Element represents the root node for a particular Part within a LSG structure. Every unique Part represented within a LSG structure should have a corresponding Part Node Element. A Part Node Element typically references (using Late Loaded Property Atoms) additional Part specific geometric data and/or properties (e.g. B-Rep data, PMI data).

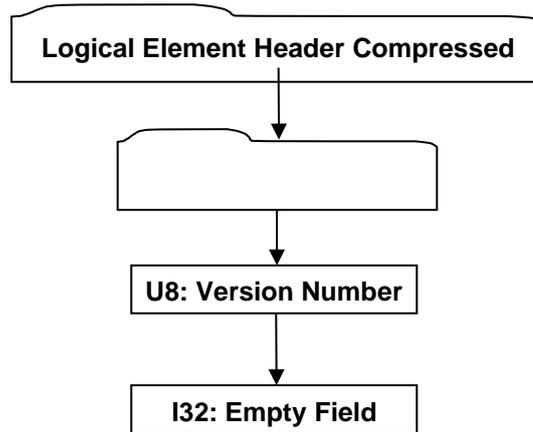


Figure 28 — Part Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data

Complete description for Meta Data Node Data can be found in Meta Data Node Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

I32: Empty Field

Refer to Common Data Conventions and Constructs Empty Field description.

6.1.6 Meta Data Node Element

Object Type ID: 0xce357245, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1

The Meta Data Node Element is a node type used for storing references to specific “late loaded” meta-data (e.g. properties, PMI). The referenced meta-data is stored in a separate addressable segment of the JT File (see Meta Data Segment) and thus the use of this Meta Data Node Element is in support of the JT file loader/reader “best practice” of late loading data (i.e. storing the referenced meta-data in separate addressable segment of the JT file allows a JT file loader/reader to ignore this node’s meta-data on initial load and instead late-load the node’s meta-data upon demand so that the associated meta-data does not consume memory until needed).

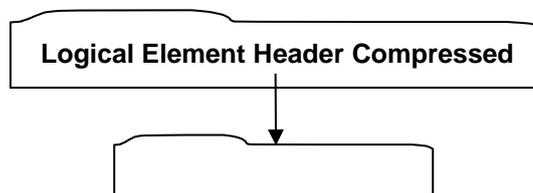


Figure 29 — Meta Data Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data

Meta Data Node Data




Figure 30 — Meta Data Node Data collection

Complete description for Group Node Data can be found in Group Node Data.

U8: Version Number

Version Number is the version identifier for this data. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

6.1.7 LOD Node Element

Object Type ID: 0x10dd102c, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

An LOD Node holds a list of alternate representations. The list is represented as the children of a base group node, however, there are no implicit semantics associated with the ordering. Traversers of LSG may apply semantics to the ordering as part of alternative representation selection.

Each alternative representation could be a sub-assembly where the alternative representation is a group node with an assembly of children.

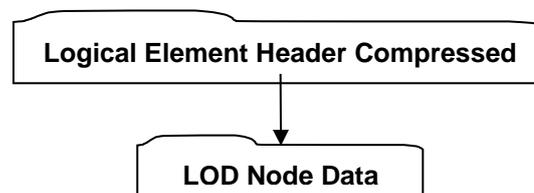


Figure 31 — LOD Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

LOD Node Data




Figure 32 — LOD Node Data collection

Complete description for Group Node Data can be found in Group Node Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

6.1.8 Range LOD Node Element

Object Type ID: 0x10dd104c, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Range LOD Nodes hold a list of alternate representations and the ranges over which those representations are appropriate. Range Limits indicate the distance between a specified centre point and the eye point, within which the corresponding alternate representation is appropriate. Traversers of LSG consult these range limit values when making an alternative representation selection.

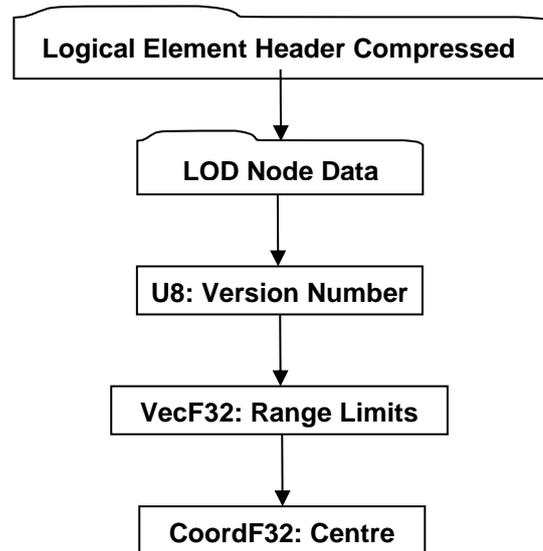


Figure 33 — Range LOD Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Complete description for LOD Node Data can be found in LOD Node Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

VecF32: Range Limits

Range Limits indicate the WCS distance between a specified centre point and the eye point, within which the corresponding alternate representation is appropriate. It is not required that the count of range limits is equivalent to the number of alternative representations. These values are considered “soft values” in that loaders/viewers of JT data are free to throw these values away and compute new values based on their desired LOD selection semantics.

Best practices suggest that LSG traversers apply the following strategy, at Range LOD Nodes, when making alternative representation selection decisions based on Range Limits: The first alternate representation is valid when the distance between the centre and the eye point is less than or equal to the first range limit (and when no range limits are specified). The second alternate representation is valid when the distance is greater than the first limit and less than or equal to the second limit, and so on. The last alternate representation is valid for all distances greater than the last specified limit.

CoordF32: Centre

Centre specifies the X,Y,Z coordinates for the MCS centre point upon which alternative representation selection eye distance computations are based. Typically this location is the centre of the highest-detail alternate representation. These values are considered “soft values” in that loaders/viewers of JT data are free to throw these values away and compute new values based on their desired LOD selection semantics.

6.1.9 Switch Node Element

Object Type ID: 0x10dd10f3, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

The Switch Node is very much like a Group Node in that it contains an ordered list of references to other nodes, called the *children* nodes. The difference is that a Switch Node also contains additional data indicating which child (one or none) a LSG traverser should process/traverse.

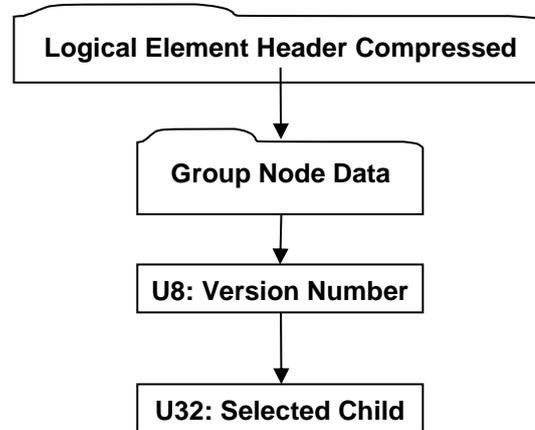


Figure 34 — Switch Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Complete description for Group Node Data can be found in Group Node Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U32: Selected Child

Selected Child is the index for the selected child node. Valid Selected Child values reside within the following range: $-1 < \text{Selected Child} < \text{Child Count}$. Where -1 indicates that no child is to be selected and Child Count is the data field value Group Node Data.

Shape Node Elements

Shape Node Elements are “leaf” nodes within the LSG structure and contain or reference the geometric shape definition data (e.g. vertices, polygons, normals, etc.).

Typically Shape Node Elements do not directly contain the actual geometric shape definition data, but instead reference (using Late Loaded Property Atoms) Shape LOD Segments within the file for the actual geometric shape definition data. Storing the geometric shape definition data within separate independently addressable data segments in the JT file, allows a JT file reader to be structured to support the “best practice” of delaying the loading/reading of associated data until it is actually needed. Complete descriptions for Late Loaded Property Atom Elements and Shape LOD Segments can be found in Late Loaded Property Atom Element and Property Atom Elements respectively.

There are several types of Shape Node Elements which the JT format supports. The following sub-sections document the various Shape Node Element types.

6.1.10 Base Shape Node Element

Object Type ID: 0x10dd1059, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Base Shape Node Element represents the simplest form of a shape node that can exist within the LSG.

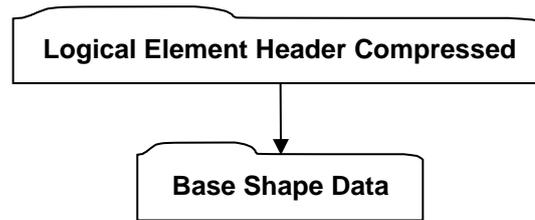


Figure 35 — Base Shape Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data .

Base Shape Data

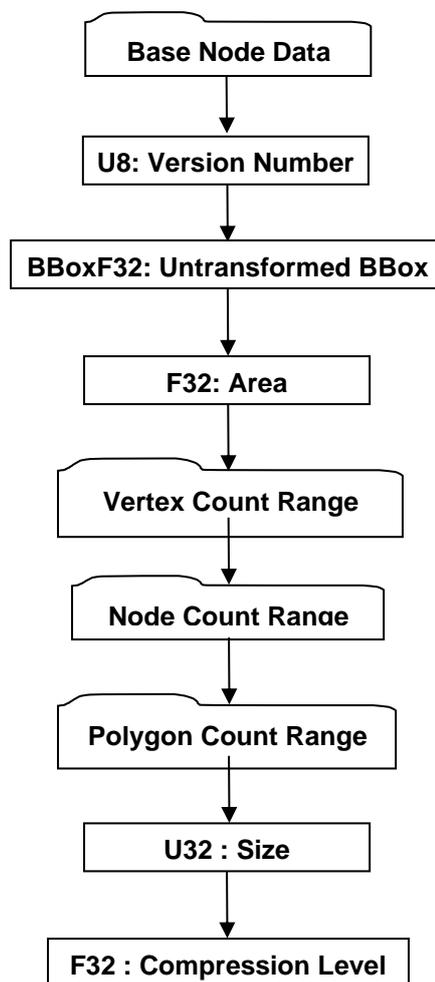


Figure 36 — Base Shape Data collection

A complete description of Base Node Data can be found in the LSG Segment section of this document under Base Node Elements in the logical collection describing Base Node Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

BBoxF32: Untransformed BBox

The Untransformed BBox is an axis-aligned LCS bounding box and represents the untransformed geometry extents for all geometry contained in the Shape Node.

F32: Area

Area is the total surface area for this node and all of its descendants. This value is stored in MCS coordinate space (i.e. values scaled by MCS scaling).

Vertex Count Range

Vertex Count Range is the aggregate minimum and maximum vertex count for this Shape Node. There is a minimum and maximum value to accommodate shape types that can themselves generate varying representations. The minimum value represents the least vertex count that can be achieved by the Shape Node. The maximum value represents the greatest vertex count that can be achieved by the Shape Node.




Figure 37 — Vertex Count Range data collection

I32: Min Count

Min Count is the least vertex count that can be achieved by this Shape Node.

I32: Max Count

Max Count is the maximum vertex count that can be achieved by this Shape Node. A value of “-1” indicates maximum vertex count is unknown.

Node Count Range

Node Count Range is the aggregate minimum and maximum count of all node descendants of the Shape Node. The minimum value represents the least node count that can be achieved by the Shape Node’s descendants. The maximum value represents the greatest node count that can be achieved by Shape Node’s descendants. For Shape Nodes the minimum and maximum count values should always be equal to “1”.

Polygon Count Range

Polygon Count Range is the aggregate minimum and maximum polygon count for this Shape Node. There is a minimum and maximum value to accommodate shape types that can themselves generate varying representations. The minimum value represents the least polygon count that can be achieved by the Shape Node. The maximum value represents the greatest polygon count that can be achieved by the Shape Node.

The data format for Polygon Count Range is the same as that described in Vertex Count Range.

U32 : Size

Size specifies the in memory length in bytes of the associated/referenced Shape LOD Element. This Size value has no relevancy to the on-disk (JT File) size of the associated/referenced Shape LOD Element. A value of zero indicates that the in memory size is unknown. See [Shape LOD Element](#) for complete description of Shape LOD Elements. JT file loaders/readers can leverage this Size value during late load processing to help pre-determine if there is sufficient memory to load the Shape LOD Element.

F32: Compression Level

Compression Level specifies the qualitative compression level applied to the associated/referenced Shape LOD Element. See the chapter on [Shape LOD Segment](#) for complete description of Shape LOD Elements. This compression level value is a qualitative representation of the compression applied to the Shape LOD Element. The absolute compression (derived from this qualitative level) applied to the Shape LOD Element is physically represented in the JT format by other data stored with both the Shape Node and the Shape LOD Element (e.g. Quantization Parameters), and thus it's not necessary to understand how to map this qualitative value to absolute compression values in order to uncompress/decode the data.

Table 12 — Compression level values

= 0.0	“Lossless” compression used.
= 0.1	“Minimally Lossy” compression used. This setting generally results in modest compression ratios with little if any visual difference when compared to the same images rendered from “Lossless” compressed Shape LOD Element.
= 0.5	“Moderate Lossy” compression used. The setting results in more data loss than “Minimally Lossy” and thus higher compression ratio is obtained. Some visual difference will likely be noticeable when compared to the same images rendered from “Lossless” compressed Shape LOD Element.
= 1.0	“Aggressive Lossy” compression used. With this setting as much data as possible will be thrown away, resulting in highest compression ratio, while still maintaining a modestly useable representation of the underlying data. Visual differences may be evident when compared to the same images rendered from “Lossless” compressed Shape LOD Element.

6.1.11 Vertex Shape Node Element

Object Type ID: 0x10dd107f, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Vertex Shape Node Element represents shapes defined by collections of vertices.

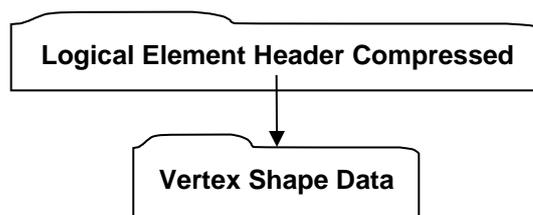


Figure 38 — Vertex Shape Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Vertex Shape Data




Figure 39 — Vertex Shape Data collection

A complete description of Base Shape Data can be found in the LSG Segment section of this document under Base Shape Node Element in the logical collection describing Base Shape Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U64: Vertex Binding

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to “0”. For more information see Vertex Shape LOD Data U64 : Vertex Bindings.

6.1.12 Tri-Strip Set Shape Node Element

Object Type ID: 0x10dd1077, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Tri-Strip Set Shape Node Element defines a collection of independent and unconnected triangle strips. Each strip constitutes one primitive of the set and is defined by one list of vertex coordinates.

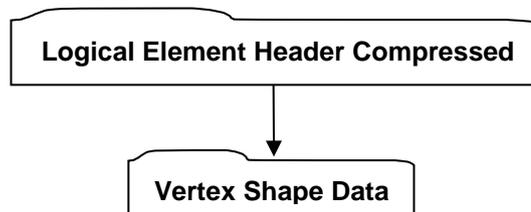


Figure 22 — Tri-Strip Shape Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Vertex Shape Data can be found in the LSG Segment section of this document under Vertex Shape Node Element in the logical collection describing Vertex Shape Data.

6.1.13 Polyline Set Shape Node Element

Object Type ID: 0x10dd1046, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Polyline Set Shape Node Element defines a collection of independent and unconnected polylines. Each polyline constitutes one primitive of the set and is defined by one list of vertex coordinates.

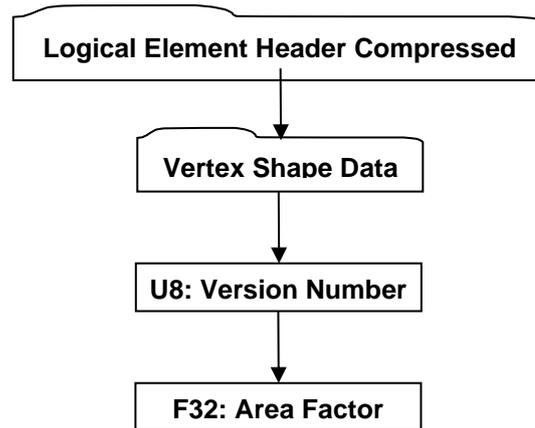


Figure 40 — Polyline Set Shape Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Vertex Shape Data can be found in the LSG Segment section of this document under Vertex Shape Node Element in the logical collection describing Vertex Shape Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

F32: Area Factor

Area Factor specifies a multiplier factor applied to a Polyline Set computed surface area. In JT data viewer applications there may be LOD selection semantics that are based on screen coverage calculations. The so-called "surface area" of a polyline is computed as if each line segment were a square. This Area Factor turns each edge into a narrow rectangle. Valid Area Factor values lie in the range (0,1].

6.1.14 Point Set Shape Node Element

Object Type ID: 0x98134716, 0x0010, 0x0818, 0x19, 0x98, 0x08, 0x00, 0x09, 0x83, 0x5d, 0x5a

A Point Set Shape Node Element defines a collection of independent and unconnected points. Each point constitutes one primitive of the set and is defined by one vertex coordinate.

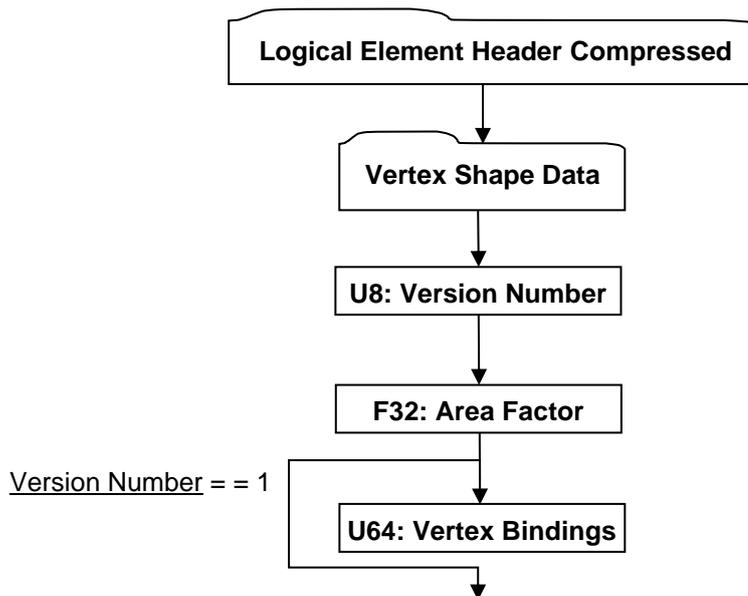


Figure 41 — Point Set Shape Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Vertex Shape Data can be found in the LSG Segment section of this document under Vertex Shape Node Element in the logical collection describing Vertex Shape Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

F32: Area Factor

Area Factor specifies a multiplier factor applied to the Point Set computed surface area. In JT data viewer applications there may be LOD selection semantics that are based on screen coverage calculations. The computed “surface area” of a Point Set is equal to the larger (i.e. whichever is greater) of either the area of the Point Set’s bounding box, or “1.0”. Area Factor scales the result of this “surface area” computation.

U64: Vertex Bindings

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to “0”. For more information see Vertex Shape LOD Data U64: Vertex Bindings.

6.1.15 Polygon Set Shape Node Element

Object Type ID: 0x10dd1048, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Polygon Set Shape Node Element defines a collection of independent and unconnected polygons. Each polygon constitutes one primitive of the set and is defined by one list of vertex coordinates.

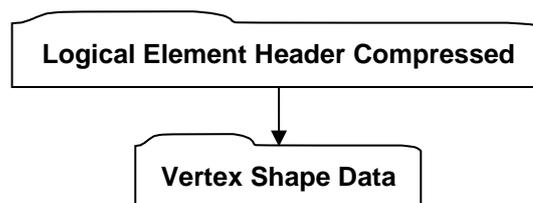


Figure 42 — Polygon Set Shape Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Vertex Shape Data can be found in the LSG Segment section of this document under Vertex Shape Node Element in the logical collection describing Vertex Shape Data.

6.1.16 NULL Shape Node Element

Object Type ID: 0xd239e7b6, 0xdd77, 0x4289, 0xa0, 0x7d, 0xb0, 0xee, 0x79, 0xf7, 0x94, 0x94

A NULL Shape Node Element defines a shape which has no direct geometric primitive representation (i.e. it is empty/NULL). NULL Shape Node Elements are often used as “proxy/placeholder” nodes within the serialized LSG when the actual Shape LOD data is run time generated (i.e. not persisted).

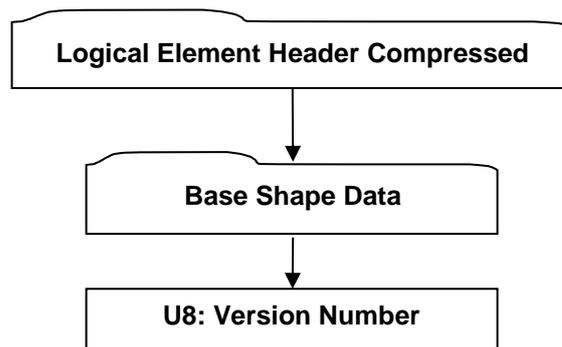


Figure 43 — NULL Shape Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Base Shape Data can be found in the LSG Segment section of this document under Base Shape Node Element in the logical collection describing Base Shape Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

6.1.17 Primitive Set Shape Node Element

Object Type ID: 0xe40373c1, 0x1ad9, 0x11d3, 0x9d, 0xaf, 0x0, 0xa0, 0xc9, 0xc7, 0xdd, 0xc2

A Primitive Set Shape Node Element represents a list/set of primitive shapes (e.g. box, cylinder, sphere, etc.) whose LODs can be procedurally generated. “Procedurally generate” means that the raw geometric shape definition data (e.g. vertices, polygons, normals, etc) for LODs is not directly stored; instead some basic shape information is stored (e.g. sphere centre and radius) from which LODs can be generated.

Primitive Set Shape Node Elements actually do not even directly contain this basic shape definition data, but instead reference (using Late Loaded Property Atoms) Primitive Set Shape Node Element within the file for the actual basic shape definition data. Storing the basic shape definition data within separate independently addressable data segments in the JT file, allows a JT file reader to be structured to support the “best practice” of delaying the loading/reading of associated data until it is actually needed. Complete descriptions for Late Loaded Property Atom Elements and Primitive Set Shape Element can be found in Late Loaded Property Atom Element and Primitive Set Shape Element respectively.

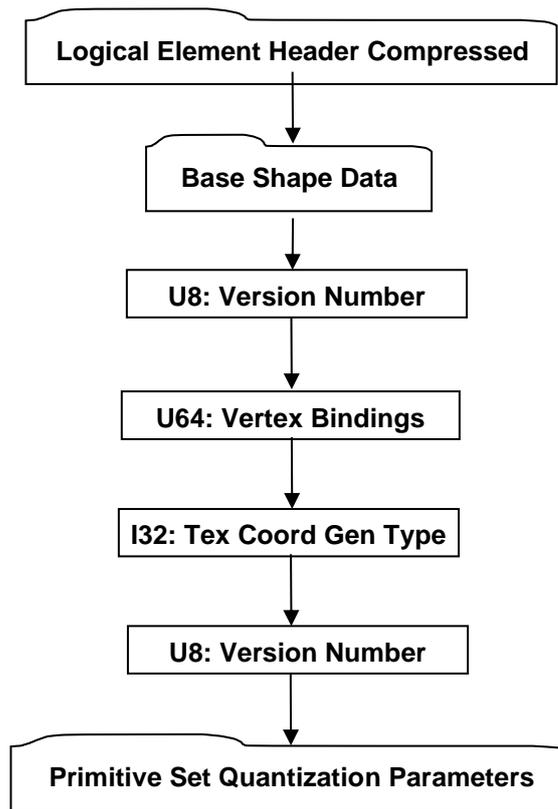


Figure 44 — Primitive Set Shape Node Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Base Shape Data can be found in the LSG Segment section of this document under Base Shape Node Element in the logical collection describing Base Shape Data.

U8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U64: Vertex Bindings

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to “0”. For more information see Vertex Shape LOD Data U64 : Vertex Bindings.

I32: Tex Coord Gen Type

Texture Coord Gen Type specifies how a texture is applied to each face of the primitive. Single tile means one copy of the texture will be stretched to fit the face, isotropic means that the texture will be duplicated on the longer dimension of the face in order to maintain the texture’s aspect ratio.

Table 13 — Texture Coord Gen Type values

= 0	Single Tile...Indicates that a single copy of a texture image will be applied to significant primitive features (i.e. cube face, cylinder wall, end cap) no matter how eccentrically shaped.
= 1	Isotropic...Implies that multiple copies of a texture image may be mapped onto eccentric surfaces such that a mapped texel stays approximately square.

U8: Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table 14 — Version Number values

= 0	Version 0 Format
= 1	Version 1 Format

Primitive Set Quantization Parameters

Primitive Set Quantization Parameters specifies for the two shape data type grouping (i.e. Vertex, Colour) the number of quantization bits used for given qualitative compression level. Although these values are saved in the associated/referenced Shape LOD Element, they are also saved here so that a JT File loader/reader does not have to load the Shape LOD Element in order to determine the Shape quantization level. See Shape LOD Element for complete description of Shape LOD Elements.




Figure 45 — Primitive Set Quantization Parameters data collection

U8: Bits Per Vertex

Bits Per Vertex specifies the number of quantization bits per vertex coordinate component. Value shall be within range [0:24] inclusive.

U8: Bits Per Colour

Bits Per Colour specifies the number of quantization bits per colour component. Value shall be within range [0:24] inclusive.

6.2 Attribute Elements

Attribute Elements (e.g. colour, texture, material, lights, etc.) are placed in LSG as objects associated with nodes. Attribute Elements are not nodes themselves, but can be associated with any node.

For applications producing or consuming JT format data, it is important that the JT format semantics of how attributes are meant to be applied and accumulated down the LSG are followed. If not followed, then consistency between the applications in terms of 3D positioning and rendering of LSG model data will not be achieved.

To that end each attribute type defines its own application and accumulation semantics, but in general attributes at lower levels in the LSG take precedence and replace or accumulate with attributes set at higher levels. Nodes without associated attributes inherit those of their parents. Attributes inherit only from their parents, thus a node's attributes do not affect that node's siblings. The root of a partition inherits the attributes in effect at the referring partition node.

In previous version of the JT file format, Attributes held a single "final" bit denoting that no further accumulations were to take place into that attribute type by Attributes of the same type lying below it in the scene graph. JTIAP Edition 3 replaces this single bit with separate "field final" bits for each field within the Attribute. Different Attributes have different fields, and are documented accordingly in the following sections. Only three Attributes define more than one internal field (i.e. Material Attribute Element, Texture Image Attribute Element, and Draw Style Attribute Element). All other Attributes merely define a single default field that encompasses their entire state.

In addition to "field final" bits, each Attribute also defines a parallel set of "field inhibit" bits. These bits denote, on a field-by-field basis, whether a field is allowed to accumulate. Said differently, if a field inhibit bit is set to 0, the field accumulates normally; if the bit is set to 1, then the field will not accumulate, and is ignored.

Descendants can explicitly do a one-shot override of “final” using the attribute “force” flag (see Base Attribute Data), but do not by default. Note that “force” does not turn OFF “final” – it is simply a one-shot override of “final” for the specific attribute marked as “forcing.” Note that the “force” flag is attribute-wide – not on a field-by-field basis like field-finals and field-inhibits. An analogy for this “force” and “final” interaction is that “final” is a back-door in the attribute accumulation semantics, and that “force” is a doggy-door in the back-door!

Base Attribute Data

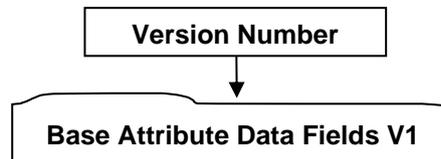


Figure 46 — Base Attribute Data collection

I8: Version Number

Version Number can have the value one or two. If the value is two then the Logical Collection Base Attribute Data Fields V2 will be read after each derived attribute type (i.e.. Material, Texture etc.) In all cases Base Attribute Data Fields V1 must be read first.

Base Attribute Data Fields V1




Figure 47 — Base Attribute Data Fields V1

U8: State Flags

State Flags is a collection of flags. The flags are combined using the binary OR operator and store various state information for Attribute Elements; such as indicating that the attributes accumulation is final. All bits fields that are not defined as in use should be set to “0”.

Table 15 — State Flag values

0x01	Unused
0x02	Accumulation Force flag. Provides a way to assign nodes in LSG, attributes that shall not be overridden by ancestors. = 0 – Accumulation of this attribute obeys ancestor’s Final flag setting. = 1 – Accumulation of this attribute is forced (overrides ancestor’s Final flag setting)
0x04	Accumulation Ignore Flag. Provides a way to indicate that the attribute is to be ignored (not accumulated). = 0 – Attribute is to be accumulated normally (subject to values of Force/Final flags) = 1 – Attribute is to be ignored.
0x08	Attribute Persistable Flag. Provides a way to indicate that the attribute is to be persistable to a JT file. = 0 – Attribute is to be non-persistable. = 1 – Attribute is to be persistable.

U32: Field Inhibit Flags

Field Inhibit Flags is a collection of flags, each flag corresponding to a collection of state data within a particular Attribute type. Each value (or semantically related set of values) present in an Attribute Element is given a field number ranging from 0 to 31. If the field's corresponding bit in Inhibit Flags is set, then the field should not participate in attribute accumulation. All bits are reserved.

See each particular Attribute Element (e.g. Material Attribute Element) for a description of bit field assignments for each attribute value.

U32: Field Final Flags

Field Final Flags is a collection of flags, each flag being parallel to the corresponding flag in the Field Inhibit Flags. If the field's bit in Field Final Flags is set, then that field within the Attribute will become "final" and will not allow any subsequent accumulation into the specified field. All bits are reserved.

See each particular Attribute Element for a description of bit field assignments for each Attribute value.

Base Attribute Data Fields V2

This logical collection is found in the Attribute Element data descriptions for; Material, Texture Image, Draw Style, Light Set Linestyle, Pointstyle, Geometric Transform, and Palette Map.

Figure 48 — Base Attribute Data Fields V2



U32: Palette Index

The palette index field is used to implicitly create a State Palette that may later be indexed by a PaletteMap attribute. For a full description see the Per Face Group Attribute Annex in this document.

Palette Index default value is -1

6.2.1 Material Attribute Element

Object Type ID: 0x10dd1030, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Material Attribute Element defines the material properties of a object. JT format LSG traversal semantics state that material attributes accumulate down the LSG by replacement.

The Field Inhibit flag (see Base Attribute Data) bit assignments for the Material Attribute Element data fields, are as follows:

Table 16 — Material Attribute data field inhibit values

Field Inhibit Flag Bit	Data Field(s) Bit Applies To
0	<u>Ambient Common RGB Value</u> , <u>Ambient Colour</u>
1	<u>Specular Common RGB Value</u> , <u>Specular Colour</u>
2	<u>Emission Common RGB Value</u> , <u>Emission Colour</u>
3	<u>Blending Flag</u> , <u>Source Blending Factor</u> , <u>Destination Blending Factor</u>
4	<u>Override Vertex Colour Flag</u>
5	<u>Material Reflectivity</u>
6	<u>Diffuse Colour</u>
7	<u>Diffuse Alpha</u>
8	

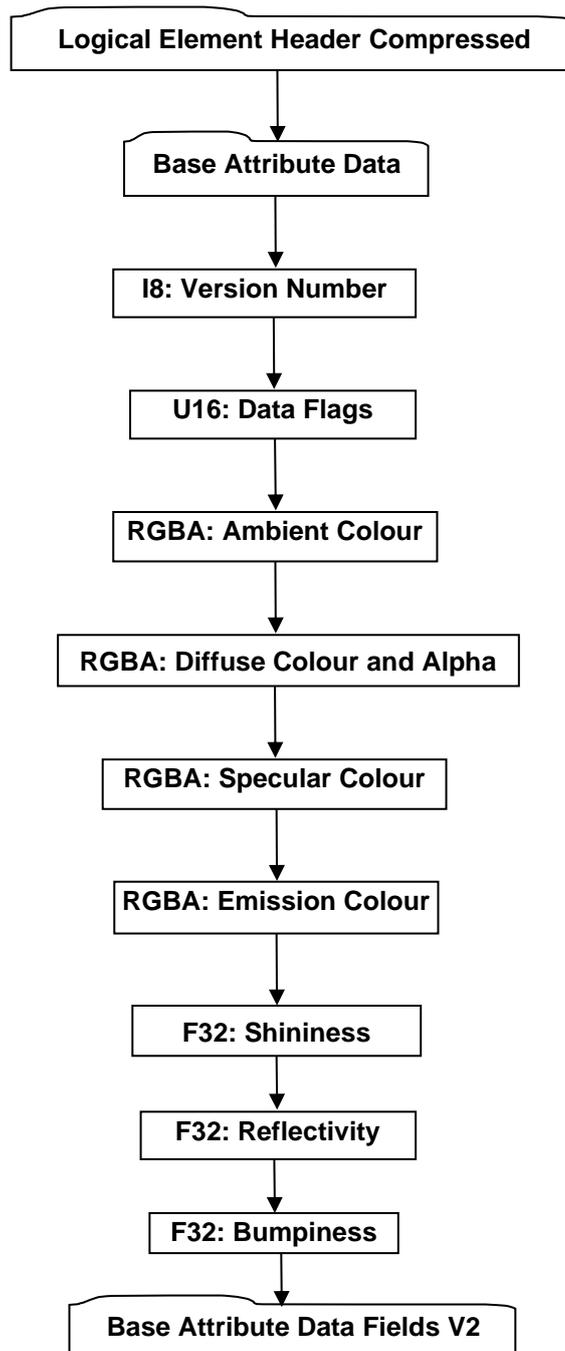


Figure 49 — Material Attribute Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Base Attribute Data can be found in the LSG Segment section of this document under Attribute Elements in the logical collection describing Base Attribute Data.

I8: Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table 17 — Material Attribute Version number value

= 1	Version-1 Format
-----	------------------

U16: Data Flags

Data Flags is a collection of flags and factor data. The flags and factor data are combined using the binary OR operator. The flags store information to be used for interpreting how to read subsequent Material data fields. All bits fields that are not defined as in use should be set to “0”.

Table 18 — Material Attribute Data Flag values

0x0010	<p>Blending Flag. Blending is a colour combining operation in the graphics pipeline that happens just before writing a colour to the framebuffer. If Blending is ON then incoming fragment RGBA colour values are used (based on Source Blend Factor) and existing framebuffer's RGBA colour values are used (based on Destination Blend Factor) to blend between the incoming fragment RGBA and the current frame buffer RGBA to arrive at a new RGBA colour to write into the framebuffer. If Blending is OFF then incoming fragment RGBA colour is written directly into framebuffer unmodified (i.e. completely overriding existing framebuffer RGBA colour).</p> <p>= 0 – Blending OFF. = 1 – Blending ON</p>
0x0020	<p>Override Vertex Colours Flag. If ON, then a shape's per vertex colours are to be overridden by the accumulated Material colour.</p> <p>= 0 – Override OFF = 1 – Override ON</p>
0x07C0	<p>Source Blend Factor (stored in bits 6 – 10 or in binary notation 0000011111000000). If Blending Flag enabled, this value indicates how the incoming fragment's (i.e. the source) RGBA colour values are to be used to blend with the current framebuffer's (i.e. the destination) RGBA colour values. Additional information on the interpretation of the Blending Factor values and how one might leverage them to render an image can be found in reference [1] listed in the bibliography section.</p> <p>= 0 – Interpret same as OpenGL GL_ZERO Blending Factor = 1 – Interpret same as OpenGL GL_ONE Blending Factor = 2 – Interpret same as OpenGL GL_DST_COLOUR Blending Factor = 3 – Interpret same as OpenGL GL_SRC_COLOUR Blending Factor = 4 – Interpret same as OpenGL GL_ONE_MINUS_DST_COLOUR Blending Factor = 5 – Interpret same as OpenGL GL_ONE_MINUS_SRC_COLOUR Blending Factor = 6 – Interpret same as OpenGL GL_SRC_ALPHA Blending Factor = 7 – Interpret same as OpenGL GL_ONE_MINUS_SRC_ALPHA Blending Factor = 8 – Interpret same as OpenGL GL_DST_ALPHA Blending Factor = 9 – Interpret same as OpenGL GL_ONE_MINUS_DST_ALPHA Blending Factor = 10 – Interpret same as OpenGL GL_SRC_ALPHA_SATURATE Blending Factor</p>
0xF800	<p>Destination Blend Factor (stored in bits 11 – 15 or in binary notation 1111100000000000).). If Blending Flag enabled, this value indicates how the current framebuffer's (the destination) RGBA colour values are to be used to blend with the incoming fragment's (the source) RGBA colour values. Additional information on the interpretation of the Blending Factor values and how one might leverage them to render an image can be found in reference [1] listed the bibliography section.</p> <p>= 0 – Interpret same as OpenGL GL_ZERO Blending Factor = 1 – Interpret same as OpenGL GL_ONE Blending Factor = 2 – Interpret same as OpenGL GL_DST_COLOUR Blending Factor = 3 – Interpret same as OpenGL GL_SRC_COLOUR Blending Factor = 4 – Interpret same as OpenGL GL_ONE_MINUS_DST_COLOUR Blending Factor = 5 – Interpret same as OpenGL GL_ONE_MINUS_SRC_COLOUR Blending Factor = 6 – Interpret same as OpenGL GL_SRC_ALPHA Blending Factor = 7 – Interpret same as OpenGL GL_ONE_MINUS_SRC_ALPHA Blending Factor = 8 – Interpret same as OpenGL GL_DST_ALPHA Blending Factor = 9 – Interpret same as OpenGL GL_ONE_MINUS_DST_ALPHA Blending Factor = 10 – Interpret same as OpenGL GL_SRC_ALPHA_SATURATE Blending Factor</p>

RGBA: Ambient Colour

Ambient Colour specifies the ambient red, green, blue, alpha colour values of the material.

RGBA: Diffuse Colour and Alpha

Diffuse Colour and Alpha specify the diffuse red, green, blue colour components and alpha value of the material.

RGBA: Specular Colour

Specular Colour specifies the specular red, green, blue, alpha colour values of the material.

RGBA: Emission Colour

Emission Colour specifies the emissive red, green, blue, alpha colour values of the material.

F32: Shininess

Shininess is the exponent associated with specular reflection and highlighting of the Phong specular lighting model. Shininess controls the degree with which the specular highlight decays. Only values in the range [1,128] are valid.

F32: Reflectivity

Reflectivity specifies the material reflectivity of the material. It represents the fraction of light reflected in the mirror direction by the material. Only values in the range [0.0, 1.0] are valid.

F32: Bumpiness

Bumpiness is used to control bump mapping, and specifies the degree to which bump mapping modifies the local normal vector. A value of 1.0 is the default. Values larger than 1.0 are intended to make the shaded object look as if it is more highly embossed; values between 0.0 and 1.0 make it look less so. Negative values are legal and make the object appear to be *engraved* rather than embossed.

Base Attribute Data Fields V2

See Common Data Attribute Containers for Attribute Elements. Base Attribute Data Fields V2 are defined when Base Attribute Version Number is set to two.

6.2.2 Texture Image Attribute Element

Object Type ID: 0x10dd1073, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Texture Image Attribute Element defines a texture image and its mapping environment. JT format LSG traversal semantics state that texture image attributes accumulate down the LSG by replacement on a *per texture channel* basis. See below for more information on texture image channels.

Note that additional information on the interpretation of the various Texture Image Attribute Element data fields can be found in the OpenGL references listed in the bibliography section [1].

The Field Inhibit and Field Final flag (see Base Attribute Data) bit assignments for the Texture Image Attribute Element data fields, are as follows:

Table 19 — Texture Image Attribute data field inhibit values

Field Flag Bit	Inhibit	Data Field(s) Bit Applies To
0		I32 : Texture Type, Mipmap Image Texel Data, MString:External Storage Name, Shared Image Flag
1		Border Mode, Border Colour
2		Mipmap Minification Filter, Mipmap Magnification Filter
3		S-Dimen Wrap Mode, T-Dimen Wrap Mode, R-Dimen Wrap Mode
4		Blend Type, Blend Colour
5		Texture Transform
6		Tex Coord Gen Mode, Tex Coord Reference Plane
7		Internal Compression Level

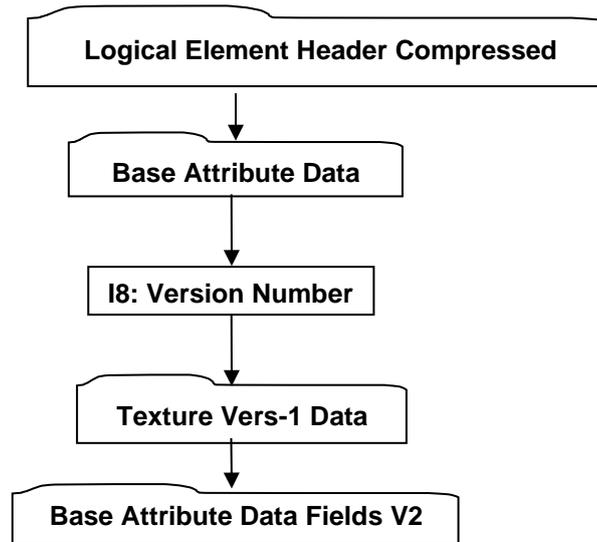


Figure 50 — Texture Image Attribute Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Base Attribute Data can be found in the LSG Segment section of this document under Attribute Elements in the logical collection describing Base Attribute Data.

I8: Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table 20 — Texture Image Version Number values

= 1	Version-1 Format
-----	------------------

When a data element in the JT file is versioned, it is for the purpose of adding a few pieces of new data onto the end of the existing data format. In this way, older viewers and readers of the JT file that do not yet know about higher local versions will naturally read the lower-numbered version blocks and ignore the higher-numbered ones they do not know how to read. At present, this mechanism is not being used in JTIAP Edition 3, but experience has shown from previous versions of JT that it probably will become useful at some point during the life of JTIAP Edition 3.

Texture Vers-1 Data

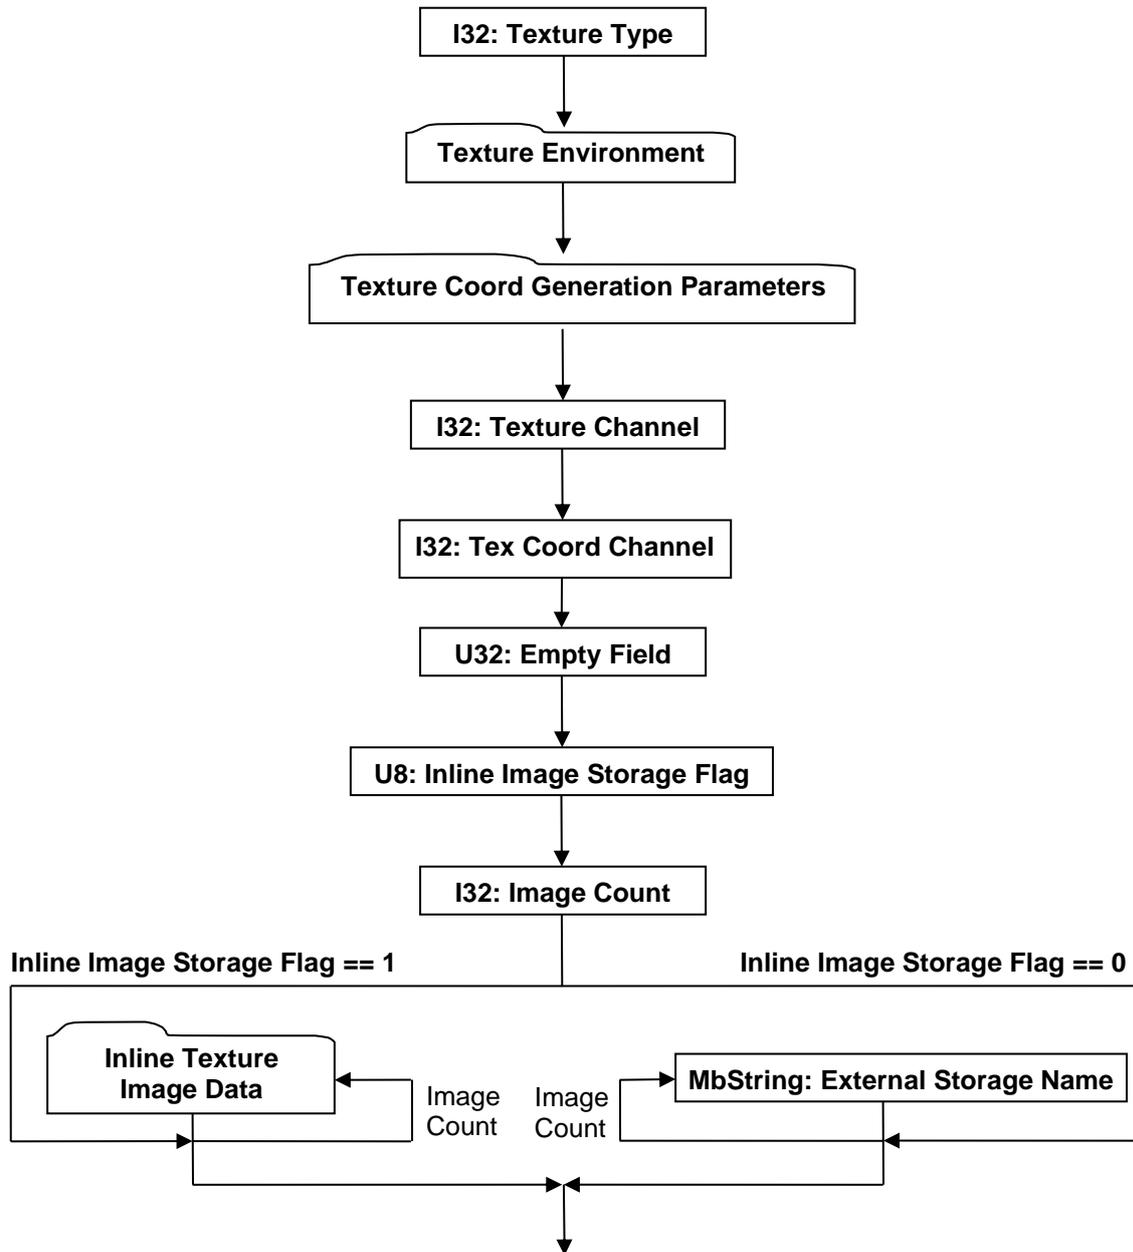


Figure 51 — Texture Vers-1 Data collection

Complete details for Texture Environment can be found in Texture Environment.

Complete details for Texture Coord Generation Parameters can be found in Texture Coord Generation Parameters.

Complete details for Inline Texture Image Data can be found in Inline Texture Image Data.

I32: Texture Type

Texture Type specifies the type of texture. A new texture type, separator texture, is defined in Texture Vers-1 Data to support resetting the texture accumulation state mid-graph. Shadow maps and pre-filtered light maps, however, are a general exception to this rule. In the following list, “image” refers to an image texture, “pre-lit” indicates that the image texture is to be applied before lighting when rendering the object to which it is applied, and “post-lit” indicates that the image texture is to be applied

after lighting. A gloss map is a pre-lit texture that applies itself to the specular material component of lighting instead of the diffuse component. A light map is an environment texture (texture at infinity surrounding the whole model) that serves as a source of illumination during shading calculations.

Table 21 — Texture Vers-1 Texture Type values

Texture Type	Description	Explicit Channel	Auto Channel
= 0	None.	N/A	N/A
= 1	One-Dimensional post-lit image texture.	Yes	No
= 2	Two-Dimensional post-lit image texture.	Yes	No
= 3	Three-Dimensional post-lit image texture.	Yes	No
= 4	Two-Dimensional 3-component tangent-space normal map.	No	Yes
= 5	Cube post-lit image texture.	Yes	No
= 7	Cube pre-lit image texture.	Yes	No
= 8	One-Dimensional pre-lit image texture.	Yes	No
= 9	Two-Dimensional pre-lit image texture.	Yes	No
= 10	Three-Dimensional pre-lit image texture.	Yes	No
= 11	Cube environment map.	No	Yes
= 12	One-Dimensional gloss map (specular) texture.	No	Yes
= 13	Two-Dimensional gloss map (specular) texture.	No	Yes
= 14	Three-Dimensional gloss map (specular) texture.	No	Yes
= 15	Cube gloss map (specular) texture.	No	Yes
= 16	Two-Dimensional 1-component bumpmap.	No	Yes
= 17	Two-Dimensional 3-component world-space normal map.	No	Yes
= 18	Two-Dimensional sphere environment map.	No	Yes
= 19	Two-Dimensional latitude/longitude environment map.	No	Yes
= 20	Two-Dimensional spherical diffuse light map.	No	Yes
= 21	Cube diffuse light map.	No	Yes
= 22	Two-Dimensional latitude/longitude diffuse light map.	No	Yes
= 23	Two-Dimensional spherical specular light map.	No	Yes
= 24	Cube specular light map.	No	Yes
= 25	Two-Dimensional latitude/longitude specular light map.	No	Yes
= 26	Resets texture state except shadow map and light maps.	N/A	N/A

I32: Texture Channel

Texture Channel specifies the texture channel number for the Texture Image Element. For purposes of multi-texturing, the JT concept of a texture channel corresponds to the OpenGL concept of a “texture unit.” The Texture Channel value shall be between -1 and 2,147,483,647 inclusive. The value -1 is accepted to denote a texture whose channel number is to be automatically assigned. This assignment will never displace another texture with an explicit texture channel assignment from its slot. Best practices suggest that a renderer of JT data ignore all but channel-0 if the renderer does not support multi-textured geometry. Also for purposes of blending, any renderer of JT data should ensure that higher numbered texture channels “blend over” lower numbered ones.

Pre- and post-lit image textures shall specify an explicit texture channel. All other texture types shall specify -1 for their texture channel.

U32: Empty Field

Refer to Common Data Conventions and Constructs Empty Field description.

U8: Inline Image Storage Flag

Inline Image Storage Flag is a flag that indicates whether the texture image is stored within the JT File (i.e. inline) or in some other external file.

Table 22 — Texture Vers-1 Inline Image Storage Flag values

= 0	Texture image stored in an external file.
= 1	Texture image stored inline in this JT file.

I32: Image Count

Image Count specifies the number of texture images. A “Cube Map” I32: Texture Type shall have six images while all other Texture Types should only have one image.

MbString: External Storage Name

External Storage Name is a string identifying the name of an external texture image storage. External Storage Name is only present if data field Inline Image Storage Flag equals “0.” If present there will be data field Image Count number of External Storage Name instances. This External Storage Name string is a relative path based name for the texture image file. Where “relative path” should be interpreted to mean the string contains the file name along with any additional path information that locates the texture image file relative to the location of the referencing JT file.

I32: Tex Coord Channel

Tex Coord Channel specifies the channel number for texture coordinate generation. Value shall be within range [-1, 2147483647] inclusive.

Texture Environment

The Texture Environment is a collection of data defining various aspects of how a texture image is to be mapped/applied to a surface.

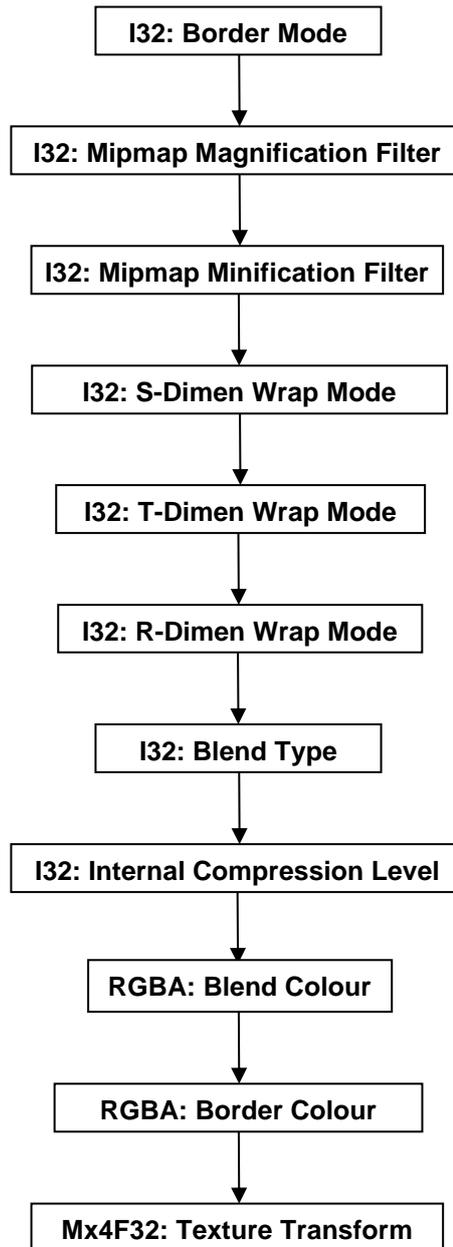


Figure 52 — Texture Environment data collection

I32: Border Mode

Border Mode specifies the texture border mode.

Table 23 — Texture Vers-1 Texture Environment Border Mode values

= 0	No border.
= 1	Constant Border Colour. Indicates that the texture has a constant border colour whose value is defined in data field <u>Border Colour</u> .
= 2	Explicit. Indicates that a border texel ring is present in the texture image definition.

I32: Mipmap Magnification Filter

Mipmap Magnification Filter specifies the texture filtering method to apply when a single pixel on screen maps to a tiny portion of a texel.

Table 24 — Texture Vers-1 Texture Environment Mipmap Magnification Filter values

= 0	None.
= 1	Nearest. Texel with coordinates nearest the centre of the pixel is used.
= 2	Linear. A weighted linear average of the 2 x 2 array of texels nearest to the centre of the pixel is used. For one-dimensional texture is average of 2 texels. For three dimensional texel is 2 x 2 x 2 array.

I32: Mipmap Minification Filter

Mipmap Minification Filter specifies the texture filtering method to apply when a single pixel on screen maps to a large collection of texels.

Table 25 — Texture Vers-1 Texture Environment Mipmap Minification Filter values

= 0	None.
= 1	Nearest. Texel with coordinates nearest the centre of the pixel is used.
= 2	Linear. A weighted linear average of the 2 x 2 array of texels nearest to the centre of the pixel is used. For one-dimensional texture is average of 2 texels. For three-dimensional texture is 2 x 2 x 2 array.
= 3	Nearest in Mipmap. Within an individual mipmap, the texel with coordinates nearest the centre of the pixel is used.
= 4	Linear in Mipmap. Within an individual mipmap, a weighted linear average of the 2 x 2 array of texels nearest to the centre of the pixel is used. For one-dimensional texture is average of 2 texels. For three-dimensional texture is 2 x 2 x 2 array
= 5	Nearest between Mipmaps. Within each of the adjacent two mipmaps, selects the texel with coordinates nearest the centre of the pixel and then interpolates linearly between these two selected mipmap values.
= 6	Linear between Mipmaps. Within each of the two adjacent mipmaps, computes value based on a weighted linear average of the 2 x 2 array of texels nearest to the centre of the pixel and then interpolates linearly between these two computed mipmap values.

I32: S-Dimen Wrap Mode

S-Dimen Wrap Mode specifies the mode for handling texture coordinates S-Dimension values outside the range [0, 1].

Table 26 — Texture Vers-1 Texture Environment S-Dimen Wrap Mode values

= 0	None.
= 1	Clamp. Any values greater than 1.0 are set to 1.0; any values less than 0.0 are set to 0.0.
= 2	Repeat Integer parts of the texture coordinates are ignored (i.e. retains only the fractional component o texture coordinates greater than 1.0 and only one-minus the fractional component of values less than zero). Resulting in copies of the texture map tiling the surface.
= 3	Mirror Repeat. Like Repeat, except the surface tiles “flip-flop” resulting in an alternating mirror pattern of surface tiles.
= 4	Clamp to Edge. Border is always ignored and instead texel at or near the edge is chosen for coordinates outside the range [0, 1]. Whether the exact nearest edge texel or some average of the nearest edge texels is used is dependent upon the mipmap filtering value.
= 5	Clamp to Border. Nearest border texel is chosen for coordinates outside the range [0, 1]. Whether the exact nearest border texel or some average of the nearest border texels is used is dependent upon the mipmap filtering value.

I32: T-Dimen Wrap Mode

T-Dimen Wrap Mode specifies the mode for handling texture coordinates T-Dimension values outside the range [0, 1]. Same mode values as documented for [S-Dimen Wrap Mode](#).

I32: R-Dimen Wrap Mode

R-Dimen Wrap Mode specifies the mode for handling texture coordinates R-Dimension values outside the range [0, 1]. Same mode values as documented for [S-Dimen Wrap Mode](#).

I32: Blend Type

Blend Type contains information indicating how the values in the texture map are to be modulated/combined/blended with the original colour of the surface or some other alternative colour to compute the final colour to be painted on the surface. Additional information on the interpretation of the Blend Type values and how one might leverage them to render an image can be found in reference [1] listed in the bibliography section.

Table 27 — Texture Vers-1 Texture Environment Blend Type values

= 0	None.
= 1	Decal. Interpret same as OpenGL GL_DECAL environment mode.
= 2	Modulate. Interpret same as OpenGL GL_MODULATE environment mode.
= 3	Replace. Interpret same as OpenGL GL_REPLACE environment mode.
= 4	Blend. Interpret same as OpenGL GL_BLEND environment mode.
= 5	Add. Interpret same as OpenGL GL_ADD environment mode.
= 6	Combine. Interpret same as OpenGL GL_COMBINE environment mode.

I32: Internal Compression Level

Internal Compression Level specifies a data compression hint/recommendation that a JT file loader is free to follow for internally (in memory) storing texel data. This setting does not affect how image texel data is actually stored in JT files or other externally referenced files.

Table 28 — Texture Vers-1 Texture Environment Internal Compression Level values

= 0	None. No compression of texel data.
= 1	Conservative. Lossless compression of texel data.
= 2	Moderate. Texel components truncated to 8-bits each.
= 3	Aggressive. Texel components truncates to 4-bits each (or 5 bits for RGB images).

RGBA: Blend Colour

Blend Colour specifies the colour to be used for the “Blend” mode of [Blend Type](#) operations.

RGBA: Border Colour

Border Colour specifies the constant border colour to use for “Clamp to Border” style wrap modes when the texture itself does not have a border.

Mx4F32: Texture Transform

Texture Transform defines the texture coordinate transformation matrix. A renderer of JT data would typically apply this transform to texture coordinates prior to applying the texture.

Texture Coord Generation Parameters

Texture Coord Generation Parameters contains information indicating if and how texture coordinate components should be automatically generated for each of the 4 components (S, T, R, Q) of a texture coordinate.

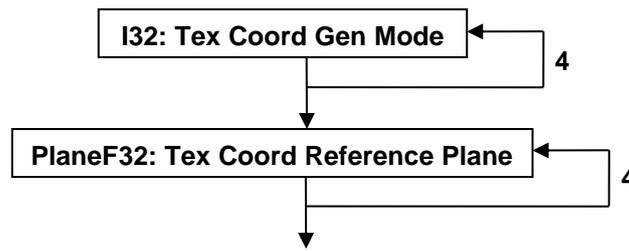


Figure 53 — Texture Coord Generation Parameters data collection

I32: Tex Coord Gen Mode

Tex Coord Gen Mode specifies the texture coordinate generation mode for each component (S, T, R, Q) of texture coordinate. There are four mode values stored, one for each component of texture coordinate. The mode values are stored in S, T, R, Q order.

Table 29 — Texture Vers-1 Texture Coord Generation Gen Mode values

= 0	None. No texture coordinates automatically generated.
= 1	Model Coordinate System Linear. Texture coordinates computed as a distance from a reference plane specified in model coordinates.
= 2	View Coordinate System Linear. Texture coordinates computed as a distance from a reference plane specified in view coordinates.
= 3	Sphere Map. Texture coordinates generated based on spherical environment mapping.
= 4	Reflection Map. Texture coordinates generated based on cubic environment mapping.
= 5	Normal Map. Texture coordinates computed/set by copying vertex normal in view coordinates to S, T, R.

PlaneF32: Tex Coord Reference Plane

Reference Plane specifies the reference plane used for “Model Coordinate System Linear” and “View Coordinate System Linear” texture coordinate generation modes. There are four Reference Planes stored, one for each component of texture coordinate. The Reference Planes are stored in S, T, R, Q order. Even if a components “Tex Coord Gen Mode” is one that does not require a reference plane, dummy reference planes are still stored in JT file.

Inline Texture Image Data

Inline Texture Image Data is a collection of data defining the texture format properties and image texel data for one texture image. Inline Texture Image Data is only present if data field Inline Image Storage Flag equals “1.” If present there will be data field Image Count number of Inline Texture Image Data instances.

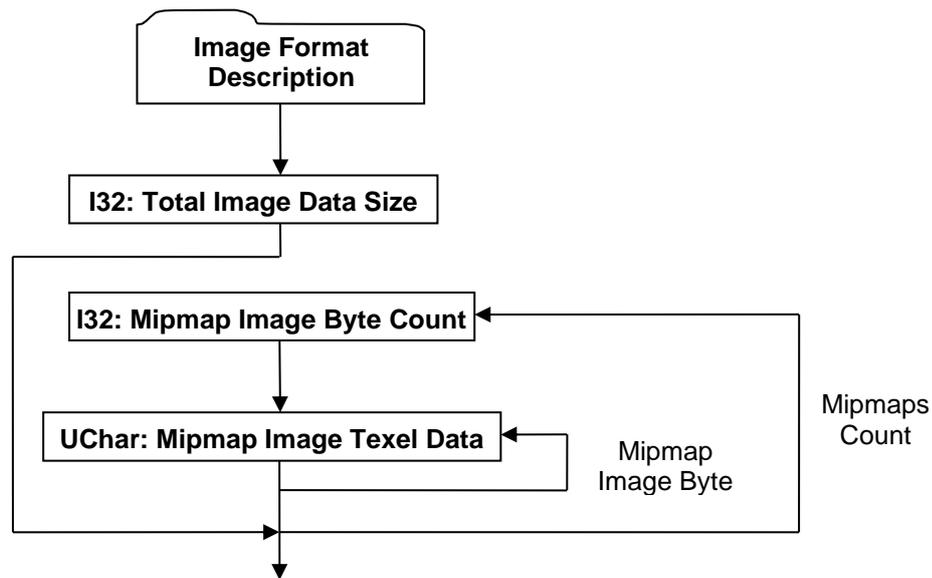


Figure 54 — Inline Texture Image Data collection

Complete description for Image Format Description can be found in Image Format Description.

I32: Total Image Data Size

Total Image Data Size specifies the total length, in bytes, of the on-disk representation for all mipmap images. This byte total does not include the I32: Mipmap Image Byte Count data field storage (4 bytes per) for each mipmap.

I32: Mipmap Image Byte Count

Mipmap Image Byte Count specifies the length, in bytes, of the on-disk representation of the next mipmap image.

UChar: Mipmap Image Texel Data

Mipmap Image Texel Data is the mipmap's block of image data. The length of this field in bytes is specified by the value of data field Mipmap Image Byte Count.

Image Format Description

The Image Format Description is a collection of data defining the pixel format, data type, size, and other miscellaneous characteristics of the texel image data.

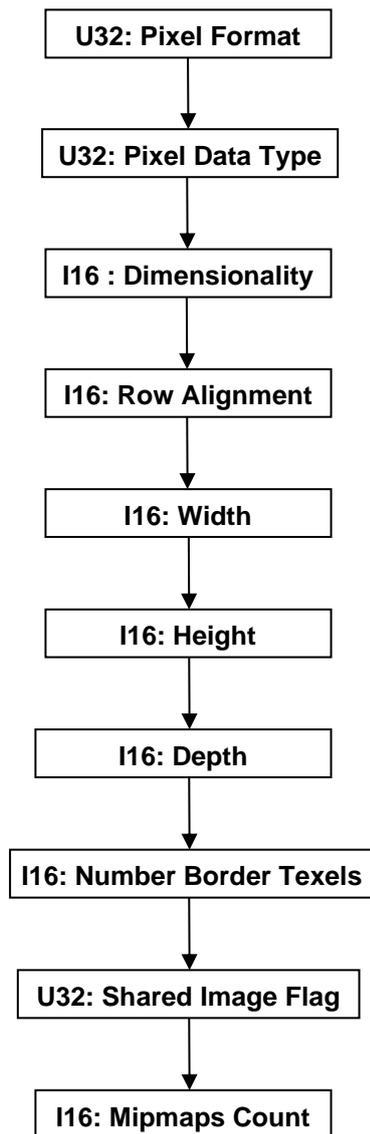


Figure 55 — Image Format Description data collection

U32: Pixel Format

Pixel format specifies the format of the texture image pixel data. Depending on the format, anywhere from one to four elements of data exists per texel.

Table 30 — Texture Vers-1 Image Format Description Pixel Format values

= 0	No format specified. Texture mapping is not applied.
= 1	RGB: A red colour component followed by green and blue colour components
= 2	RGBA: A red colour component followed by green, blue, and alpha colour components
= 3	LUM: A single luminance component
= 4	LUMA: A luminance component followed by an alpha colour component
= 5	A single stencil index
= 6	A single depth component
= 7	A single red colour component
= 8	A single green colour component
= 9	A single blue colour component
= 10	A single alpha colour component

= 11	A blue colour component, followed by green and red colour components
= 12	A blue colour component, followed by green, red, and alpha colour components
= 13	A depth component, followed by a stencil component

U32: Pixel Data Type

Pixel Data Type specifies the data type used to store the per texel data. If the Pixel Format represents a multi component value (e.g. red, green, blue) then each value requires the Pixel Data Type number of bytes of storage (e.g. a Pixel Format Type of “1” with Pixel Data Type of “3” would require 3 bytes of storage for each texel).

Table 31 — Texture Vers-1 Image Format Description Pixel Data values

= 0	No type specified. Texture mapping is not applied.
= 1	Signed 8-bit integer
= 2	Single-precision 32-bit floating point
= 3	Unsigned 8-bit integer
= 4	Single bits in unsigned 8-bit integers
= 5	Unsigned 16-bit integer
= 6	Signed 16-bit integer
= 7	Unsigned 32-bit integer
= 8	Signed 32-bit integer
= 9	16-bit floating point according to IEEE-754 format (i.e. 1 sign bit, 5 exponent bits, 10 mantissa bits)

I16 : Dimensionality

Dimensionality specifies the number of dimensions the texture image has. Valid values include:

Table 32 — Texture Vers-1 Image Format Description Dimensionality values

= 1	One-dimensional texture
= 2	Two-dimensional texture
= 3	Three-dimensional texture

I16: Row Alignment

Row Alignment specifies the byte alignment for image data rows. This data field shall have a value of 1, 2, 4, or 8. If set to 1 then all bytes are used (i.e. no bytes are wasted at end of row). If set to 2, then if necessary, an extra wasted byte(s) is/are stored at the end of the row so that the first byte of the next row has an address that is a multiple of 2 (multiple of four for Row Alignment equal 4 and multiple of 8 for row alignment equal 8). The actual formula (using C syntax) to determine number of bytes per row is as follows:

$$\text{BytesPerRow} = (\text{numBytesPerPixel} * \text{ImageWidth} + \text{RowAlignment} - 1) \& \sim(\text{RowAlignment} - 1)$$

I16: Width

Width specifies the width dimension (number of texel columns) of the texture image in number of pixels.

I16: Height

Height specifies the height dimension (number of texel rows) of the texture image in number of pixels. Height is 1 for one-dimensional images.

I16: Depth

Depth specifies the depth dimension (number of texel slices) of the texture image in number of pixels. Depth is 1 for one-dimensional and two-dimensional images.

I16: Number Border Texels

Number Border Texels specifies the number of border texels in the texture image definition. Valid values are 0 and 1.

U32: Shared Image Flag

Shared Image Flag is a flag indicating whether this texture image is shareable with other Texture Image Element attributes.

Table 33 — Texture Vers-1 Image Format Description Shared Image Flag values

= 0	Image is not shareable with other Texture Image Elements.
= 1	Image is shareable with other Texture Image Elements.

I16: Mipmaps Count

Mipmaps Count specifies the number of mipmap images. A value of 1 indicates that no mipmaps are used. A value greater than 1 indicates that mipmaps are present all the way down to a 1-by-1 texel.

Base Attribute Data Fields V2

See Common Data Attribute Containers for Attribute Elements. Base Attribute Data Fields V2 are defined when Base Attribute Version Number is set to two.

6.2.3 Draw Style Attribute Element

Object Type ID: 0x10dd1014, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Draw Style Attribute Element contains information defining various aspects of the graphics state/style that should be used for rendering associated geometry. JT format LSG traversal semantics state that draw style attributes accumulate down the LSG by replacement.

The Field Inhibit flag (see Base Attribute Data) bit assignments for the Draw Style Attribute Element data fields, are as follows:

Table 34 — Draw Style Attribute Field Inhibit flag values

Field Flag Bit	Inhibit	Data Field(s) Bit Applies To
0		Two Sided Lighting Flag
1		Back-face Culling Flag
2		Outlined Polygons Flag
3		Lighting Enabled Flag
4		Flat Shading Flag
5		Separate Specular Flag

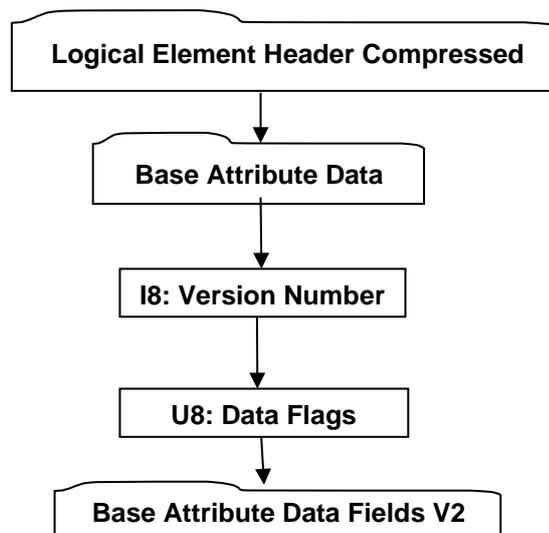


Figure 56 — Draw Style Attribute Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Base Attribute Data can be found in the LSG Segment section of this document under Attribute Elements in the logical collection describing Base Attribute Data.

I8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers. Only version 1 is defined for JTIAE Edition 3.

U8: Data Flags

Data Flags is a collection of flags. The flags are combined using the binary OR operator and store various state settings for Draw Style Attribute Elements. All bits fields that are not defined as in use should be set to "0".

Table 35 — Draw Style Attribute Data Flag values

0x01	Back-face Culling Flag. Indicates if back-facing polygons should be discarded (culled). = 0 – Back-facing polygons not culled. = 1 – Back-facing polygons culled.
0x02	Two Sided Lighting Flag. Indicates if two sided lighting should be enabled to insure that polygons are illuminated on both sides. = 0 – Disable two sided lighting. = 1 – Enable two sided lighting.
0x04	Outlined Polygons Flag. Indicates if polygons should be draw as "wireframes" i.e. not filled. = 0 – Polygons drawn as filled. = 1 – Only polygon's outline drawn.
0x08	Lighting Enabled Flag. Indicates if lighting should be enabled. If lighting disabled, then renderer should perform no calculations concerning normals, light sources, material properties, etc. = 0 – Disable lighting. = 1 – Enable lighting.
0x10	Flat Shading Flag. Indicates if the geometry should be rendered with single colour (flat shading) or with many different colour (smooth/Gouraud) shading. = 0 – Disable flat shading (i.e. use smooth/Gouraud shading). = 1 – Enable flat shading.
0x20	Separate Specular Flag. Indicates if the application of the specular colour should be delayed until after texturing. If no texture mapping then this flag setting is irrelevant. = 0 – Apply specular colour contribution before texture mapping. = 1 – Apply specular colour contribution after texture mapping.

Base Attribute Data Fields V2

See Common Data Attribute Containers for Attribute Elements. Base Attribute Data Fields V2 are defined when Base Attribute Version Number is set to two.

Palette Index default value is -1

6.2.4 Light Set Attribute Element

Object Type ID: 0x10dd1096, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Light Set Attribute Element holds an unordered list of Lights. JT format LSG traversal semantics state that light set attributes accumulate down the LSG through addition of lights to an attribute list.

Light Set Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

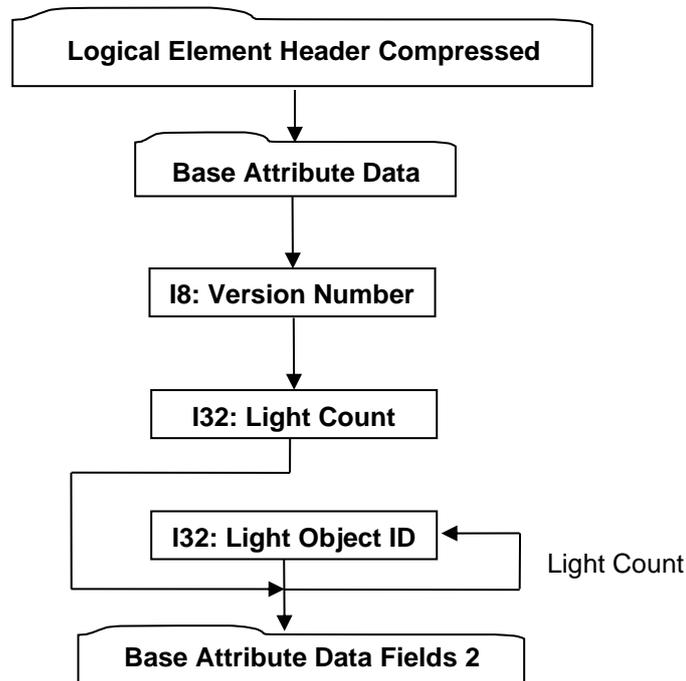


Figure 57 — Light Set Attribute Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Base Attribute Data can be found in the LSG Segment section of this document under Attribute Elements in the logical collection describing Base Attribute Data.

I8: Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers. Only version 1 is defined for JTIAP Edition 3.

I32: Light Count

Light Count specifies the number of lights in the Light Set.

I32: Light Object ID

Light Object ID is the identifier for a referenced Light Object.

Base Attribute Data Fields V2

See Common Data Attribute Containers for Attribute Elements. Base Attribute Data Fields V2 are defined when Base Attribute Version Number is set to two.

6.2.5 Linestyle Attribute Element

Object Type ID: 0x10dd10c4, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Linestyle Attribute Element contains information defining the graphical properties to be used for rendering polylines. JT format LSG traversal semantics state that Linestyle attributes accumulate down the LSG by replacement.

Linestyle Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

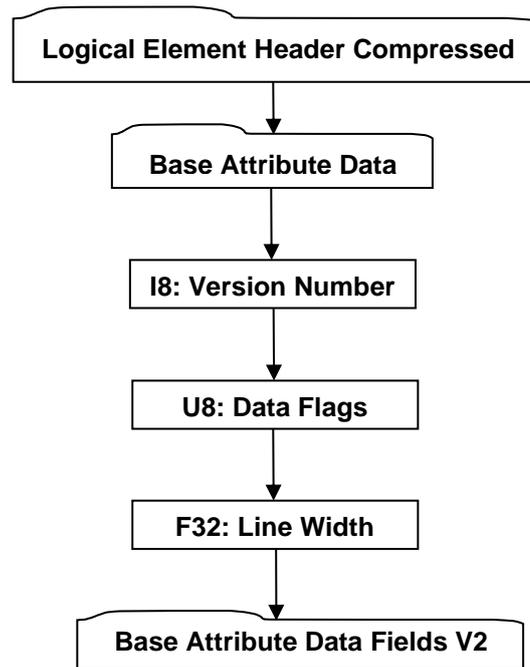


Figure 58 — Linestyle Attribute Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Base Attribute Data can be found in the LSG Segment section of this document under Attribute Elements in the logical collection describing Base Attribute Data.

I8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U8: Data Flags

Data Flags is a collection of flags and line type data. The flags and line type data are combined using the binary OR operator and store various polyline rendering attributes. All bits fields that are not defined as in use should be set to “0”.

Table 36 — Linestyle Attribute Data Flag values

0x0F	<p>Line Type (stored in bits 0 – 3 or in binary notation 00001111) Line type specifies the polyline rendering stipple-pattern.</p> <ul style="list-style-type: none"> = 0 - Solid _____ = 1 – Dash - - - - - = 2 – Dot = 3 – Dash_Dot - . - . - . = 4 – Dash_Dot_Dot - . - . - . = 5 – Long_Dash _ _ _ _ _ = 6 – Centre_Dash - - - - - = 7 – Centre_Dash_Dash - . - . - .
0x10	<p>Antialiasing Flag (stored in bit 4 or in binary notation 00010000) Indicates if antialiasing should be applied as part of rendering polylines.</p> <ul style="list-style-type: none"> = 0 – Antialiasing disabled. = 1 – Antialiasing enabled.

F32: Line Width

Line Width specifies the width in pixels that should be used for rendering polylines. The value of this field shall be greater than 0.0.

Base Attribute Data Fields V2

See Common Data Attribute Containers for Attribute Elements. Base Attribute Data Fields V2 are defined when Base Attribute Version Number is set to two.

6.2.6 Pointstyle Attribute Element

Object Type ID: 0x8d57c010, 0xe5cb, 0x11d4, 0x84, 0xe, 0x00, 0xa0, 0xd2, 0x18, 0x2f, 0x9d

Pointstyle Attribute Element contains information defining the graphical properties that should be used for rendering points. JT format LSG traversal semantics state that Pointstyle attributes accumulate down the LSG by replacement.

Pointstyle Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

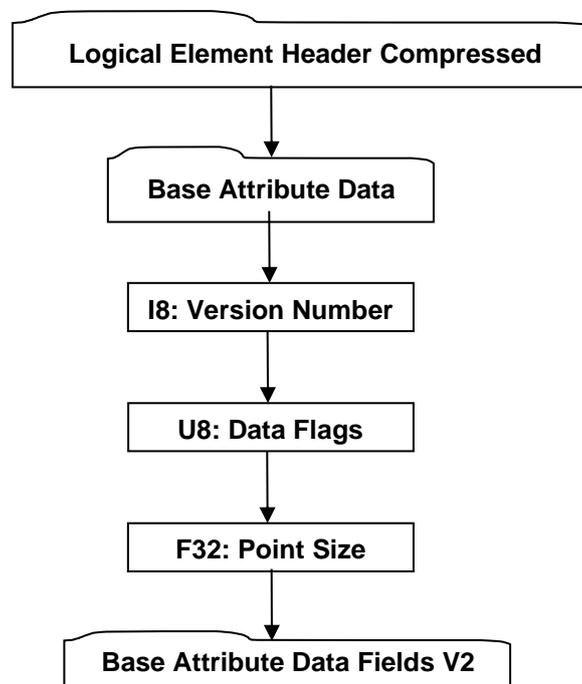


Figure 59 — Pointstyle Attribute Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Base Attribute Data can be found in the LSG Segment section of this document under Attribute Elements in the logical collection describing Base Attribute Data.

I8: Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U8: Data Flags

Data Flags is a collection of flags and point type data. The flags and point type data are combined using the binary OR operator and store various point rendering attributes. All bits fields that are not defined as in use should be set to "0".

Table 37 — Pointstyle Attribute Data Flag values

0x0F	Point Type (stored in bits 0 – 3 or in binary notation 00001111) These bits are reserved for future expansion of the format to support Point Types.
0x10	Antialiasing Flag (stored in bit 4 or in binary notation 00010000) Indicates if antialiasing should be applied as part of rendering points. = 0 – Antialiasing disabled. = 1 – Antialiasing enabled.

F32: Point Size

Point Size specifies the size in pixels that should be used for rendering points. The value shall be greater than 0.0.

Base Attribute Data Fields V2

See Common Data Attribute Containers for Attribute Elements. Base Attribute Data Fields V2 are defined when Base Attribute Version Number is set to two.

6.2.7 Geometric Transform Attribute Element

Object Type ID: 0x10dd1083, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Geometric Transform Attribute Element contains a 4x4 homogeneous transformation matrix that positions the associated LSG node’s coordinate system relative to its parent LSG node. JT format LSG traversal semantics state that geometric transform attributes accumulate down the LSG through matrix multiplication as follows:

$$p' = pAM$$

Where p is a point of the model, p' is the transformed point, M is the current modelling transformation matrix inherited from ancestor LSG nodes and previous Geometric Transform Attribute Element, and A is the transformation matrix of this Geometric Transform Attribute Element. The matrix is allowed to contain translation, rotation, and uniform- and non-uniform scaling factors, including negative scales. It is not allowed to contain shearing or projective components, or scaling factors of zero (which would make the matrix singular).

Geometric Transform Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

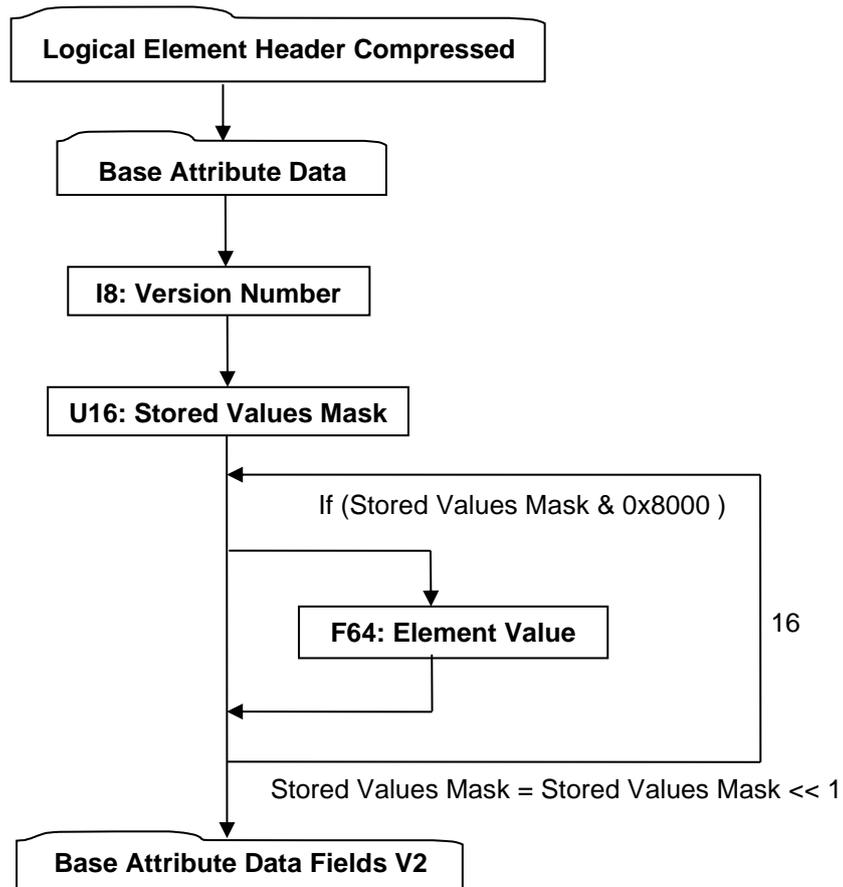


Figure 60 — Geometric Transform Attribute Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Base Attribute Data can be found in the LSG Segment section of this document under Attribute Elements in the logical collection describing Base Attribute Data.

I8: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U16: Stored Values Mask

Stored Values mask is a 16-bit mask where each bit is a flag indicating whether the corresponding element in the matrix is different from the identity matrix. Only elements which are different from the identity matrix are actually stored. The bits are assigned to matrix elements as follows:

- Bit15 Bit14 Bit13 Bit12
- Bit11 Bit10 Bit9 Bit8
- Bit7 Bit6 Bit5 Bit4
- Bit3 Bit2 Bit1 Bit0

The individual bit-flag values are interpreted as follows:

Table 38 — Geometric Transform Attribute Stored Value Mask individual bit-flag values

= 0	Value not stored (matrix value same as corresponding element in identity matrix)
= 1	Value stored

F64: Element Value

Element Value specifies a particular matrix element value.

Base Attribute Data Fields V2

See Common Data Attribute Containers for Attribute Elements. Base Attribute Data Fields V2 are defined when Base Attribute Version Number is set to two.

6.2.8 Palette Map Attribute Element

Object Type ID: 0x10dd1106,0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Palette Map Attribute is used on a shape such that any face group can be rendered with a chosen entry from the palette. Each Attribute entry in the palette is inherited down the scene graph independent from any other palette entry. Attributes Elements in the scene graph are able to specify to which palette entry they apply.

For a complete description of per face group attributes and palette map see the Perface Group Attributes Annex in this document.

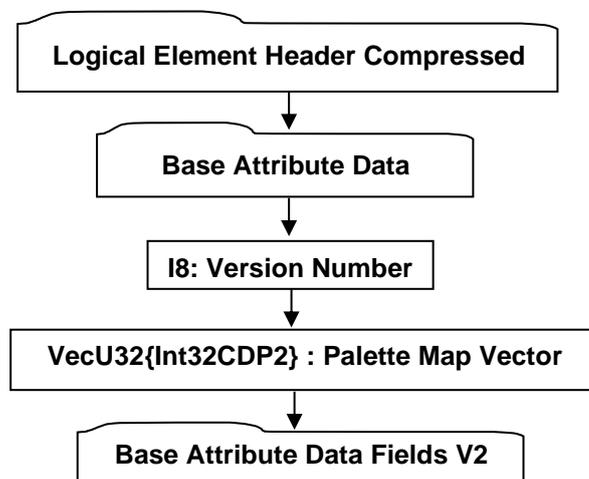


Figure 61 — PaletteMap Attribute Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

A complete description of Base Attribute Data can be found in the LSG Segment section of this document under Attribute Elements in the logical collection describing Base Attribute Data.

I8:Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

VecU32{Int32CDP2}: Palette Map Vector

A Palette Map is a set of accumulated states belonging to an instance of a node in the LSG. Each state in a palette is accumulated by different levels and types of attributes with the same palette index.

The Palette Map Vector contains a mapping vector indexed by face group number storing the palette index of the state to be assigned to that face group. A Palette Map entry of -1 indicates that the "fallback" state is to be used for the corresponding face group. A Palette Map entry of -2 indicates that the corresponding face group is to be inhibited entirely, and not rendered at all.

For a complete description of this topic see the Perface Group Attributes Annex in this document.

Base Attribute Data Fields V2

See Common Data Attribute Containers for Attribute Elements. Base Attribute Data Fields V2 must be set to -1 for the PaletteMap Attribute element.

6.2.9 Sabot V104 Attribute Element

Object Type ID: 0x96603dd3, 0x5a0f, 0x40f5, 0x97, 0xcb, 0x1e, 0x96, 0x47, 0xcb, 0xd3, 0x7e);

Sabot V104 is used to insulate pre JTIAP Edition 3 readers from attributes with non-fallback pallet Index attributes in order to preserve forward compatibility.

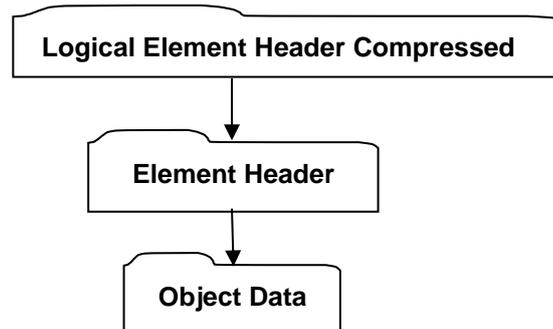


Figure 62 — Sabot V104 Attribute Element

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

The complete description for Element Header can also be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Data Object

The Object Data contained in the Sabot V104 object is an attribute element. The Sabot V104 object exists only to insulate pre edition 3 readers from the contained attribute element. The attribute element contained is wrapped in a Sabot V104 attribute because its palette index is not -1. Older readers must ignore such attributes to function as they did with previous version of JT.

Each time a Sabot V104 object is read, the Sabot V104 object must be discarded and the wrapped attribute read in its place. A Sabot V104 object never appears in the scenegraph, only in the persisted JT file.

When writing an JTIAP Edition 3 JT file, all attributes having Palettet Index not set to -1 must be wrapped by a Sabot V104 attribute.

6.2.10 Infinite Light Attribute Element

Object Type ID: 0x10dd1028, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Infinite Light Attribute Element specifies a light source emitting unattenuated light in a single direction from every point on an infinite plane. The infinite location indicates that the rays of light can be considered parallel by the time they reach an object.

JT format LSG traversal semantics state that infinite light attributes accumulate down the LSG through addition of lights to an attribute list.

Infinite Light Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

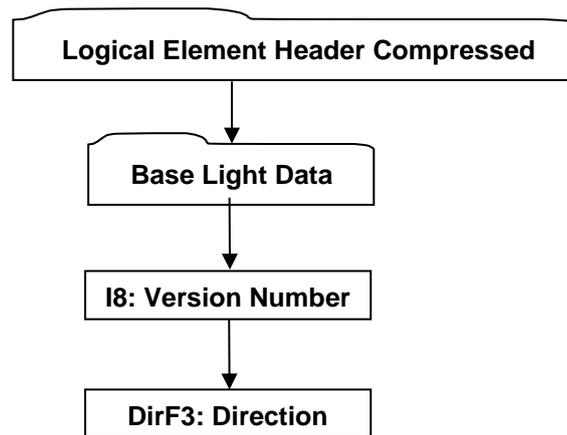


Figure 63 — Infinite Light Attribute Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Complete description for Base Light Data can be found in Base Light Data.

I8: Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table 39 — Light Set Attribute Version Number values

= 1	Version-1 Format
-----	------------------

DirF3: Direction

Direction specifies the direction the light is pointing in.

Base Light Data

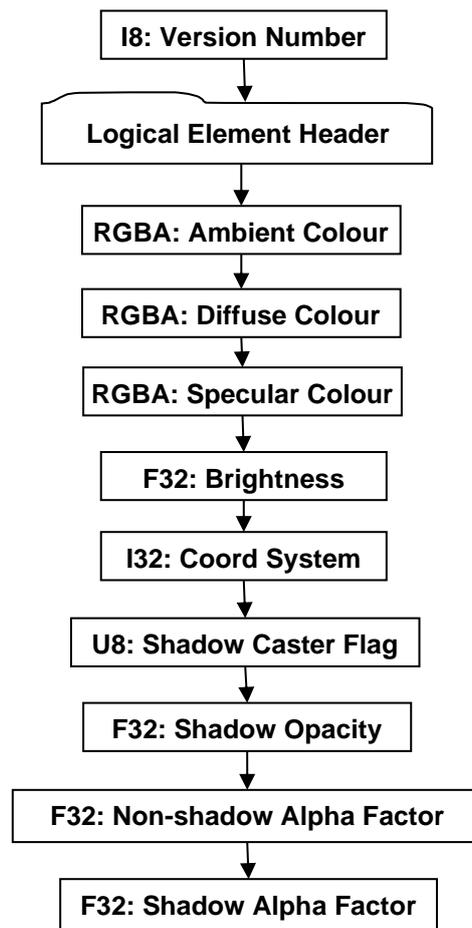


Figure 64 — Base Light Data collection

I8: Version Number

Version number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers. Only version 1 is defined for JTIAP Edition 3.

Logical Element Header

A complete description of Logical Element Header can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

RGBA: Ambient Colour

Ambient Colour specifies the ambient red, green, blue, alpha colour values of the light.

RGBA: Diffuse Colour

Diffuse Colour specifies the diffuse red, green, blue, alpha colour values of the light.

RGBA: Specular Colour

Specular Colour specifies the specular red, green, blue, alpha colour values of the light.

F32: Brightness

Brightness specifies the Light brightness. The Brightness value shall be greater than or equal to “-1”.

I32: Coord System

Coord System specifies the coordinate space in which Light source is defined. Valid values include the following:

Table 40 — Base Light Data Coord System values

= 1	Viewpoint Coordinate System. Light source is to move together with the viewpoint.t
= 2	Model Coordinate System. Light source is affected by whatever model transforms that are current when the light source is encountered in LSG.
= 3	World Coordinate system. Light source is not affected by model transforms in the LSG.

U8: Shadow Caster Flag

Shadow Caster Flag is a flag that indicates whether the light is a shadow caster or not.

Table 41 — Base Light Data Shadow Caster Flag values

= 0	Light source is not a shadow caster.
= 1	Light source is a shadow caster.

F32: Shadow Opacity

Shadow Opacity specifies the shadow opacity factor on Light source. Value shall be within range [0.0, 1.0] inclusive. Shadow Opacity is intended to convey how dark a shadow cast by this light source are to be rendered. A value of 1.0 means no light from this light source reaches a shadowed surface, resulting in a black shadow.

F32: Non-shadow Alpha Factor

Non-shadow Alpha Factor is one of a matched pair of fields intended to govern how a shadowing light source (one whose Shadow Caster Flag is set) casts "alpha light" into areas that it directly illuminates (i.e. are not in shadow). Those fragments directly lit by this light source will have their alpha values scaled by Non-shadow Alpha Factor. Non-shadow Alpha Factor value shall lie on the range [0.0, 1.0] inclusive.

This field can be used to create "drop shadows" by setting its value to 0. The effect being that all geometry illuminated by the light source will be "burned away," leaving behind only those parts lying in shadow. Naturally, implementing this intended behaviour implies extensive viewer support.

F32: Shadow Alpha Factor

Shadow Alpha Factor is one of a matched pair of fields intended to govern how a shadowing light source (one whose Shadow Caster Flag is set) casts "alpha light" into areas that it does not illuminate (i.e. are in shadow). Those fragments in shadow from this light source will have their alpha values scaled by Shadow Alpha Factor. Shadow Alpha Factor value shall lie on the range [0.0, 1.0] inclusive.

This field has the opposite effect of Non-shadow Alpha Factor. If set to a value of 0, for example, it will cause all geometry shadowed from the light source to be burned away, leaving behind only those parts directly illuminated by the light source. Naturally, implementing this intended behaviour implies extensive viewer support.

6.2.11 Point Light Attribute Element

Object Type ID: 0x10dd1045, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Point Light Attribute Element specifies a light source emitting light from a specified position, along a specified direction, and with a specified spread angle.

JT format LSG traversal semantics state that point light attributes accumulate down the LSG through addition of lights to an attribute list.

Point Light Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

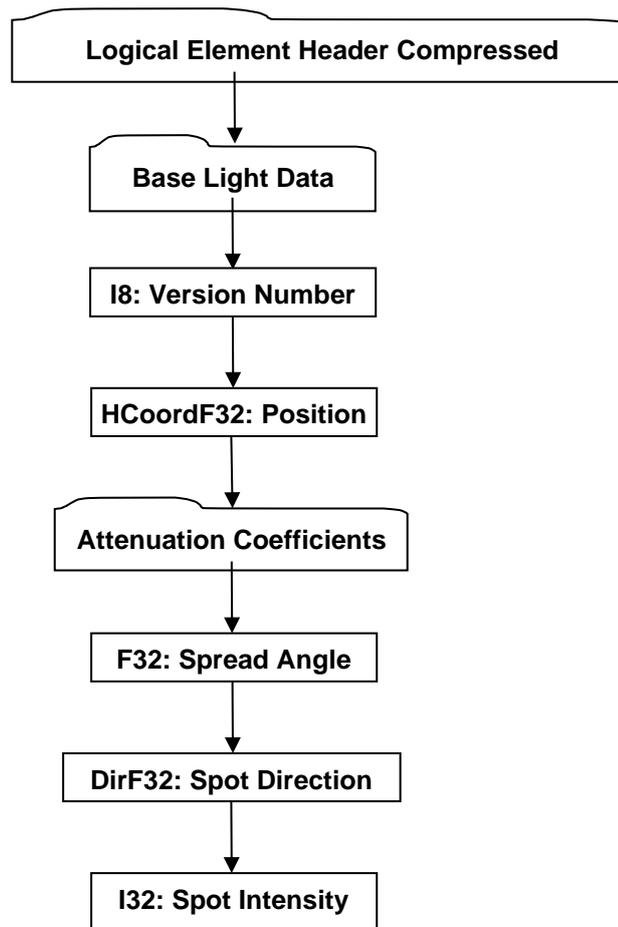


Figure 65 — Point Light Attribute Element data collection

Complete description for Logical Element Header can be found in Logical Element Header.

Complete description for Base Light Data can be found in Base Light Data.

Complete description for Attenuation Coefficients can be found in Attenuation Coefficients.

I8: Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table 42 — Point Light Attribute Version Number values

= 1	Version-1 Format
-----	------------------

HCoordF32: Position

Position specifies the light position in homogeneous coordinates.

F32: Spread Angle

Spread Angle, as shown in the figure below with respect to the light cone, specifies in degrees the half angle of the light cone. Valid Spread Angle values are clamped and interpreted as follows:

Table 43 — Point Light Attribute Spread Angle values

angle == 180.0	Simple point light
0.0 >= angle <= 90.0	Spot Light

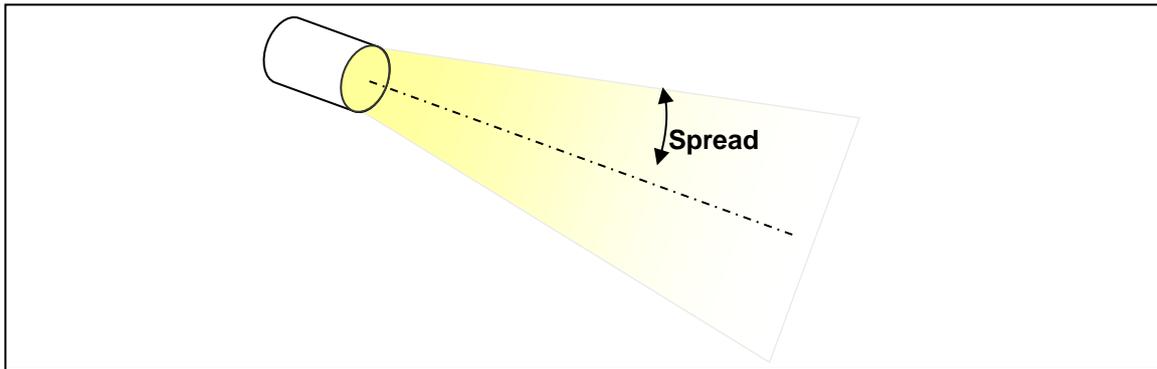


Figure 66 — Spread Angle value with respect to the light cone

DirF32: Spot Direction

Spot Direction specifies the direction the spot light is pointing in.

I32: Spot Intensity

Spot Intensity specifies the intensity distribution of the light within the spot light cone. Spot Intensity is really a “spot exponent” in a lighting equation and indicates how focused the light is at the centre. The larger the value, the more focused the light source. Only non-negative Spot intensity values are valid.

Attenuation Coefficients

Attenuation Coefficients data collection contains the coefficients for how light intensity decreases with distance.

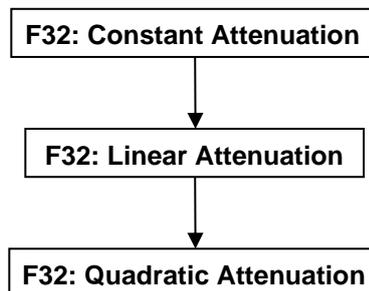


Figure 67 — Attenuation Coefficients data collection

F32: Constant Attenuation

Constant Attenuation specifies the constant coefficient for how light intensity decreases with distance. Value shall be greater than or equal to “0”.

F32: Linear Attenuation

Linear Attenuation specifies the linear coefficient for how light intensity decreases with distance. Value shall be greater than or equal to “0”.

F32: Quadratic Attenuation

Quadratic Attenuation specifies the quadratic coefficient for how light intensity decreases with distance. Value shall be greater than or equal to “0”.

6.2.12 Mapping Plane Element

Object Type ID: 0xa3cfb921, 0xbdeb, 0x48d7, 0xb3, 0x96, 0x8b, 0x8d, 0xe, 0xf4, 0x85, 0xa0

Mapping Plane Element defines the mapping plane for texture coordinate generation.

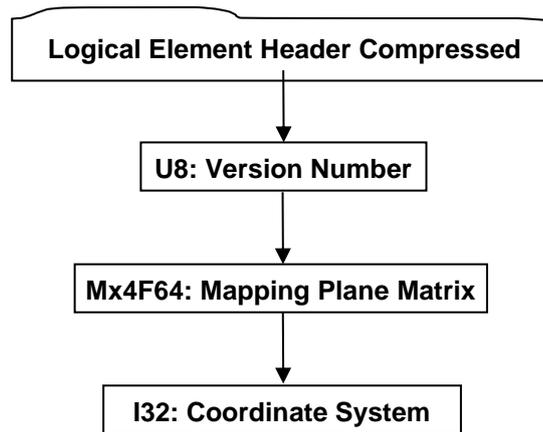


Figure 68 — Mapping Plane Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

U8: Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

Mx4F64: Mapping Plane Matrix

Mx4F64: Mapping Plane Matrix specifies the transformation matrix and mapping parameters for the mapping plane. The transformation matrix defines the mapping coordinate system transformed from I32: Coordinate System. The mapping parameters specifies the width and height of the mapping plane. The mapping plane is defined in the + xy-plane of the mapping coordinate system. In the mapping process, the geometry vertex coordinates in Model Coordinate System are transformed to the mapping coordinate system at first, and then the transformed vertex coordinates are mapped to texture coordinates as following:

$$s\text{-coordinate} = x\text{-coordinate of the transformed vertex} / \text{the width of the mapping plane}$$

$$t\text{-coordinate} = y\text{-coordinate of the transformed vertex} / \text{the height of the mapping plane}$$

I32: Coordinate System

Coordinate System specifies the coordinate space in which mapping plane is defined. Valid values include the following:

Table 44 — Mapping Plane Matrix Coordinate System values

= 0	Undefined Coordinate System.
= 1	Viewpoint Coordinate System. Mapping plane is to move together with the viewpoint.
= 2	Model Coordinate System. Mapping plane is affected by whatever model transforms that are current when the mapping plane is encountered in LSG.
= 3	World Coordinate system. Mapping plane is not affected by model transforms in the LSG.

6.2.13 Mapping Cylinder Element

Object Type ID: 0x3e70739d, 0x8cb0, 0x41ef, 0x84, 0x5c, 0xa1, 0x98, 0xd4, 0x0, 0x3b, 0x3f

Mapping Cylinder Element defines the mapping cylinder for texture coordinate generation.

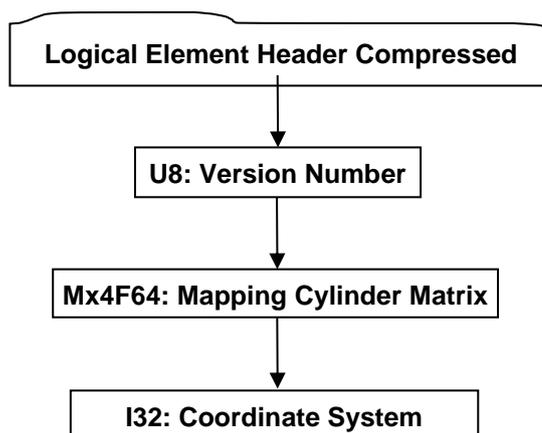


Figure 69 — Mapping Cylinder Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

U8: Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

Mx4F64: Mapping Cylinder Matrix

Mx4F64: Mapping Cylinder Matrix specifies the transformation matrix and mapping parameters for the mapping cylinder. The transformation matrix defines the mapping coordinate system transformed from I32: Coordinate System. The mapping parameters specifies the horizontal sweep angle and height of the mapping cylinder. The mapping cylinder's axis is parallel to the z-axis of the mapping coordinate system, and the horizontal sweep angle starts from the +x-axis in a counter clockwise direction. In the mapping process, the geometry vertex coordinates in Model Coordinate System are transformed to the mapping coordinate system at first, and then the transformed vertex coordinates are mapped to texture coordinates as following:

- s-coordinate = the horizontal sweep angle of the vertex / the horizontal sweep angle of the mapping cylinder
- t-coordinate = the z-coordinate of the vertex / height of the mapping cylinder

Mapping Cylinder Element implements the strategy to handle texture coordinates who cross the seam of the texture in the mapping process.

I32: Coordinate System

Coordinate system specifies the coordinate space in which mapping cylinder is defined. Valid values include the following:

Table 45 — Mapping Cylinder Matrix Coordinate System values

= 0	Undefined Coordinate System.
= 1	Viewpoint Coordinate System. Mapping cylinder is to move together with the viewpoint.
= 2	Model Coordinate System. Mapping cylinder is affected by whatever model transforms that are current when the mapping cylinder is encountered in LSG.
= 3	World Coordinate system. Mapping cylinder is not affected by model transforms in the LSG.

6.2.14 Mapping Sphere Element

Object Type ID: 0x72475fd1, 0x2823, 0x4219, 0xa0, 0x6c, 0xd9, 0xe6, 0xe3, 0x9a, 0x45, 0xc1

Mapping Sphere Element defines the mapping sphere for texture coordinate generation.

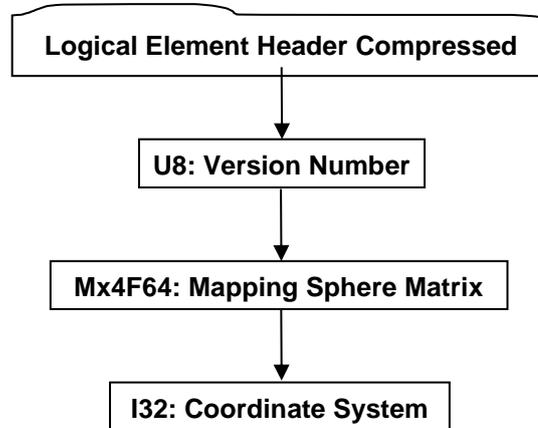


Figure 70 — Mapping Sphere Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

U8: Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

Mx4F64: Mapping Sphere Matrix

Mx4F64: Mapping Sphere Matrix specifies the transformation matrix and mapping parameters of the mapping sphere. The transformation matrix defines the mapping coordinate system transformed from I32: Coordinate System. The mapping parameters specify the horizontal sweep angle and vertical sweep angle of the mapping sphere. The mapping sphere's centre is at the origin of the mapping coordinate system, and the poles of the sphere are parallel to the z-axis of the coordinate system. The horizontal sweep angle starts from the +x-axis in a counter clockwise direction, and the vertical sweep angle is from the +z-axis to the -z-axis. In the mapping process, the geometric vertex coordinates in Model Coordinate System are transformed to the mapping coordinate system at first, and then the transformed vertex coordinates are mapped to texture coordinates as following:

s-coordinate = the horizontal sweep angle of the vertex / the horizontal sweep angle of the mapping sphere

t-coordinate = the vertical sweep angle of the vertex / the vertical sweep angle of the mapping sphere

I32: Coordinate System

Coordinate system specifies the coordinate space in which mapping sphere is defined. Valid values include the following:

Table 46 — Mapping Sphere Matrix Coordinate System values

= 0	Undefined Coordinate System.
= 1	Viewpoint Coordinate System. Mapping sphere is to move together with the viewpoint.
= 2	Model Coordinate System. Mapping sphere is affected by whatever model transforms that are current when the mapping sphere is encountered in LSG.
= 3	World Coordinate system. Mapping sphere is not affected by model transforms in the LSG.

6.2.15 Mapping TriPlanar Element

Object Type ID: 0x92f5b094, 0x6499, 0x4d2d, 0x92, 0xaa, 0x60, 0xd0, 0x5a, 0x44, 0x32, 0xcf

Mapping TriPlanar Element defines the mapping triplanar surface for texture coordinate generation.

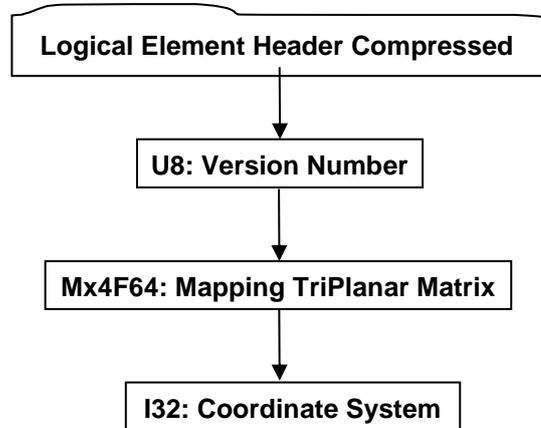


Figure 71 — Mapping TriPlanar Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

U8: Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

Mx4F64: Mapping TriPlanar Matrix

Mx4F64: Mapping TriPlanar Matrix specifies the transformation matrix and mapping parameter for the mapping triplanar. The transformation matrix defines the mapping coordinate system transformed from I32: Coordinate System. The mapping parameter specifies the planar length of the triplanar. The left bottom corner of the triplanar is located at the origin of the mapping coordinate system, and the three planes are in the + xy-plane, + yz-plane, and + xz-plane respectively. In the mapping process, the geometry vertex coordinates in Model Coordinate System are transformed to the mapping coordinate system at first, and then the transformed vertex coordinates are projected to the corresponding plane based on the maximum component of its normals, and at last the projected vertex coordinates are mapped to texture coordinates as following:

s-coordinate = the first-coordinate of the projected vertex / the planar length of the triplanar

t-coordinate = the second-coordinate of the projected vertex / the planar length of the triplanar

I32: Coordinate System

Coordinate system specifies the coordinate space in which mapping triplanar surface is defined. Valid values include the following:

Table 47 — Mapping TriPlanar Matrix Coordinate System values

= 0	Undefined Coordinate System.
= 1	Viewpoint Coordinate System. Mapping triplanar surface is to move together with the viewpoint.
= 2	Model Coordinate System. Mapping triplanar surface is affected by whatever model transforms that are current when the mapping triplanar surface is encountered in LSG.
= 3	World Coordinate system. Mapping triplanar surface is not affected by model transforms in the LSG.

6.3 Property Atom Elements

Property Atom Elements are meta-data objects associated with nodes or Attributes. Property Atom Elements are not nodes or attributes themselves, but can be associated with any node or Attribute to maintain arbitrary application- or enterprise information (meta-data) pertaining to that node or Attribute. Each Node Element or Attribute Element in an LSG may hold zero or more Property Atom Elements and this relationship information is stored within Property Table section of a JT file.

An individual property is specified as a *key/value* Property Atom Element pair, where the *key* identifies the type and meaning of the *value*. The JT format supports many different Property Atom Element key/value object types. The different Property Atom Element key/value object types are documented in the following subsections.

Some “Best Practices” for placing application or enterprise properties/meta-data on Nodes in JT files can be found in Metadata Conventions section of this reference.

6.3.1 Base Property Atom Element

Object Type ID: 0x10dd104b, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Base Property Atom Element represents the simplest form of a property that can exist within the LSG and has no type specific value data associated with it.

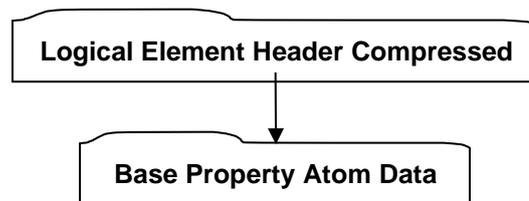


Figure 72 — Base Property Atom Element data collection

Complete description for Logical Element Header Compressed can be found in Logical Element Header Compressed in this document.

Base Property Atom Data




Figure 73 — Base Property Atom Data collection

U8: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U32: State Flags

State Flags is a collection of flags. The flags are combined using the binary OR operator and store various state information for property atoms. Bits 0 – 7 are freely available for an application to store whatever property atom information desired. The topmost 0x40000000 bit must be set to 1 for general viewing support. All other bits are reserved for future expansion of the file format.

6.3.2 String Property Atom Element

Object Type ID: 0x10dd106e, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

String Property Atom Element represents a character string property atom.

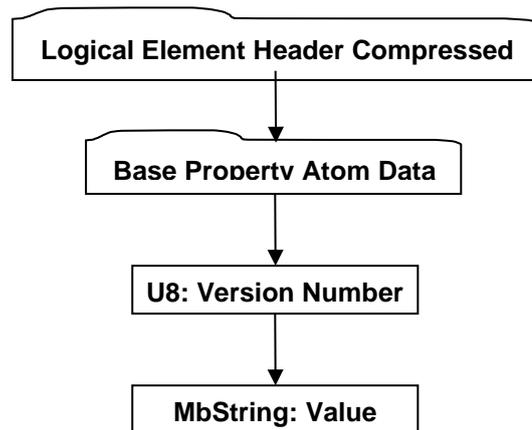


Figure 74 — String Property Atom Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Complete description for Base Property Atom Data can be found in Base Property Atom Data.

U8: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

MbString: Value

Value contains the character string value for this property atom.

6.3.3 Integer Property Atom Element

Object Type ID: 0x10dd102b, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Integer Property Atom Element represents a property atom whose value is of I32 data type.

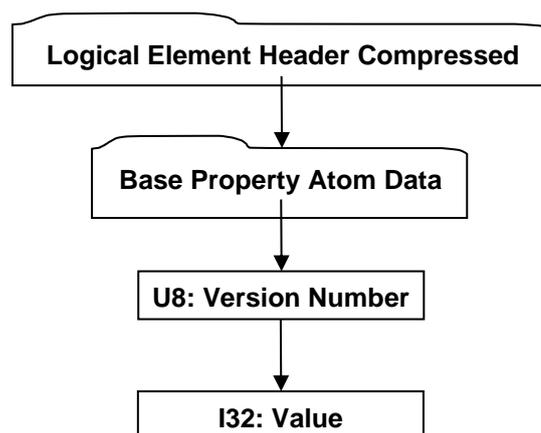


Figure 75 — Integer Property Atom Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Complete description for Base Property Atom Data can be found in Base Property Atom Data.

U8: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

I32: Value

Value contains the integer value for this property atom.

6.3.4 Floating Point Property Atom Element

Object Type ID: 0x10dd1019, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Floating Point Property Atom Element represents a property atom whose value is of F32 data type.

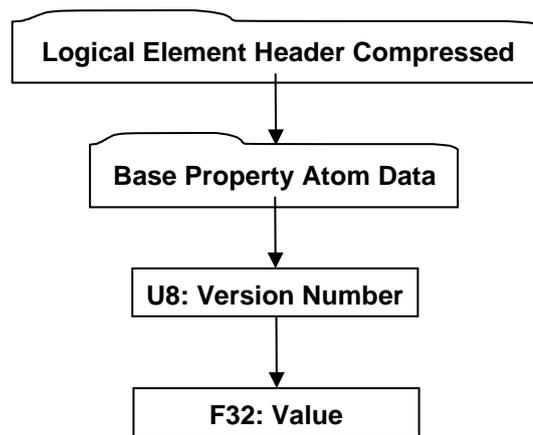


Figure 76 — Floating Point Property Atom Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Complete description for Base Property Atom Data can be found in Base Property Atom Data.

U8: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

F32: Value

Value contains the floating point value for this property atom.

6.3.5 JT Object Reference Property Atom Element

Object Type ID: 0x10dd1004, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

JT Object Reference Property Atom Element represents a property atom whose value is an object ID for another object within the JT file.

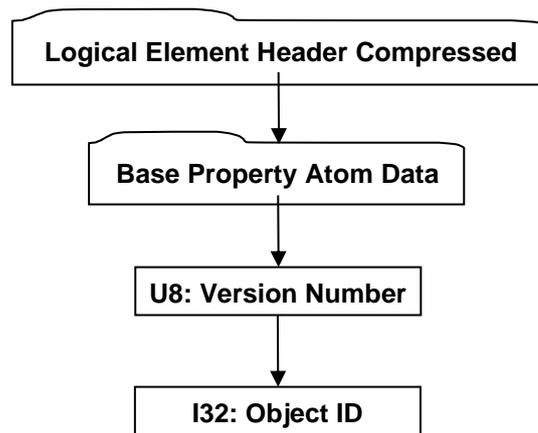


Figure 77 — JT Object Reference Property Atom Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Complete description for Base Property Atom Data can be found in Base Property Atom Data.

U8: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

I32: Object ID

Object ID specifies the identifier within the JT file for the referenced object.

6.3.6 Date Property Atom Element

Object Type ID: 0xce357246, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1

Date Property Atom Element represents a property atom whose value is a “date”.

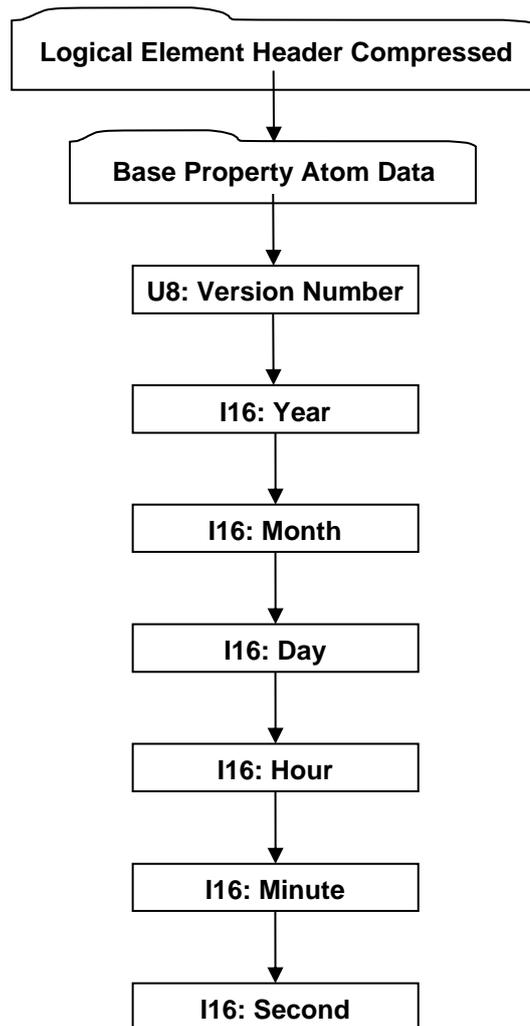


Figure 78 — Date Property Atom Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Complete description for Base Property Atom Data can be found in Base Property Atom Data.

U8: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

I16: Year

Year specifies the date year value. Valid values are [1900, 2999] inclusive.

I16: Month

Month specifies the date month value. Valid values are [0, 11] inclusive.

I16: Day

Day specifies the date day value. Valid values are [1, 31] inclusive.

I16: Hour

Hour specifies the date hour value. Valid values are [0, 23] inclusive.

I16: Minute

Minute specifies the date minute value. Valid values are [0, 59] inclusive.

I16: Second

Second specifies the date Second value. Valid values are [0, 59] inclusive.

6.3.7 Late Loaded Property Atom Element

Object Type ID: 0xe0b05be5, 0xfbbd, 0x11d1, 0xa3, 0xa7, 0x00, 0xaa, 0x00, 0xd1, 0x09, 0x54

Late Loaded Property Atom Element is a property atom type used to reference an associated piece of atomic data in a separate addressable segment of the JT file. The “Late Loaded” connotation derives from the associated data being stored in a separate addressable segment of the JT file, and thus a JT file reader can be structured to support the “best practice” of delaying the loading/reading of the associated data until it is actually needed.

Late Loaded Property Atom Elements are used to store a variety of data, including, but not limited to, Shape LOD Segments and B-Rep Segments (see Shape LOD Element).

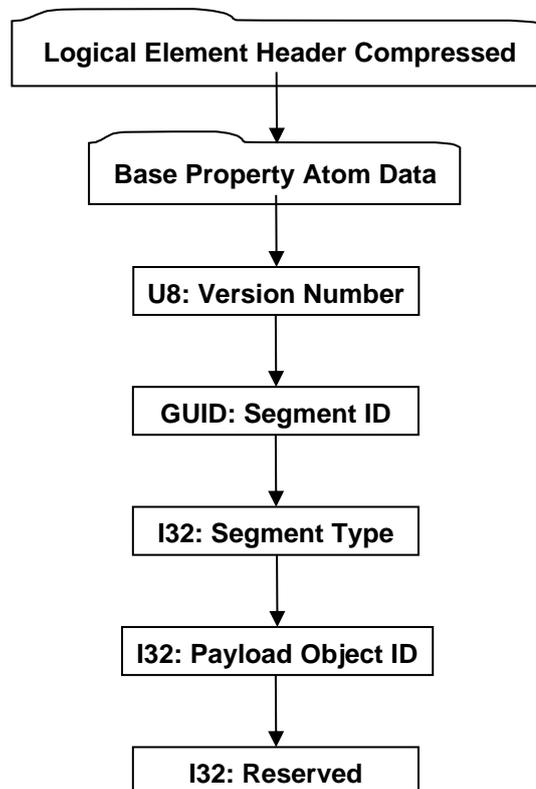


Figure 79 — Late Loaded Property Atom Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Complete description for Base Property Atom Data can be found in Base Property Atom Data.

U8: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

GUID: Segment ID

Segment ID is the globally unique identifier for the associated data segment in the JT file. See TOC Segment for additional information on how this Segment ID can be used in conjunction with the file TOC Entries to locate the associated data in the JT file.

The complete list of segment types can be found the Segment Types Table.

I32: Segment Type

Segment Type defines a broad classification of the associated data segment contents. For example, a Segment Type of “1” denotes that the segment contains Logical Scene Graph material; “2” denotes contents of a B-Rep, etc.

I32: Payload Object ID

Object ID is the identifier for the payload. Other objects referencing this particular payload will do so using the Object ID.

I32: Reserved

Reserved data field that is guaranteed to always be greater than or equal to 1.

6.3.8 Vector4f Property Atom Element

Object Type ID: 0x2e7db4be, 0xc71a, 0x4b18, 0x9d, 0x7, 0xc7, 0x22, 0x7e, 0x9f, 0xef, 0x76

Vector4f Property Atom Element represents a property atom whose value is of VecF32 data type with the length to be equal to 4 .

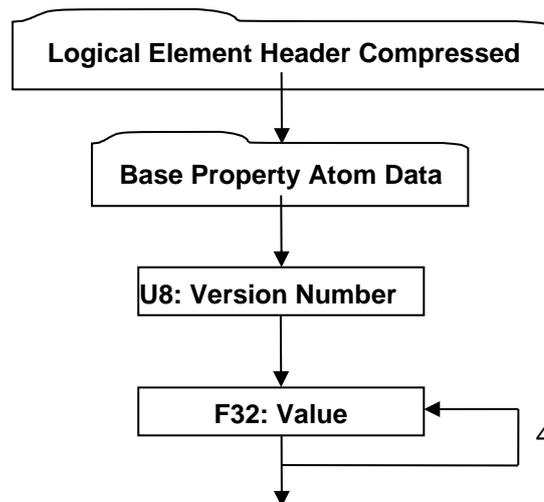


Figure 80 — Vector4f Property Atom Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

Complete description for Base Property Atom Data can be found in Base Property Atom Data.

U8: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

F32: Value

Value contains the floating point value for this property atom.

6.4 Property Table

The Property Table is where the data connecting Node Elements and Attribute Elements with their associated Properties is stored. The Property Table contains an Element Property Table for each element in the JT File which has associated Properties. An Element Property Table is a list of key/value Property Atom Element pairs for all Properties associated with a particular Node Element Object or Attribute Element Object.

For a reference compliant JT File all Node Elements, Attribute Elements, and Property Atom Elements contained in a JT file should have been read by the time a JT file reader reaches the Property Table section of the file. This means that all Node Objects, Attribute Objects, and Property Atom Objects referenced in the Property Table (through Object IDs), should have already been read, and if not, then the file is corrupt (i.e. not reference compliant).

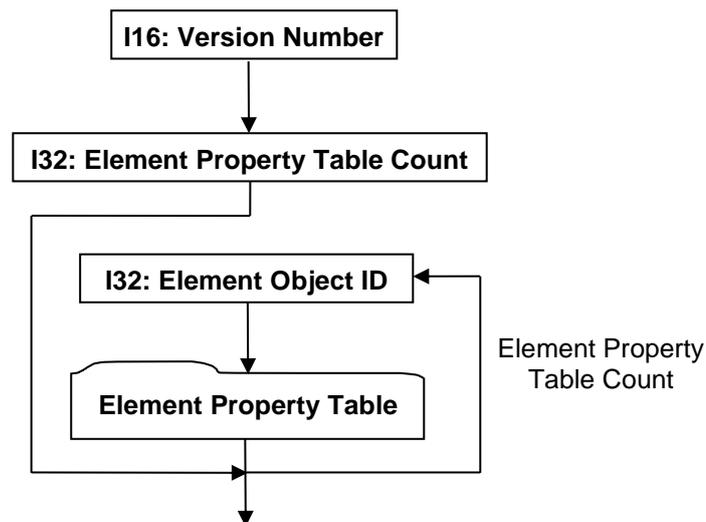


Figure 81 — Property Table data collection

I16: Version Number

Version Number is the version identifier for this Property Table. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

I32: Element Property Table Count

Element Property Table Count specifies the number of Element Property Tables to follow. This value is equivalent to the total number of Node Elements (see Node Elements) and Attribute Elements (see Attribute Elements) that have associated Property Atom Elements (see Property Atom Elements).

I32: Element Object ID

Element Object ID is the identifier for the Node Element object (see Node Elements) or the Attribute Element object (see Attribute Elements) that the following Element Property Table is for (i.e. Node Element or Attribute Element that all properties in the following Element Property Table are associated with).

Element Property Table

The Element Property Table is a list of key/value Property Atom Element pairs for all properties associated with a particular Node Element Object or Attribute Element Object. The list is terminated by a "0" value for Key Property Atom Object ID.

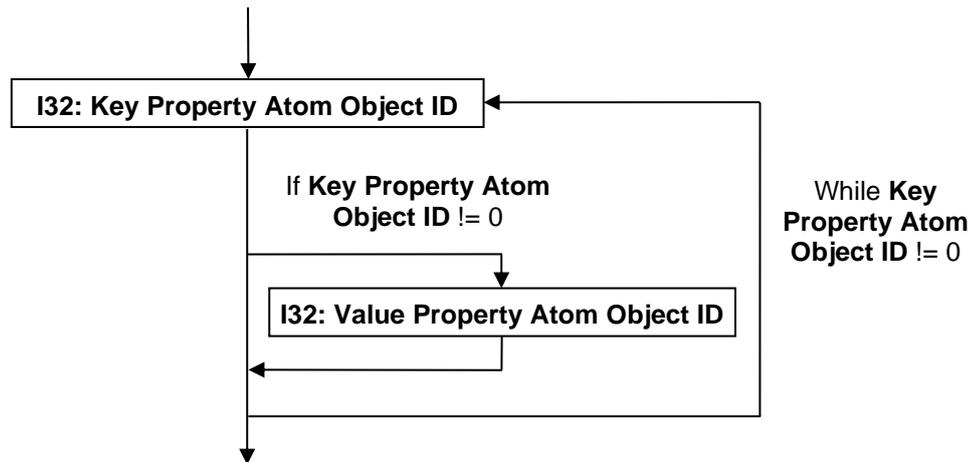


Figure 82 — Element Property Table data collection

I32: Key Property Atom Object ID

Key Property Atom Object ID is the identifier for the Property Atom Element object (see Property Atom Elements) representing the “key” part of the property key/value pair. A value of “0” indicates the end of the Node Property Table.

I32: Value Property Atom Object ID

Value Property Atom Object ID is the identifier for the Property Atom Element object (see Property Atom Elements) representing the “value” part of the property key/value pair. A value is not stored if I32: Key Property Atom Object ID has a value of “0”.

7 Shape LOD Segment

Shape LOD Segment contains an Element that defines the geometric shape definition data (e.g. vertices, polygons, normals, etc) for a particular shape Level Of Detail or alternative representation. Shape LOD Segments are typically referenced by Shape Node Elements using Late Loaded Property Atom Elements (see Shape Node Elements and Late Loaded Property Atom Element respectively).




Figure 83 — Shape LOD Segment data collection

Complete description for Segment Header can be found in Segment Header.

7.1 Shape LOD Element

- A Shape LOD Element is the holder/container of the geometric shape definition data (e.g. vertices, polygons, normals, etc.) for a single LOD. Much of the “heavyweight” data contained within a Shape LOD Element may be optionally compressed and/or encoded. The compression and/or encoding state is indicated through other data stored in each Shape LOD Element.

There are several types of Shape LOD Elements which the JT format supports. The following subsections document the various Shape LOD Element types.

7.1.1 Tri-Strip Set Shape LOD Element

Object Type ID: 0x10dd10ab, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Tri-Strip Set Shape LOD Element contains the geometric shape definition data (e.g. vertices, polygons, normals, etc.) for a single LOD of a collection of independent and unconnected triangle strips. Each strip constitutes one primitive of the set and the ordering of the vertices in forming triangles, is the same as OpenGL’s triangle strip definition [1].

A Tri-Strip Set Shape LOD Element is typically referenced by a Tri-Strip Set Shape Node Element using Late Loaded Property Atom Elements (see Tri-Strip Set Shape Node Element and Late Loaded Property Atom Element respectively).

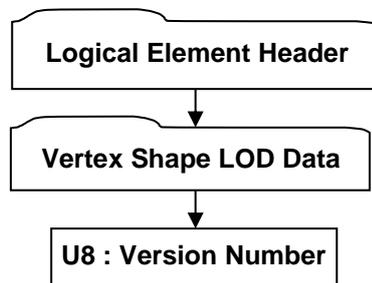


Figure 84 — Tri-Strip Set Shape LOD Element data collection

Complete description for Logical Element Header can be found in Logical Element Header.

Complete description for Vertex Shape LOD Data can be found in Vertex Shape LOD Data.

U8 : Version Number

Version Number is the version identifier for this Tri-Strip Set Shape LOD. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

7.1.2 Polyline Set Shape LOD Element

Object Type ID: 0x10dd10a1, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A 7.1.2 Polyline Set Shape LOD Element contains the geometric shape definition data (e.g. vertices, normals, etc.) for a single LOD of a collection of independent and unconnected polylines. Each polyline constitutes one primitive of the set.

A Polyline Set Shape LOD Element is typically referenced by a Polyline Set Shape Node Element using Late Loaded Property Atom Elements (see Polyline Set Shape Node Element and Late Loaded Property Atom Element respectively).

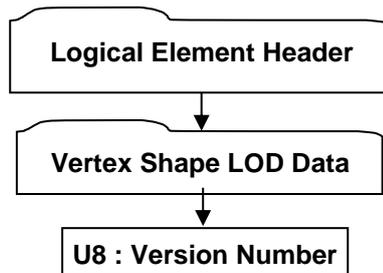


Figure 85 — Polyline Set Shape LOD Element data collection

Complete description for Logical Element Header can be found in Logical Element Header.

Complete description for Vertex Shape LOD Data can be found in Vertex Shape LOD Data.

U8 : Version Number

Version Number is the version identifier for this Polyline Set Shape LOD. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

7.1.3 Point Set Shape LOD Element

Object Type ID: 0x98134716, 0x0011, 0x0818, 0x19, 0x98, 0x08, 0x00, 0x09, 0x83, 0x5d, 0x5a

A Point Set Shape LOD Element contains the geometric shape definition data (e.g. coordinates, normals, etc.) for a collection of independent and unconnected points. Each point constitutes one primitive of the set.

A Point Set Shape LOD Element is typically referenced by a Point Set Shape Node Element using Late Loaded Property Atom Elements (see Point Set Shape Node Element and Late Loaded Property Atom Element respectively).

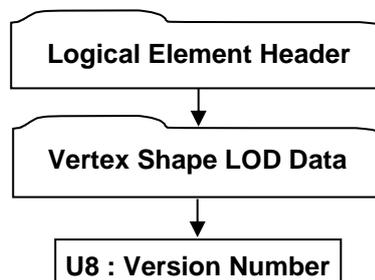


Figure 86 — Point Set Shape LOD Element data collection

Complete description for Logical Element Header can be found in Logical Element Header.

Complete description for Vertex Shape LOD Data can be found in Vertex Shape LOD Data.

U8 : Version Number

Version Number is the version identifier for this Point Set Shape LOD. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

7.1.4 Polygon Set LOD Element

Object Type ID: 0x10dd109f, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Polygon Set LOD Element contains the geometric shape definition data (e.g. vertices, polygons, normals, etc.) for a single LOD of a collection of independent and unconnected polygons. Each polygon constitutes one primitive of the set and the ordering of the vertices in forming polygons, is the same as OpenGL's polygon definition [1].

A Polygon Set LOD Element is typically referenced by a Polygon Set Shape Node Element using Late Loaded Property Atom Elements (see Polygon Set Shape Node Element and Late Loaded Property Atom Element respectively).

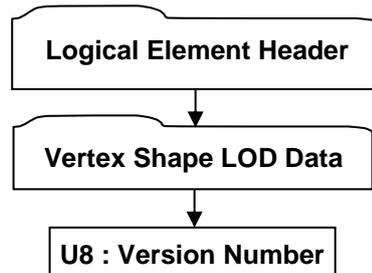


Figure 87 — Polygon Set LOD Element data collection

Complete description for Logical Element Header can be found in Logical Element Header.

Complete description for Vertex Shape LOD Data can be found in Vertex Shape LOD Data.

U8 : Version Number

Version Number is the version identifier for this Polygon Set LOD Element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

Vertex Shape LOD Data

Vertex Shape LOD Data collection is an abstract container for geometric *primitives* such as triangles, line strips, or points, depending on the specific type of Vertex Shape. The set of primitives are further partitioned into so-called "face groups." The Vertex Shape LOD Data also contains the vertex attribute bindings and quantization settings used to store the vertex records referenced by the primitives.

One use for face groups is to establish a correspondence between Brep faces and their triangle representation. A convention for mapping JT Brep and XT Brep faces to face groups is described in section B-Rep Face Group Associations.

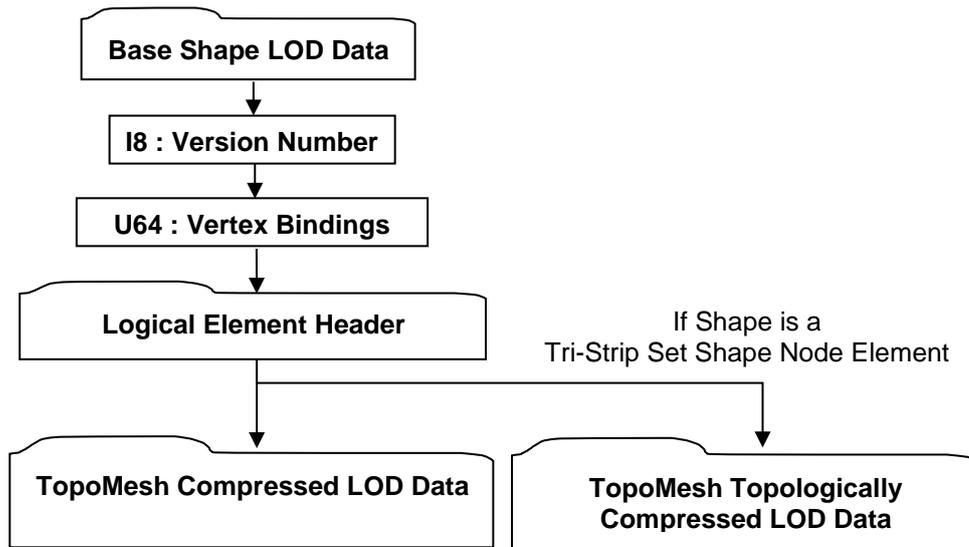


Figure 88 — Vertex Shape LOD Data collection

Complete description for Logical Element Header can be found in Logical Element Header.

Complete description for TopoMesh Compressed LOD Data and TopoMesh Topologically Compressed LOD Data can be found in TopoMesh Compressed LOD Data and TopoMesh Topologically Compressed LOD Data.

I8 : Version Number

Version Number is the version identifier for this Vertex Shape LOD Data. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U64 : Vertex Bindings

Binding Attributes is a collection of normal, texture coordinate, and colour binding information encoded within a single U64 using the following bit allocation. All bits fields that are not defined as in use should be set to “0”.

Table 48 — Vertex Shape LOD Bindings values

Bits 1-3	Vertex Coordinate Binding. The Vertex Coordinate Binding denotes per vertex coordinate field data is present when one of the bits is set. Bit 1 - 2 Component Vertex Coordinates Bit 2 - 3 Component Vertex Coordinates Bit 3 - 4 Component Vertex Coordinates
Bit 4	Normal Binding. The Normal Binding denotes per vertex normal field data is present when the bit is set. Normal field data is always stored in 3 Component Normals when present.
Bits 5 -6	Colour Binding. The Colour Binding denotes per vertex colour field data is present when one of the bits is set. Bit 5 - 3 Component Colours Bit 6 - 4 Component Colour
Bit 7	Vertex Flag Binding. The Vertex Flag Binding denotes the per vertex flag field is present on the shape when the bit is set.
Bits 9-12	Texture Coordinate 0 Binding. The Texture Coordinate 0 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 9 - 1 Component Texture Coordinates Bit 10 - 2 Component Texture Coordinates Bit 11 - 3 Component Texture Coordinates Bit 12 - 4 Component Texture Coordinates
Bits 13-16	Texture Coordinate 1 Binding. The Texture Coordinate 1 binding denotes per vertex texture coordinates field data is present when one of the bits is

	set: Bit 13 - 1 Component Texture Coordinates Bit 14 - 2 Component Texture Coordinates Bit 15 - 3 Component Texture Coordinates Bit 16 - 4 Component Texture Coordinates
Bits 17-20	Texture Coordinate 2 Binding. The Texture Coordinate 2 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 17 - 1 Component Texture Coordinates Bit 18 - 2 Component Texture Coordinates Bit 19 - 3 Component Texture Coordinates Bit 20 - 4 Component Texture Coordinates
Bits 21-24	Texture Coordinate 3 Binding. The Texture Coordinate 3 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 21 - 1 Component Texture Coordinates Bit 22 - 2 Component Texture Coordinates Bit 23 - 3 Component Texture Coordinates Bit 24 - 4 Component Texture Coordinates
Bits 25-28	Texture Coordinate 4 Binding. The Texture Coordinate 4 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 25 - 1 Component Texture Coordinates Bit 26 - 2 Component Texture Coordinates Bit 27 - 3 Component Texture Coordinates Bit 28 - 4 Component Texture Coordinates
Bits 29-32	Texture Coordinate 5 Binding. The Texture Coordinate 5 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 29 - 1 Component Texture Coordinates Bit 30 - 2 Component Texture Coordinates Bit 31 - 3 Component Texture Coordinates Bit 32 - 4 Component Texture Coordinates
Bits 33-36	Texture Coordinate 6 Binding. The Texture Coordinate 6 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 33 - 1 Component Texture Coordinates Bit 34 - 2 Component Texture Coordinates Bit 35 - 3 Component Texture Coordinates Bit 36 - 4 Component Texture Coordinates
Bits 37-40	Texture Coordinate 7 Binding. The Texture Coordinate 7 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 37 - 1 Component Texture Coordinates Bit 38 - 2 Component Texture Coordinates Bit 39 - 3 Component Texture Coordinates Bit 40 - 4 Component Texture Coordinates
Bits 41-62	Unused
Bit 63	
Bit 64	Auxiliary Vertex Field Binding. The Auxiliary Vertex Field Binding denotes per vertex auxiliary field data is present on the shape when the bit is set.

Base Shape LOD Data

Base shape LOD data contains the common items to all shape LODs.



Figure 89 — Base Shape LOD Data collection

I8 : Version Number

Version Number is the version identifier for this Base Shape LOD Data. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

TopoMesh Compressed LOD Data

TopoMesh Compressed LOD Data collection contains the common items to all TopoMesh Compressed LOD data elements.

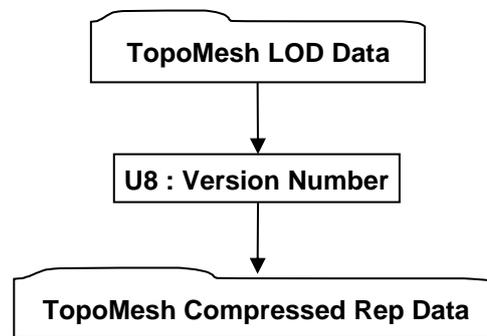


Figure 90 — TopoMesh Compressed LOD Data collection

Complete description for TopoMesh LOD Data, and TopoMesh Compressed Rep Data, can be found in TopoMesh LOD Data, TopoMesh Compressed Rep Data.

U8 : Version Number

Version Number is the version identifier for this TopoMesh Compressed LOD Data. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

TopoMesh LOD Data

TopoMesh LOD Data collection contains the common items to all TopoMesh LOD elements.

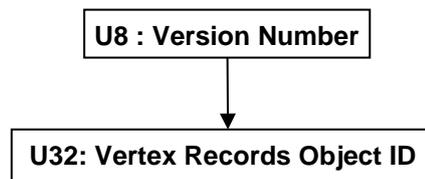


Figure 91 — TopoMesh LOD Data collection

U8 : Version Number

Version Number is the version identifier for this TopoMesh LOD Data. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U32: Vertex Records Object ID

Vertex Records Object ID is the identifier for the vertex records associated with this Object. Other objects referencing these vertex records will do so using this Object ID. It is via this mechanism that multiple TopoMeshes are able to reference the same set of vertex records.

TopoMesh Compressed Rep Data

TopoMesh Compressed Rep Data contains the geometric shape definition data (e.g. vertices, colours, normals, etc.) in a lossy or lossless compressed format. This format is used when the shape type is Polyline Set Shape Node Element, or Point Set Shape Node Element. For Tri-Strip Set Shape Node Element and Polygon Set Shape Node Element, please refer to Topologically Compressed Rep Data.

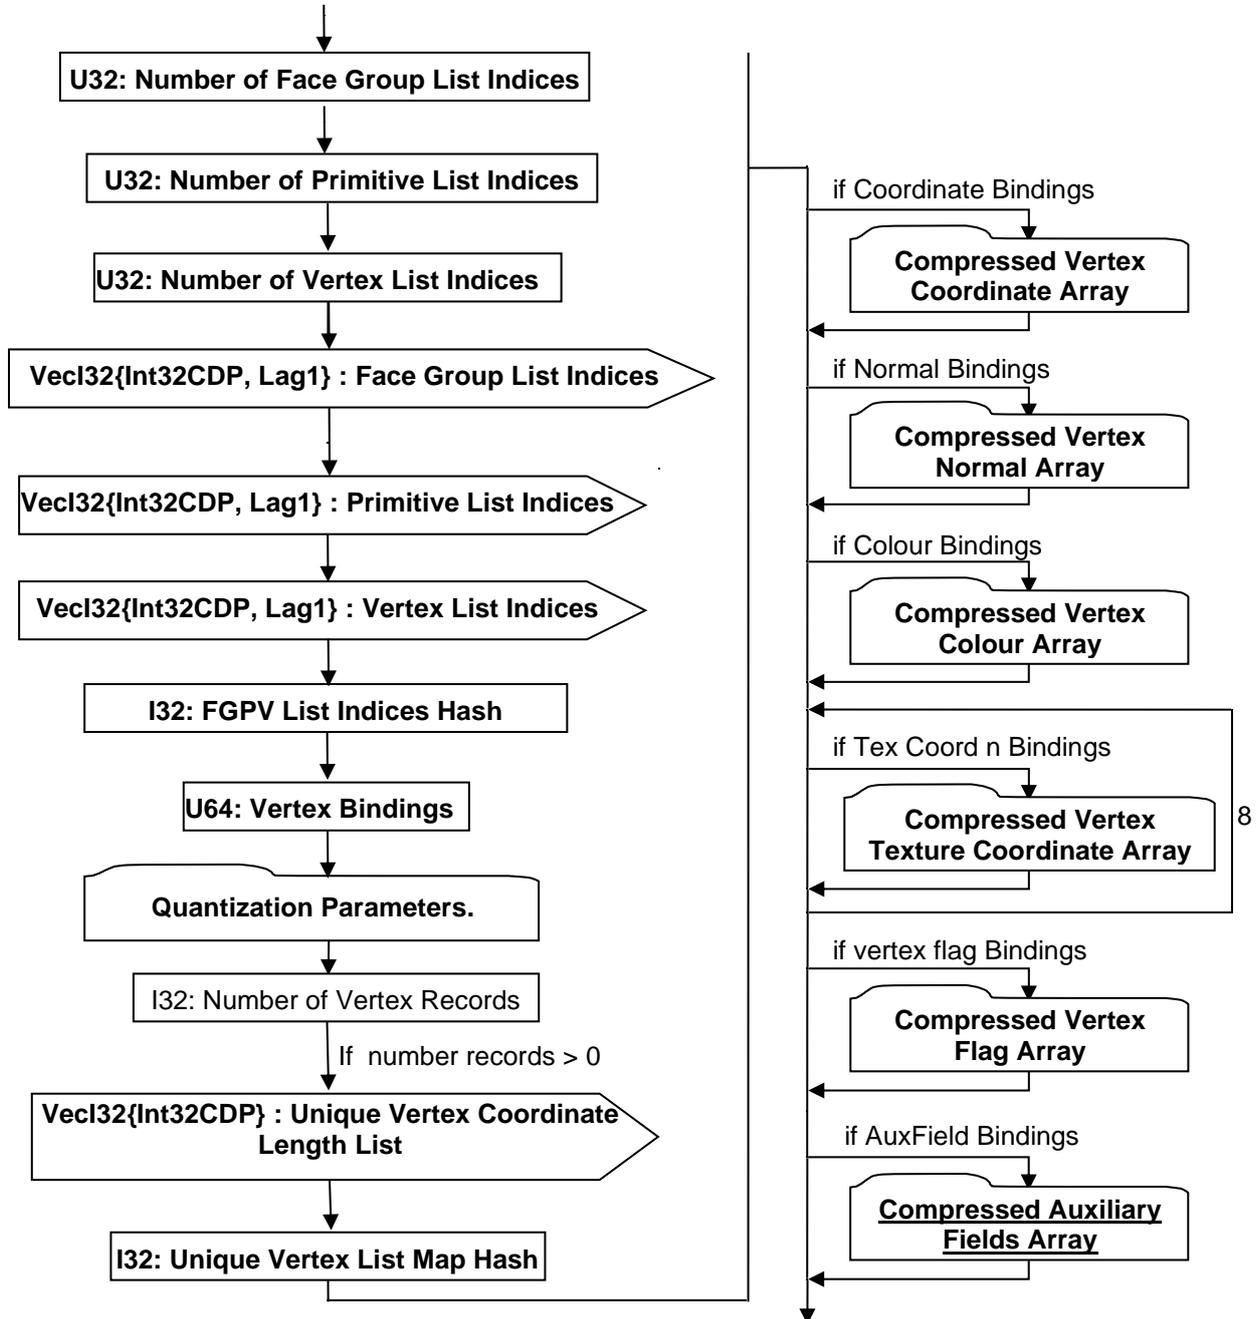


Figure 92 — TopoMesh Compressed Rep Data data collection

Complete description for Quantization Parameters can be found in Quantization Parameters.

Complete description for Compressed Vertex Coordinate Array, Compressed Vertex Normal Array, Compressed Vertex Colour Array, Compressed Vertex Texture Coordinate Array, Compressed Vertex

Flag Array and Compressed Vertex Auxiliary Fields Array can be found in Data Compression and Encoding.

U32: Number of Face Group List Indices

Number of Face Group List Indices.

U32: Number of Primitive List Indices

Number of Primitive List Indices.

U32: Number of Vertex List Indices

Number of Vertex List Indices.

VecI32{Int32CDP, Lag1} : Face Group List Indices

Face Group List Indices is a vector of indices into the uncompressed Raw Primitive Data marking the start/beginning of Faces. Face Group List Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1} : Primitive List Indices

Primitive List Indices is a vector of indices into the uncompressed Raw Vertex Data marking the start/beginning of primitives. Primitive List Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1} : Vertex List Indices

Vertex List Indices is a vector of indices (one per vertex) into the uncompressed/dequantized unique vertex data arrays (Vertex Coords, Vertex Normals, Vertex Texture Coords, Vertex Colours) identifying each Vertex's data (i.e. for each Vertex there is an index identifying the location within the unique arrays of the particular Vertex's data). The Compressed Vertex Index List uses the Int32 version of the CODEC to compress and encode data.

I32: FGPV List Indices Hash

The FGPV Hash is the combined hash value of the Face Group List Indices (if Polyline), Primitive List Indices, and Vertex List Indices. Refer to section Annex C for a more detailed description on hashing.

```
UInt32 uHash      = 0;
UInt32 nFGIdx     = 0,
      nPrimIdx    = 0,
      nVtxIdx     = 0;
vecI32 vFGIndices, vPrimIndices, vVertexIndices;
...
uHash = hash32( (UInt32*)& vFGIndices), nFGIdx+1, uHash );
uHash = hash32( (UInt32*)& vPrimIndices), nPrimIdx+1, uHash );
uHash = hash32( (UInt32*)& vVertexIndices), nVtxIdx , uHash );
```

U64: Vertex Bindings

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to "0". For more information see Vertex Shape LOD Data U64 : Vertex Bindings.

I32: Number of Vertex Records

Number of vertex records.

VecI32{Int32CDP} : Unique Vertex Coordinate Length List

The Unique Vertex Length List contains the number of vertex records containing each of the unique vertex coordinates and should sum to the number of vertex records. When read in the Compressed Vertex Coordinate Array only contains a single value for each unique vertex coordinate value and is therefore parallel to the Unique Vertex Length List. In order to expand its coordinates into the vertex record space its unique coordinate value will need to be smeared out such that each unique vertex coordinate is repeated the number of times specified in the Unique Vertex Length List. The Compressed Vertex Normal, Colour, Texture, and Flag Arrays do not require the same expansion.

I32: Unique Vertex List Map Hash

The Unique Vertex List Map Hash is the hash value of Unique Vertex Coordinate Length List. Refer to section Annex C for a more detailed description on hashing.

```
UInt32 uHash      = 0;  
UInt32 nUniqVtx  = 0;  
vecF32 vUniqVtxIndices;  
...  
uHash = hash32( (UInt32*)&vUniqVtxIndices, nUniqVtx, uHash );
```

Quantization Parameters

Quantization Parameters specifies for each shape data type grouping (i.e. Vertex, Normal, Texture Coordinates, Colour) the number of quantization bits used for given qualitative compression level. Although these Quantization Parameters values are saved in the associated/referenced Shape LOD Element, they are also saved here so that a JT File loader/reader does not have to load the Shape LOD Element in order to determine the Shape quantization level. See Shape LOD Element for complete description of Shape LOD Elements.

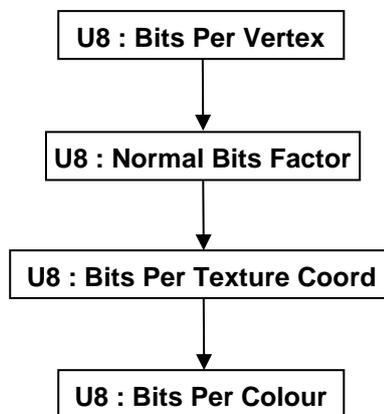


Figure 93 — Quantization Parameters data collection

U8 : Bits Per Vertex

Bits Per Vertex specifies the number of quantization bits per vertex coordinate component. Value shall be within range [0:24] inclusive.

U8 : Normal Bits Factor

Normal Bits Factor is a parameter used to calculate the number of quantization bits for normal vectors. Value shall be within range [0:13] inclusive. The actual number of quantization bits per normal is computed using this factor and the following formula: "BitsPerNormal = 6 + 2 * Normal Bits Factor".

U8 : Bits Per Texture Coord

Bits Per Texture Coord specifies the number of quantization bits per texture coordinate component. Value shall be within range [0:24] inclusive.

U8 : Bits Per Colour

Bits Per Colour specifies the number of quantization bits per colour component. Value shall be within range [0:24] inclusive.

TopoMesh Topologically Compressed LOD Data

TopoMesh Topologically Compressed LOD Data collection contains the common items to all TopoMesh Topologically Compressed LOD data elements such as Tri-Strip Set Shape LOD Element.

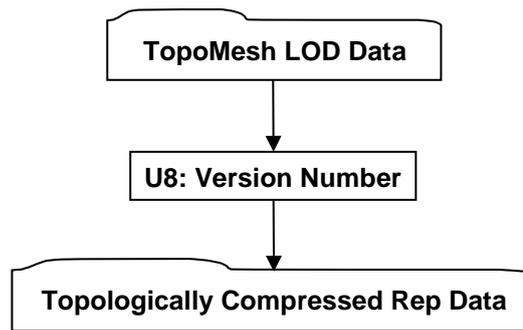


Figure 94 — TopoMesh Topologically Compressed LOD Data collection

Complete description for TopoMesh LOD Data and Topologically Compressed Rep Data can be found in TopoMesh LOD Data and Topologically Compressed Rep Data.

U8: Version Number

Version Number is the version identifier for this TopoMesh Topologically Compressed LOD Data. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

7.1.4.1 Topologically Compressed Rep Data

This JT specification, like JT v9, represents triangle strip data very differently than it does in the JT v8 format. The scheme stores the triangles from a TriStripSet or polygons from a PolygonSet as a topologically-connected mesh. Even though *more* information is stored to the JT file, the additional structure provided by storing the full topological adjacency information actually provides a handsome reduction in the number of bytes needed to encode the triangles or polygons. More importantly, however, the topological information aids us in a more significant respect -- that of only storing the *unique* vertex records used by the TriStripSet or PolygonSet. Combined, these two effects reduce the typical storage footprint of TriStripSet data by approximately half relative to the JT v8 format.

The trisstrip information itself is not stored in the JT file -- only the triangles themselves. The reader is expected to re-trisstrip (or not) as she sees fit, as trisstrips may no longer provide a performance advantage during rendering. There may, however, remain some memory savings for trisstripping, and so the decision to trisstrip is left to the user.

To begin the decoding process, first read the compressed data fields shown in figure below. These fields provide all the information necessary to reconstruct the per face-group organized sets of triangles. The first 22 fields represent the topological information, and the remaining fields constitute the set of unique vertex records to be used. The next step is to run the topological decoder algorithm detailed in provided in the annex on this data to reconstruct the topologically connected representation of the triangle mesh in a so-called "Dual VFMesh." The triangles or polygons in this heavy-weight data structure can then be exported to a lighter-weight form, and the dual VFMesh discarded if desired.

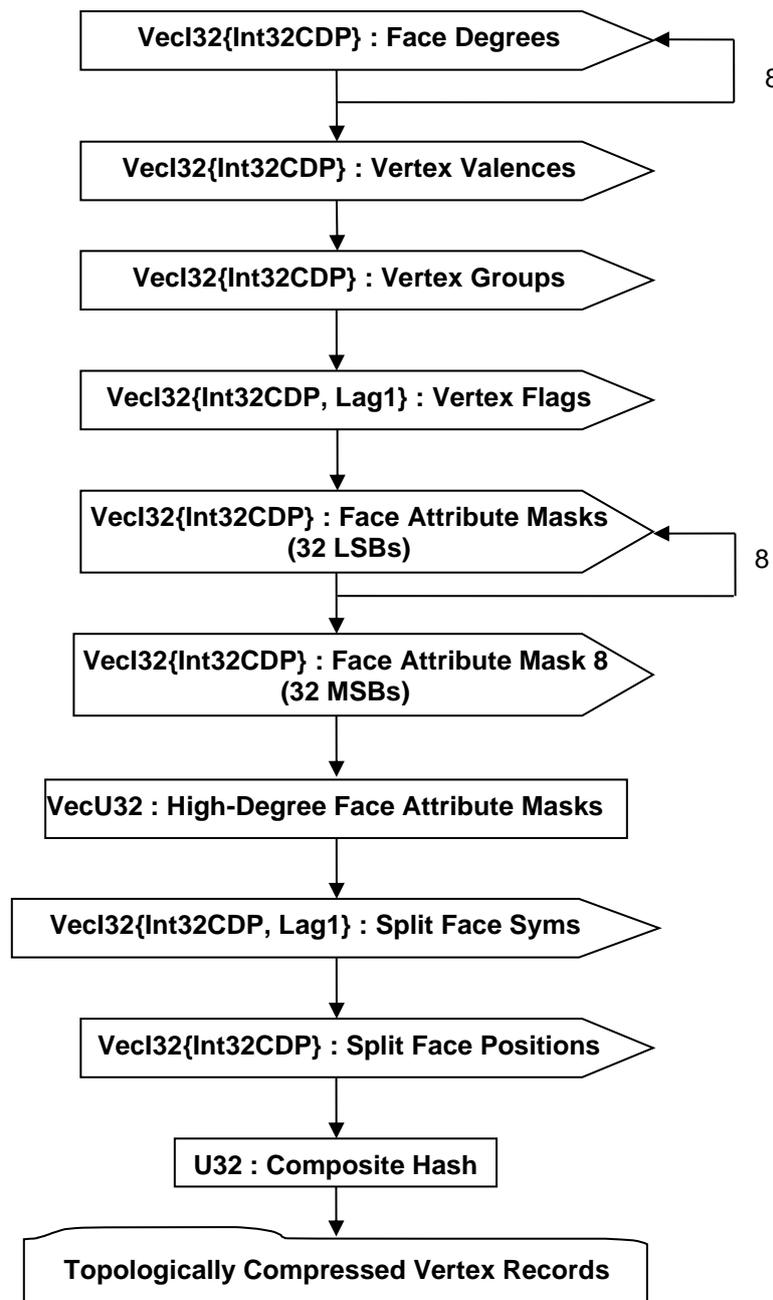


Figure 95 — Topologically Compressed Rep Data Collection

VecI32{Int32CDP} : Face Degrees

Similarly to the way valences are encoded, the topology encoder emits the *degree* (number of incident vertices) of each face *in the order they were visited*. The number of face degrees in this array is equal to the number of faces in the mesh.

VecI32{Int32CDP} : Vertex Valences

As the coder visits each vertex in the mesh, it emits the *valence* (number of incident faces) of each vertex. These valences are collect *in the order they were visited* into this array. The number of valences in this array is equal to the number of (topological) vertices in the mesh.

VecI32{Int32CDP} : Vertex Groups

This array is parallel to the Vertex Valences array above. As the coder emits the valence of each vertex, it also emits the face group number to which the dual vertex belongs into this array.

VecI32{Int32CDP, Lag1} : Vertex Flags

This array is also parallel to the Vertex Valences array, and contains a value of 0 when the dual face was present in the original triangle mesh, and a value of 1 if the dual face is a *cover face* that was added to artificially close the original mesh.

VecI32{Int32CDP} : Face Attribute Masks (32 LSBs)

This field is written 8 times – once for each of the 8 context groups listed above – and encodes the face attribute bit vector associated with a single face.

VecI32{Int32CDP} : Face Attribute Mask 8 (32 MSBs)

This field encodes the 32 most significant bits of the 8th context group of face attribute bit vectors.

VecU32 : High-Degree Face Attribute Masks

This field encodes all remaining face attribute bit vectors, adjoined end-to-end, and encoded as a single array of unsigned integers.

VecI32{Int32CDP, Lag1} : Split Face Syms

Encodes the list of “split face” ID numbers in the order the coder encountered them.

VecI32{Int32CDP} : Split Face Positions

Encodes the list of “split face” positions in the active vertex queue in the order the code encountered them.

U32 : Composite Hash

This field is a hash value computed on all of the above data using the hash function described in Annex C. It is written into the JT file so that a reader can perform the same hash on the above data and compare against this value in order to guarantee that it has read and decoded correct data from the JT file. It is *highly* encouraged that all readers perform this check, as even a single bit error in the topology information above can have catastrophic consequences on the topology decoder and the resulting mesh. Any writers are *required* to write this field using the method provided so that other readers may validate the data they read.

```
UInt32 uHash          = 0;
UInt32 anDegSyms[8]  = {0},
      nValSyms      = 0,
      nVGrpSyms    = 0,
      nVtxFlags     = 0,
      anAttrMasks[8] = {0},
      nLrgAttrMasks = 0,
      nSplitVtxSyms = 0,
      nSplitVtxPos  = 0;
VecI32 vFaceDegreeSymbols[8], vviValenceSymbols, vFaceGroupSyms,
      vvuAttrMasks[8], viSplitVtxSyms, viSplitVtxPos;
VecI16 vFaceFlags;
VecU32 vuTmp, vuAttrMasksLrg;
...
for (i=0 ; i<8 ;i++)
    uHash = hash32((UInt32*) vFaceDegreeSymbols[i].ptr(), anDegSyms[i], uHash );
uHash = hash32((UInt32*) vviValenceSymbols.ptr(), nValSyms, uHash );
uHash = hash32((UInt32*)vVtxGroupSyms.ptr(), nVGrpSyms, uHash );
uHash = hash16((UInt16*)vVtxFlags.ptr(), nFlags, uHash );
for (i=0 ; i<7 ;i++)
    uHash = hash32((UInt32*)vVuAttrMasks[i].ptr(), anAttrMasks[i], uHash );
vuTmp = vVuAttrMasks[7] & 0xffffffff; // Lower 32 bits of each element
uHash = hash32(vuTmp.ptr(), anAttrMasks[7], uHash );
vuTmp = (vVuAttrMasks[7] >> 32) & 0xffffffff; // Next 32 bits of each element
uHash = hash32(vuTmp.ptr(), anAttrMasks[7], uHash );
uHash = hash32(vuAttrMasksLrg.ptr(), nLrgAttrMasks, uHash );
```

```
uHash = hash32((UInt32*)viSplitVtxSyms.ptr(), nSplitVtxSyms, uHash );  
uHash = hash32((UInt32*)viSplitVtxPos.ptr(), nSplitVtxPos, uHash );
```

7.1.4.2 Topologically Compressed Vertex Records

Documented here is the format of the vertex data written by the topological encoder found in the annex. Some additional explanation is necessary, however, because only the *unique* vertex coordinates are written to the JT file, while the remaining vertex attributes (normals, colours, texture coordinates, vertex flags) may not be unique.

Vertex coordinates are written to the file in the order that they were visited by the topology encoder. Note that this means that the number of vertex coordinates written is equal to the number of topological vertices in the mesh (i.e. all vertex coordinates are unique).

By contrast one set of vertex attribute records is written to the file corresponding to each 1 bit across all encoded dual Face Attribute Masks. The vertex attribute records are written in the order that the topology encoder visited them. The reader shall then use the topology decoder's output to correctly associate each vertex attribute record to the correct vertex coordinate using the dual Face Attribute Masks.

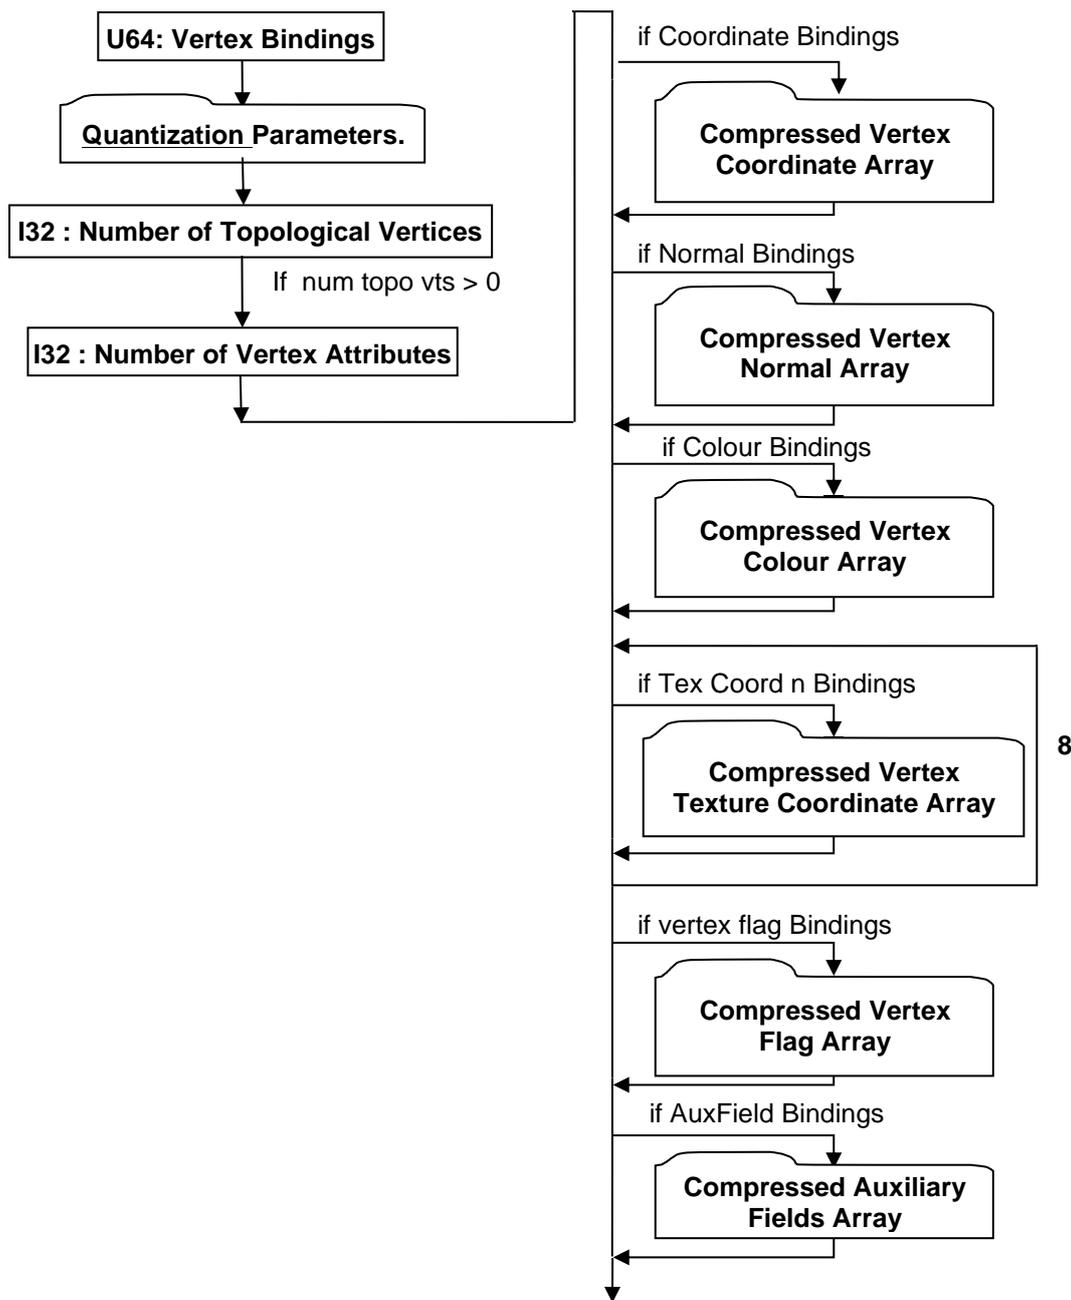


Figure 96 — Topologically Compressed Vertex Records data collection

Complete description for Compressed Vertex Coordinate Array, Compressed Vertex Normal Array, Compressed Vertex Colour Array, Compressed Vertex Texture Coordinate Array, Compressed Vertex Flag Array and Compressed Vertex Auxiliary Fields Array can be found in Data Compression and Encoding.

U64: Vertex Bindings

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to “0”. For more information see Vertex Shape LOD Data U64 : Vertex Bindings.

I32 : Number of Topological Vertices

This field is the number of topological vertices encoded by the topology encoder. This is the number of unique vertex coordinates that will be written in the later Compressed Vertex Coordinate Array field.

I32 : Number of Vertex Attributes

One set of vertex attribute records is written to the file corresponding to each 1 bit across all encoded dual Face Attribute Masks. The vertex attribute records are written in the order that the topology encoder visited them. The reader shall then use the topology decoder's output to correctly associate each vertex attribute record to the correct vertex coordinate using the dual Face Attribute Masks.

7.1.5 Null Shape LOD Element

Object Type ID: 0x3e637aed, 0x2a89, 0x41f8, 0xa9, 0xfd, 0x55, 0x37, 0x37, 0x3, 0x96, 0x82

A Null Shape LOD Element represents the pseudo geometric shape definition data for a NULL Shape Node Element. Although a NULL Shape Node Element has no real geometric primitive representation (i.e. is empty), its usage as a “proxy/placeholder” node within the LSG still supports the concept of having a defined bounding box and thus the existence of this Null Shape LOD Element type.

A Null Shape LOD Element is typically referenced by a NULL Shape Node Element using Late Loaded Property Atom Elements (see NULL Shape Node Element and Late Loaded Property Atom Element respectively).

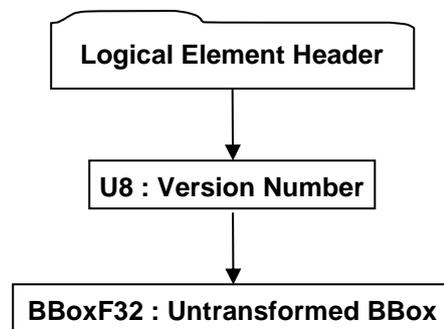


Figure 97 — Null Shape LOD Element data collection

Complete description for Logical Element Header can be found in Logical Element Header.

U8 : Version Number

Version Number is the version identifier for this Null Shape LOD Element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

BBoxF32 : Untransformed BBox

The Untransformed BBox is an axis-aligned LCS bounding box and represents the untransformed extents for this Null Shape LOD Element.

7.1.6 Primitive Set Shape Element

Object Type ID: 0xe40373c2, 0x1ad9, 0x11d3, 0x9d, 0xaf, 0x0, 0xa0, 0xc9, 0xc7, 0xdd, 0xc2

A Primitive Set Shape Element defines the minimum data necessary to procedurally generate LODs for a list of primitive shapes (e.g. box, cylinder, sphere, etc.). “Procedurally generate” means that the raw geometric shape definition data (e.g. vertices, polygons, normals, etc) for LODs is not directly stored; instead some basic shape information is stored (e.g. sphere centre and radius) from which LODs can be generated.

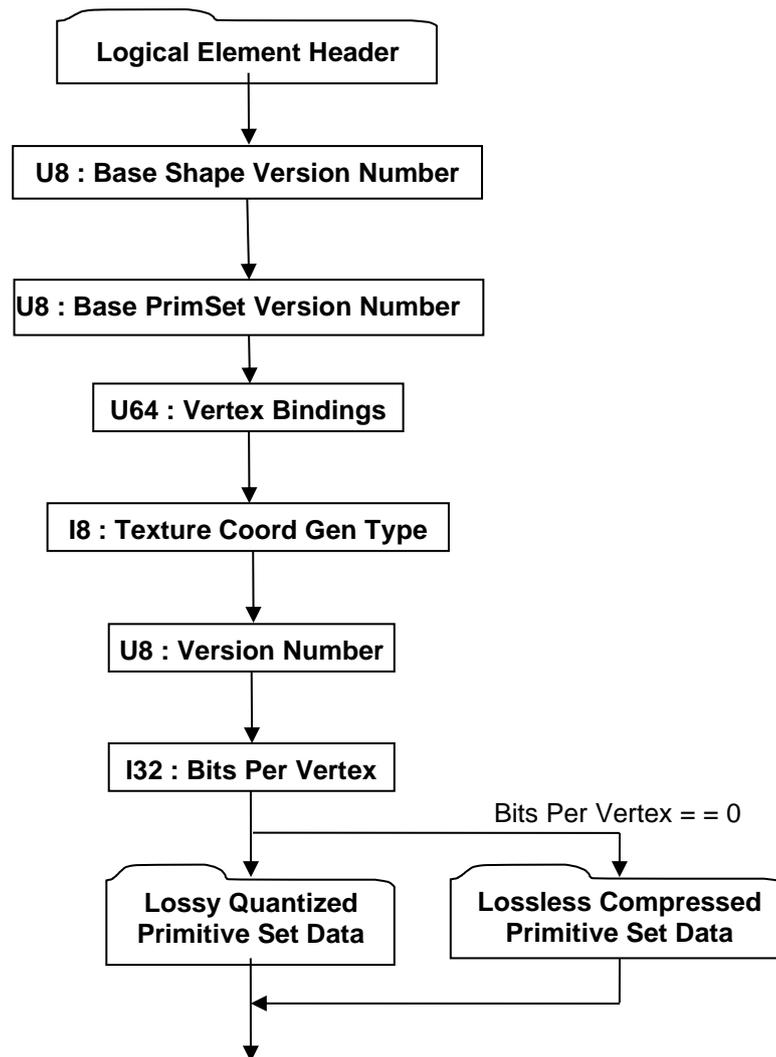


Figure 98 — Primitive Set Shape Element data collection

Complete description for Logical Element Header can be found in Logical Element Header.

U8 : Base Shape Version Number

Base Shape Version Number is the version identifier for the 2-level base class of this element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U8 : Base PrimSet Version Number

Base PrimSet Version Number is the version identifier for the immediate base class of element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

U64 : Vertex Bindings

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to “0”. For more information see Vertex Shape LOD Data U64 : Vertex Bindings.

U8 : Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table 49 — Primitive Set Shape Version Number values

= 1	Version-1 Format
-----	------------------

I32 : Bits Per Vertex

Bits Per Vertex specifies the number of quantization bits per vertex coordinate component. Value shall be within range [0:32] inclusive.

I8 : Texture Coord Gen Type

Texture Coord Gen Type specifies how a texture is applied to each face of the primitive. Single tile means one copy of the texture will be stretched to fit the face, isotropic means that the texture will be duplicated on the longer dimension of the face in order to maintain the texture’s aspect ratio.

Table 50 — Primitive Set Shape Texture Coord Gen Type values

= 0	Single Tile...Indicates that a single copy of a texture image will be applied to significant primitive features (i.e. cube face, cylinder wall, end cap) no matter how eccentrically shaped.
= 1	Isotropic...Implies that multiple copies of a texture image may be mapped onto eccentric surfaces such that a mapped texel stays approximately square.

Lossless Compressed Primitive Set Data

The Lossless Compressed Primitive Set Data collection contains all the per-primitive information stored in a “lossless” compression format for all primitives in the Primitive Set. The Lossless Compressed Primitive Set Data collection is only present when the Bits Per Vertex data field equals “0” (see Primitive Set Shape Element for complete description).

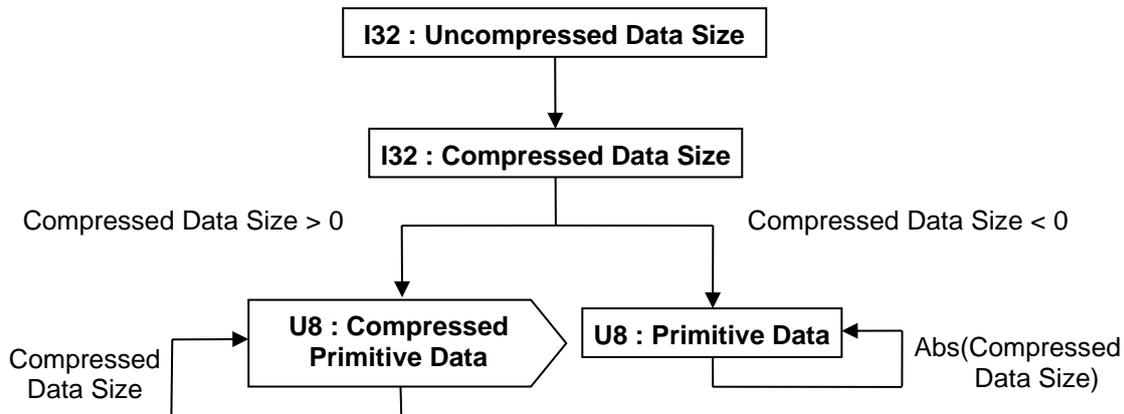


Figure 99 — Lossless Compressed Primitive Set Data collection

I32 : Uncompressed Data Size

Uncompressed Data size specifies the uncompressed size of Primitive Data or Compressed Primitive Data in bytes.

I32 : Compressed Data Size

Compressed Data Size specifies the compressed size of Primitive Data or Compressed Primitive Data in bytes. If the Compressed Data Size is negative, then the Compressed Primitive Data field is not present (i.e. data is not compressed) and the absolute value of Compressed Data Size should be equal to Uncompressed Data Size value.

U8 : Primitive Data

The Primitive Data field is a packed array of the raw per primitive data (i.e. reserved, params1, params2, params3, colour, type) sequentially for all primitives in the set. The Primitive Data field is only present if Compressed Data Size value is less than zero. The per primitive data is packed into Primitive Data array using an interleaved data schema/format as follows:

{[reserved], [params1], [params2], [params3], [colour], [type]}, ..., **for all primitives**

Where the data elements have the following size and meaning:

Table 51 — Lossless Compressed Primitive Set Data Field values

Element	Data Type	Description
reserved	I32	This is a field reserved for future expansion of the JT Format.
params1	CoordF32	Interpretation is Primitive Type specific (see below table)
params2	DirF32	Interpretation is Primitive Type specific (see below table)
params3	Quaternion	Interpretation is Primitive Type specific (see below table)
Colour	RGB	Red, Green, Blue colour component values
Type	I32	Primitive Type = 0 – Box = 1 – Cylinder = 2 – Pyramid = 3 – Sphere = 4 – Tri-Prism

Given this format of the Primitive Data, and the previously read size fields, a reader can then implicitly compute the data stride (length of one primitive entry in Primitive Data), and number of primitives.

The interpretation of the three “params#” data fields is primitive type dependent as follows:

Table 52 — Primitive Set “params#” Data Fields Interpretation

Primitive Type	params1			params2			params3			
	[0]	[1]	[2]	[0]	[1]	[2]	[0]	[1]	[2]	[3]
Box	min X	min Y	min Z	length X	length Y	length Z	orientation in Quaternion form			
Cylinder	base centre X	base centre Y	base centre Z	spine X	spine Y	spine Z	radius 1	radius 2	N/A	N/A
Pyramid	base centre X	base centre Y	base centre Z	length X	length Y	length Z	orientation in Quaternion form			
Sphere	centre X	centre Y	centre Z	radius	N/A	N/A	N/A	N/A	N/A	N/A
Tri-Prism	bottom front X	bottom front Y	bottom front Z	length X (to right)	length Y (to back)	length Z (to top)	orientation in Quaternion form			

U8 : Compressed Primitive Data

The Compressed Primitive Data field represents the same data as documented in [Primitive Data](#) field above except that the data is compressed using the general “LZMA” method. The Compressed Primitive Data field is only present if Compressed Data Size value is greater than zero. See Data Compression and Encoding for more details on LZMA compression and LZMA library version used.

Lossy Quantized Primitive Set Data

The Lossy Quantized Primitive Set Data collection contains all the per-primitive information (i.e. reserved, params1, params2, params3, colour, type) stored in a “lossy” encoding/compression format for all primitives in the Primitive Set. The Lossy Quantized Primitive Set Data collection is only present

when the Bits Per Vertex data field is NOT equal to “0” (See Primitive Set Shape Element for complete description).

The interpretation of the three per-primitive “params#” data fields is primitive type dependent. See Table 52 — Primitive Set “params#” Data Fields Interpretation in Lossless Compressed Primitive Set Data for per-primitive type description of the “params#” data fields.

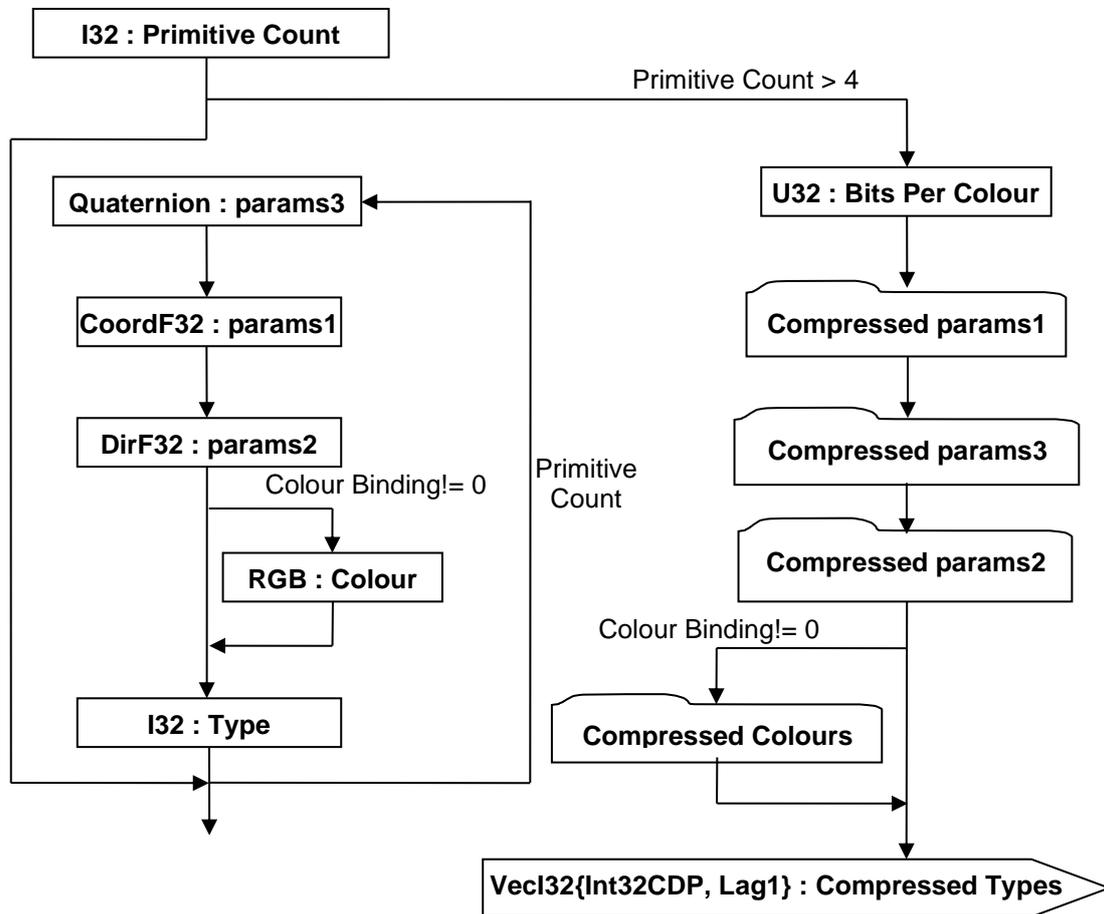


Figure 100 — Lossy Quantized Primitive Set Data collection

I32 : Primitive Count

Primitive Count specifies the number of primitives in the Primitive Set.

Quaternion : params3

Interpretation of params3 data field is primitive Type dependent. See Table for Primitive Set “params#” Data Fields Interpretation in Lossless Compressed Primitive Set Data for per-primitive type description of the params3 data fields.

CoordF32 : params1

Interpretation of params1 data field is primitive Type dependent. See Table for Primitive Set “params#” Data Fields Interpretation in Lossless Compressed Primitive Set Data for per-primitive type description of the params1 data fields.

DirF32 : params2

Interpretation of params1 data field is primitive Type dependent. See Table for Primitive Set “params#” Data Fields Interpretation in Lossless Compressed Primitive Set Data for per-primitive type description of the params1 data fields.

RGB : Colour

Colour specifies the Red, Green Blue colour components for the primitive. This data field is only present if previously read Colour Binding (see Primitive Set Shape Element) is not equal to "0".

I32 : Type

Type specifies the primitive type. See Table for Lossless Compressed Primitive Set Data Field values in Lossless Compressed Primitive Set Data for valid primitive Type values.

U32 : Bits Per Colour

Bits Per Colour specifies the number of quantization bits per colour component. Value shall be within range [0:32] inclusive.

VecI32{Int32CDP, Lag1} : Compressed Types

The Compressed Types data field is a vector of Type data for all the primitives in the Primitive Set. Compressed Types uses the Int32 version of the CODEC to compress and encode data. In an uncompressed form the valid primitive Type values are as documented in Table for Lossless Compressed Primitive Set Data Field values in Lossless Compressed Primitive Set Data.

Compressed params1

Compressed params1 is the compressed representation of the *params1* data for all the primitives in the Primitive Set. Note that the interpretation of the uncompressed *params1* data is primitive Type dependent. See Table for Primitive Set "params#" Data Fields Interpretation in Lossless Compressed Primitive Set Data for per-primitive type description of the *params1* data fields.

The *params1* data for all primitives in the Primitive Set is compressed/encoded on a per ordinate basis using a separate Uniform Quantizer (with Bits Per Vertex number of quantization bits) for each collection of ordinate values. Since *params1* is of type "CoordF32", it has three ordinate values (three F32 values), and thus three Uniform Quantizers (where a Uniform Quantizer is a scalar quantizer/encoder whose range is divided into levels of equal spacing). See Data Compression and Encoding for more complete description of Uniform Quantizer.

The JT Format packs all the *params1* data for all primitives into a single array using an ordinate dependent order (as shown below) and then encodes each of the lists of ordinate values using a separate Uniform Quantizer per ordinate list.

```
{prim1 params1[0], prim2 params1[0],...primN params1[0],
 prim1 params1[1], prim2 params1[1],...primN params1[1],
 prim1 params1[2], prim2 params1[2],...primN params1[2]}
```

The result of the Uniform Quantizer encoding is a range min and max floating point value pairs for each ordinate value collection, and an integer array of *params1* quantization codes that corresponds to the above described "ordinate dependent order" packed array of *params1* data.

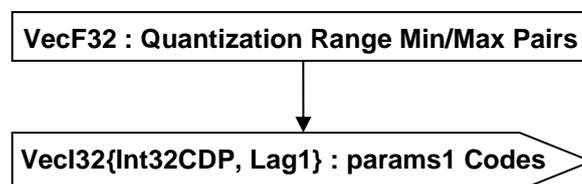


Figure 101 — Compressed params1 data collection

VecF32 : Quantization Range Min/Max Pairs

Quantization Range Min/Max Pairs is a vector of Uniform Quantizer range min/max value pairs. There shall be a min/max pair for each ordinate value collection (i.e. each Uniform Quantizer). Thus the length of this vector is "2 * num_ordinates" (so vector length would be "6" for *params1* data).

VecI32{Int32CDP, Lag1} : params1 Codes

The *params1* Codes data field is a vector of quantizer “codes” for the *params1* data of all the primitives in the Primitive Set. The *params1*Codes also uses the Int32 version of the CODEC to compress and encode data.

Compressed params3

Compressed *params3* is the compressed representation of the *params3* data for all the primitives in the Primitive Set. Note that the interpretation of the uncompressed *param31* data is primitive Type dependent. See Table 52 — Primitive Set “params#” Data Fields Interpretation in Lossless Compressed Primitive Set Data for per-primitive type description of the *params3* data fields.

The *params3* data for all primitives in the Primitive Set is compressed/encoded on a per ordinate basis using a separate Uniform Quantizer (with Bits Per Vertex number of quantization bits) for each collection of ordinate values. Since *params1* is of type “Quaternion”, it has four ordinate values (four F32 values), and thus four Uniform Quantizers (where a Uniform Quantizer is a scalar quantizer/encoder whose range is divided into levels of equal spacing). See Data Compression and Encoding for more complete description of Uniform Quantizer.

The JT Format packs all the *params3* data for all primitives into a single array using an ordinate dependent order (as shown below) and then encodes each of the lists of ordinate values using a separate Uniform Quantizer per ordinate list.

```
{prim1 params3[0], prim2 params3[0],...primN params3[0],  
 prim1 params3[1], prim2 params3[1],...primN params3[1],  
 prim1 params3[2], prim2 params3[2],...primN params3[2],  
 prim1 params3[3], prim2 params3[3],...primN params3[3]}
```

The result of the Uniform Quantizer encoding is a range min and max floating point value pairs for each ordinate value collection, and an integer array of *params3* quantization codes that corresponds to the above described “ordinate dependent order” packed array of *params3* data.

The storage format of Compressed *params3* is exactly the same as that documented in Figure for Compressed *params1* data collection.

Compressed params2

Compressed *params2* is the compressed representation of the *params2* data for all the primitives in the Primitive Set. Note that the interpretation of the uncompressed *params2* data is primitive Type dependent. See Table for Primitive Set “params#” Data Fields Interpretation in Lossless Compressed Primitive Set Data for per-primitive type description of the *params2* data fields.

The *params2* data for all primitives in the Primitive Set is compressed/encoded on a per ordinate basis using a separate Uniform Quantizer (with Bits Per Vertex number of quantization bits) for each collection of ordinate values. Since *params2* is of type “DirF32”, it has three ordinate values (three F32 values), and thus three Uniform Quantizers (where a Uniform Quantizer is a scalar quantizer/encoder whose range is divided into levels of equal spacing). See Data Compression and Encoding for more complete description of Uniform Quantizer.

The JT Format packs all the *params2* data for all primitives into a single array using an ordinate dependent order (as shown below) and then encodes each of the lists of ordinate values using a separate Uniform Quantizer per ordinate list.

```
{prim1 params2[0], prim2 params2[0],...primN params2[0],  
 prim1 params2[1], prim2 params2[1],...primN params2[1],  
 prim1 params2[2], prim2 params2[2],...primN params2[2]}
```

The result of the Uniform Quantizer encoding is a range min and max floating point value pairs for each ordinate value collection, and an integer array of *params2* quantization codes that corresponds to the above described “ordinate dependent order” packed array of *params2* data.

The storage format of Compressed *params2* is exactly the same as that documented in Figure for Compressed *params1* data collection.

Compressed Colours

Compressed Colours is the compressed representation of the *colour* data for all the primitives in the Primitive Set. This data collection is only present if previously read Colour Binding (see Primitive Set Shape Element) is not equal to "0".

The *colour* data for all primitives in the Primitive Set is compressed/encoded on a per ordinate basis using a separate Uniform Quantizer (with Bits Per Colour number of quantization bits) for each collection of ordinate values. Since *colour* is of type "RGB", it has three ordinate values (three F32 values), and thus three Uniform Quantizers (where a Uniform Quantizer is a scalar quantizer/encoder whose range is divided into levels of equal spacing). See Data Compression and Encoding for more complete description of Uniform Quantizer.

The JT Format packs all the *colour* data for all primitives into a single array using an ordinate dependent order (as shown below) and then encodes each of the lists of ordinate values using a separate Uniform Quantizer per ordinate list.

```
{prim1 colour[0], prim2 colour[0],...primN colour[0],  
 prim1 colour[1], prim2 colour[1],...primN colour[1],  
 prim1 colour[2], prim2 colour[2],...primN colour[2]}
```

The result of the Uniform Quantizer encoding is a range min and max floating point value pairs for each ordinate value collection, and an integer array of *colour* quantization codes that corresponds to the above described "ordinate dependent order" packed array of *colour* data.

The storage format of Compressed Colours is exactly the same as that documented in Figure for Compressed params1 data collection.

8 Geometry Segments

The Geometry Segments in JT contain Element that define a range of geometry definitions that can be included with a JT file. Complete descriptions for each geometry segment can be found in the Geometry Annexes.

8.1 XT B-Rep Segment

XT B-Rep Segment contains an Element that defines the precise geometric Boundary Representation data for a particular Part in XT boundary representation format.

XT B-Rep Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element).

The XT B-Rep Segment type supports LZMA compression on all element data, so all elements in XT B-Rep Segment use the Logical Element Header LZMA form of element header data.

Object Type ID: 0x873a70e0, 0x2ac9, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

See Annex H XT B-Rep Segment for a full description of the XT B-Rep Segment.

8.2 STEP B-Rep Segment

STEP B-Rep Segment contains an Element that defines the precise geometric Boundary Representation data for a particular Part in STEP boundary representation format (ISO 10303-42).

STEP B-Rep Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element).

The STEP B-Rep Segment type supports compression methods described for all element data. The main component of the STEP B-Rep segment is an ISO 10303-21 file with the compression options as defined by the compression flag in Data for the data segments.

Object Type ID: 0x869c7d53, 0xccb0, 0x451b, 0xb2, 0x3, 0xd1, 0x42, 0x81, 0x56, 0x14, 0x56

See Annex B STEP B-Rep Segment for a full description of the STEP B-Rep Segment.

8.3 JT ULP Segment

The JT ULP Segment contains an Element that defines the lightweight geometric Boundary Representation data for a particular Part in the JT ULP format.

JT ULP Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element). The JT ULP Segment type supports compression on all element data, so all elements in JT ULP Segment use the Logical Element Header Compressed form of element header data.

Object Type ID: 0xf338a4af, 0xd7d2, 0x41c5, 0xbc, 0xf2, 0xc5, 0x5a, 0x88, 0xb2, 0x1e, 0x73

See Annex I JT ULP Segment for a full description of the legacy ULP segment.

8.4 JT Smart Topology Table (STT) Segment

JT Smart Topology Table (hereafter referred to as STT) Segment contains an Element that defines the lightweight B-Rep description for a particular Part.

JT STT Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element). The JT STT Segment type supports compression on all element data, so all elements in JT STT Segment use the Logical Element Header Compressed form of element header data.

Object Type ID: 0xca7e6f89, 0x97c8, 0x47f0, 0x9f, 0xca, 0x16, 0x99, 0xc, 0xfb, 0xe2, 0x17

See Annex J JT Smart Topology Table (STT) Segment for a full description of the STT Segment.

8.5 JT LWPA Segment

JT LWPA Segment contains an Element that defines light weight precise analytic data for a particular part. More specifically LWPA contains the collection of analytic surfaces in the B-Rep definition of the part.

JT LWPA Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element). The JT LWPA Segment type supports LZMA compression on all element data, so all elements in JT LWPA Segment use the Logical Element Header Compressed form of element header data.

Object Type ID: 0xd67f8ea8, 0xf524, 0x4879, 0x92, 0x8c, 0x4c, 0x3a, 0x56, 0x1f, 0xb9, 0x3a

See Annex K JT LWPA Segment for a full description of the JT LWPA Segment.

8.6 Wireframe Segment

The Wireframe Segment contains an Element that defines the precise 3D wireframe data for a particular Part.

A Wireframe Segment is typically referenced by a Part Node Element using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element). The Wireframe Segment type supports LZMA compression on all element data, so all elements in Wireframe Segment use the Logical Element Header Compressed form of element header data.

Object Type ID: 0x873a70d0, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

See Annex L Wireframe Segment for a full description of the JT Wireframe Segment.

8.7 JT B-Rep Element (deprecated)

JT B-Rep Element represents a particular Part's precise data in JT boundary representation format.

JT B-Rep Segments are typically referenced by Part Node Elements using Late Loaded Property Atom Elements.

The JT B-Rep Segment type supports LZMA compression on all element data, so all elements in JT B-Rep Segment use the Logical Element Header LZMA form of element header data.

Object Type ID: 0x873a70c0, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

See Annex M JT B-rep Segment for a full description of the JT B-Rep Segment.

NOTE: JT B-Rep is deprecated and should be considered read only for application creation.

9 Meta Data Segment

Meta Data Segments are used to store large collections of meta-data in separate addressable segments of the JT File. Storing meta-data in a separate addressable segment allows references (from within the JT file) to these segments to be constructed such that the meta-data can be late-loaded (i.e. JT file reader can be structured to support the “best practice” of delaying the loading/reading of the referenced meta-data segment until it is actually needed).

Meta Data Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element).

The Meta Data Segment type supports compression on all element data, so all elements in Meta Data Segment use the Logical Element Header Compressed form of element header data.




Figure 102 — Meta Data Segment data collection

Complete description for Segment Header can be found in Segment Header.

The following sub-sections document the various Meta Data Element types.

9.1 Property Proxy Meta Data Element

Object Type ID: 0xce357247, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1

A Property Proxy Meta Data Element serves as a “proxy” for all meta-data properties associated with a particular Meta Data Node Element (see Meta Data Node Element). The proxy is in the form of a list of key/value property pairs where the *key* identifies the type and meaning of the *value*. Although the property *key* is always in the form of a String data type, the *value* can be one of several data types.

U8: Property Value Type

Property Value Type specifies the data type for the Property Value. If the type equals “0” then no Property Value is written. Valid types include the following:

Table 53 — Property Proxy Meta Data Property Value Type values

= 0	Unknown
= 1	MbString data type value
= 2	I32 data type value
= 3	F32 data type value
= 4	Date value

MbString: String Property Value

String Property Value represents the property value when Property Value Type = = 1.

I32: Integer Property Value

Integer Property Value represents the property value when Property Value Type = = 2.

F32: Float Property Value

Float Property Value represents the property value when Property Value Type = = 3.

Date Property Value

Date Property Value represents the property value when Property Value Type = = 4. Date Property Value data collection represents a date as a combination of year, month, day, hour, minute, and second data fields.

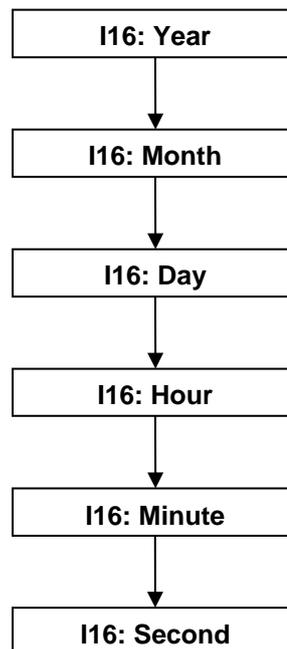


Figure 104 — Date Property Value data collection

I16: Year

Year specifies the date year value.

I16: Month

Month specifies the date month value.

I16: Day

Day specifies the date day value.

I16: Hour

Hour specifies the date hour value.

I16: Minute

Minute specifies the date minute value.

I16: Second

Second specifies the date Second value.

9.2 PMI Manager Meta Data Element

Object Type ID: 0xce357249, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1

The PMI Manager Meta Data Element data collection is a type of Meta Data Element which contains the Product and Manufacturing Information for a part/assembly.

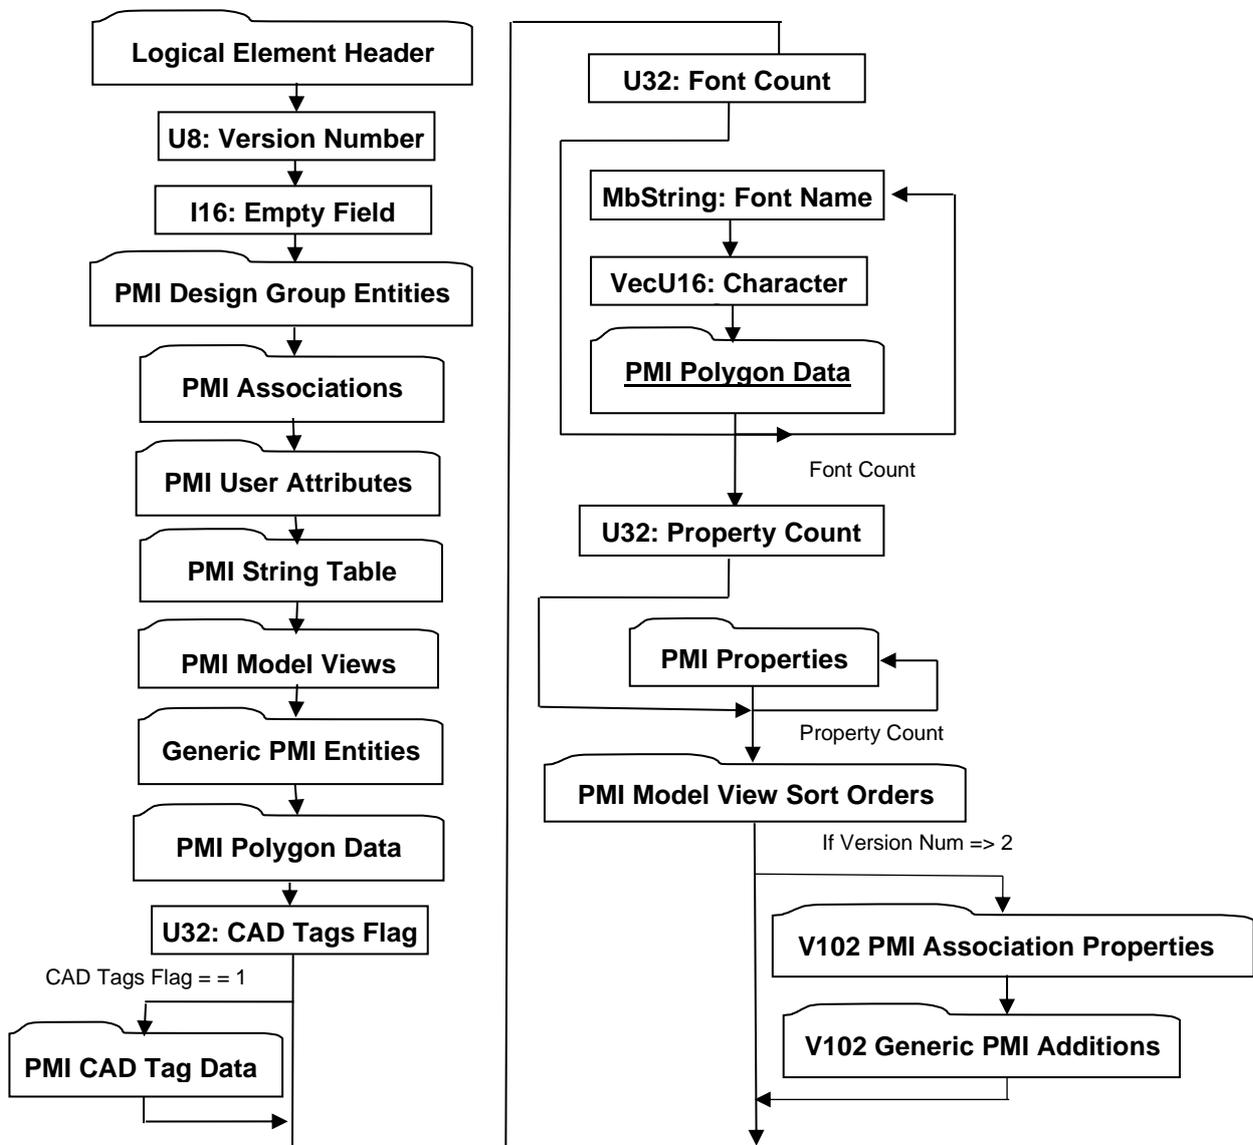


Figure 105 — PMI Manager Meta Data Element data collection

A complete description of Logical Element Header Compressed can be found in the File Format section of this document under Data Segment in the logical collection describing Data.

U8: Version Number

Version Number is the version identifier for this PMI Manager Element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

I16: Empty Field

Refer to Common Data Conventions and Constructs Empty Field.

U32: CAD Tags Flag

CAD Tags Flag is a flag indicating whether CAD Tag data exist for the PMI.

U32: Font Count

U32: Font Count specifies the number of sets of glyph definitions. Each set of glyphs represents a single font definition that consists of a name, a character set and polygonal glyph definition for each character in the set.

MbString: Font Name

Font name specifies a representative name for the font set.

VecU16: Character Set

VecU16:Character Set contains the unsigned 16-bit integer identifiers for each character whose symbol is defined in the ensuing PolygonData segment.

U32: Property Count

Property Count specifies the number of PMI Properties

9.2.1 PMI Design Group Entities

The PMI Design Group Entities data collection defines data for a list of Design Groups. Design Groups are collections of PMI created to organize a model into smaller subsets of information. This organization is achieved via PMI Associations (see PMI Associations), where specific PMI entities are associated as “destinations” to a “source” PMI Design Group.

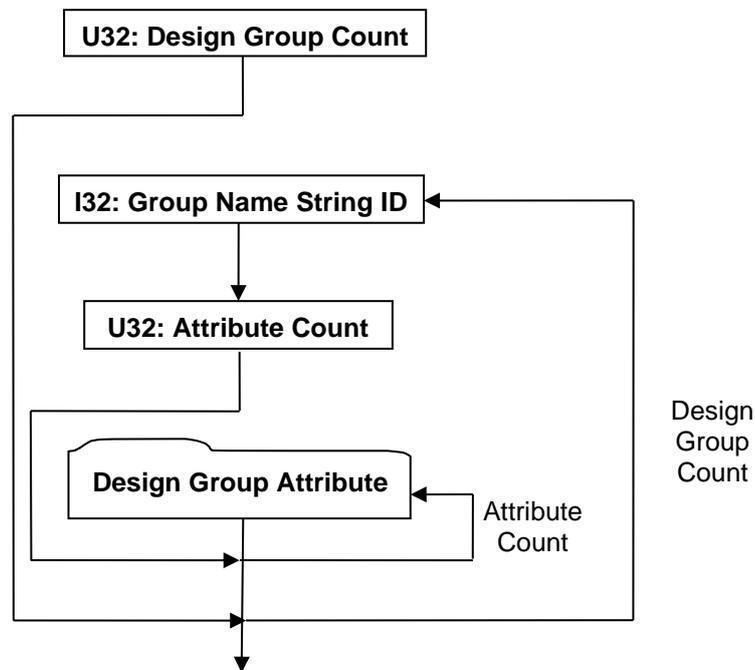


Figure 106 — PMI Design Group Entities data collection

U32: Design Group Count

Design Group Count specifies the number of Design Group entities.

I32: Group Name String ID

Group Name String ID specifies the identifier for the group name character string. This identifier is an index to a particular character string in the PMI String Table. An identifier value of “-1” indicates no string.

U32: Attribute Count

Attribute Count specifies the number of Design Group Attribute data collections.

Design Group Attribute

The Design Group Attribute data collection defines a group property/attribute.

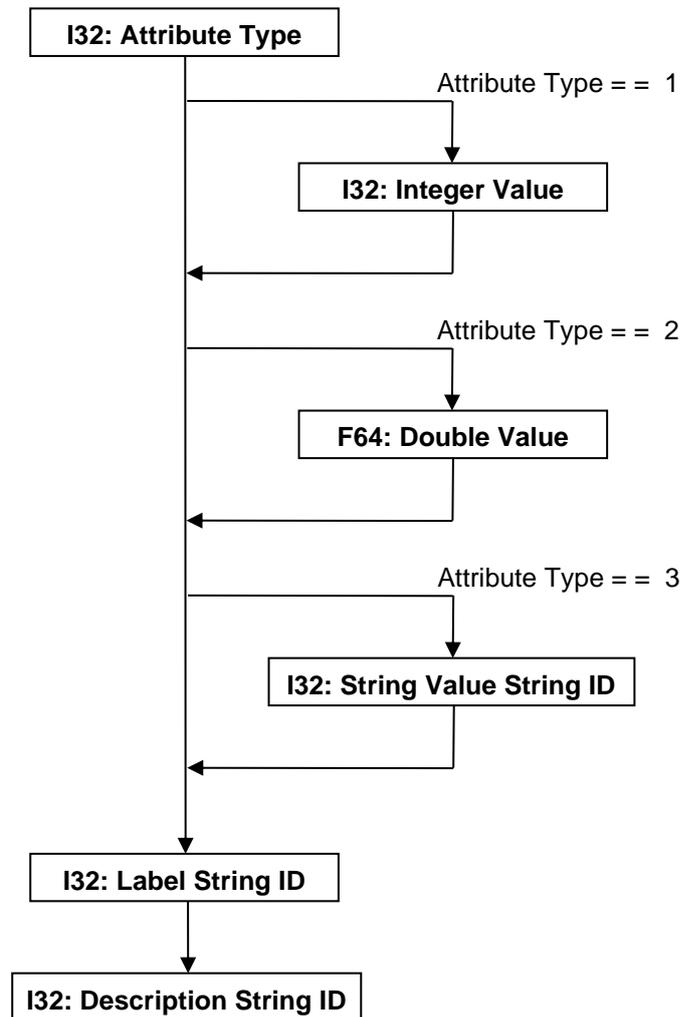


Figure 107 — Design Group Attribute data collection

I32: Attribute Type

Attribute Type specifies the attribute type. Valid types include the following:

Table 54 — PMI Design Group Attribute Type values

= 1	Integer
= 2	Double
= 3	String

I32: Integer Value

Integer Value specifies the value for “integer” Attribute Types.

F64: Double Value

Double Value specifies the value for “double” Attribute Types.

I32: String Value String ID

String Value String ID specifies the string identifier value for “string” Attribute Types. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

I32: Label String ID

Label String ID specifies the string identifier for the attribute label. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

I32: Description String ID

Description String ID specifies the string identifier for the attribute description. This identifier is an index to a particular character string in the PMI String Table. An identifier value of “-1” indicates no string.

9.2.2 PMI Associations

The PMI Associations data collection defines data for a list of associations. An association defines a link (“relationship”) between two PMI, B-Rep, or Wireframe Rep entities where one entity is defined as the “source” and the other entity is defined as the “destination”.

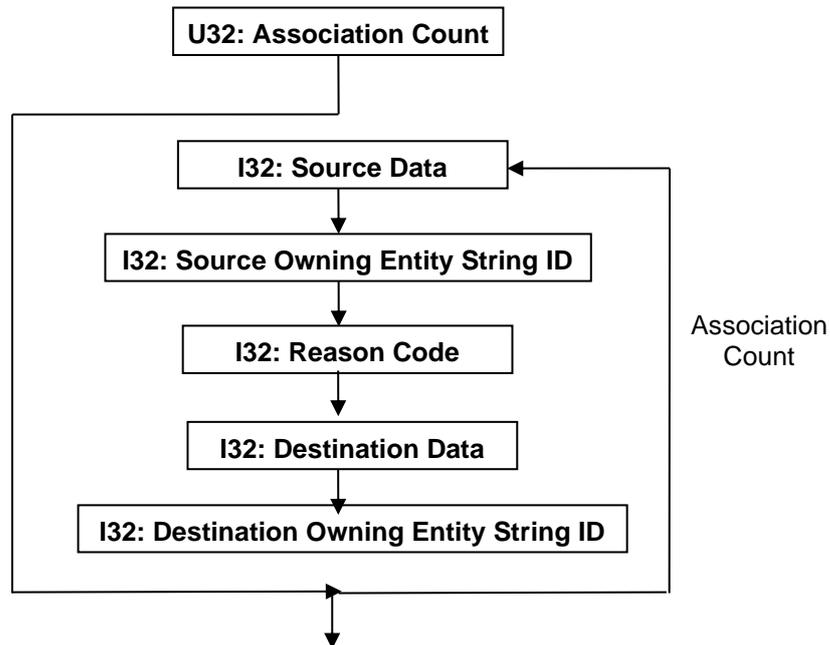


Figure 108 — PMI Associations data collection

U32: Association Count

Association Count specifies the number of associations.

I32: Source Data

Source Data is a collection of source entity information encoded/packed within a single I32 using the following bit allocation. All bits fields that are not defined as in use should be set to “0”.

Table 55 — PMI Associations Source Data values

Bits 0 - 23	Source Entity Identifier. The interpretation of this identifier data is dependent upon the value of Bit 31 documented below.
Bits 24 -30	Source Entity PMI or B-Rep type. Valid types include the following: = 0 PMI - Dimension = 1 PMI - Note = 2 PMI - Datum Feature Symbol = 3 PMI - Datum Target = 4 PMI - Feature Control Frame = 5 PMI - Line Weld = 6 PMI - Spot Weld = 7 PMI - Measurement Point = 8 PMI - Surface Finish = 9 PMI - Locator Designator = 10 PMI - Reference Geometry = 11 PMI - Coordinate System = 12 PMI - Design Group = 13 PMI - User Attribute = 14 B-Rep - Vertex = 15 B-Rep - Edge = 16 B-Rep - Face = 17 PMI - Model View = 18 PMI - Generic = 19 Wireframe Rep - Edge = 20 PMI - Unspecified type = 21 Part Instance
Bit 31	Indirect Identifier Flag = 0 – Value in Bits 0-23 is not the actual CAD identifier, instead Bits 0-23 is an index into the source type’s PMI array or index of the edge/face in B-Rep or Wireframe Rep for the source entity. = 1 – Value in Bits 0-23 is not the actual CAD identifier; instead Bits 0-23 is an index into the list of CAD Tags (as documented in PMI CAD Tag Data) identifying the CAD Tag belonging to the particular source entity.

I32: Source Owning Entity String ID

Source Owning Entity String ID specifies the string identifier for the string which contains the unique CAD identifier of the component (part or assembly) that owns the source PMI or B-Rep entity. This identifier is an index to a particular character string in the PMI String Table. An identifier value of “-1” indicates no string and implies that the entity is to be found on the current node’s PMI/B-Rep/Wireframe-Rep segment. It is valid for the source owning entity to be the same as the destination owning entity (i.e. an association between two PMI or B-Rep entities in the same part/assembly).

I32: Reason Code

Reason Code specifies the “reason” for the association. Valid Reason Codes include the following:

Table 56 — PMI Associations Reason Code values

= 0	Association is to the primary entity being dimensioned.
= 1	Association is to the secondary entity being dimensioned.
= 2	Association is to the dimension plane.
= 5	Association is to the entity used to specify the Z-Axis of a coordinate system.
= 10	Association is to an entity "associated" to or "included in" a PMI symbol.
= 11	Association is to an entity used to "attach" a PMI symbol.
= 12	Association is to first entity used to “attach” a PMI symbol.
= 13	Association is to second entity used to “attach” a PMI symbol.
= 14	Specifying PMI grouping, source is PMI/B-Rep entity and destination is design group.

= 15	Association is to a weld line entity.
= 16	Association is to a “hot spot”.
= 20	Association is to a PMI B-rep entity contained in a virtual group. Similar to reason code 14 but for a virtual group
= 17	Association is to a child in a PMI stack.
= 72	Association is for PMI miscellaneous relation.
= 73	Association is for PMI related entity.
= 78	Association is to a product instance to cut by a PMI section. Only required for partial scene sectioning
= 98	Association is to show the PMI when associated Model View is selected. Source is the PMI, and destination is Model View.
= 99	Association is to show/select PMI B, if showing/selecting PMI A. Source is PMI A, and destination is PMI B. This is different from an “attached” PMI, where the convention is to show the PMI visibly linked to one another.
= 100	Association is to show all parts except the associated part instance. Source is the part instance, and destination is Model View.
=256	Association is to say cut the selected content that doesn't exist within the regular scene graph (such as a targetted PMI Display) within the given section
=257	Association is to identify that the PMI source content should be part of the MV (Model View) destination with its visibility toggled to off.

I32: Destination Data

Destination Data is a collection of destination entity information encoded/packed within a single I32. The encoding schema and interpretation of this data is the same as that documented in Source Data.

I32: Destination Owning Entity String ID

Destination Owning Entity String ID specifies the string identifier for the string which contains the unique CAD identifier of the component (part or assembly) that owns the destination PMI or B-Rep entity. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string and implies that the entity is to be found on the current node’s PMI/B-Rep/Wireframe-Rep segment. It is valid for the source owning entity to be the same as the destination owning entity (i.e. an association between two PMI or B-Rep entities in the same part/assembly).

9.2.3 PMI User Attributes

The PMI User Attributes collection defines data for a list of user attributes. PMI User Attributes are used to add attribute data to a part/assembly. Each user attribute is composed of key/value pair of strings.

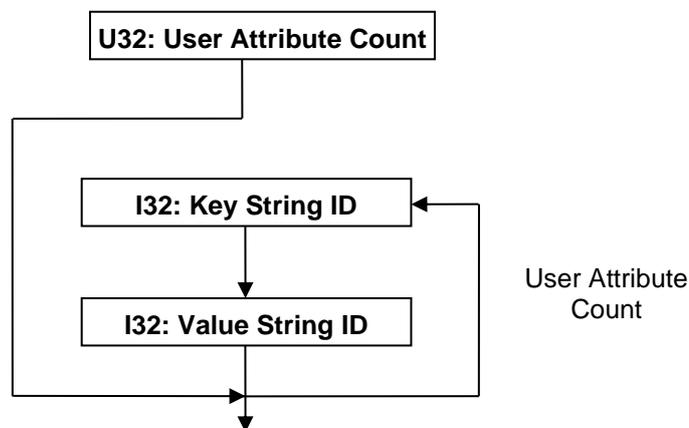


Figure 109 — PMI User Attributes data collection

U32: User Attribute Count

User Attribute Count specifies the number of user attributes.

I32: Key String ID

Key String ID specifies the string identifier for the user attribute key. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

I32: Value String ID

Value String ID specifies the string identifier for the user attribute value. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

9.2.4 PMI String Table

The PMI String Table data collection defines data for a list of character strings and serves as a central repository for all character strings used by other PMI Entities within the same PMI Manager Meta Data Element. PMI Entities reference into this list/array of character strings to define usage of a particular character string using a simple list/array “index” (i.e. String ID).

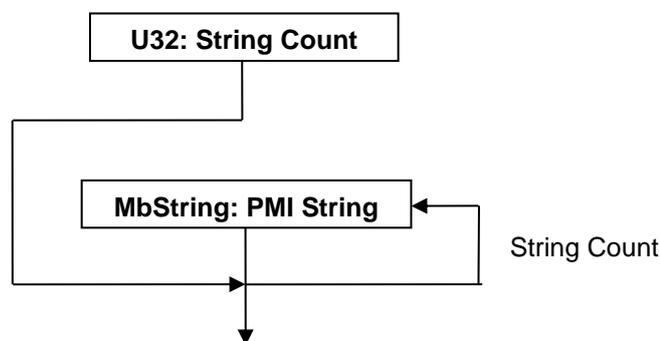


Figure 110 — PMI String Table data collection

U32: String Count

String Count specifies the number of character strings in the string table.

MbString: PMI String

PMI String specifies the character string.

9.2.5 PMI Model Views

The PMI Model Views data collection defines data for a list of Model Views. A fully annotated part/assembly may contain so much PMI information, that it becomes very difficult to interpret the design intent when viewing a 3D Model (with PMI visible) of the part/assembly. Model Views provide a means to capture and organize PMI information about a 3D model so that the design intent can be clearly interpreted and communicated to others in later stages of the Product Lifecycle Management (PLM) process (e.g. manufacturing, inspection, assembly). This organization is achieved via PMI Associations (see PMI Associations), where specific PMI entities are associated as “destinations” to a “source” PMI Model View.

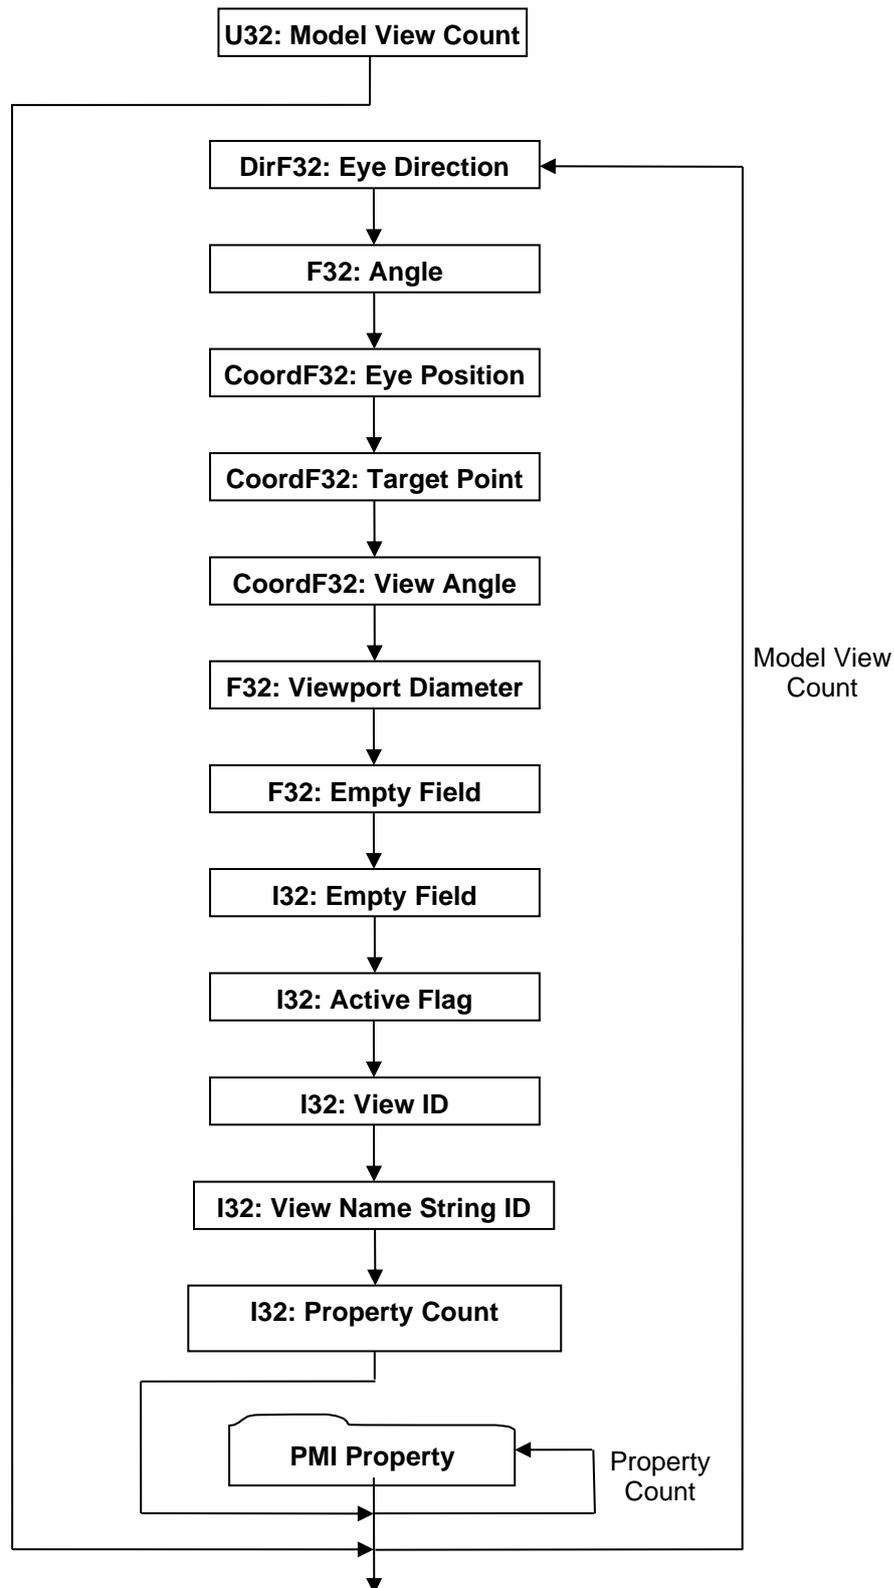


Figure 111 — PMI Model Views data collection

U32: Model View Count

Model View Count specifies the number of Model Views.

DirF32: Eye Direction

Eye Direction specifies the camera direction vector.

F32: Angle

Angle specifies the camera rotation angle (in degrees where positive is counter-clockwise) about the Eye Direction. So this Angle in combination with the Eye Direction is equivalent to specifying a rotation using axis-angle representation.

CoordF32: Eye Position

Eye Position specifies the WCS coordinates of the eye/camera “look from” position.

CoordF32: Target Point

Target Point specifies the WCS coordinates of the eye/camera “look at” position.

CoordF32: View Angle

View angle specifies the X, Y, Z rotation angles (in degrees) of the model’s axis. The rotations are defined with respect to an initial orientation where the model’s axis are aligned with the screen’s axis (i.e. +X axis points to right, +Y axis points up, +Z axis points out at you).

F32: Viewport Diameter

Viewport Diameter specifies the diameter in WCS coordinates of the largest possible circle that could be inscribed within viewport. If a large diameter value is specified, the model appears very small in relation to the viewport; whereas if a small diameter value is specified a close-up (“zoomed-in”) view of the model results.

F32: Empty Field

Refer to Common Data Conventions and Constructs Empty Field.

I32: Empty Field

Refer to Common Data Conventions and Constructs Empty Field.

I32: Active Flag

Active Flag is a flag specifying whether this Model View is the “active” view. Valid values include the following:

Table 57 — PMI Model Views Active Flag values

= 0	Is not the active Model View.
= 1	Is the active Model View

I32: View ID

View ID specifies the Model View unique identifier.

I32: View Name String ID

View Name String ID specifies the string identifier for the Model View’s name. This identifier is an index to a particular character string in the PMI String Table. An identifier value of “-1” indicates no string.

PMI Property

A PMI Property data collection consists of a key/value pair and is used to describe attributes of Generic PMI Entity or other specific data.

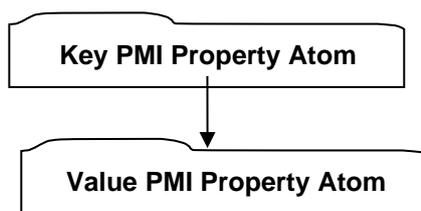


Figure 112 — PMI Property data collection

Both Key and Value have the same format as that documented in Key PMI Property Atom.

For a full description of PMI “Key” strings and “Value” string encoding format descriptions see the PMI Properties Annex in this document.

Key PMI Property Atom

Key PMI Property Atom data collection represents the data format for both the key and value data of a PMI Property key/value pair.




Figure 113 — Key PMI Property Atom data collection

MbString: Value

Value specifies the property atom value encoded into a String. See [Table 58 — Common Property Keys and Their Value Encoding formats](#) above for encoding formats of the Value string.

U32: Hidden Flag

Hidden Flag specifies if the property is “hidden” or not. A JT file reader could use this flag to control whether read properties should be exposed to the end user of the application reading the JT file. Valid values include the following:

Table 58 — PMI Property Atom Hidden Flag values

= 0	Property is not hidden.
= 1	Property is hidden.

9.2.6 Generic PMI Entities

The Generic PMI Entity data collection provides a “generic” format for defining various PMI entity types, including user defined types. The generic format defines the data making up the PMI Entity through a combination of the PMI 2D Data collection and a list of PMI Property data collections.

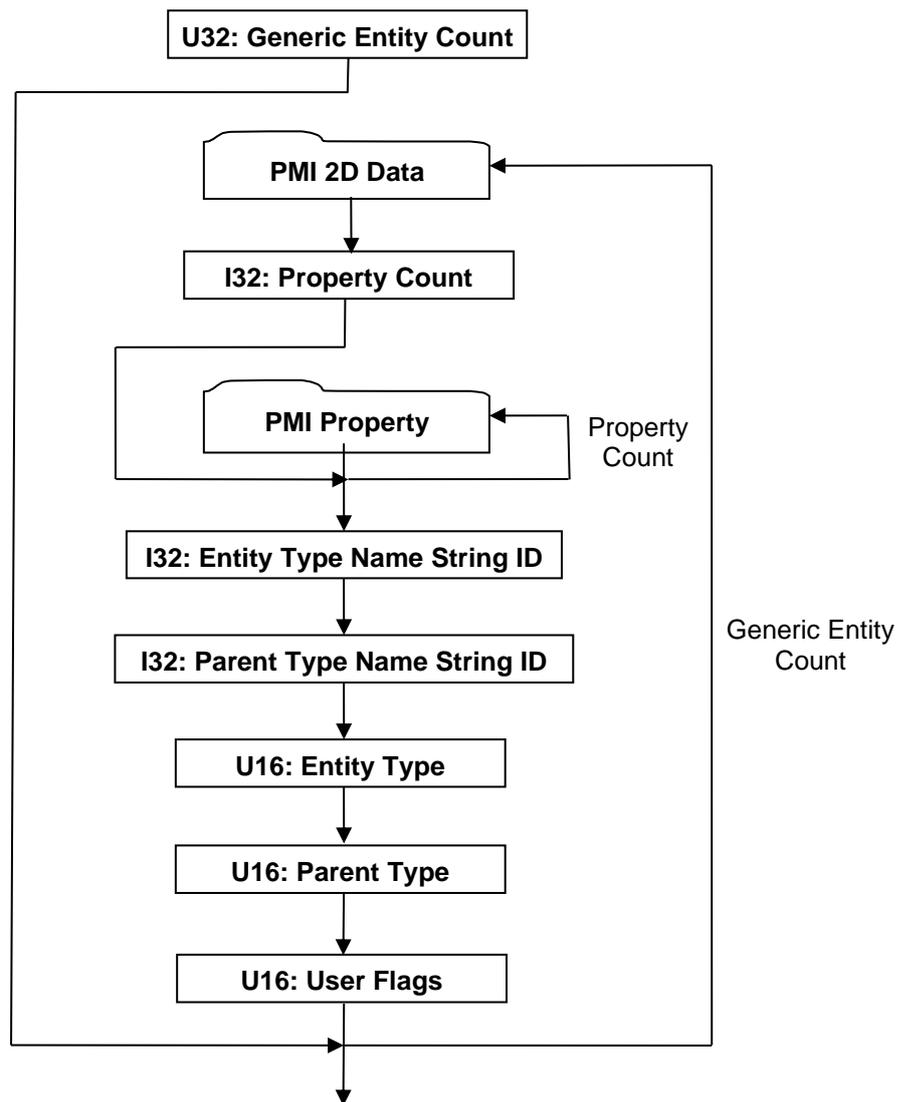


Figure 114 — Generic PMI Entity data collection

Complete description for PMI Property can be found in the logical collection for PMI Property found in PMI Model View.

U32: Generic Entity Count

Generic Entity Count specifies the number of Generic PMI Entities.

I32: Property Count

Property Count specifies the number of PMI Properties.

I32: Entity Type Name String ID

Entity Type Name String ID specifies the string identifier for the name of the Generic PMI Entity Type. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

I32: Parent Type Name String ID

Parent Type Name String ID specifies the string identifier for the name of the parent Generic PMI Entity Type. This identifier is an index to a particular character string in the PMI String Table. An identifier value of “-1” indicates no string.

U16: Entity Type

Entity Type specifies the Generic PMI Entity Type. The valid Entity Type values (in hexadecimal format) are documented in the following table. Note that for “user defined” Generic PMI Entities a hexadecimal value of “0x0114” (as documented in table below) should be used.

Table 59 — Generic PMI Entity Type values

Entity Type	Description
0x0001	PMI (generally only used as a Parent Type)
0x0002	Weld
0x0004	Spot Weld
0x0008	Line Weld
0x0010	Groove Weld
0x0011	Fillet Weld
0x0012	Slot Weld
0x0014	Edge Weld
0x0018	Arc Spot Weld
0x0020	Resistance Spot Weld
0x0021	Resistance Seam Weld
0x0022	Structural Adhesive Bead Shaped
0x0024	Structural Adhesive Tape Shaped
0x0028	Structural Adhesive Dollop Shaped
0x0040	Mechanical Clinch Connector
0x0041	Surface Finish
0x0042	Measurement Point
0x0044	Datum Locator
0x0048	Certification Point
0x0080	Geometric Dimensioning and Tolerancing
0x0081	Feature Control Frame
0x0082	Dimension
0x0084	Datum Feature Symbol
0x0088	Datum Target
0x0100	Note
0x0101	Face Attribute Note
0x0102	Model View Label Note
0x0104	Coordinate System
0x0108	Reference Geometry
0x0110	Reference Point
0x0111	Reference Axis
0x0112	Reference Plane
0x0114	User Defined
0x0118	Measurement Locator
0x0120	Datum Point
0x0121	Surface Vector Measurement Point
0x0122	Hole Vector Measurement Point
0x0124	Trimmed Sheet Vector Measurement Point
0x0128	Hem Vector Measurement Point
0x0230	Fastener PMI
0x0231	Material specification
0x0232	Process specification
0x0233	Part specification
0x0235	Balloon Note
0x0238	Circle Centre
0x0239	Coordinate Note
0x0240	AttributeNote
0x0241	Bundle or Dressing Note

Entity Type	Description
0x0242	Cutting Plane Symbol
0x0243	Crosshatch
0x0244	E Marking (Note)
0x0245	Organization
0x0246	Region
0x0305	Section
0x0306	Centreline
0x0307	Fit Designation
0x0308	Composite Feature Control Frame
0x0309	Weld Note Type
0x030A	Reference Circle
0x030B	Reference Cylinder
0x030C	Part Transform
0x030D	Callout Dimension Type
0x030E	Parameter Dimension Type (reserved not in use)
0x030F	Chamfer Dimension Type
0x0310	Model View Style
0x0311	PMI Table Type
0x0312	Parameter Fit Designation Type (reserved not in use)
0x0313	Callout Fit Designation
0x8000	Feature Type
0x8001	Feature Thread Type
0x8002	Feature Arc Weld Type
0x8003	Feature Datum Type
0x8004	Feature Discrete Join Type
0x8005	Feature Resistance Weld Type
0x8006	Feature Continuous Join Type
0x8007	Feature Adhesive Fill Type
0x8008	Feature Surface Weld Type
0x8009	Feature Measurement Locator Type
0x800A	Feature Grouped Weld
0x800B	Feature Lazer Weld Type

U16: Parent Type

Parent Type specifies the parent Generic PMI Entity Type. The valid Parent Type values are the same as that documented above for Entity Type. The Parent Type is used to create a class hierarchy of PMI when presenting the PMI contents from a JT file.

U16: User Flags

User Flags is a collection of flags. The flags are combined using the binary OR operator and store various state information for the Generic PMI Entity. All bits fields that are not defined as in use should be set to "0".

Table 60 — Generic PMI User Flag values

0x0001	Show PMI Entity "flat to screen only" flag = 0 – Allow PMI display plane to rotate with model. = 1 – Display PMI entity in the plane of the screen, so that it does not rotate with model.
--------	--

PMI 2D Data

The PMI 2D Data collection defines a data format common to all 2D based PMI entities.

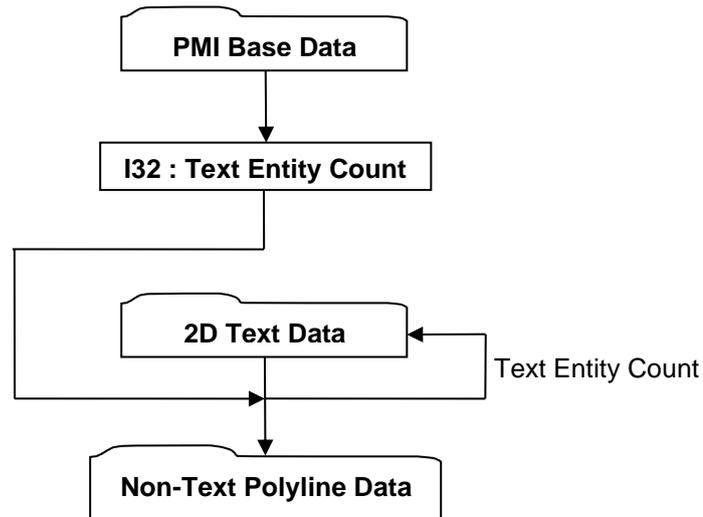


Figure 115 — PMI 2D Data collection

I32: Text Entity Count

Text Entity Count specifies the number of Text entities in the particular PMI entity.

When working with JT version 10.2 and greater the Text Entity Count is used again when reading additional 2D Text Data . See the figure titled V102 2D Text Data collection in this section of the document.

PMI Base Data

The PMI Base Data collection defines the basic/common data that every 2D and 3D PMI entity.

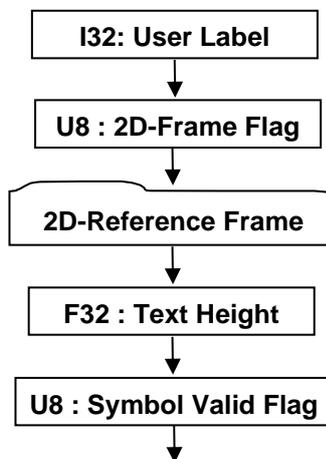


Figure 116 — PMI Base Data collection

I32: User Label

User Label specifies the particular PMI entity identifier.

U8: 2D-Frame Flag

2D-Frame Flag is a flag specifying whether 2D-Reference Frame data is stored. If 2D-Frame Flag has a non-zero value then 2D-Reference Frame data is included. If 2D-Frame Flag has a value of “2”, then dummy (i.e. all zeros) 2D-Reference Frame data is written. The “2D-Frame Flag = 2” case is used by Generic PMI Entities because for Generic PMI Entities all the Non-Text Polyline Data is already in 3D form (i.e. XYZ coordinate data).

F32: Text Height

Text Height specifies the PMI text height in WCS.

U8: Symbol Valid Flag

Symbol Valid Flag is a flag specifying whether the particular PMI entity is valid. If Symbol Valid Flag has a non-zero value then PMI entity is valid.

2D-Reference Frame

The 2D-Reference Frame data collection defines a reference frame (2D coordinate system) where the PMI entity is displayed in 3D space. All the PMI entity's 2D and 3D polyline data is assumed to lie on the defined plane.




Figure 117— 2D-Reference Frame data collection

CoordF32: Origin

Origin defines the origin (min-corner) of the 2D coordinate system.

CoordF32: X-Axis Point

X-Axis Point defines a point along the X-Axis of the 2D coordinate system.

CoordF32: Y-Axis Point

Y-Axis Point defines a point along the Y-Axis of the 2D coordinate system.

2D Text Data

The 2D Text Data collection defines a 2D text entity/primitive.

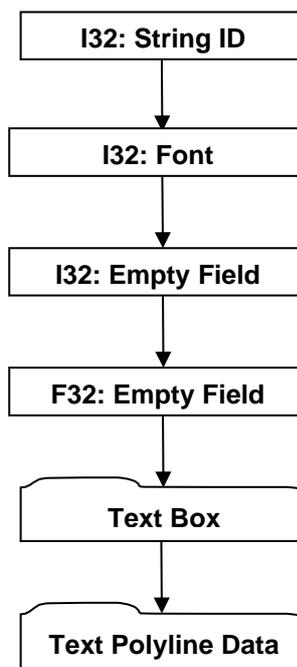


Figure 118 — 2D Text Data collection

I32: String ID

String ID specifies the identifier for the character string. This identifier is an index to a particular character string in the PMI String Table. An identifier value of “-1” indicates no string.

I32: Font

Font identifies the font to be used for this text. Valid values include the following:

Table 61 — PMI 2D Base Data Font values

= 1	Simplex
= 2	Din
= 3	Military
= 4	ISO
= 5	Lightline
= 6	IGES 1001
= 7	Century
= 8	IGES 1002
= 9	IGES 1003
= 101	Japanese JISX 0208 coded character set
= 102	Japanese Extended Unix Codes JISX 0208 coded character set
= 103	Chinese GB 2312.1980 Simplified coded character set
= 104	Korean KSC 5601 coded character set
= 105	Chinese Big5 Traditional coded character set

I32: Empty Field

Refer to Common Data Conventions and Constructs Empty Field.

F32: Empty Field

Refer to Common Data Conventions and Constructs Empty Field.

Text Box

The Text Box data collection specifies a 2D box that particular text fits within. All values are with respect to 2D-Reference Frame documented in 2D-Reference Frame.

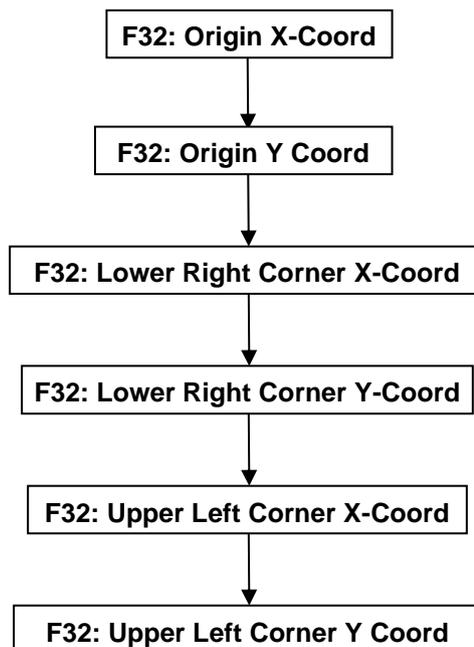


Figure 119 — Text Box data collection

F32: Origin X-Coord

Origin X-Coord defines the 2D X-coordinate of the text origin with respect to 2D-Reference Frame.

F32: Origin Y Coord

Origin Y-Coord defines the 2D Y-coordinate of the text origin with respect to 2D-Reference Frame.

F32: Lower Right Corner X-Coord

Lower Right Corner X-Coord defines the 2D X-coordinate of the lower right corner of the text with respect to 2D-Reference Frame.

F32: Lower Right Corner Y-Coord

Lower Right Corner Y-Coord defines the 2D Y-coordinate of the lower right corner of the text with respect to 2D-Reference Frame.

F32: Upper Left Corner X-Coord

Upper Left Corner X-Coord defines the 2D X-coordinate of the upper left corner of the text with respect to 2D-Reference Frame.

F32: Upper Left Corner Y Coord

Upper Left Corner Y-Coord defines the 2D Y-coordinate of the upper left corner of the text with respect to 2D-Reference Frame.

Text Polyline Data

The Text Polyline Data collection defines any polyline segments which are part of the text representation. This existence of this polyline data is conditional (i.e. not all text has it) and is made up of an array of indices into an array of polyline segments packed as 2D vertex coordinates, specifying where each polyline segment begins and ends. Polylines are constructed from these arrays of data as follows:

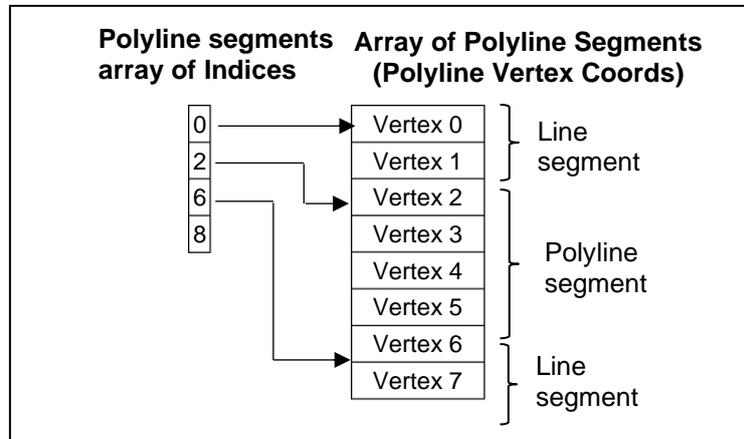


Figure 120 — Constructing Text Polylines from data arrays

This data is represented in JT file in the following format:

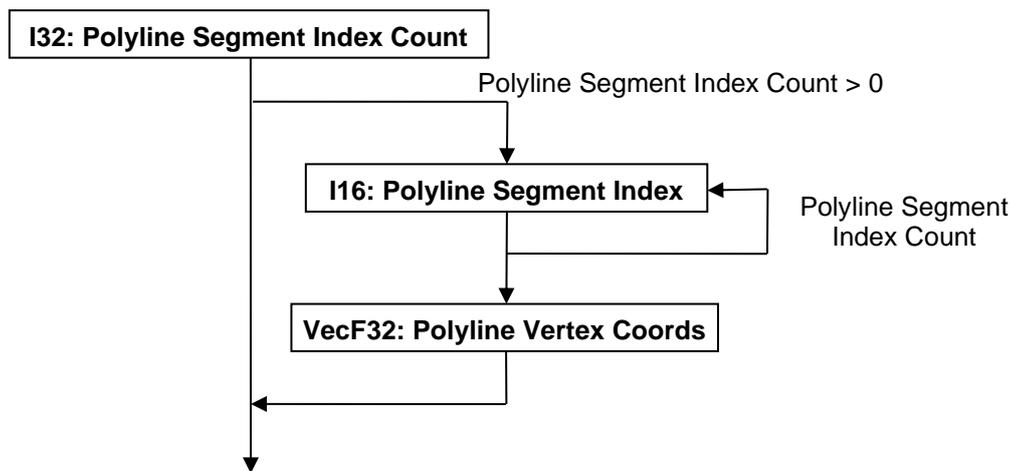


Figure 121 — Text Polyline Data collection

I32: Polyline Segment Index Count

Polyline Segment Index Count specifies the number of polyline segment indices.

I16: Polyline Segment Index

Polyline Segment Index is an index into the Polyline Vertex Coords array specifying where polyline segment begins or ends. This index is a vertex coordinate index so the absolute index into the Polyline Vertex Coords array is computed by multiplying the index value by “2” (i.e. for 2D coordinates).

VecF32: Polyline Vertex Coords

Polyline Vertex Coords is an array of polyline segments packed as 2D point coordinates. These 2D point coordinates are with respect to the 2D-Reference Frame documented in 2D-Reference Frame.

Non-Text Polyline Data

The Non-Text Polyline Data collection contains all the non-text polylines making up the particular PMI entity. Examples of non-text polylines include line attachments, text boxes, symbol box dividers, etc. The Non-Text Polyline Data collection is made up of an array of indices into an array of polyline segments packed as either 2D or 3D vertex coordinates, specifying where each polyline segment begins and ends. Whether vertex coordinates are 2D or 3D is dependent upon the PMI entity type using this data collection. If it is a Generic PMI Entities type then the packed coordinate data is 3D; for all other PMI entity types the packed coordinate data is 2D. Two arrays of values that sequentially specify the polyline type and width in the polyline segments array are included.

The Figure below, titled Constructing Non-Text Polylines from packed 2D data arrays, shows how Polylines are constructed from these arrays of data for the packed 2D coordinates case. The packed 3D coordinates case is interpreted the same except that the coordinates array includes a Z component and is thus packed as “[XYZ][XYZ][XYZ]...”

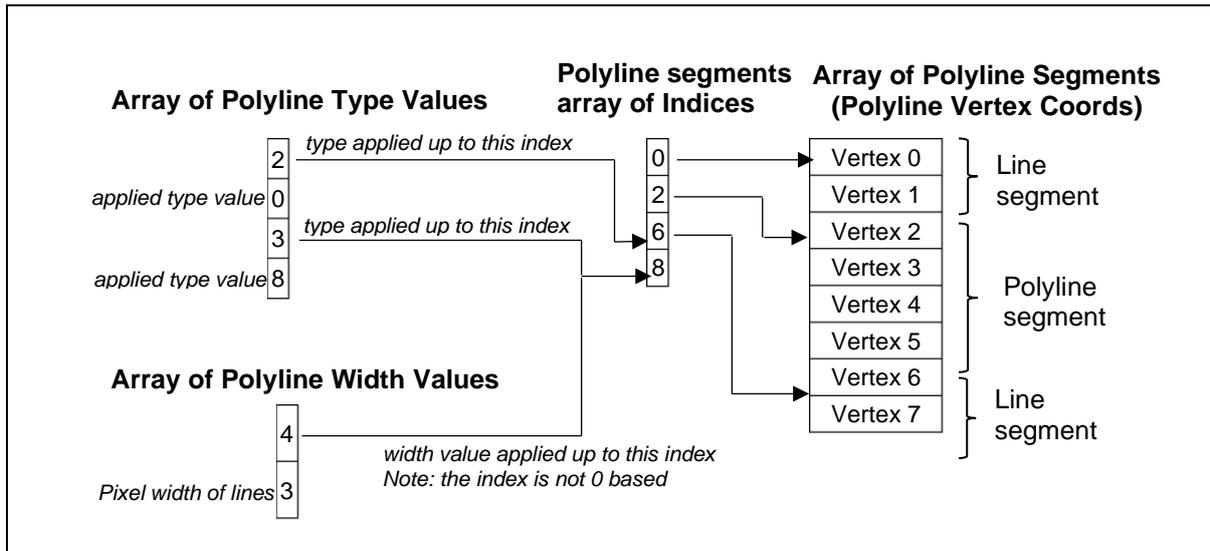


Figure 122 — Constructing Non-Text Polylines from packed 2D data arrays

This data is represented in the JT format as follows:

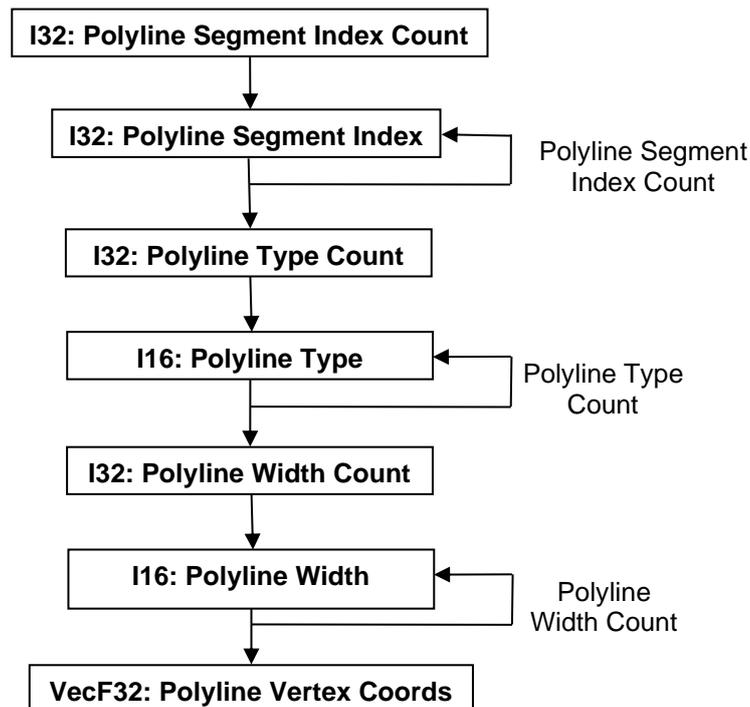


Figure 123 — Non-Text Polyline Data collection

I32: Polyline Segment Index Count

Polyline Segment Index Count specifies the number of polyline segment indices.

I32: Polyline Segment Index

Polyline Segment Index is an index into the Polyline Vertex Coords array specifying where polyline segment begins or ends. This index is a vertex/coordinate index so the absolute index into the Polyline Vertex Coords array is computed by multiplying the index value by “2” (i.e. for 2D coordinates).

I32: Polyline Type Count

Polyline Type Count specifies the number of polyline type values.

I16: Polyline Type

Polyline Type specifies the type of the polyline segments in the Polyline Vertex Coords array. See Figure 127 — Constructing Non-Text Polylines from packed 2D data arrays for interpretation of this array of type values relative to the defined polylines. Valid values include the following:

Table 62 — PMI 2D Non-Text Polyline Type values

= 0	General line
= 1	General arrow
= 2	General circle
= 3	General arc
= 4	Extended line 1
= 5	Extended line 2
= 6	Extended arc
= 7	Extended circle
= 8	Text line (used in text boxes and symbol box dividers)
= 9	Text string

I32: Polyline Width Count

Polyline Width Count specifies the number of polyline width values.

I16: Polyline Width

Polyline Width specifies the width of polyline segment in Polyline Vertex Coords array. See Figure 127 — Constructing Non-Text Polylines from packed 2D data arrays for interpretation of this array of width values relative to the defined polylines.

VecF32: Polyline Vertex Coords

Polyline Vertex Coords is an array of polyline segments packed as 2D point coordinates. These 2D point coordinates are with respect to the 2D-Reference Frame documented in 2D-Reference Frame.

9.2.7 PMI CAD Tag Data

The PMI CAD Tag Data collection contains the list of persistent IDs, as defined in the CAD System, to uniquely identify individual PMI entities. The existence of this PMI CAD Tag Data collection is dependent upon the value of previously read data field CAD Tags Flag as documented in J.3.2 PMI Manager Meta Data Element.

If the PMI CAD Tag Data collection is present, there will be a CAD Tag for each PMI entity as specified by the below documented CAD Tag Index Count formula.

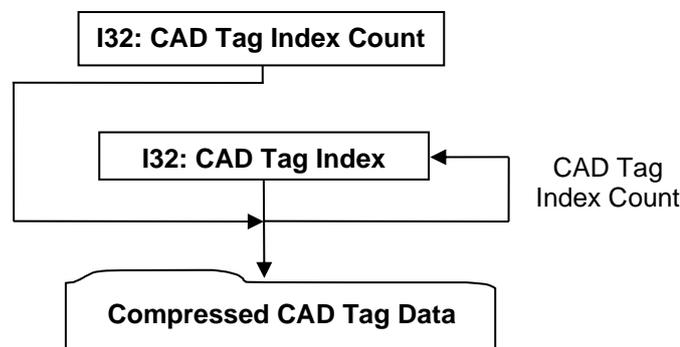


Figure 124 — PMI CAD Tag Data collection

Complete description for Compressed CAD Tag Data can be found in Compressed CAD Tag Data.

I32: CAD Tag Index Count

CAD Tag Index Count specifies the total number of CAD Tag indices. This value shall be equal to the summation of the previously read count values for all the PMI entities supporting CAD Tags. The formula is the sum of the following:

- Line Weld Count
- Spot Weld Count
- SF Count
- MP Count
- Reference Geometry Count
- Datum Target Count
- FCF Count
- Locator Count
- Dimension Count
- DFS Count
- Note Count
- Model View Count
- Design Group Count
- Coord Sys Count
- Generic Entity Count

I32: CAD Tag Index

CAD Tag Index specifies an index into a list of CAD Tags, identifying the CAD Tag belonging to a particular PMI entity. There will be a total of CAD Tag Index Count number of CAD Tag Indices and the order of the indices will be as defined by the above documented CAD Tag Index Count formula (i.e. Line Weld CAD Tag Indices are first, followed by the Spot Weld CAD Tag Indices, followed by the Surface Finish CAD Tag Indices, etc.).

9.2.8 PMI Polygon Data

The PMI Polygon Data collection contains a list of vertices classified as polygonal primitives. Its composition is shown in the figure 162. Each block of PMI PolygonData contains a list of 0 or more PolygonData elements. Empty PolygonData elements are written with 0 vertices and no additional fields.

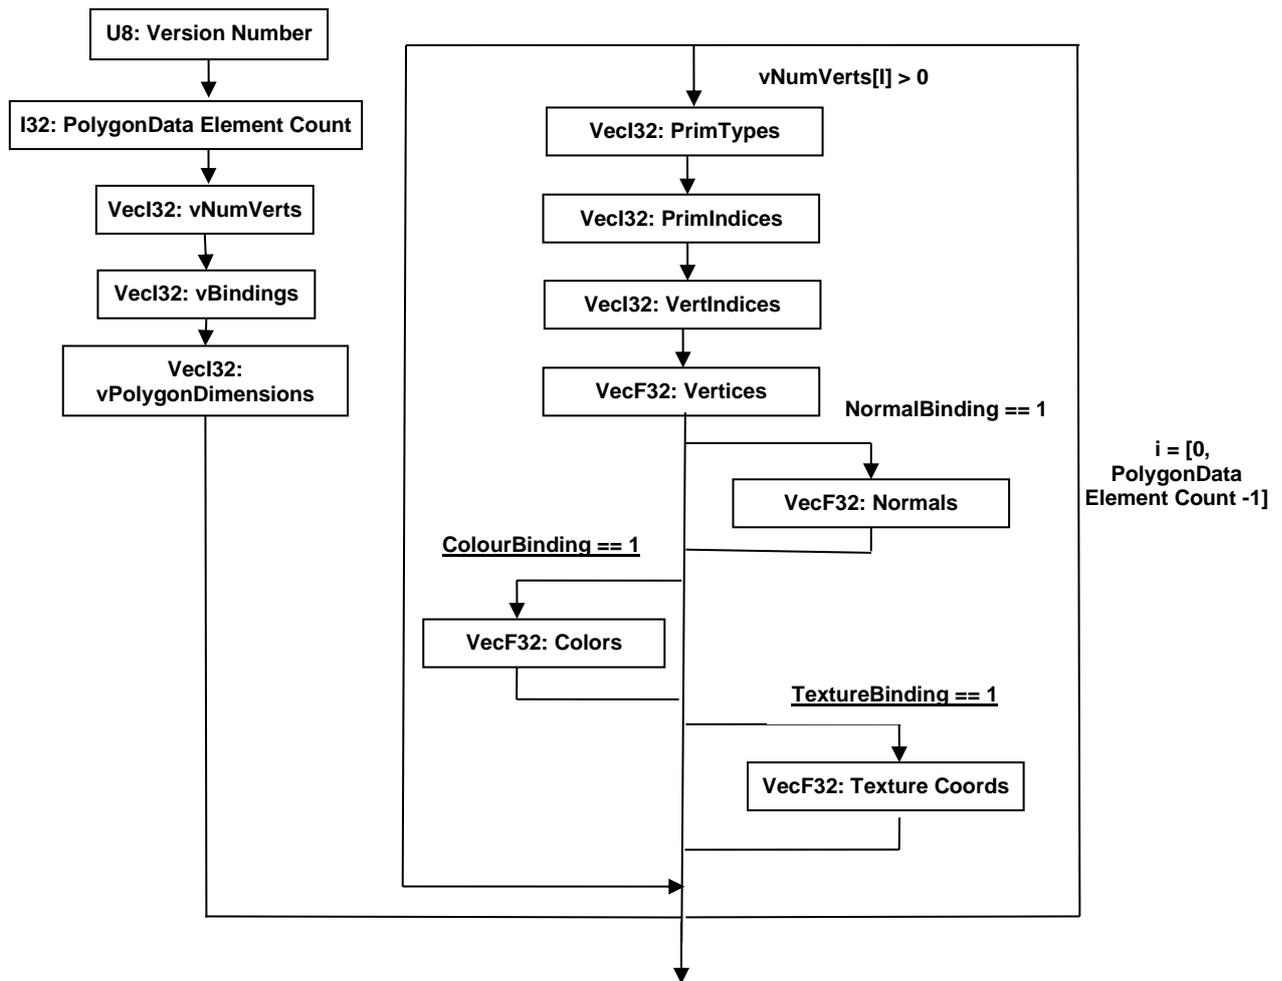


Figure 125 — PMI Polygon Data Collection

U8: Version Number

Version number is the version identifier for this PMI Polygon Data. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

I32: PolygonData Element Count

PolygonData Element Count specifies the number of PolygonData elements.

VecI32: vNumVerts

An integer vector is used to record the number of vertices in each polygon data element. The length of this vector is equal to PolygonData Element Count written in this block of PMI PolygonData. The presence of additional data fields in each PolygonData element is hinged upon that element having more than 0 vertices recorded in this vector.

Retrieve next vertCount from vNumVerts

If the next element in the vNumVerts vector is non-zero, proceed to read other fields that make up a single PMI PolygonData element. Otherwise, skip reading more data for this element and loop back to seek the next element in the vector.

VecI32: vBindings

An integer vector used to record the bindings of all non-zero polygon data elements. This vector has three entries for each such element. The first entry is the color binding, followed by the normal binding, followed by the texture binding. These map to the non-zero polygon data elements in order.

For example:

```
If vNumVerts = {10, 0, 10, 0, 12}
vBindings = {1,0,0, 1,0,0, 1,0,0}
Then
Polygon data element 0: {Color binding = 1; Normal binding = 0; Texture binding =
0}
Polygon data element 1: there are no entries in this array since numVerts[1] = 0
Polygon data element 2: {Color binding = 1; Normal binding = 0; Texture binding =
0}
Polygon data element 3: there are no entries in this array since numVerts[3] = 0
Polygon data element4: {Color binding = 1; Normal binding = 0; Texture binding = 0}
```

VecI32: vPolygonDimensions:

An integer vector used to record the dimensions of all non-zero polygon data elements. The vector has one entry for each such element. These map to the non-zero polygon data elements in order.

For example:

```
If vNumVerts = {10, 0, 10, 0, 12}
vPolygonDimensions = {3, 3, 3}
Then
Polygon data element 0: {PolygonDimension = 3}
Polygon data element 1: there are no entries in this array since numVerts[1] = 0
Polygon data element 2: {PolygonDimension = 3}

Polygon data element 3: there are no entries in this array since numVerts[3] = 0
Polygon data element4: {PolygonDimension = 3}
```

iNumVerts

Number of vertices for the i^{th} PolygonData element.

I32: ColorBinding

A Boolean value that indicates if there are colors present along with the list of coordinates at each vertex.

I32: NormalBinding

A Boolean value that indicates if there are normals present along with the list of coordinates at each vertex.

I32: TextureBinding

A Boolean value that indicates if there are Texture Coordinates present along with the list of coordinates at each vertex.

I32: PolygonDimension

Indicates the dimension of vertex coordinates.

VecI32: PrimTypes

An array indicating the type of each of the primitive stored in the PrimIndices array. Adjacent numbers in the array form tuples of the form [PrimIndex, PrimType]. All primitives to the left of the PrimIndex are of type PrimType unless they are already to the left of an earlier PrimIndex in this array.

VecI32: PrimIndices

Indices of vertices that form a single primitive. The difference between two adjacent values in this array determines the length of the primitive. An extra element is stored at the end of this array to identify the length of the last primitive. Values in this array are indices into the VertIndices array.

VecI32: VertIndices

An array of indices into the Vertices array. This index array eliminates the need to duplicate floating point vertices that are shared by multiple primitives.

VecF32: Vertices

The list of vertex coordinates. Each vertex is made of PolygonDimension coordinates. The length of this list is equal to number of vertices multiplied by PolygonDimension.

VecF32: Normals

An optional list of Normals for each vertex. Presence of this list is indicated by the NormalBinding flag. Each normal consists of PolygonDimension components. The size of this list is equal to number of vertices multiplied by PolygonDimension.

VecF32: Colors

An optional list of Colours for each vertex. Presence of this list is indicated by the ColorBinding flag. Each color consists of PolygonDimension components. The size of this list is equal to number of vertices multiplied by PolygonDimension.

VecF32: Texture Coords

An optional list of Texture coordinates for each vertex. Presence of this list is indicated by the TexCoordBinding flag. Each TexCoord consists of 2 components. The size of this list is equal to number of vertices multiplied by 2.

9.2.9 PMI Properties

The PMI data segment itself can contain a list of PMI Properties to hold special semantic information. See PMI Property for the data description. There are no pre-defined properties for the PMI data segment itself.

9.2.10 PMI Model View Sort Orders

The PMI Model View Sort Orders collection defines data for a list of model view sort orders. Each model view sort order is composed of key/value pair of strings.

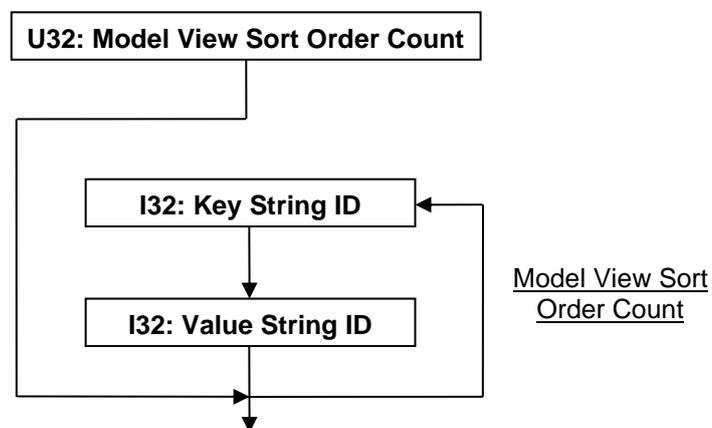


Figure 126 — PMI Model View Sort Orders data collection

U32: Model View Sort Order Count

Model View Sort Order Count specifies the number of model view sort orders.

I32: Key String ID

Key String ID specifies the string identifier for the key of model view sort order. This identifier is an index to a particular character string in the PMI String Table. An identifier value of “-1” indicates no string.

I32: Value String ID

Value String ID specifies the string identifier for the value of model view sort order. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

9.2.11 V102 PMI Association Properties

The V102 PMI Associations Properties define the data for a list of associations that are found in version 10.2 and beyond JT files.

An association defines a link (“relationship”) between two PMI, B-Rep, or Wireframe Rep entities where one entity is defined as the “source” and the other entity is defined as the “destination”.

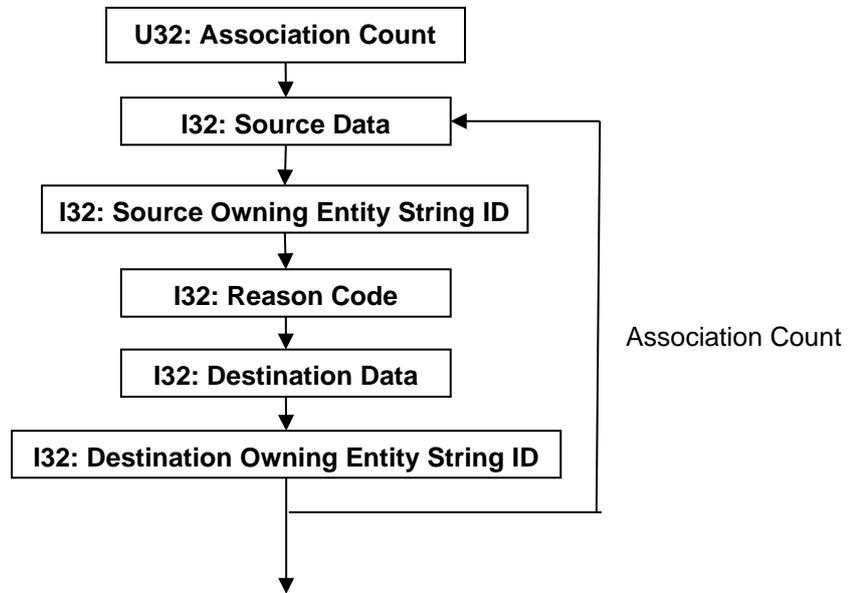


Figure 127 — V102 Association Properties data collection

U32: Association Count

Association Count specifies the number of associations.

I32: Source Data

Source Data is a collection of source entity information encoded/packed within a single I32 using the following bit allocation. All bits fields that are not defined as in use should be set to “0”.

Table 63 — V102 PMI Associations Source Data values

Bits 24 -30	Source Entity PMI or B-Rep type. Valid types include the following: = 22 B-rep body = 23 Group
-------------	--

I32: Source Owning Entity String ID

Source Owning Entity String ID specifies the string identifier for the string which contains the unique CAD identifier of the component (part or assembly) that owns the source PMI or B-Rep entity. This identifier is an index to a particular character string in the PMI String Table. An identifier value of “-1” indicates no string and implies that the entity is to be found on the current node’s PMI/B-Rep/Wireframe-Rep segment. It is valid for the source owning entity to be the same as the destination owning entity (i.e. an association between two PMI or B-Rep entities in the same part/assembly).

I32: Reason Code

The Reason Code specifies the “reason” for the association.

The **PMI Associations Reason Code values** table can be found in the **PMI Associations** data collection section of this document

I32: Destination Data

Destination Data is a collection of destination entity information encoded/packed within a single I32. The encoding schema and interpretation of this data is the same as that documented in [Source Data](#).

I32: Destination Owning Entity String ID

Destination Owning Entity String ID specifies the string identifier for the string which contains the unique CAD identifier of the component (part or assembly) that owns the destination PMI or B-Rep entity. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of "-1" indicates no string and implies that the entity is to be found on the current node's PMI/B-Rep/Wireframe-Rep segment. It is valid for the source owning entity to be the same as the destination owning entity (i.e. an association between two PMI or B-Rep entities in the same part/assembly).

9.2.12 V102 Generic PMI Additions

The V102 Generic PMI Entity data collection is additive to the previously read **Generic PMI Entity data collection**. It contains information that applies to JT version 10.2 and forward JT files. This data cannot exist independent of a Generic PMI Entity description.

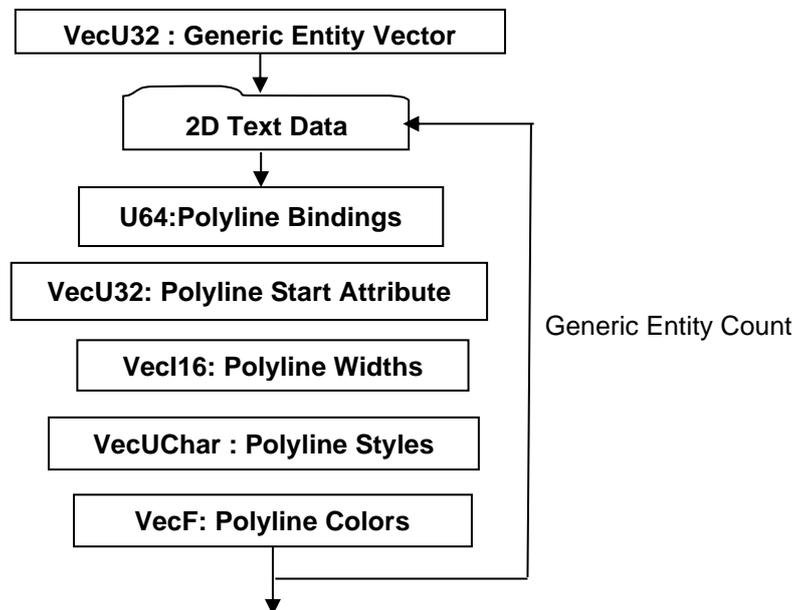


Figure 128 — V102 Generic PMI Entity data collection

VecU32: Generic Entity Count:

Array of unsigned integers defining the amount of V102 Generic PMI information to overlay into the already loaded PMI Generic Entities. As Generic Entity Count is looped, information in processed it should be overlaid onto the already loaded PMI Generic Entity

U64: Polyline Bindings

Polyline bindings are a collection of width, style and colour information encoded within a single U64 value using the following bit allocation. All bits fields that are not defined as in use should be set to "0".

Table 64 — V102 PMI Attribute Bindings

Bits 1	Width binding status. Bit-1 Width information present
Bit 2	Style binding status. Bit-2 Style information present
Bits 3-4	Colour Binding status. Bit-3 RGB colour information present. Bit-4 RGBA colour information present. Cannot be used in conjunction.
Bit 5	Spacing binding status Bit-5 not currently in use

VecU32: Polyline Start Attribute

If polylineBindings is non zero, a Polyline Start Attribute vector must be defined. The vector defines where attributes (such as; widths, styles, colours) apply within the Generic PMI data for V102 and forward JT files .

In the Figure titled Constructing Text Polylines Attribute data arrays the first entry in the subsequent vectors applies up to the line identified by the first polyline start attribute vector entry. The Polyline Start Attribute vector is not zero based, the first value is 1.

Polyline start array defines the boundary in term of the already read line segments (refer to the Figure titled Constructing Non-Text Polylines from packed 2D data arrays)

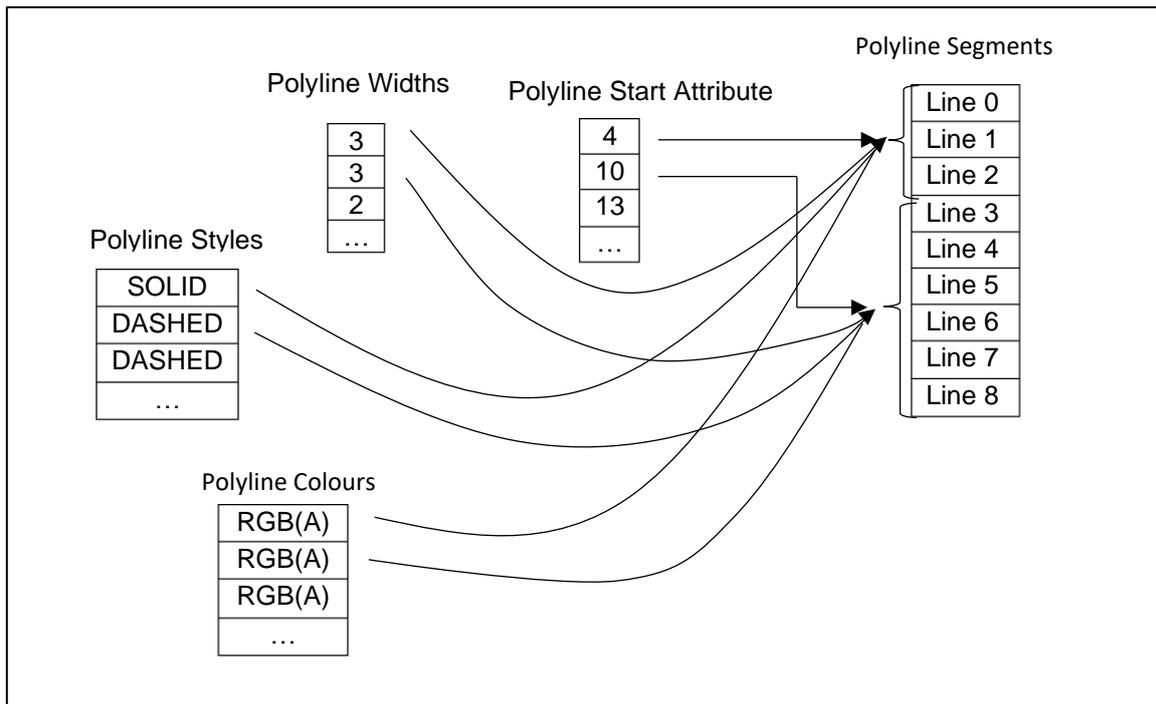


Figure 129 — Constructing Text Polylines Attribute data arrays

Vec16: Polyline Widths

When Bit-1 is defined in the polyline binding this vector should be of equal length to polyline Start Attribute vector. This information supercedes the polyline width array read from Generic PMI Entity description. It defines the width to apply to the lines within the polyline data in pixels.

VecUChar: Polyline Styles

When Bit 2 is defined in the polyline binding this vector should be of equal length to polyline Start Attribute vector.

It is an vector of byte data representing the linestyle to apply to the lines within the polyline data as described in the Table of Polyline Styles below.

Table 65 — Polyline Styles

0x0F	Line Type (stored in bits 0 – 3 or in binary notation 00001111) Line type specifies the polyline rendering stipple-pattern. = 0 – Solid = 1 – Dash = 2 – Dot = 3 – Dash_Dot = 4 – Dash_Dot_Dot = 5 – Long_Dash = 6 – Centre_Dash = 7 – Centre_Dash_Dash = 8 – Invisible
------	---

VecF: Polyline Colors

When Bit 3 or 4 is defined in the polyline binding this vector should be of equal length to polyline Start Attribute vector when multiplied by the implied number of colour components. When Colour3 binding is in use the data is RGB. When colour 4 binding in use the data is packed RGBA

The values should be between 0 and 1, the Alpha follows the JT format convention such that 1 is opaque.

2D Text Data

V102 2D Text Data is additive to the pre 10.2 JT text data definitions. The number of elements in the data collection is determined by subtracting the **Text Entity Index** from the **Text Entity Count** previously read from the **2D Text Data** collection

U32: 2D Text Entity Index

The Text Entity Index is used as a count to overlay the V102 Text Entities into the existing 2D Text

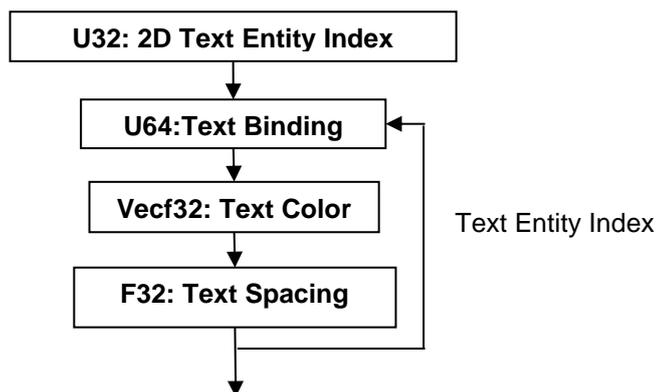


Figure 130 — V102 2D Text Data collection

Data collection. The data should be processed such that this information is overlayed into the pre-existing read text data. The data is applied from the start index to the end of the Generic Entity 2D text.

U64: Text Binding

The Text Binding indicates what additional v102 data is overlayed on Generic Entity 2D text already read.

Table 66 —Supported Values

Bits 1	NA
Bit 2	NA
Bits 3-4	Colour Binding status. Bit-3 RGB colour information present. Bit-4 RGBA colour information present. Cannot used in conjunction.
Bit 5	Spacing binding status

Vecf32: Text Color

The **colour of this** text. When Bit 3 binding in use the data is RGB. When Bit 4 binding in use the data is packed RGBA

The values should be between 0 and 1 and the Alpha follows the JT format convention such that 1 is opaque.

F32: Text Spacing

Bit 5 is used to define the spacing between the text characters. This field is not being populated in JT files supporting up to version 10.5. , this value should be left as zero or whatever it is read as.

10 Info Segment

The info segment is made up of text strings that contain information on the system(s) used to author the JT file it exists in. It is intended to provide a richer list of information than what is stored in the 80 character version string in the File Header.

The information contained in the Info segment is meta-information about the provenance of the JT file itself – not information pertaining to, modifying, or supplementing the content of the JT file proper.

The Info segment is must not be used as a means of expansion to include new kinds of data in a JT file.

The Info segment must not refer to or be referred to by the JT file’s content proper. The Info segment stands alone and apart from the content proper, and does not share a swizzling namespace with the remainder of the JT file..

The info segment uses the Logical Element Header Compression form of element header data.




Figure 131 — Info Segment data collection

Complete description for Segment Header can be found in this document.

10.1 Info Segment Data Element

Object Type ID: 0x84c2112a, 0x0001, 0x11e7, 0x80, 0x00, 0xa4, 0x24, 0x9a, 0x27, 0x47, 0x70

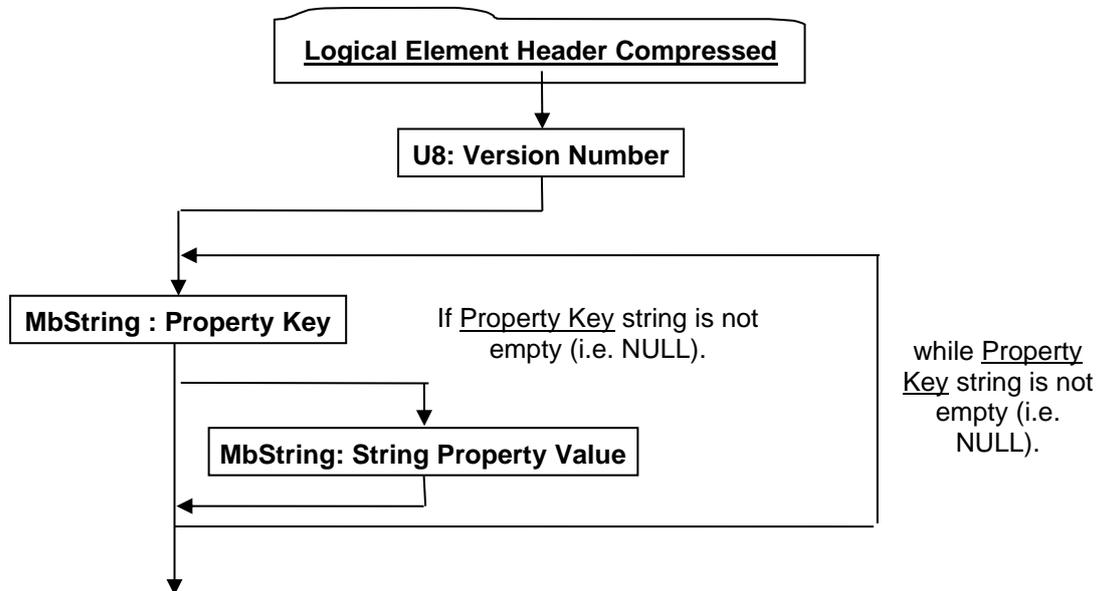


Figure 132 — Property Proxy Meta Data Element data collection

A complete description for Logical Element Header Compressed cab be found in this document.

U8: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

MbString: Property Key

Property Key specifies the *key* string for the property.

MbString: String Property Value

String Property Value represents the property value when Property Value Type = = 1.

11 Data Compression and Encoding

The JT File format utilizes best-in-class compression and encoding algorithms to produce compact and efficient representations of data. The types of compression algorithms supported by the JT format vary from standard data type agnostic LZMA dictionary compression to entropy coding algorithms that exploit knowledge of the characteristics of the data types they are compressing. Some of the JT format data collections are always stored in a compressed format, whereas other data collections support multiple compression storage formats that qualitatively vary from “lossless” compression to more aggressive strategies that employ “lossy” compression. This support by the JT format of varying qualitative levels of compression allows producers of JT data to fine tune the trade-off between compression ratio and fidelity of the data.

In some instances, data may be encoded/compressed using multiple techniques applied on top of one another in a serial fashion (i.e. encoding applied to the output of another encoder). One common example of this multiple encoding is when an array/vector of floating point data is first quantized into some integer codes and then these resulting integer codes are further compressed/encoded using an Arithmetic or BitLength CODEC (see Encoding Algorithms).

Beyond the data collection specific compression/encoding, some JT format Data Segment types (see) also support having LZMA compression conditionally applied to all the bytes of information persisted within the segment. So individual fields or collections of data may first have data type specific encoding/compression algorithms applied to them, and then if their Data Segment type supports it, the resulting data may be additionally compressed using LZMA.

Whether, and at what qualitative level, a particular Data Segment’s data is compressed/encoded is indicated through compression related data values stored as part of the particular Data Segment storage format. In general, aggressive application of advanced compression/encoding techniques is reserved for the heavy-weight renderable geometric data (e.g. triangles and wireframe lines) which can exist in a JT File.

The following sections document the format of the data compression/encoding within the JT file. Along with documenting the format, a technical description of the various compression/encoding algorithms is included and an example implementation of the decoding portion of the algorithms can be found within Annex B.

11.1 Common Compression Data Collection Formats

For convenience and brevity in documenting the JT format, this section of the reference documents the format for several common “data compression/encoding” related data collections that can exist in the JT format. You will find references to these common compression data collections in the Data Segments section of the document.

11.1.1 Int32 Compressed Data Packet

The Int32CDP (i.e. Int32 Compressed Data Packet) represents a third-generation format used to encode/compress a collection of data into a series of Int32 based symbols. This version of the Int32CDP supersedes the two similarly-named ones from the Version 9 JT Specification, and should not be confused with either of its predecessors. Note that the Int32 Compressed Data Packet collection can in itself contain another nested Int32 Compressed Data Packet collection in some cases.

Four distinct CODECs are available for use within the Int32 Compressed Data Packet, depending on the nature of the data to be compressed.

The Arithmetic CODEC is a so-called “entropy coder” because it can exploit the statistics present in the relative frequencies of the values being encoded. Basically, the more often a value is present the fewer bits it takes to represent that value in the compressed code text. Values that occur too infrequently to take advantage of this property are written *aside* into the “out-of-band data” array to be encoded separately. An “escape” symbol is encoded in their place as a placeholder in the primal CODEC (note, see “Symbol” data field definition in Int32 Compressed Data Packet for further details on the representation of “escape” symbol).

Essentially the “out-of-band data” is the high-entropy residue left over after the CODEC has squeezed all the advantage out of the original data stream that it can. However, this “out-of-band data” is sent back around for another pass because sometimes there are *new* or *different* statistics to be exploited.

The *Chopper* pseudo-CODEC’s is used to identify fields of bits in a sequence of otherwise incompressible data that may be hiding low-entropy statistics that can be profitably exploited. In other words, it “chops” the input data up into bit fields, and then encodes them separately using the other CODECs, or in some cases, another round of chopping. The Chopper also removes *value bias* from the original input data array. Some input data arrays may contain values that are clustered around a certain central value. In these cases, it is profitable to first subtract out a *bias value* from the original input data. In some cases, this simple expedient may dramatically reduce the apparent field width necessary to code the variation in the original sequence.

In some cases, all values may be written as “out of band” when the Codec cannot perform *any* useful compression. In this case, the encoded CodeText Length field will be 0, and the I32: **Out-of-Band Value Count** will be equal to I32: Value Count. The implied action in this case is to merely copy the Out-Of-Band value data into the output Value Element array instead of invoking the Codec.

The Move-to-Front pseudo-CODEC is useful for data that exhibits spatial coherence (i.e. if a given value is likely to be used again in the near future). It decomposes the incoming data stream into two streams called “values” and “offsets”. Each time a new value is observed in the data stream, it is added to a small “cache” or “window” of the most recently seen few values (16 in this case), the value emitted to the “values” array and an “escape” emitted into the “offsets” array. When a value is seen that is already in the cache, then only its offset into the window is emitted, and the value is moved to the front of the window (hence the name). Runs and clusters are thus more efficiently represented by the values/offsets arrays. These arrays in turn are subjected to a different CODEC to finish the job – most likely the Arithmetic or Bitlength.

When all other coding options have been exhausted, the Bitlength CODEC is invoked. The Bitlength CODEC directly encodes all values given to it, does not require a probability context, and hence never produces additional “out-of-band data”. The byte stops there, in other words.

Note that in the diagram below, encoding can loop back recursively for Out-Of-Band data and chopper fields. *For JT files compliant with this specification, the maximum recursion depth may not exceed eight.*

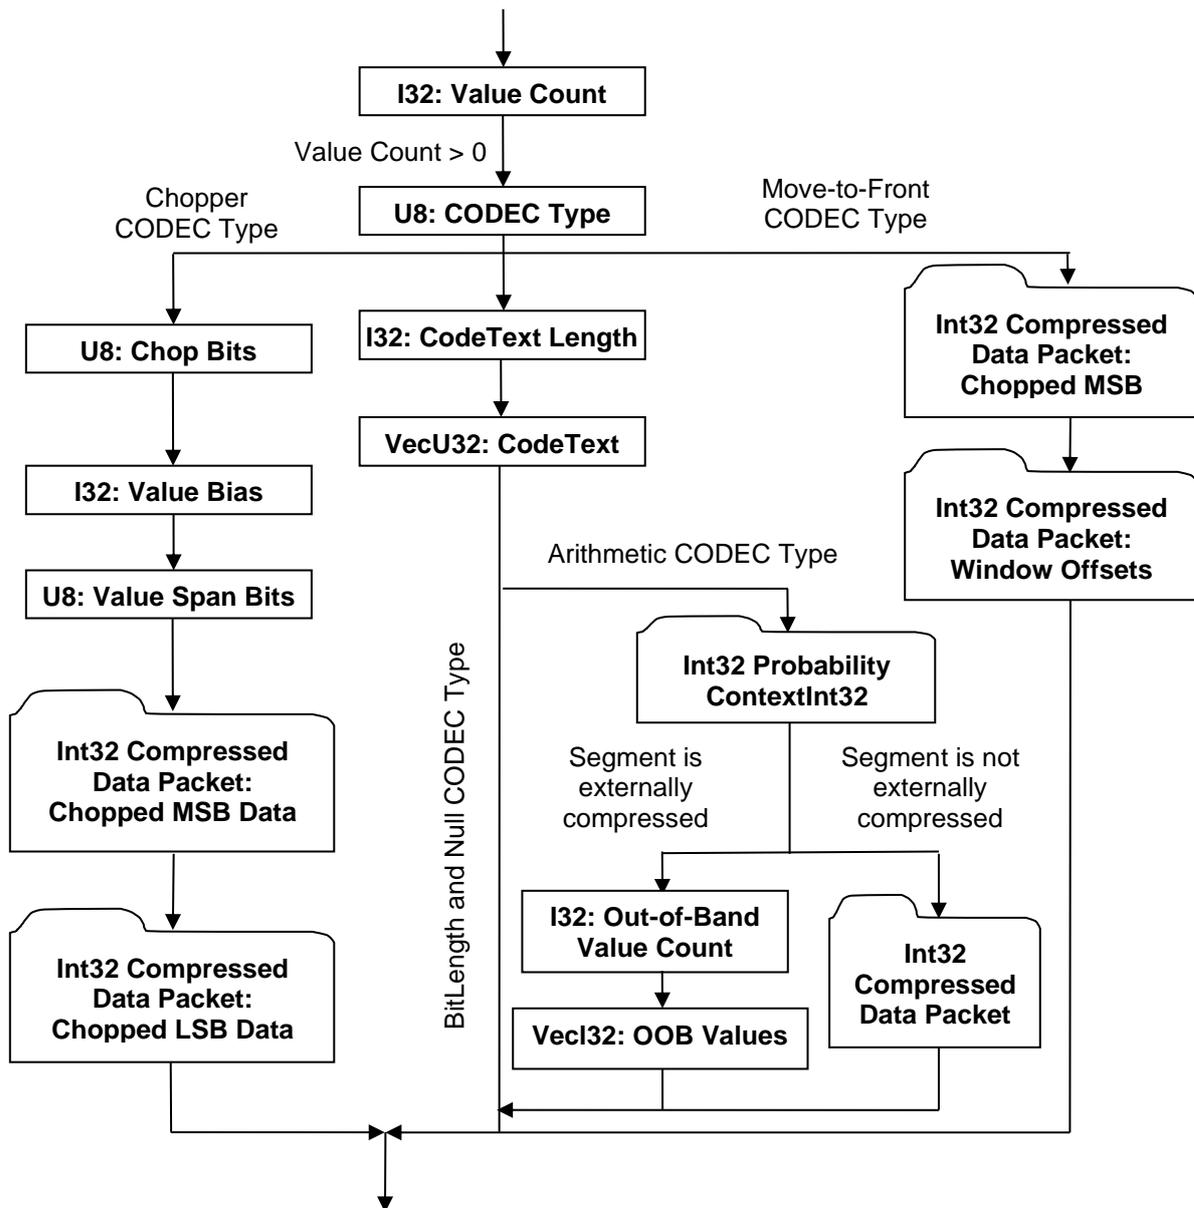


Figure 133 — Int32 Compressed Data Packet data collection

I32: Value Count

Value Count specifies the number of values that the CODEC is expected to decode (i.e. it's like the "length" field written if you're just writing out a vector of integers). Upon completion of decoding the CodeText data field below, the number of decoded Values should be equal to Value Count. When only a single Probability Context Table is used, Value Count will also be equal to the number of Symbols decoded upon completion of decoding.

U8: CODEC Type

CODEC Type specifies the algorithm used to encode/decode the data. See 12.2 Encoding Algorithms for complete explanation of each of the encoding algorithms.

Table 67 — Int32 Probability Contexts CODEC Type values

= 0	Null CODEC
= 1	Bitlength CODEC
= 2	Illegal value
= 3	Arithmetic CODEC
= 4	Chopper CODEC
= 5	Move-to-front CODEC

I32: CodeText Length

CodeText Length specifies the total number of bits of CodeText data.

VecU32: CodeText

CodeText is the array/vector of encoded symbols. For CODEC Type not equal to “Null CODEC”, the total number of bits of encoded data in this array is indicated by the previously described CodeText Length data field.

U8: Chop Bits

Chop Bits specifies the number of high-order bits "chopped off" from the *biased* input data array and coded separately from the low-order bits. Repeated applications of the Chopper pseudo-CODEC can expose low-entropy bit fields that would be inaccessible by directly coding the data array. Chop Bits is the number of bits coded into the Chopped MSB Data field. The number of Chop Bits is always greater than 0, and less than 32.

I32: Value Bias

Value Bias is the (signed) number that is subtracted from the original input data array elements *before* computing Value Span Bits and Chop Bits. See Chopped LSB Data below for a full explanation of how to reconstitute the original data values using Value Bias and the two chopped fields.

U8: Value Span Bits

Value Span Bits specifies the total bit width of the *biased* input data array. Note that Value Span Bits minus Chop Bits is the number of low-order bits present in the Chopped LSB Data field.

Int32 Compressed Data Packet: Chopped MSB Data

This field contains the separately compressed most significant bits of the *biased* input data array, whose elements contain Value Span Bits bits of significance. In other words, this field contains the bit field from the *biased* data array beginning at bit number ValueSpan-ChopBits and ending at bit number ValueSpan-1 inclusive. This field may contain negative numbers.

Int32 Compressed Data Packet: Chopped LSB Data

This field contains the separately compressed most significant bits of the original input data array, whose elements contain Value Span Bits bits of significance. In other words, this field contains the bit field from the original data array beginning at bit number 0 and ending at bit number ValueSpan-ChopBits-1 inclusive. This field may only contain positive numbers; all bits above this range shall encode to 0. A pseudo-code representation of the re-constituting the original data values is as follows:

$$\text{OrigValue}[i] = (\text{LSBValue}[i] | (\text{MSBValue}[i] \ll (\text{ValSpanBits} - \text{ChopBits})) + \text{ValueBias};$$

I32: Out-of-Band Value Count

This field encodes the number of out-of-band values associated with the Arithmetic CODEC.

VecI32: OOB Values

This field encodes the out-of-band Int32 values associated with the Arithmetic CODEC.

Int32 Compressed Data Packet: Window Values

Used by the move to pseudo codec, reference Move-To-Front pseudo CODEC

Int32 Compressed Data Packet: Window Offsets

Used by the move to pseudo codec, reference Move-To-Front pseudo CODEC

Int32 Probability Context

Int32 Probability Context data collection encodes a Probability Context Table, and is present only for the Arithmetic CODEC Type. A Probability Context Table is a trimmed and scaled histogram of the input values. It tallies the frequencies of the several most frequently occurring values. It is central to the operation of the Arithmetic CODEC.

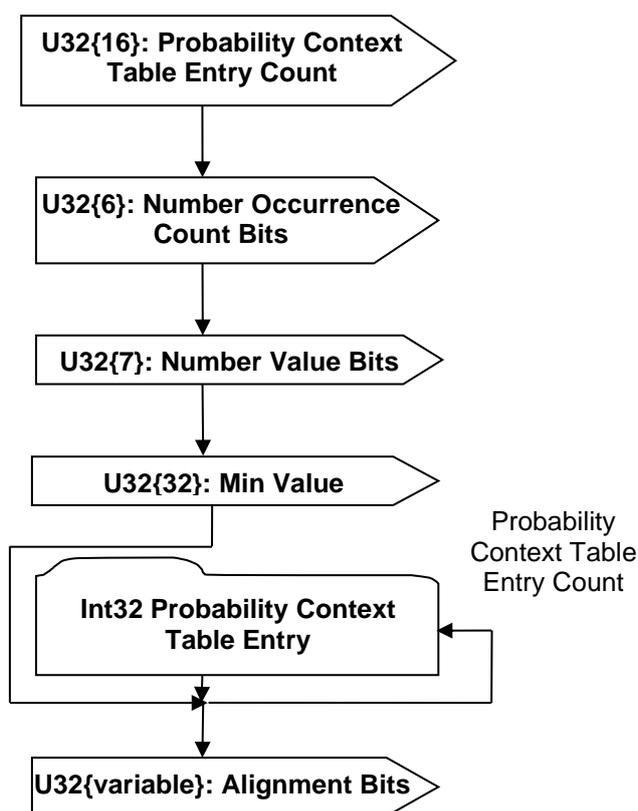


Figure 134 — Int32 Probability Context data collection

U32{16}: Probability Context Table Entry Count

Probability Context Table Entry Count specifies the number of entries in this Probability Context Table.

U32{6}: Number Occurrence Count Bits

Number Occurrence Count Bits specifies the number of bits used to encode the Occurrence Count range.

U32{7}: Number Value Bits

Number Value Bits specifies the number of bits used to encode the Associated Value range. Note that Number Value Bits is only specified in the JT file for the *first* Probability Context Table. If a second Probability Context Table is present, the Number Value Bits from the first should be used for the second as well.

U32{32}: Min Value

Min Value specifies the minimum of all Associated Values (i.e. one per table entry) stored in this Probability Context Table. This value is used to compute the real Associated Value for a Probability Context Table Entry. See Associated Value description in Int32 Probability Context Table Entry.

U32{variable}: Alignment Bits

Alignment Bits represents the number of additional padding bits stored to arrive at the next even multiple of 8 bits. Values of “0” are stored in the alignment bits.

Note: Data written into a JT file is always aligned on bytes. Therefore after reading in a block of bit data such as the probability context tables it is necessary to discard any remaining bits on the last byte that is read in. This is represented by the “Alignment Bits” entry.

Int32 Probability Context Table Entry

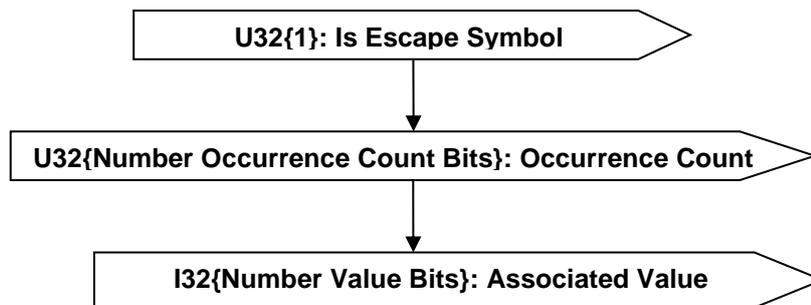


Figure 135 — Int32 Probability Context Table Entry data collection

U32{1}: Is Escape Symbol

This Boolean flag denotes whether the context entry is the escape symbol entry. At most one entry will have this flag set to true in any context.

U32{Number Occurrence Count Bits}: Occurrence Count

Occurrence Count specifies the relative frequency of the value. Complete description for Number Occurrence Count Bits can be found in Int32 **Probability Context**.

Note: Occurrence Counts for all symbols are normalized (converted to a relative frequency) during the write process in order to ensure the minimum amount of bits possible is used to write them while closely approximating their actual frequency.

This has several implications the reader should be aware of:

The sum of all Occurrence Counts is not guaranteed to equal the number of symbols to be decoded (see I32: Value Count for number of symbols to be decoded).

During Arithmetic decoding

pDriver->numSymbolsToRead() – Refers to the total number of symbols to be decoded (i.e. I32: Value Count).

pCurrContext->totalCount() – Refers to the sum of the “Occurrence Count” values for all the symbols associated with a Probability Context.

I32{Number Value Bits}: Associated Value

Associated Value is the value (from the input data) that the symbol represents. The CODECs don’t directly encode values, they encode symbols. Symbols, then, are associated with specific values, so when the CODEC decodes an array of symbols, you can reconstruct the array of values that was intended by looking up the symbols in the Probability Context Table. This value is stored with “Min Value” subtracted from the value. Complete descriptions for “Min Value” and Number Value Bits can be found in Int32 **Probability Context**.

Note: The associated value for an escape symbol is undefined and therefore can be any valid U32 number.

11.1.2 Int64 Compressed Data Packet

The Int64CDP (i.e. Int64 Compressed Data Packet) represents a format used to encode/compress a collection of data into a series of Int64 based symbols. Int64CDP shares the same encoding and

compression logic as Int32CDP (i.e. Int32 Compressed Data Packet), except the data being compressed consists of an array of Int64 numbers instead of Int32 numbers.

Any scalar field (e.g. the “MinValue” field in an Int64 Probability Context) that is longer than 32 bits is written with the low-order 32 bits first in the stream, then followed by the remaining bits.

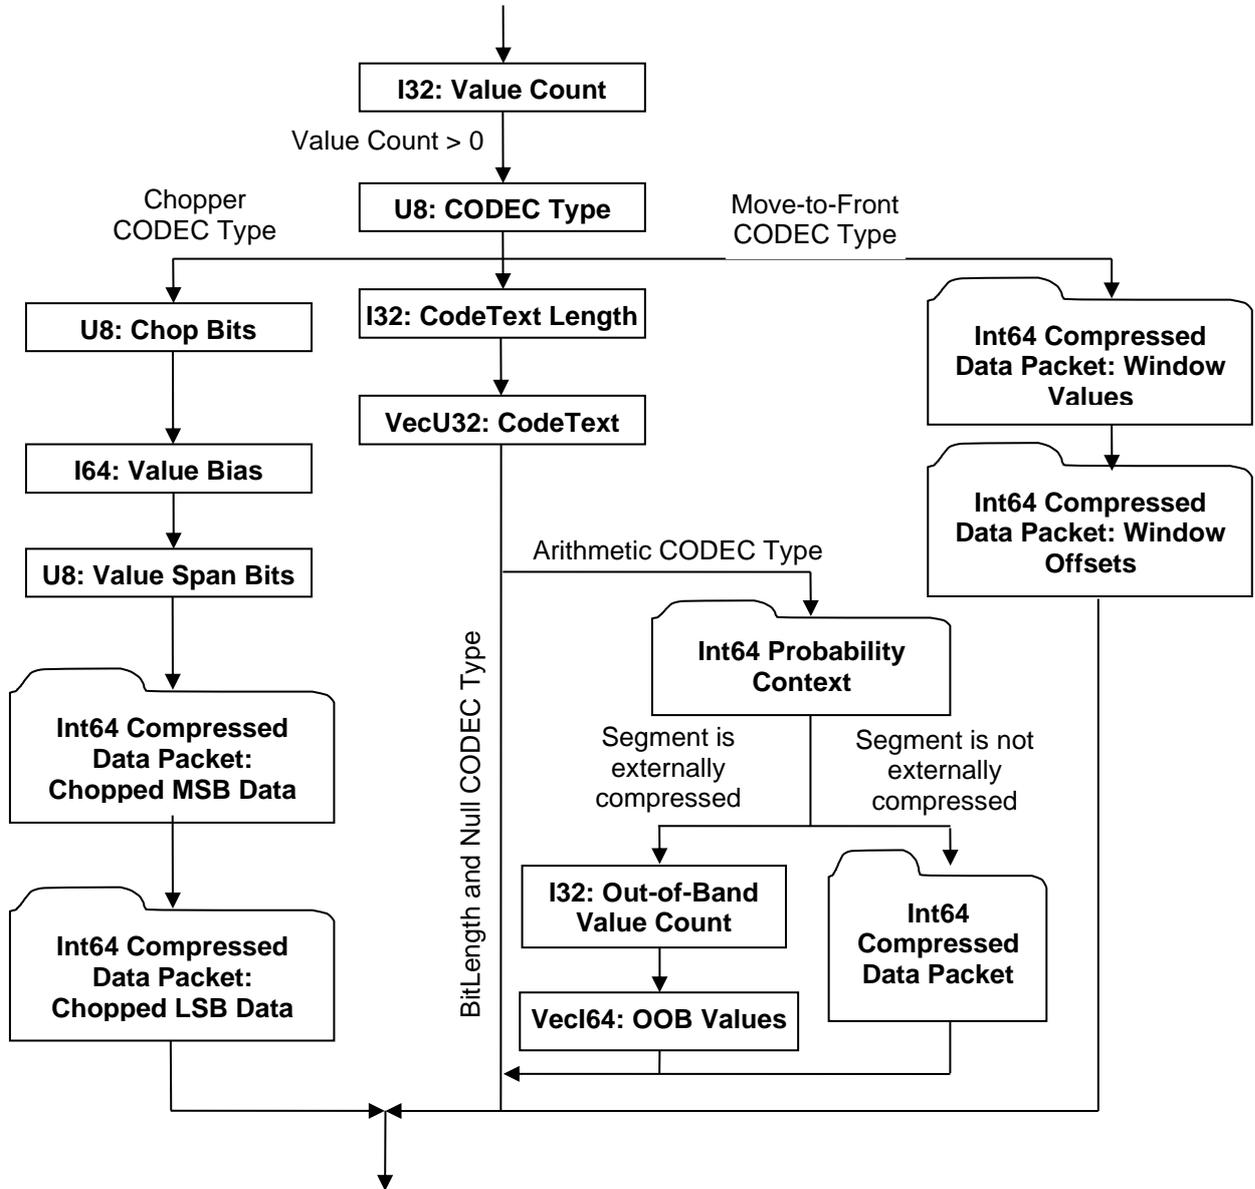


Figure 136 — Int64 Compressed Data Packet data collection

VecI64: OOB Values

This field encodes the out-of-band Int64 values associated with the Arithmetic CODEC.

I64: Value Bias

The meaning of this field is the same as I32: Value Bias except the data type is Int64 instead of Int32.

Int64 Compressed Data Packet: Chopped MSB Data

The meaning of this field is the same as Int32 Compressed Data Packet: Chopped MSB Data except the data type is Int64 instead of Int32.

Int64 Compressed Data Packet: Chopped LSB Data

The meaning of this field is the same as Int32 Compressed Data Packet: Chopped LSB Data except the data type is Int64 instead of Int32.

Int64 Compressed Data Packet: Window Values

The meaning of this field is the same as Int32 Compressed Data Packet: Chopped MSB Data except the data type is Int64 instead of Int32.

Int64 Compressed Data Packet: Window Offsets

The meaning of this field is the same as Int32 Compressed Data Packet: Window Offsets except the data type is Int64 instead of Int32.

Int64 Probability Context

Int64 Probability Context data collection encodes a Probability Context Table, and is present only for the Arithmetic CODEC Type. Int64 Probability Context is the same as Int32 Probability Context, except the data element is of type Int64 instead of Int32.

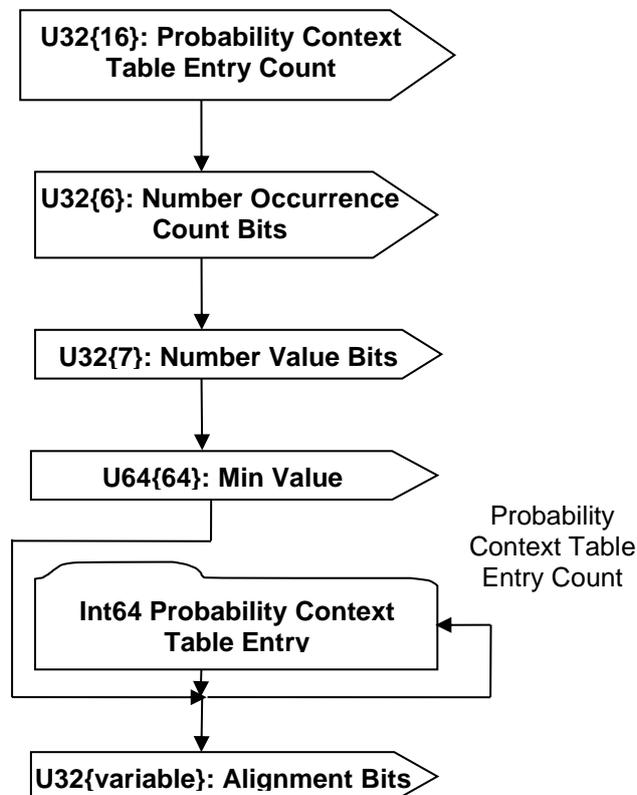


Figure 137 — Int64 Probability Context data collection

U64{64}: Min Value

Min Value specifies the minimum of all Associated Values (i.e. one per table entry) stored in this Probability Context Table. This value is used to compute the real Associated Value for a Probability Context Table Entry. See Associated Value description in Int64 Probability Context Table Entry.

Int64 Probability Context Table Entry

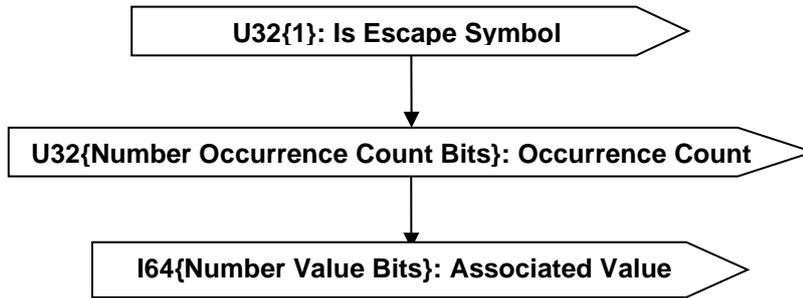


Figure 138 — Int64 Probability Context Table Entry data collection

I64{Number Value Bits}: Associated Value

Similar to I32{Number Value Bits}: Associated Value, I64{Number Value Bits}: Associated Value is the value (from the input data) that the symbol represents. This value is stored with “Min Value” subtracted from the value. Complete descriptions for “Min Value” and Number Value Bits can be found in Int64 Probability Context.

11.1.3 Compressed Vertex Coordinate Array

The Compressed Vertex Coordinate Array data collection contains the quantization data/representation for a set of vertex coordinates.

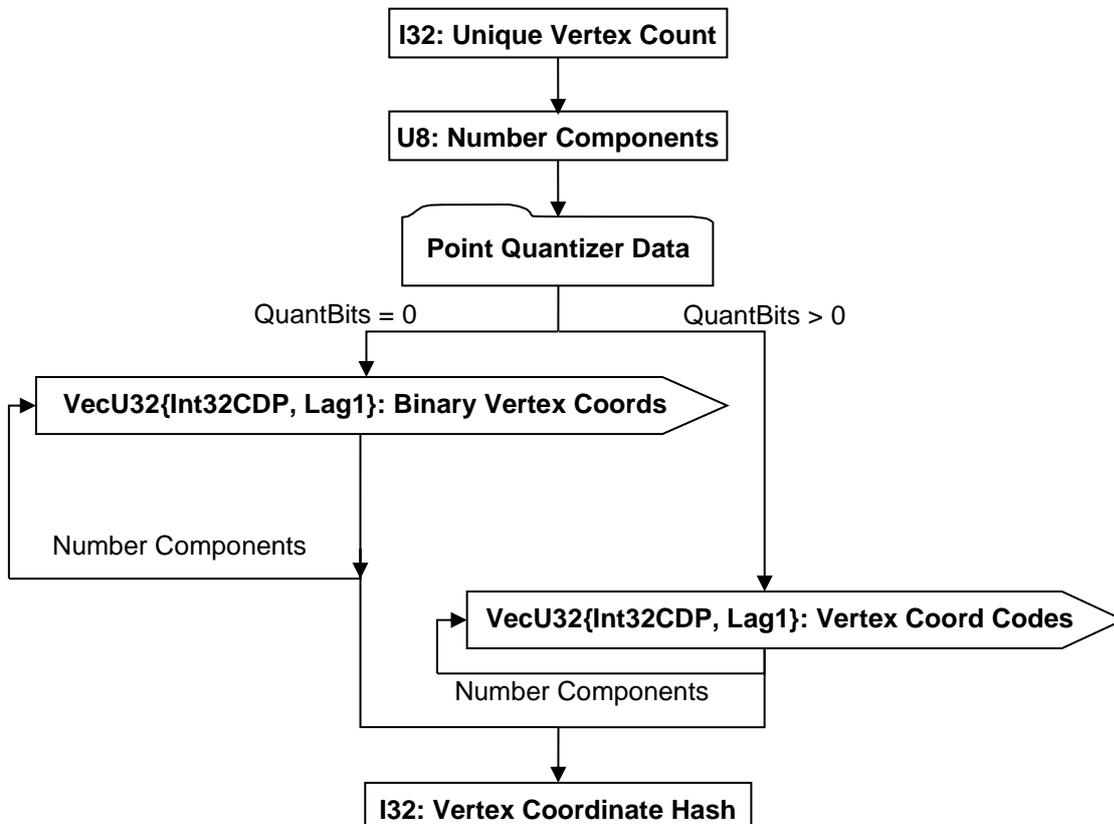


Figure 139 — Compressed Vertex Coordinate Array data collection

Complete description for Point Quantizer Data can be found in Point Quantizer Data.

The above predicates “QuantBits = 0” and “QuantBits > 0” refer to the value of the field U8: Number Of Bits stored in the three components of Point Quantizer Data. All three of these fields are required to be equal.

I32: Unique Vertex Count

Vertex Count specifies the count (number of unique) vertices in the Vertex Codes arrays. Identical values are only stored once therefore it may be necessary to smear out the vertices as described in TopoMesh Compressed Rep Data and TopoMesh Topologically Compressed LOD Data.

U8: Number Components

Number Components specifies the number of vertex components present for each vertex record in the set of vertex records. The only legal value for this field is 3.

VecU32{Int32CDP, Lag1}: Binary Vertex Coords

Binary Vertex Coords is a vector of the *i*th component values of a set of vertex coordinates *interpreted* as integers. That is to say, the binary IEEE-754 floating point representation of the coordinates is fed *directly* into the Lag1 predictor as if they were integers.

VecU32{Int32CDP, Lag1}: Vertex Coord Codes

Vertex Coord Codes is a vector of quantizer “codes” for all the *i*th component values of a set of vertex coordinates. Vertex Coord Codes uses the Int32 version of the CODEC to compress and encode data.

I32: Vertex Coordinate Hash

The Vertex Coordinate Hash is the combined hash of the unique vertex coordinate records. If the number of quantization bits is equal to zero the hash value is equal to the combined hash of the vertex coordinate values for each of the component arrays. If the number of quantization bits is greater than 0 the hash value is equal to the combined hash of the vertex coordinates codes for each of the component arrays. Refer to the Hashing Annex for a more detailed description on hashing.

```
UInt32 uHash      = 0;
uInt32 nUniqVtx  = 0;
vecF32 vCoord[nUniqVtx][3];
vecU32 vCodes[3];
...
if ( uQuantBits == 0 ) {
    for ( int i=0 ; i<nComp ; i++ ) {
        for ( int j=0 ; j<nUniqVtx ; j++ ) {
            uHash = hash32( (const UInt32*)(&vCoord[j][i]), 1, uHash );
        }
    }
} else {
    for ( int i=0 ; i<nComp ; i++ ) {
        uHash = hash32( &vCodes[i], nUniqVtx, uHash );
    }
}
```

11.1.4 Compressed Vertex Normal Array

The Compressed Vertex Normal Array data collection contains the compressed data/representation for a set of vertex normals. Compressed Vertex Normal Array data collection is only present if previously read vertex bindings denote normals are present (see Vertex Shape LOD Data U64 : Vertex Bindings for complete explanation of the vertex bindings).

A variation of the CODEC developed by Michael Deering at Sun Microsystems is used to encode the normals when quantization is enabled. The variation being that the “Sextants” are arranged differently than in Deering’s scheme [4], for better delta encoding. See Deering Normal CODEC for a complete explanation on the Deering CODEC used.

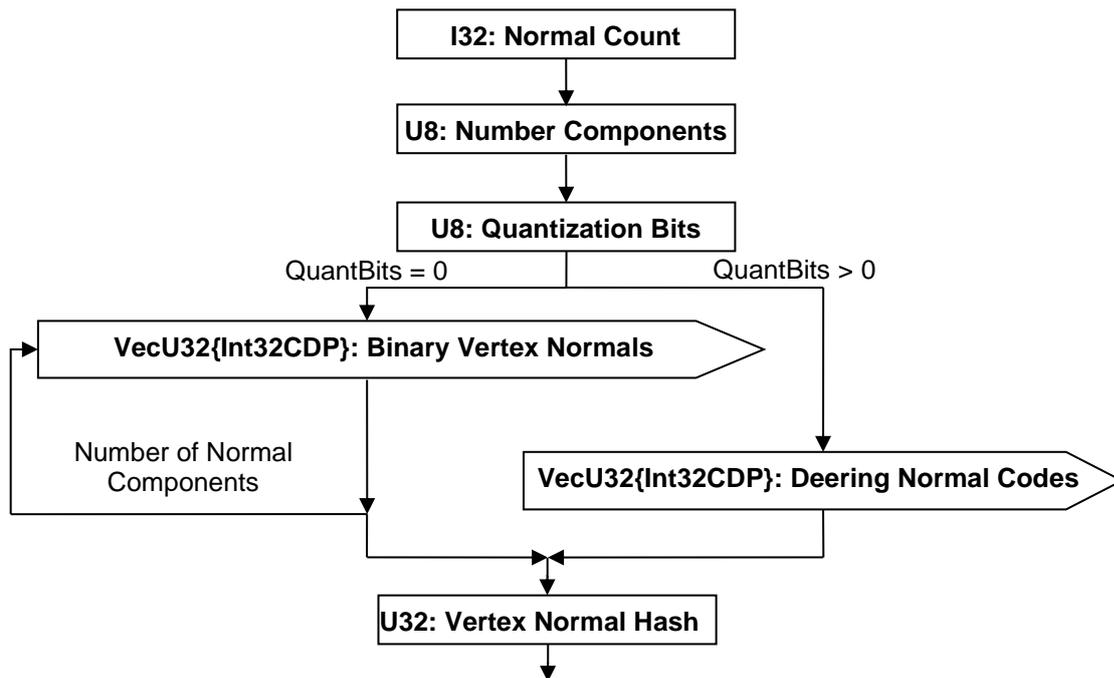


Figure 140 — Compressed Vertex Normal Array data collection

I32: Normal Count

Normal count specifies the number of normals. This number should equal the total number of vertex records.

U8: Number Components

Number Components specifies the number of normal components present for each vertex record in the set of vertex records.

U8: Quantization Bits

The number of bits used when the Deering Normal CODEC if quantization is enabled. A value of 0 denotes that quantization is disabled. The maximum value for this field is 13 (so that the resulting Deering normal codes are of at most 32 bits).

VecU32{Int32CDP}: Binary Vertex Normals

Binary Vertex Normals is a vector of the *i*th component values of a set of vertex normals *interpreted* as integers. That is to say, the binary IEEE-754 floating point representation of the coordinates is fed *directly* into the Lag1 predictor as if they were integers.

VecU32{Int32CDP}: Deering Normal Codes

Deering Normal Codes is a vector of “codes” (one per normal) for a set of normals produced by the Deering Normal Codec (q.v.). Deering Normal Codes uses the Int32 version of the CODEC to compress and encode data.

U32: Vertex Normal Hash

The Vertex Normal Hash is the combined hash of the vertex normals. If the number of quantization bits is equal to zero the hash value is equal to the combined hash of the vertex normal values for each of the component arrays. If the number of quantization bits is greater than 0 the hash value is equal to the combined hash of the Sextant, Octant, Theta, and Psi Codes for all vertex records.

```

UInt32 uHash    = 0;
uInt32 nVtxRec = 0;
vecF32 vNorm[nVtxRec][3];
vecU32 vDeeringCodes;
...
  
```

```

if ( uQuantBits == 0 ) {
  for ( int i=0 ; i<nComp ; i++ ) {
    for ( int j=0 ; j<nVtxRec ; j++ ) {
      uHash = hash32( (UInt32*)&vNorm[j][i], 1, uHash );
    }
  }
} else {
  uHash = hash32( &vDeeringCodes, nVtxRec, uHash );
}

```

11.1.5 Compressed Vertex Texture Coordinate Array

The Compressed Vertex Texture Coordinate Array data collection contains the quantization data/representation for a set of vertex texture coordinates. Compressed Vertex Texture Coordinate Array data collection is only present if previously read vertex bindings denote texture coordinates are presents (See Vertex Shape LOD Data U64 : Vertex Bindings for complete explanation of the vertex bindings).

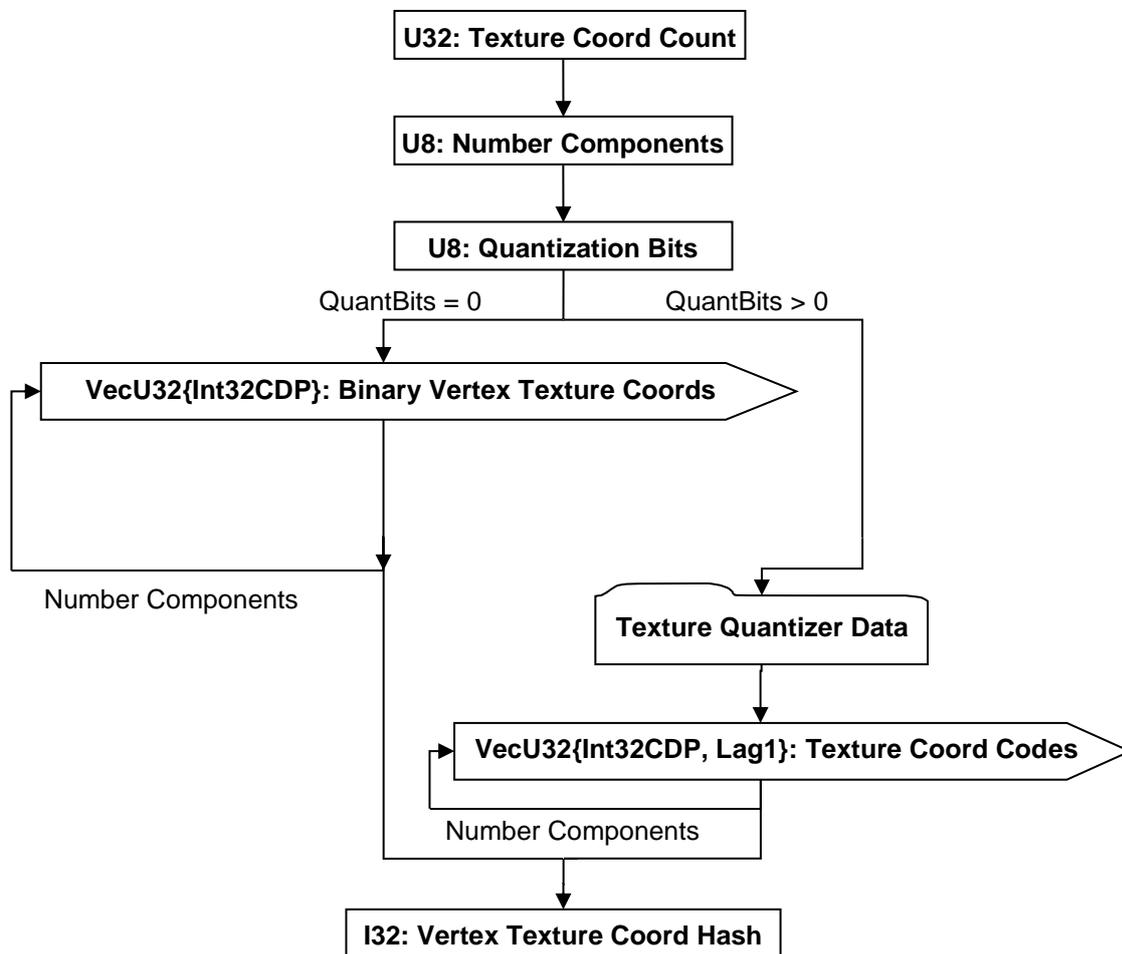


Figure 141 — Compressed Vertex Texture Coordinate Array data collection

Complete description for Texture Quantizer Data can be found in Texture Quantizer Data.

U32: Texture Coord Count

Coord Count specifies the number of Texture Coordinates. This number should equal the total number of vertex records.

U8: Number Components

Number Components specifies the number of Texture Coordinate components present for each vertex record in the set of vertex records.

U8: Quantization Bits

Number of Bits specifies the quantized size (i.e. the number of bits of precision) for each of the components. The actual number of quantization bits used is specified within Texture Quantizer Data. Value shall be within range [0:24] inclusive.

VecU32{Int32CDP}: Binary Vertex Texture Coords

Binary Vertex Texture Coordinates is a vector of the *i*th component values of a set of texture coordinates *interpreted* as integers. That is to say, the binary IEEE-754 floating point representation of the coordinates is fed *directly* into the Lag1 predictor as if they were integers.

VecU32{Int32CDP, Lag1}: Texture Coord Codes

Texture Coord Codes is a vector of quantizer “codes” for all the *n*th-component of a set of vertex texture coordinates. Texture Coord Codes uses the Int32 version of the CODEC to compress and encode data.

I32: Vertex Texture Coord Hash

The Vertex Texture Coord Hash is the combined hash of the Vertex Texture Coordinates. If the number of quantization bits is equal to zero the hash value is equal to the combined hash of the vertex texture coordinate values for each of the component arrays. If the number of quantization bits is greater than 0 the hash value is equal to the combined hash of the vertex texture coordinates codes for each of the component arrays.

```
UInt32 uHash      = 0;
uInt32 nVtxRec    = 0;
vecF32 vTexCoord[nVtxRec][4];
vecU32 vCodes[4];
...
if ( uQuantBits == 0 ) {
    for ( int i=0 ; i<nComp ; i++ ) {
        for ( int j=0 ; j<nVtxRec ; j++ ) {
            uHash = hash32( (UInt32*)&vTexCoord[j][i], 1, uHash );
        }
    }
} else {
    for ( int i=0 ; i<nComp ; i++ ) {
        uHash = hash32( &vCodes[i], nVtxRec, uHash );
    }
}
```

11.1.6 Compressed Vertex Colour Array

The Compressed Vertex Colour Array data collection contains the quantization data/representation for a set of vertex colours. Compressed Vertex Colour Array data collection is only present if previously read Colour Binding value is not equal to zero (See Vertex Shape LOD Data for complete explanation of Colour Binding data field).

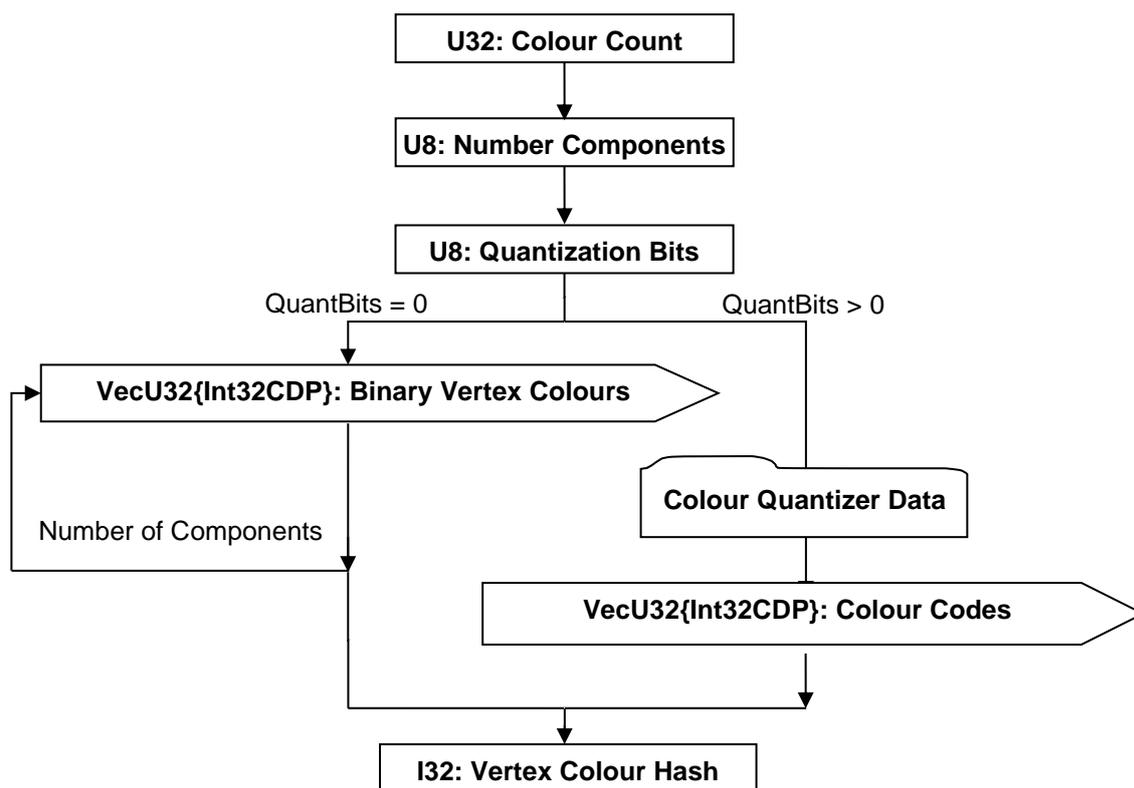


Figure 142 — Compressed Vertex Colour Array data collection

Complete description for Colour Quantizer Data can be found in Colour Quantizer Data.

U32: Colour Count

Colour count specifies the number of colour records. This number should equal the total number of vertex records.

U8: Number Components

Number Components specifies the number of Colour components present for each vertex record in the set of vertex records.

U8: Quantization Bits

Number of Bits specifies the quantized size (i.e. the number of bits of precision) for each of the 3 or 4 colour components. This value shall satisfy the following condition: “0 <= Number Of Bits <= 8”.

VecU32{Int32CDP}: Binary Vertex Colours

Binary Vertex Colours is a vector of the *i*th component values of a set of texture coordinates *interpreted* as integers. That is to say, the binary IEEE-754 floating point representation of the coordinates is fed *directly* into the Lag1 predictor as if they were integers.

VecU32{Int32CDP}: Colour Codes

Colour Codes is a vector of quantizer “codes” for all the vertex colours. Each Colour Code contains up to four bit fields representing the RGBA or HSVA encoded colour. The width of each field is set by the corresponding data in Colour Quantizer Data. The alpha field lies in the least significant bits, the B/V field lies immediately to the left of the alpha field, the G/S field lies immediately to the left of B/V field, and so on toward the more significant bits.

I32: Vertex Colour Hash

The Vertex Colour Hash is the combined hash of the vertex colours. If the number of quantization bits is equal to zero the hash value is equal to the combined hash of the vertex colour values for each of

the component arrays. If the number of quantization bits is greater than 0 the hash value is equal to the hash of the Colour Codes vector.

```

UInt32 uHash      = 0;
uInt32 nVtxRec   = 0;
vecF32 vCol[nVtxRec][3];
vecU32 vColorCodes;
...
if ( uQuantBits == 0 ) {
  for ( int i=0 ; i<nComp ; i++ ) {
    for ( int j=0 ; j<nVtxRec ; j++ ) {
      uHash = hash32( (UInt32*)&vCol[j][i], nVtxRec, uHash );
    }
  }
} else {
  uHash = hash32( &vColorCodes, nVtxRec, uHash );
}

```

11.1.7 Compressed Vertex Flag Array

The Compressed Vertex Flag Array data collection contains the quantization data/representation for per vertex flags. Compressed Vertex Flag Array data collection is only present if previously read Vertex Flag Binding value is not equal to zero.

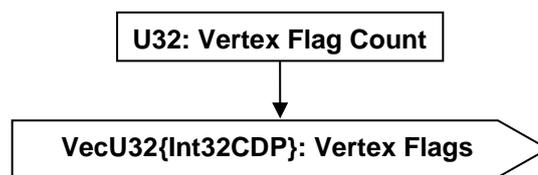


Figure 143 — Compressed Vertex Flag Array data collection

U32: Vertex Flag Count

Vertex flag count specifies the number of vertex flags. This number should be equal to the total number of vertex records.

VecU32{Int32CDP}: Vertex Flags

Vertex Flags is a vector of per vertex bit flags encoded as integers with valid values of either 0 (false) or 1 (true). Vertex Flags uses the Int32 version of the CODEC to compress and encode data.

11.1.8 Compressed Auxiliary Fields Array

Compressed Auxiliary Fields Array data contains additional geometric shape data (auxiliary vertex fields) that may be associated with each vertex record defined in TopoMesh Compressed LOD Data. Each Auxiliary field contains data that is parallel to the existing vertex record fields in order capture additional information about each vertex (e.g. Vertex Identifiers, Weights, or other information). Importantly, each datum in the Auxiliary field may have a single value (of the specified type), or *may have many values* (called „steps“). Again, each data collection may have multiple Auxiliary fields, each of which contains one datum per vertex record in the TopoMesh Compressed LOD Data, each datum containing 1 or more values (steps).

Each Auxiliary field has a GUID tag (unique to the fields in the current TopoMesh Compressed LOD Data record), and a field data type that allows the user to store a variety of different data types. It is not intended that Auxiliary fields be required to directly participate in rendering – that is the province of the vertex attributes defined in TopoMesh Compressed LOD Data.

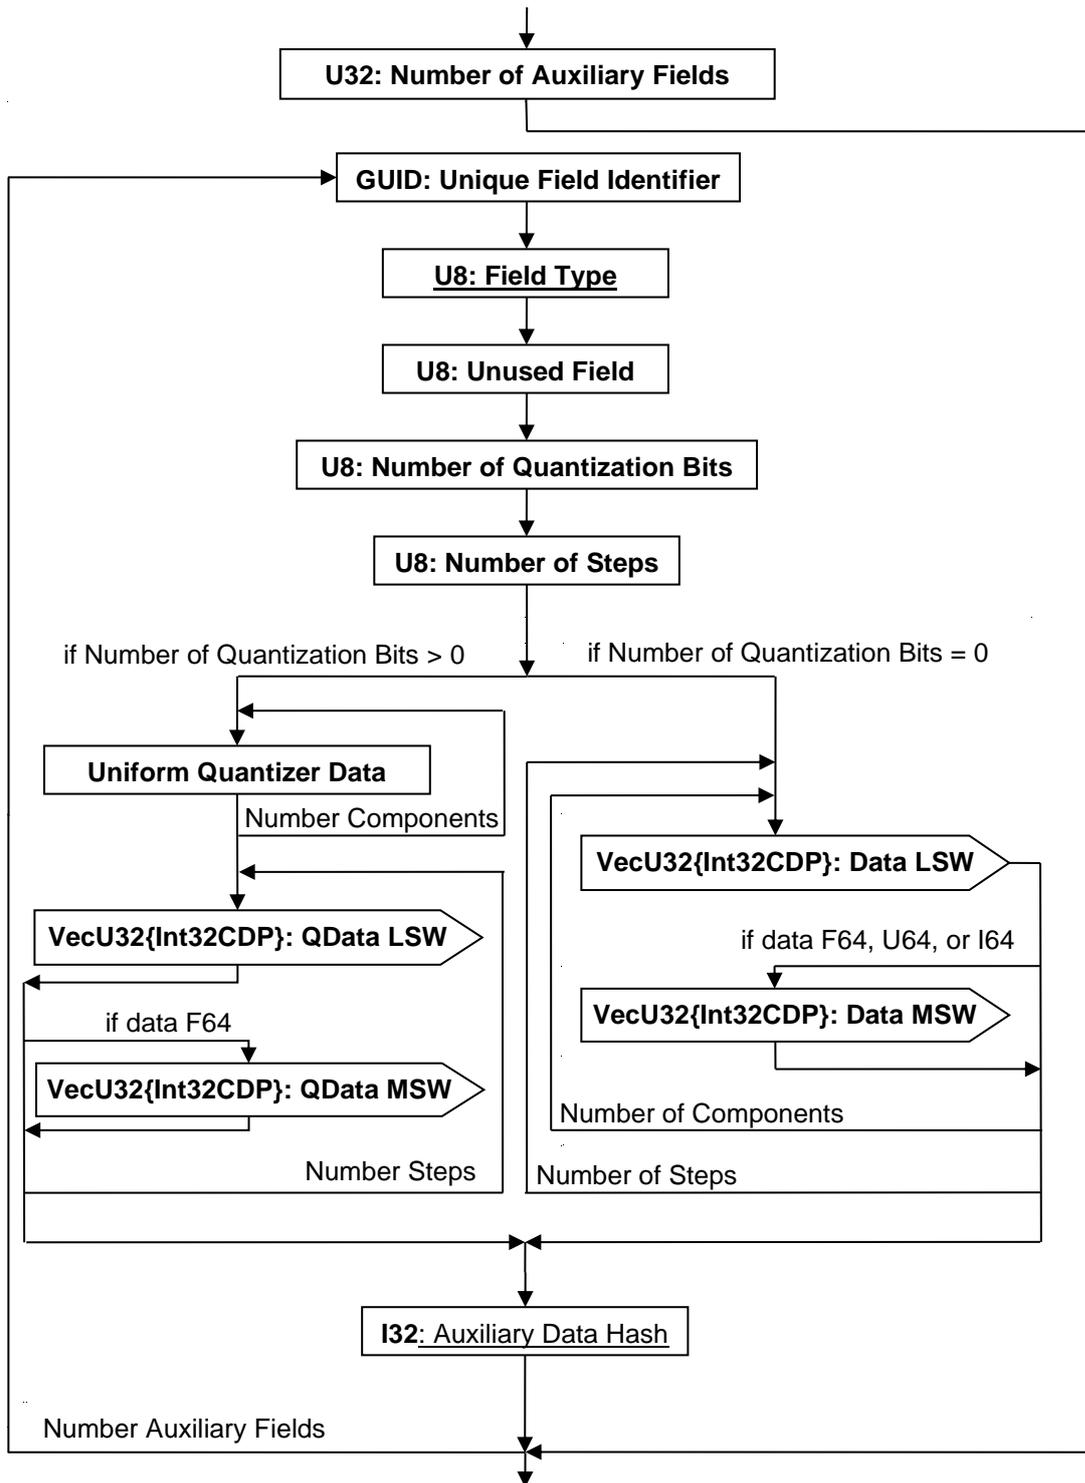


Figure 144 — Compressed Auxiliary Fields Array data collection

U32: Number of Auxiliary Fields

The number of auxiliary vertex fields included in the data collection.

GUID: Unique Field Identifier

Each Auxiliary Vertex Field is associated with Unique Field Identifier to denote the usage of the contained data. This field is intended to be user defined. Any valid GUID, as defined in Table 4, can be used as a Unique Field Identifier.

U8: Field Type

Defines the number of components and type of data contained within the auxiliary field based upon the below table.

Table 68 — TopoMesh Compressed Rep Data V2 Field Type values

Type	Data	Components	Type	Data	Components
1	U8	1	24	I32	4
2	U8	2	25	U64	1
3	U8	3	26	U64	2
4	U8	4	27	U64	3
5	I8	1	28	U64	4
6	I8	2	29	I64	1
7	I8	3	30	I64	2
8	I8	4	31	I64	3
9	U16	1	32	I64	4
10	U16	2	33	F32	1
11	U16	3	34	F32	2
12	U16	4	35	F32	3
13	I16	1	36	F32	4
14	I16	2	37	F32	2x2
15	I16	3	38	F32	3x3
16	I16	4	39	F32	4x4
17	U32	1	40	F64	1
18	U32	2	41	F64	2
19	U32	3	42	F64	3
20	U32	4	43	F64	4
21	I32	1	44	F64	2x2
22	I32	2	45	F64	3x3
23	I32	3	46	F64	4x4

U8: Unused Field

This field is unused.

U8: Number of Quantization Bits

Each Auxiliary field can be lossily or losslessly compressed. A value of 0 in this field means that that field data are to be losslessly compressed. This field must be 0 for all integer field types (i.e. lossy compression is not defined for integer field types). Only floating-point field types may be lossily compressed. A value between 1 and 32, or between 1 and 64 for double precision floating point typed fields, indicates that the data are quantized to the indicated number of bits of significance.

U8: Number of Steps

This field represents the number of “steps” present with each vertex record for the given Auxiliary field. The field must be a number greater than 0. All vertex records have the same number of “steps.” One or more steps, called “suppressed steps”, may contain no auxiliary data. At least one step must be not suppressed for any auxiliary field.

VecU32{Int32CDP}: Data LSW

Data LSW is an array of the low order 32 bits of the vector formed from all steps, components, and vertex records of a single Auxiliary Data field. The data is laid out by cycling through vertex records first, then components, and steps last so that adjacent vertex records for the same step and component are contiguous (i.e. in “stepwise-major, component semi-major” order). For U8, I8, U16, I16, U32, I32 and lossless F32 data types this contains all bits. For U64, I64, and lossless F64 data types it contains bits 0 through 31. Data LSW uses the Int32 version of the CODEC to compress and encode data. In the case when the data is a zero length vector, it means that no auxiliary data exists

on any vertex record for this component in this step. In addition, if no auxiliary data exists for one component in a particular step then it is guaranteed that no auxiliary data exists for all the other components in the same step.

VecU32{Int32CDP}: Data MSW

Data MSW is an array of the low order 32 bits of the vector formed from all steps, components, and vertex records of a single Auxiliary Data field. The data is laid out by cycling through vertex records first, then components, and steps last so that adjacent vertex records for the same step and component are contiguous (i.e. in “stepwise-major, component semi-major” order). For U64, I64, and lossless F64 data types it contains bits 32 through 63. Data MSW uses the Int32 version of the CODEC to compress and encode data. In the case when the data is a zero length vector, it means that no auxiliary data exists on any vertex record for this component in this step. In addition, if no auxiliary data exists for one component in a particular step then it is guaranteed that no auxiliary data exists for all the other components in the same step.

VecU32{Int32CDP}: QData LSW

QData LSW is an array of the low order 32 bits of the vector formed from all components and vertex records of a single Auxiliary Data field. The data is laid out by cycling through vertex records first, then components so that adjacent vertex records for the same step are contiguous (i.e. in “stepwise-major” order) For the F32 data type this field contains all bits. For F64 the data type it contains bits 0 through 31. QData LSW uses the Int32 version of the CODEC to compress and encode data. Note that there is one QData LSW packet for each step in the Auxfield rather than a single unified packet as with Data LSW. In the case when the data is a zero length vector, it means that no auxiliary data exists on any vertex record for this component in this step. In addition, if no auxiliary data exists for one component in a particular step then it is guaranteed that no auxiliary data exists for all the other components in the same step.

VecU32{Int32CDP}: QData MSW

QData MSW is an array of the low order 32 bits of the vector formed from all steps, components, and vertex records of a single Auxiliary Data field. The data is laid out by cycling through vertex records first, then components, and steps last so that adjacent vertex records for the same step and component are contiguous (i.e. in “stepwise-major, component semi-major” order). For U64, I64, and lossless F64 data types it contains bits 32 through 63. QData MSW uses the Int32 version of the CODEC to compress and encode data. Note that there is one QData MSW packet for each step in the Auxfield rather than a single unified packet as with Data MSW. In the case when the data is a zero length vector, it means that no auxiliary data exists on any vertex record for this component in this step. In addition, if no auxiliary data exists for one component in a particular step then it is guaranteed that no auxiliary data exists for all the other components in the same step.

I32: Auxiliary Data Hash

The Auxiliary Data Hash is the combined hash of auxiliary field data arrays.

```
UInt32 uHash      = 0;
UInt32 nVtxRec    = 0, // Number of vertex records
      nComp       = 0, // Number of components in current Auxfield
      nSteps      = 0; // Number of steps in current Auxfield
vecU32 vDataLSW [nSteps][nComp],
      vDataMSW [nSteps][nComp],
      vQDataLSW[nSteps],
      vQDataMSW[nSteps];
...
if (nQuantBits == 0) {
  if ( bU8 || bI8 || bU16 || bI16 || bU32 || bI32 || bF32 ) {
    for ( int i=0 ; i<nSteps ; i++ )
      for ( int j=0 ; j<nComp ; j++ )
        uHash = hash32( vDataLSW[i][j], nVtxRec, uHash );
  }
  else { // bU64 || bI64
    for ( int i=0 ; i<nSteps ; i++ ) {
      for ( int j=0 ; j<nComp ; j++ ) {
        uHash = hash32( vDataLSW[i][j], nVtxRec, uHash );
      }
    }
  }
}
```

```

    uHash = hash32( vDataMSW[i][j], nVtxRec, uHash );
  }
}
} else {
  if (bF32) {
    for ( int i=0 ; i<nSteps ; i++ )
      uHash = hash32( vQDataLSW[i], nVtxRec * nComp, uHash );
  }
  else { // bF64
    for ( int i=0 ; i<nSteps ; i++ ) {
      uHash = hash32( vQDataLSW[i], nVtxRec * nComp, uHash );
      uHash = hash32( vQDataMSW[i], nVtxRec * nComp, uHash );
    }
  }
}
}
}

```

11.1.9 Point Quantizer Data

A Point Quantizer Data collection is made up of three Uniform Quantizer Data collections; there is a separate Uniform Quantizer Data collection for the X, Y, and Z values of point coordinates.

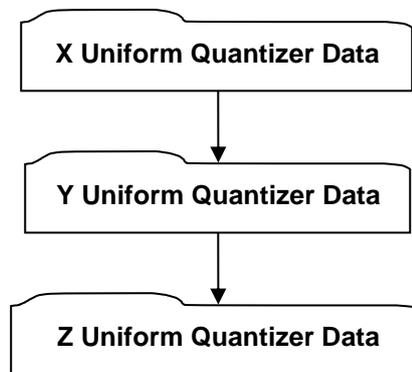


Figure 145 — Point Quantizer Data collection

Complete description for X Uniform Quantizer Data, Y Uniform Quantizer Data and Z Uniform Quantizer Data can be found in Uniform Quantizer Data.

11.1.10 Texture Quantizer Data

A Texture Quantizer Data collection is made up of n Uniform Quantizer Data collections; there is a separate Uniform Quantizer Data collection for each component of the texture coordinates. The number of components is not specified within the quantizer, but rather is determined by the number of texture components present in the underlying data (See Compressed Vertex Texture Coordinate Arrays U8: Number Components).

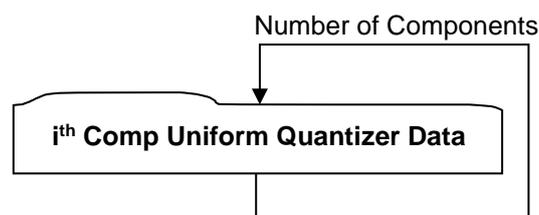


Figure 146 — Texture Quantizer Data collection

Complete description for U Uniform Quantizer Data and V Uniform Quantizer Data can be found in Uniform Quantizer Data.

11.1.11 Colour Quantizer Data

A Colour Quantizer Data collection contains the quantizer information for each of the colour components. The Colour Quantizer utilizes a separate Uniform Quantizer Data collection for each of the 4 colour components, but if the HSV colour model is being used, then it is not necessary to store a complete Uniform Quantizer Data Collection.

For the HSV model, since the range values for each colour component are constant, only the Number of Bits of precision for each colour component's Uniform Quantizer is stored. The Uniform Quantizer range values for the HSV colour components should always be assumed to be the following:

Table 69 — Colour Quantizer values

Component	Quantizer Range	
	Min	Max
Hue	0.0	6.0
Saturation	0.0	1.0
Value	0.0	1.0
Alpha	0.0	1.0

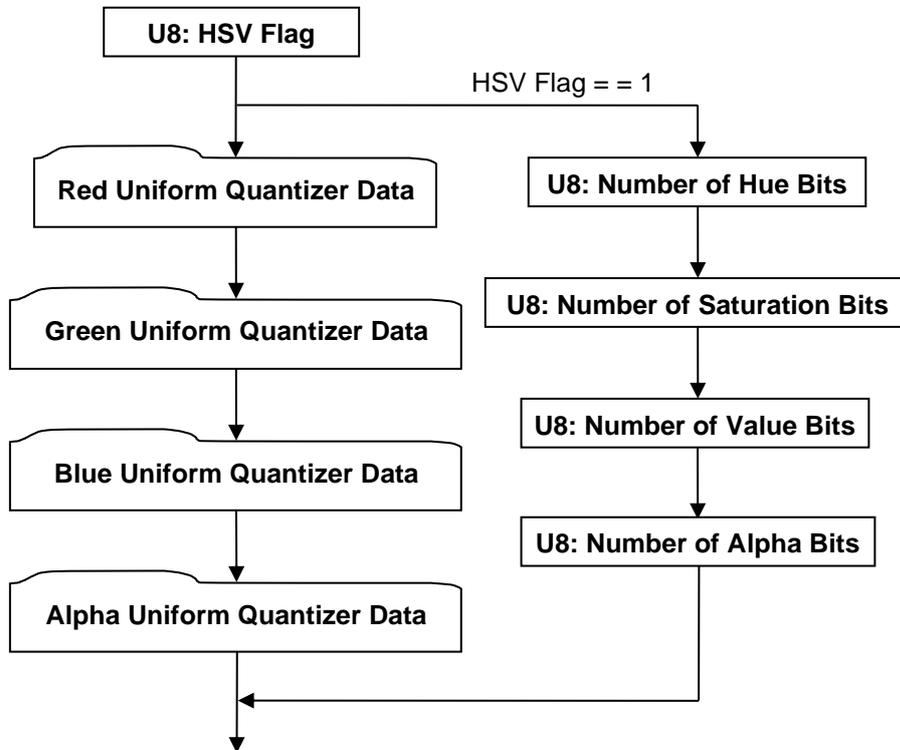


Figure 147 — Colour Quantizer Data collection

Complete descriptions for Red Uniform Quantizer Data, Green Uniform Quantizer Data, Blue Uniform Quantizer Data and Alpha Uniform Quantizer Data can be found in Uniform Quantizer Data. These four Uniform Quantizer Data collections are only present when data field HSV Flag = 0.

U8: HSV Flag

HSV Flag is a flag indicating whether colour component data is stored in HSV colour model form.

Table 70 — Colour Quantizer HSV Flag values

= 0	Colour component data stored in RGB colour model form.
= 1	Colour component data stored in HSV colour model form.

U8: Number of Hue Bits

Number of Hue Bits specifies the quantized size (i.e. the number of bits of precision) for the Hue component of the colour. Number of Hue Bits data is only present when data field HSV Flag = = 1.

U8: Number of Saturation Bits

Number of Saturation Bits specifies the quantized size (i.e. the number of bits of precision) for the Saturation component of the colour. Number of Saturation Bits data is only present when data field HSV Flag = = 1.

U8: Number of Value Bits

Number of Value Bits specifies the quantized size (i.e. the number of bits of precision) for the Value component of the colour. Number of Value Bits data is only present when data field HSV Flag = = 1.

U8: Number of Alpha Bits

Number of Alpha Bits specifies the quantized size (i.e. the number of bits of precision) for the Alpha component of the colour. Number of Alpha Bits data is only present when data field HSV Flag = = 1.

11.1.12 Uniform Quantizer Data

The Uniform Quantizer Data collection contains information that defines a scalar quantizer/dequantizer (encoder/decoder) whose range is divided into levels of equal spacing.




Figure 148 — Uniform Quantizer Data collection

F32: Min

Min specifies the minimum of the quantized range.

F32: Max

Max specifies the maximum of the quantized range.

U8: Number Of Bits

Number of Bits specifies the quantized size (i.e. the number of bits of precision). In general, this value shall satisfy the following condition: "0 <= Number Of Bits <= 32".

11.1.13 Compressed Entity List for Non-Trivial Knot Vector

Compressed Entity List for Non-Trivial Knot Vector data collection specifies index identifiers (i.e. indices to particular entities within a list of entities) for a set of entities that contain Non-Trivial Knot Vectors. The entity types which can contain non-trivial knot vectors include:

JT B-Rep NURBS Surfaces

JT B-Rep PCS NURBS Curves

JT B-Rep MCS NURBS Curves

Wireframe MCS NURBS Curves

Note that any one occurrence of Compressed Entity List for Non-Trivial Knot Vector data collection will only contain index identifiers for one particular type of the above listed entities. The entity type is

inferred based on the data collection which includes/references the Compressed Entity List for Non-Trivial Knot Vector.

A trivial knot vector is one which completely satisfies all conditions of at least one of the following cases:

Case-1 for trivial knot vector:

- Number of knots is an even number.
- Knot vector has a [0:1] knot range.
- There are no interior knots (i.e. $\text{NumberKnots} = 2 * (\text{NurbsEntityDegree} + 1)$).

Case-2 for trivial knot vector:

- Number of knots is an even number.
- Knot vector has a [0:1] knot range.
- $\text{NurbsEntityDegree} < 3$.
- Difference between successive non-repeating knots (i.e. KnotDelta) is:
 - $\text{KnotDelta} = 2.0 / (\text{NumberKnots} - (2.0 * \text{NurbsEntityDegree}))$.

Any knot vector which does not satisfy one of the above cases for “trivial knot vector” is classified as a “non-trivial knot vector.”

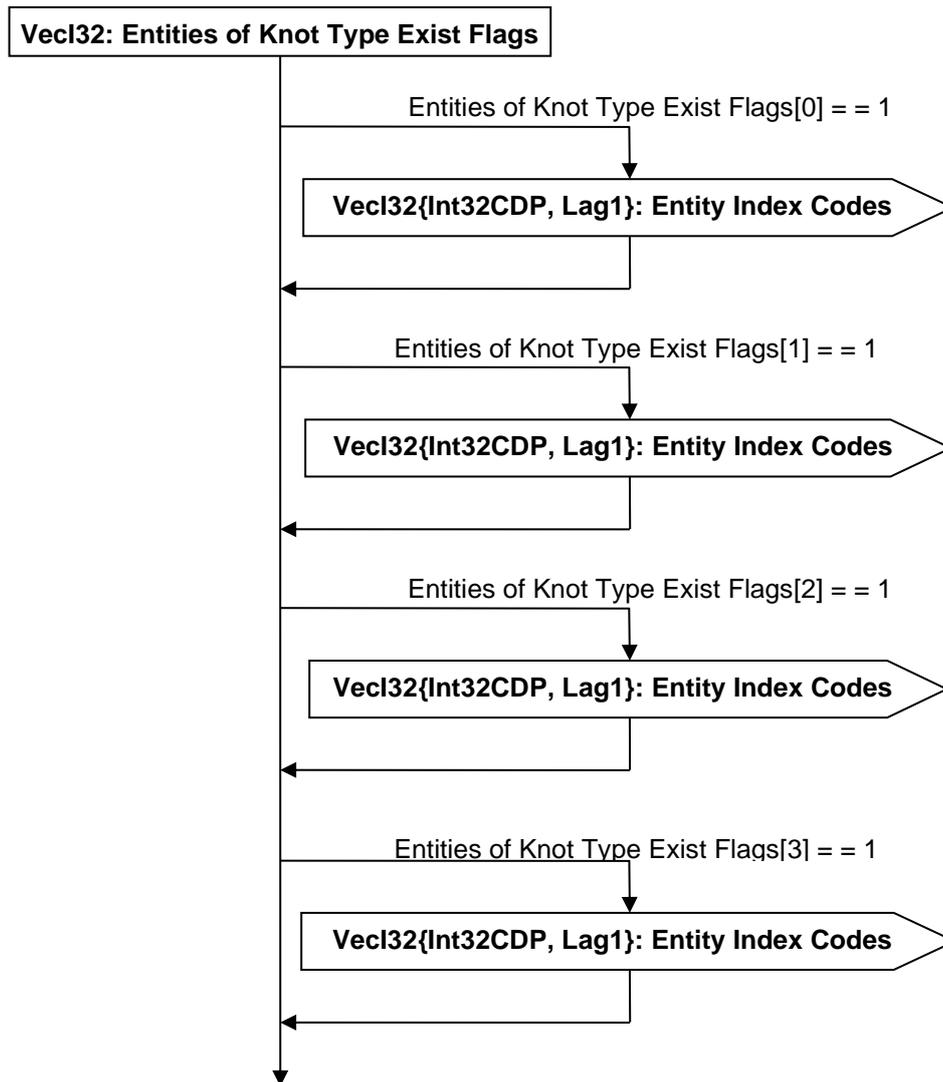


Figure 149 — Compressed Entity List for Non-Trivial Knot Vector data collection

VecI32: Entities of Knot Type Exist Flags

Entities of Knot Type Exist Flags, is a vector of flags indicating for each knot vector type whether Entity Index ID data collections exist/follow for that knot vector type. Knot Vectors are categorized into types based on the following characteristics: whether internal knots occur in *adjacent pairs* and whether the knot range is [0:1] or some other [x₁:x₂] range.

Currently there are four knot vector types, so this Entities of Knot Type Exist Flags vector should be of length four. The four flags have the following meaning:

Table 71 — Knot Type Exist Flag values

[0]	Flag indicating whether Entity IDs data collection exists for “Even Count [0:1] Range” knot type. Knots in this category have their knot range on [0:1], internal knots occur in <i>adjacent pairs</i> , <i>except</i> when there are no internal knots, in which case Type = 1 instead. = 0 – No Entity IDs data collection exists. = 1 – Entity IDs data collection exists.
[1]	Flag indicating whether Entity IDs data collection exists for “Even Count [x ₁ :x ₂] Range” knot type. Knots in this category have their knot range on [x ₁ :x ₂], and internal knots occur in <i>adjacent pairs</i> . = 0 – No Entity IDs data collection exists. = 1 – Entity IDs data collection exists.
[2]	Flag indicating whether Entity IDs data collection exists for “Odd Count [0:1] Range” knot type. Knots of this type have their knot range on [0:1], and are not Type 0. = 0 – No Entity IDs data collection exists. = 1 – Entity IDs data collection exists.
[3]	Flag indicating whether Entity IDs data collection exists for “Odd Count [x ₁ :x ₂] Range” knot type. Knots of this type have their knot range on [x ₁ :x ₂], and are not Type 1. = 0 – No Entity IDs data collection exists. = 1 – Entity IDs data collection exists.

Examples of knot vectors of Type 0:

```
0 0 X X 1 1
0 0 X X Y Y 1 1
0 0 X X Y Y Z Z 1 1
```

Examples of knot vectors of Type 1:

```
0 0 1 1          (Note: This is the exception to Type 0)
X X Y Y
X X Y Y Z Z
X X Y Y Z Z W W
```

Examples of knot vectors of Type 2:

```
0 0 X 1 1
0 0 X Y 1 1
0 0 X Y Z 1 1
0 0 X X X 1 1
0 0 X X Y Z Z 1 1
```

Examples of knot vectors of Type 3:

```
X X Y Z Z
X X Y Z W W
```

With this information in hand, the reader is able to reconstruct complete knot vectors in the following manner. When reconstructing the knot vector, you only take just enough values from the decoded knot value array. This may be as few as one. All the other values are inferred. Here's a sketch of the reconstruction algorithm:

```
// Number of knots in the knot vector
cNumKnots = numCtlPts + degree + 1;
// Necessary knot multiplicity at both ends of the knot vector
cClamping = degree + 1;
switch (knotType) {
  // Clamping is 0..1, internal knots occur in ADJACENT PAIRS
  // *EXCEPT* when there are no internal knots, in which case
  // Type = 1 instead.
  case 0: numVals = (cNumKnots - 2 * cClamping)/2;
```

```

// Clamping is X1..X2, internal knots occur in ADJACENT PAIRS
case 1: numVals = (cNumKnots - 2 * cClamping)/2 + 2;
// Clamping is 0..1, and not Type 0
case 2: numVals = (cNumKnots - 2 * cClamping);
// Clamping is X1..X2, and not Type 1
case 3: numVals = (cNumKnots - 2 * cClamping) + 2;
}
// numVals is the number of non-inferable knot values needed
// Let vVals be the knot vector value array
// vKnot will be the final output knot vector
if (knotType is either 0 or 2)
  Set vKnot[0 .. cClamping-1] to 0
  Set vKnot[cNumKnots-cClamping .. cNumKnots-1] to 1
else
  Set vKnot[0 .. cClamping-1] to vVals[0]
  Set vKnot[cNumKnots-cClamping .. cNumKnots-1] to vVals[numVals-1]
Set vKnot[cClamping .. cNumKnots-cClamping-1] from vVals[1 .. numVals-2]
VecI32{Int32CDP, Lag1}: Entity Index Codes

```

Entity Index Codes is a vector of quantizer “codes” representing entity index identifiers for a set of entities (i.e. indices to particular entities within a list of entities). Entity Index Codes uses the Int32 version of the CODEC to compress and encode data.

11.1.14 Compressed Control Point Weights Data

Compressed Control Point Weights Data collection is the compressed and/or encoded representation of weight data for some set of Control Points. All NURBS based geometry use this data collection to compress/encode Control Point Weight data.

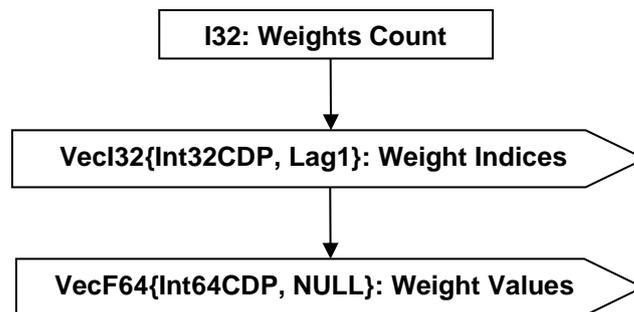


Figure 150 — Compressed Control Point Weights Data collection

I32: Weights Count

Weights Count specifies the total number of Weights. This count can differ from the Control Point count (see A.1.4.1.3 NURBS Surface Control Point Counts) because if the Control Point Dimensionality is non-rational (see data field), then no Weight values are stored for the particular Control Point. Weights Count value also does not necessarily equate to the actual number of Weights stored, since if a particular Control Point’s Weight values is “1”, then no actual Weight value is stored (i.e. JT file loaders/readers can infer that the Weight Value is “1” for Control Points that don’t have a Weight value stored).

VecI32{Int32CDP, Lag1}: Weight Indices

Weight Indices is a vector of indices representing the index identifiers for the conditional set of weights for which an actual Weight Values is stored in Weight Values. Weight Indices uses the Int32 version of the CODEC to compress and encode data.

VecF64{Int64CDP, NULL}: Weight Values

Weight Values is a vector of weight values for the conditional set of weights. Weight Values uses the Int64 version of the CODEC to compress and encode data. Each deserialized 64 bit integer number should be converted to bit wise equivalent 64 bit floating number.

11.1.15 Compressed Curve Data

Compressed Curve Data collection contains JT B-Rep or Wireframe Rep compressed/encoded geometric Curve data. Currently only NURBS Curve types are supported as part of this data collection. Complete documentation for JT B-Rep and Wireframe Rep can be found in the sections on JT B-Rep Element and Wireframe Rep Element respectively.

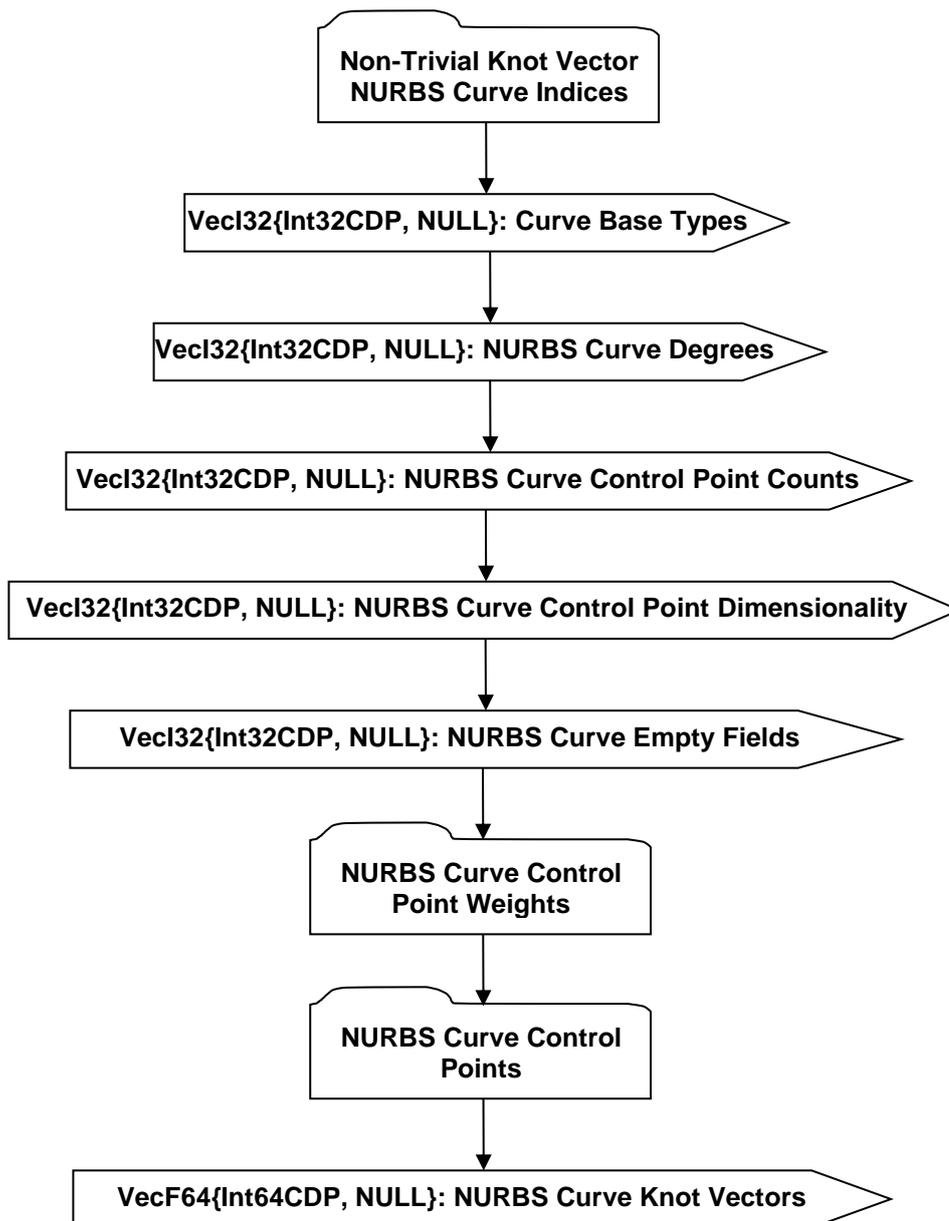


Figure 151 — Compressed Curve Data collection

VecI32{Int32CDP, NULL}: Curve Base Types

Each Curve is assigned a base type identifier. Curve Base Types is a vector of base type identifiers for each Curve in a list of Curves. Currently only NURBS Curve Base Type is supported, but a type

identifier is still included in the specification to allow for future expansion of the JT Format to support other curve types.

In an uncompressed/decoded form the Curves base type identifier values have the following meaning:

Table 72 — Compressed Curve Base Type values

= 1	Curve is a NURBS curve
-----	------------------------

Curve Base Types uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, NULL}: NURBS Curve Degrees

NURBS Curve Degrees is a vector of Curve degree values for each NURBS Curve in a list of Curves (there is a stored value for each NURBS Curve in the list). NURBS Curve Degrees uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, NULL}: NURBS Curve Control Point Counts

NURBS Curve Control Point Counts is a vector of control point counts for each NURBS Curve in a list of curves (there is a stored value for each NURBS Curve in the list). NURBS Curve Control Point Counts uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, NULL}: NURBS Curve Control Point Dimensionality

NURBS Curve Control Point Dimensionality is a vector of control point dimensionality values for each NURBS Curve in a list of Curves (i.e. there is a stored values for each NURBS Curve in the list).

In an uncompressed/decoded form the control point dimensionality values meaning is dependent upon the NURBS Entity type.

For NURBS UV Curve entities the dimensionality value has the following definition:

Table 73 — NURB UV Curve entity dimensionality values

= 2	Non-Rational (each control point has 2 coordinates)
= 3	Rational (each control point has 3 coordinates)

For NURBS XYZ Curve entities the dimensionality value has the following definition:

Table 74 — NURB XYZ Curve entity dimensionality values

= 3	Non-Rational (each control point has 3 coordinates)
= 4	Rational (each control point has 4 coordinates)

NURBS Curve Control Point Dimensionality uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, NULL}: NURBS Curve Empty Fields

NURBS Curve Empty Fields is a vector of data. Each NURBS Curve in a list of Curves has one reserved data field entry in this NURBS Curve Empty Fields vector. NURBS Curve Empty Fields uses the Int32 version of the CODEC to compress and encode data. Refer to Common Data Conventions and Constructs, Empty Field.

VecF64{Int64CDP, NULL}: NURBS Curve Knot Vectors

NURBS Curve Knot Vectors is a list of knot vector values for each NURBS Curve having non-trivial knot vectors in a list of Curves (i.e. there are stored values for each non-trivial knot vector NURBS Curve in the list). All these NURBS Curve non-trivial knot vectors are accumulated into this single list in the same order as the Curve appears in the Curve list (i.e. Curve-N Non-Trivial Knot Vector, Curve-M Non-Trivial Knot Vector, etc.). The NURBS Curves for which knot vectors are stored (i.e. those containing non-trivial knot vectors) are identified in data collection Non-Trivial Knot Vector NURBS Curve Indices documented in Non-Trivial Knot Vector NURBS Curve Indices. NURBS Curve Knot Vectors uses the Int64 version of the CODEC to compress and encode data. Each deserialized 64 bit integer number should be converted to bit wise equivalent 64 bit floating number.

Non-Trivial Knot Vector NURBS Curve Indices

Non-Trivial Knot Vector NURBS Curve Indices data collection specifies the Curve index identifiers (i.e. indices to particular NURBS Curves within a list of Curves) for all NURBS Curves containing non-trivial knot vectors. A description/definition for “non-trivial knot vector” can be found in Compressed Entity List for Non-Trivial Knot Vector.

This Curve index data is stored in a compressed format.



Figure 152 — Non-Trivial Knot Vector NURBS Curve Indices data collection

Complete description for Compressed Entity List for Non-Trivial Knot Vector can be found in Compressed Entity List for Non-Trivial Knot Vector.

NURBS Curve Control Point Weights

NURBS Curve Control Point Weights data collection defines the Weight values for a conditional set of Control Points for a list of NURBS Curves. The storing of the Weight value for a particular Control Point is conditional, because if NURBS Curve Control Point Dimension is “non-rational” or the actual Control Point’s Weight value is “1”, then no Weight value is stored for the Control Point (i.e. Weight value can be inferred to be “1”).

The NURBS Curve Control Point Weights data is stored in a compressed format.



Figure 153 — NURBS Curve Control Point Weights data collection

Complete description for Compressed Control Point Weights Data can be found in Compressed Control Point Weights Data.

NURBS Curve Control Points is the compressed and/or encoded representation of the Control Point coordinates for each NURBS Curve in a list of Curves (i.e. there are stored values for each NURBS Curve in the list). Note that these are non-homogeneous coordinates (i.e. Control Point coordinates have been divided by the corresponding Control Point Weight values).



Figure 154 — NURBS Curve Control Points data collection

VecF64{Int64CDP, NULL}: Control Points

Control Points is a vector of Control Point coordinates for all the NURBS Curves in a list of Curves. All the NURBS Curve Control Point coordinates are accumulated into this single vector in the same order as the Curve appears in the Curve list (i.e. Curve-1 Control Points, Curve-2 Control Points, etc.). Control Points uses the Int64 version of the CODEC to compress and encode data in a “lossless” manner. Each deserialized 64 bit integer number should be converted to bit wise equivalent 64 bit floating number.

11.1.16 Compressed CAD Tag Data

The Compressed CAD Tag Data collection contains the persistent IDs, as defined in the CAD System, to uniquely identify individual CAD entities (e.g. Faces and Edges of a JT B-Rep, PMI, etc.). Exactly

what CAD entity types have CAD Tags and what order they are stored in Compressed CAD Tag Data is defined by users of this data collection.

What constitutes a CAD Tag is outside the scope of the JT File format and is indeed part of the CAD system. The JT File format simply provides a way to store any kind of CAD Tag as provided by the CAD system which produced the CAD entity.

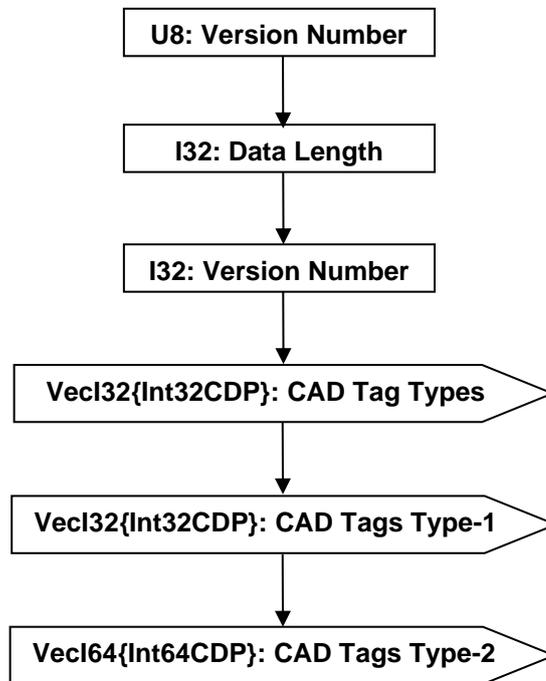


Figure 155 — Compressed CAD Tag Data collection

U8: Version Number

Version Number is the version identifier for the CADTag element. For information on local version numbers see Common Data Conventions and Constructs, Local version numbers.

I32: Data Length

Data Length specifies the length in bytes of the Compressed CAD Tag Data collection. A JT file loader/reader may use this information to compute the end position of the Compressed CAD Tag Data within the JT file and thus skip reading the remaining Compressed CAD Tag Data.

I32: Version Number

Version Number is the local version identifier for the Compressed CAD Tag Data. For information on local version numbers see Common Data Conventions and Constructs, Local version numbers.

VecI32{Int32CDP}: CAD Tag Types

CAD Tag Types is a vector of type identifiers for a list of CAD Tags (where each CAD Tag in the list has a type identifier value).

In an uncompressed/decoded form the CAD Tag type identifier values have the following meaning:

Table 75 — Compressed CAD Tag Type values

= 1	32 Bit Integer CAD Tag Type
= 2	64 Bit Integer CAD Tag Type

CAD Tag Types uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP}: CAD Tags Type-1

CAD Tags Type-1 is a vector of the Type-1 (i.e. 32 Bit Integer Type) CAD Tags for a list of CAD Tags. CAD Tags Type-1 uses the Int32 version of the CODEC to compress and encode data. CAD Tags Type-1 is only present if there are Type-1 CAD Tags in the CAD Tag Types vector.

VecI64{Int64CDP}: CAD Tags Type-2

CAD Tags Type-2 is a vector of the Type-2 (i.e. 64 Bit integer Type) CAD Tag data for a list of CAD Tags. CAD Tags Type-2 uses the Int64 version of the CODEC to compress and encode data. CAD Tags Type-2 is only present if there are Type-2 CAD Tags in the CAD Tag Types vector.

11.2 Encoding Algorithms

The following sections give a brief technical overview/descriptions of the various encoding algorithms used in the JT format. A sample implementation of the encoding and decoding portion of each algorithm can be found in this document Annex.

11.2.1 Uniform Data Quantization

Uniform Data Quantization is a lossy encoding technique in which a continuous set of input values (floating point data) is approximated with integral multiples (i.e. integers) of a common factor. How close the quantization output approximates the original input data is dependent upon the quantization data range and the number of bits specified to hold the resulting integer value.

The quantization is considered “uniform” because the algorithm divides the data input range into levels of equal spacing (i.e. a uniform scale). The form of Uniform Data Quantization used by the JT format is also considered scalar in nature, in that each input value is treated separately in producing the output integer value.

Given the following definitions:

```
inputVal:      Input floating point data to quantize
outputVal:     Resulting quantized output integer value
minInputRange: Specified minimum value of input data range
maxInputRange: Specified maximum value of input data range
nBits:        Specified number of bits of precision (quantized size)
The basic algorithm (using C++ style syntax) for Uniform Data Quantization is as follows:
UInt32 iMaxCode = (nBits < 32) ? (0x1 << nBits) - 1 : 0xffffffff;
Float64 encodeMultiplier = Float64(iMaxCode) / (maxInputRange - minInputRange);
UInt32 outputVal = UInt32( (inputVal - minInputRange) * encodeMultiplier + 0.5 );
```

Note: For reasons of robustness, “outputVal” shall also be explicitly clamped to the range [0,iMaxCode]. This is because floating-point roundoff error in the calculation of “encodeMultiplier” can otherwise cause “outputVal” to sometimes come out equal to “iMaxCode + 1”.

Note that all compression algorithms in the following sections operate on quantized integer data.

11.2.2 Bitlength CODEC

This is a very simple compression algorithm that runs either a fixed-width or adaptive-width bit field encoding for each value. It is used whenever none of the more sophisticated CODECs are able to extract any compression advantage. In essence, the Bitlength CODEC takes advantage of the fact that most of the values will require less than 32 bits to represent, and so can be written as bitfields narrower than 32 bits. In some cases, the best answer is to choose a fixed field width that can represent all values in the array. In other cases, a little more compression can be had by using an adjustable-width coding scheme.

When using the variable-width scheme, as each input value is encountered, the number of bits needed to represent it is calculated and compared to the current “field width”. The current field width is then adjusted upwards or downwards by a constant “step_size” number of bits (i.e. 2 bits for the JT format) to accommodate the input value storage. This increment or decrement of the current field width is indicated for each encoded value by a prefix code stored with each value.

The prefix code will be one of the following two forms:

A single '0' bit to denote the same (i.e. current) field width is to be used for the next value.


A '1' bit followed by a series of one or more bits where each bit indicates whether the field width is to be incremented (a '1' bit) or decremented (a '0' bit) by the field step_size, followed by a single terminator bit (which is complement of the previous increment/decrement bit). Note that there can only be increments or decrements in a given prefix code, never both, and that is why the prefix code terminator bit can be recognized as bits are read by simply looking for the complement of the previous increment/decrement bit.

Some examples of prefix codes and their interpretation are as follows:


Example 1: Prefix code to maintain same (current) field width.



Example 2: Prefix code to increment field width four times (8 bits).

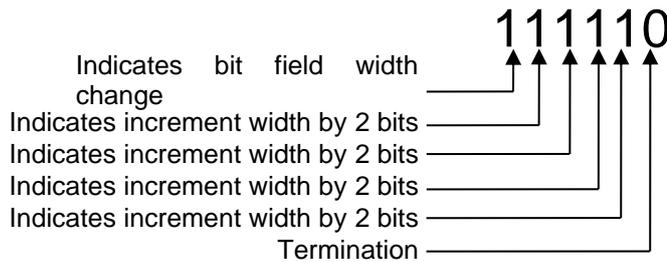

Example 3: Prefix code to decrement field width two times.

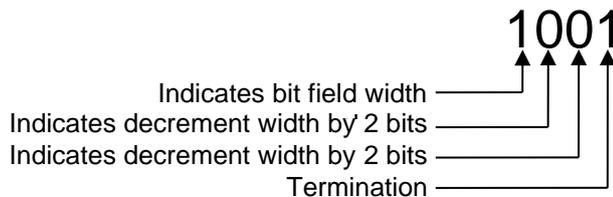

A pseudo-code sample implementation of bit length decoding is available in the Annex.

11.2.3 Arithmetic CODEC

In 1948, Claude Shannon of Bell Laboratories published his seminal paper “A mathematical theory of communication” that launched the new field of Information Theory. In that same year, two Doctoral students at the Massachusetts Institute of Technology (MIT) made breakthroughs in the coding of information. The first to press was David Huffman, whose coding scheme we now know as Huffman Coding. In that same class with Huffman was Peter Elias who reportedly developed the first articulation of arithmetic coding, but it lay unpublished until 1976, when Jorma Rissanen and Richard Pasco, of IBM, refined it into a practically useful algorithm.

Arithmetic encoding is a so-called “entropy coding” algorithm that replaces an input stream of symbols or bytes with a single fixed point output number (i.e. only the mantissa bits to the right of the binary point are output from MSB to LSB). The total number of bits needed in the output number is dependent upon the length and statistical properties of the input message (i.e. the longer the input message the more bits needed in the output number). This single fixed point number output from an

arithmetic encoding process shall be uniquely decodable to create the exact stream of input symbols that were used to create it.

Initially all symbols being encoded have a probability value assigned to them based on the likelihood that the symbol will occur next in the input stream (i.e. the frequency of the symbol in the input stream). Given probability value assignments, each individual symbol is then assigned an interval range along a nominal 0 to 1 “probability line”, where the size of each range corresponds to the symbol’s probability value. Note that a particular symbol owns all values within its assigned range up to, but not including, the range high value, and that it does not matter which symbols are assigned which segment of the range as long it is done in the same manner by both the encoder and the decoder.

Given the above described input stream probability and interval range assignments, a high level description of the arithmetic encoding process is as follows:

Begin with a “current interval” initialized to [0,1). Note, that in interval range notation (i.e. “[0,1)”), the “[” symbol indicates inclusive of the interval low limit and “)” symbol indicates exclusive of the interval high limit.

Sequentially for each symbol of the input stream, perform two steps.

Subdivide the current interval into subintervals based on the input stream symbol probability values as described above.

Select the subinterval corresponding to the current input stream symbol being sequentially processed and make it the new “current interval”.

After all input stream symbols have been sequentially processed; output enough bits to distinguish the final “current interval” from all other possible final intervals.

In pseudo code form, the algorithm to accomplish the above described arithmetic encoding for an input stream message of any length could look as follows:

```
Set low to 0.0
Set high to 1.0
While there are still input symbols do
    cur_symbol = get next input symbol
    range = high - low
    high = low + range * high_range(cur_symbol)
    low = low + range * low_range(cur_symbol)
End of While
Output low
```

So the arithmetic encoding process is simply one in which we narrow the range of possible numbers with every new sequentially processed input symbol; where the new narrowed range is proportional to the predefined probability values assigned to each symbol in the input stream.

The arithmetic decoding process is the inverse procedure; where the range is expanded in proportion to the probability of each symbol as it is extracted. For the arithmetic decoding process we find the first symbol in the message by seeing which symbol owns the interval range that our encoded message falls in. Then, since we know the low and high range limit values of the first symbol we can remove their effects by reversing the process that put them in.

In pseudo code form, the algorithm for decoding the incoming number could look as follows:

```
Get encoded_number
Do
    find symbol whose range straddles the encoded_number
    output the symbol
    range = symbol_high_value - symbol_low_value
    encoded_number = encoded_number - symbol_low_value
    encoded_number = encoded_number / range
until no more symbols
```

Example

Following is an example to demonstrate in practice the basic principles of arithmetic coding.

Suppose you want to compress, using arithmetic coding, the following sequence/array of integer data:

{2, 9, 12, 12, 0, 7, 1, 20, 5, 19}

For this input stream of data, the assigned probability values will be as follows:

Table 76 — Example assigned probability values

Number	Probability
0	1/10
1	1/10
2	1/10
5	1/10
7	1/10
9	1/10
12	2/10
19	1/10
20	1/10

Then based on each input numbers probability value, an interval range along a 0 to 1 “probability line” can be assigned to each input number as follows:

Table 77 — Example “probability line” values

Number	Probability	Range
0	1/10	[0.00, 0.10)
1	1/10	[0.10, 0.20)
2	1/10	[0.20, 0.30)
5	1/10	[0.30, 0.40)
7	1/10	[0.40, 0.50)
9	1/10	[0.50, 0.60)
12	2/10	[0.60, 0.80)
19	1/10	[0.80, 0.90)
20	1/10	[0.90, 1.00)

Now proceeding with encoding the example input integer sequence {2, 9, 12, 12, 0, 7, 1, 20, 5, 19}, the first number to be encoded is “2”; so the final encoded value will be a number that is greater than or equal to 0.20 and less than 0.30. Now as each subsequent number in the input stream is sequentially processed for encoding, the possible range of the output number is further restricted. In our example the next number to be encoded is “9” which owns the range [0.50, 0.60) within the new sub-range of [0.20, 0.30); which now further restricts our output number to the range [0.25, 0.26). If we continue this logic for the complete input integer sequence we end up with the following:

Table 78 — Example input integer sequence values

New integer number	Low value	High value
	0.0	1.0
2	0.2	0.3
9	0.25	0.26
12	0.256	0.258
12	0.2572	0.2576
0	0.25720	0.25724
7	0.257216	0.257220
1	0.2572164	0.2572168
20	0.25721676	0.2572168
5	0.257216772	0.257216776
19	0.2572167752	0.2572167756

From the above table, the final low value is “0.2572167752” which is the output number that uniquely encodes the integer number sequence {2, 9, 12, 12, 0, 7, 1, 20, 5, 19}.

Given this encoding scheme, the decoding would simply follow the process previously described. We find the first number in the sequence by looking up in the probability range for the value, whose range, our encoded number “0.2572167752” falls within. In our example this equates to the value “2” and so our first decoded value shall be “2”. Then we apply the previously described decoding subtraction and division steps to arrive at a new encoded value of “0.572167752”. Using this new “0.572167752” encoded value and the same logic of the first step, the second decoded value will be “9”. We continue this process until there are no more numbers to decode.

In practice, due to floating point size (i.e. number of bits) restrictions and possible differences in floating point formats on machines, arithmetic encoding is best implemented using 16 bit or 32 bit integer math. Using 16 bit or 32 bit integer math, an incremental transmission scheme can be implemented, where fixed size integer state variables receive new bits in at the low end and shift them out the high end, forming a single number that can be as many bits long as are available on the computer’s storage medium.

Using our example as a guide, define the starting range [0.0, 1.0) to instead be 0 to 0.999 (which is .111 in binary). Then in order to use integer registers to store these numbers, justify the values so that the implied decimal point is at the left hand side of the word. Now load the initial range values based on the word size we are using. In the case of a 16 bit implementation the initial range values will be low equals 0x0000 and high equals 0xFFFF. Since we know these values will go on forever (e.g. 0.999... will continue with FFs) we can shift those extra bits in as needed with no detrimental effects.

Going back to our example and using a 5 digit register, we start with the range:

High: 99999

Low: 00000

Applying the previously described encoding algorithm we first calculate the range between the low and high values; which in this case is 100000 (not 9999 since we assume the high value has an infinite number of 9’s). Next, we calculate the new high value which in this example will be 30000. But before we store the new high value we shall decrement it to account for the implied digits appended to it; so new high value will be 29999. Applying similar logic to computing the new low value results in a new range of:

High: 29999 (999...)

Low: 20000 (000...)

In looking at the newly computed high and low range values, it can be seen that the most significant digits of high and low match. A property of arithmetic coding is that as this encoding process continues, the high and low values will continue to get closer, but will never match exactly. Given this property, once the most significant digit of high and low match, it will never change, and thus we can output this most significant digit as the first number in the coded word and continue working with just 16 bit high and low values. This output process is accomplished by shifting both the high and low values left by one digit and shifting in a “9” in the least significant digit of the high value.

Applying the previously described encoding algorithm and continuing the above described process of shifting out most significant digit into the coded word as high and low continually grow closer together looks as follows for encoding our example integer number sequence {2, 9, 12, 12, 0, 7, 1, 20, 5, 19}:

Table 79 — Example integer number sequence values

	High	Low	Range	Cumulative output
Initial State	99999	00000	100000	
Encode “2” [0.2, 0.3)	29999	20000		
Shift out 2	99999	00000	100000	.2
Encode “9” [0.5, 0.6)	59999	50000		.2
Shift out 5	99999	00000	100000	.25
Encode “12” [0.6, 0.8)	79999	60000	20000	.25
Encode “12” [0.6, 0.8)	75999	72000		.25
Shift out 7	59999	20000	40000	.257

	High	Low	Range	Cumulative output
Encode "0" [0.0, 0.1)	23999	20000		.257
Shift out 2	39999	00000	40000	.2572
Encode "7" [0.4, 0.5)	19999	16000		.2572
Shift out 1	99999	60000	40000	.25721
Encode "1" [0.1, 0.2)	67999	64000		.25721
Shift out 6	79999	40000	40000	.257216
Encode "20" [0.9, 1.0)	79999	76000		.257216
Shift out 7	99999	60000	40000	.2572167
Encode "5" [0.3, 0.4)	75999	72000		.2572167
Shift out 7	59999	20000	40000	.25721677
Encode "19" [0.8, 0.9)	55999	52000		.25721677
Shift out 5	59999	20000	40000	.257216775
Shift out 2				.2572167752
Shift out 0				.25721677520

As can be seen in the above table, after all values in the input stream have been encoded and any final matching most significant digit has been output, the arithmetic coding algorithm requires that two extra digits be shifted out of either the high or low value to finish up the cumulative output word.

Although the above example incrementally encodes very nicely with the arithmetic coding algorithm, there are certain cases where the computed high and low values get closer, but never actually converge to one value in the most significant digit (e.g. High = 0.300001, Low = 0.29992). Thus after a few iterations the difference between high and low becomes so small that 16 bits is not sufficient to represent any difference between the values (i.e. all calculations return the same values). This condition is known as "underflow" and special logic shall be added to the arithmetic coding algorithm to recognize that "underflow" is occurring and thus head it off before the computations reach an impasse.

The additional logic for recognizing that "underflow" is occurring would be executed after each recalculation of High and Low value set, and in pseudo code form this logic would look as follows:

```

underflow = FALSE
if( (High and Low value's significant digits don't match but are on adjacent
numbers) &&
    (2nd MSDMSD of High is "0" and the 2nd MSDMSD of low is "9") )
{
    underflow = TRUE
}

```

When/if it is identified that "underflow" is occurring, the encoding algorithm shall perform the following steps to stop the current "underflow":

Delete the 2nd most significant digit from both the High and Low value.

Shift the other digits (those to the right of the deleted 2nd digit) to the left to fill up the space (note that the most significant digit stays in place).

Increment a counter to remember that we threw away a digit and don't know whether it was going to converge to "0" or "9".

A before and after example of performing the above steps to the High and Low values when 'underflow' occurs is as follows:

	<u>Before</u>	<u>After</u>
High	40344	43449
Low	39810	38100
Underflow_counter	0	1

Now as the encoding algorithm continues and the most significant digit of High and Low values once again converge to a common value, then that value shall be output to the coded word along with "Underflow_counter" number of "underflow" digits that were previously deleted. The underflow digits output to the coded word will either be all 9s or 0s, depending on whether the High and Low value converged to the higher or lower value.

A pseudo-code sample implementation of arithmetic decoding is available in the annex.

11.2.4 Deering Normal CODEC

Michael Deering first published his work on geometry compression in 1995 [2] and later helped present a course on the subject at SIGGRAPH'99 [3]. Although Deering's approach to geometric compression involves compression of vertices, colours and normals, the description detailed here will focus solely on compression of normals since this is the only component of Deering's approach used in the JT format.

Through both theoretical examination and empirical testing, Deering found that an angular density of 0.01 radians between normals (about 100,000 normalized normals distributed over unit sphere) gave results that were not visually distinguishable from results obtained from finer normal representations. This observation reduced the problem of having to "exactly" represent any general surface normal, to only having to represent about 100,000 specific normals (i.e. general surface normal replaced by the appropriate one of the 100,000 specific normals).

If there were no run-time memory concerns and no concerns for on disk footprint size, these specific 100,000 normals could be simply represented in a table that is indexed into, to reference a particular normal. Instead, Deering's approach leverages symmetrical properties of the unit sphere to reduce the size of the table and allow any normal to be represented by, at max, an 18 bit index as summarized below:

- All normals are normalized (i.e. can be represented as points on the surface of the unit sphere).
- Unit sphere is divided into eight symmetrical octants based on sign bits of normal's X,Y,Z rectilinear representation (see Figure 155).
- Using three bits to represent the three sign bits of the normals XYZ components reduces the problem space to one eighth of the unit sphere.
- Each octant of the unit sphere is divided into six identical sextants by folding about the planes of symmetry; $x=y$, $x=z$, and $y=z$ (see Figure 155)
- . The particular sextant can be encoded using another three bits. So now unit sphere is divided into 48 identically shaped triangle patches reducing the normal look-up table to about 2000 entries (i.e. $100000/48$).
- Then, a local rectangular orthogonal two dimensional grid is created on the sextant and all normals within the sextant are represented as two n-bit angular addresses (i.e. a quantization of two angular values along the unit sphere) where "n" is in the range from 0 to 6 bits.
- Resulting in a max grand total of 18 bits ($3 + 3 + 6 + 6$) to represent any normal on the unit sphere.

In the figure below, the sphere is divided into eight octants and each octant is divided into six sextants. Each sextant is assigned an identifying three bit code.

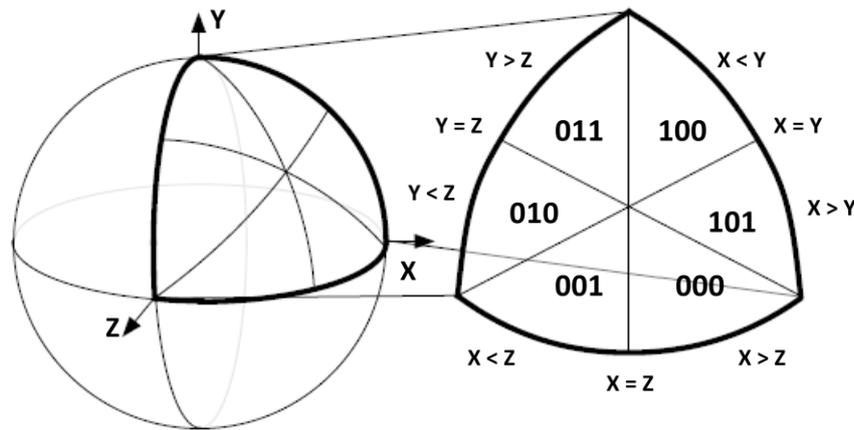


Figure 156 — Sextant Coding on the Sphere

Note that the sextant three bit code assignments used by the JT format (as seen in Figure 155) are slightly modified from the original assignments as specified by Deering.

The representation of all normals within a sextant by two n-bit angular addresses, as summarized above, is based on the following:

- In spherical coordinates, points on a unit sphere can be parameterized by two angles, θ and φ ; where θ is the angle about the y axis and φ is the longitudinal angle from the $y=0$ plane.
- Mapping between rectangular and spherical coordinates is:

$$x = \cos\theta * \cos\varphi \quad y = \sin\varphi \quad z = \sin\theta * \cos\varphi.$$

- All encoding takes place in the positive octant.
- Angles θ and φ can be quantized into two n-bit integers θ'_n and φ'_n (where “n” is in the range of 0 to 6) and the relationship between these n-bit integers and angles θ and φ for a given “n” is:

$$\theta(\theta'_n) = \text{asin} \tan(\varphi_{\max} * (n - \theta'_n) / 2n)$$

$$\varphi(\varphi'_n) = \varphi_{\max} * \varphi'_n / 2n.$$

Thus to encode (i.e. quantize) a given normal **N** into θ'_n and φ'_n :

- **N** shall be first represented (see Figure 155) in the positive octant and appropriate sextant within that octant, resulting in **N'**.
- Then **N'** shall be dotted with all quantized normals in the sextant.
- For a fixed “n”, the corresponding θ'_n and φ'_n values of the quantized sextant normal that result in the largest (nearest unity) dot product defines the proper θ'_n and φ'_n encoding of **N**.

With this encoding of normal **N** into θ'_n and φ'_n n-bit integers the complete bit representation of normal **N** can now be defined as follows:

- Uppermost three bits specify the octant.
- Next three bits specify the sextant code as defined in Figure 155.
- Next two n-bit fields specify θ'_n and φ'_n values respectively.

11.3 LZMA compression

LZMA is a (lossless) dictionary-based data compression algorithm and is essentially the same as that in 7-Zip. Implementers of this specification should consider using XZ Utils for compressing and

decompressing JT data. XZ Utils is free general-purpose data compression software. XZ Utils are the successor to LZMA Utils.

The core of the XZ Utils compression code is based on LZMA SDK, but it has been modified quite a lot to be suitable for XZ Utils. The primary compression algorithm is currently LZMA2, which is used inside the .xz container format. Typically, XZ Utils create 30 % smaller output than gzip and 15 % smaller output than bzip2.

Entry points from the liblzma API, used when compressing and decompressing JT files using XZ utils, are listed here;

lzma_code

lzma_easy_encoder

lzma_end

lzma_stream_decoder

The compression and decompression XZ Utils are freely available and in the public domain. For complete description and source code visit <http://tukaani.org/xz/> .

12 Conformance requirements

Conformance to JTIAP Edition 3 includes satisfying the requirements stated in this document and the relevant requirements of the normative references.

A JTIAP Edition 3 file shall contain at least all of the following segments:

- the logical scene graph segment (LSG);
- one shape LOD segment.

An implementation shall support at least all the following segments:

- the logical scene graph segment (LSG);
- one shape LOD segment.

On top of these mandatory segments, there is a list of optional segments available to provide complementary capabilities in the 3D Light visualization scope: See Table 6 — Segment Types

The implementers shall not implement deprecated segments in write mode.

12.1 Conformance Classes

JT Conformance Classes are defined as a recommendation for JT users and implementers. The aim of JT Conformance Classes is to give a guideline to the geometric content needed in a JT file for certain use cases.

12.1.1 Visualization (CC0x)

These conformance classes are intended for use cases where visualization performance and small file size are more important than precise geometry data.

- CC01
 - This conformance class uses different levels of tessellation for the presentation of the geometry. These are described in Shape LOD Segment. The Shape LOD Segment is the only segment containing geometry data in this conformance class. The Precise Geometry Segment is empty.
- CC02
 - This conformance class uses ULP for the presentation of the geometry. The precision of the representation of geometry is adjustable to the users' needs, so it can also be used for advanced visualization use cases. ULP is referenced in Precise Geometry Segment and described in ULP Segment Annex. It is not recommended to use another geometry representation if ULP is used. With this, the smallest possible file size is achieved.

12.1.2 Engineering, Production & Long-Term Data Retention (CC1x)

These conformance classes are intended for use cases in which the precision of the geometric data is of high importance. These include downstream engineering processes, production, data exchange and archiving. For the presentation of geometry data all conformance classes of the CC1x group use the Shape LOD Segment with at least 1 LOD. In general, it is highly recommended to only use one B-Rep in a JT file.

- CC11
 - This conformance class exclusively uses the XT B-Rep Segment for the representation of exact geometry data. The XT B-Rep Segment is referenced in Chapter 8, Precise Geometry Segment and described in the XT B-Rep Segment

Annex. This is the default Conformance Class which should be used if no other Conformance Class is explicitly specified.

- CC12
 - This conformance class exclusively uses the STEP B-Rep Segment for the representation of exact geometry data. The STEP B-Rep Segment is referenced in Chapter 8, Precise Geometry Segment and described in the STEP B-Rep Segment.

13 Common Data Conventions and Constructs

The proceeding sections of this specification specify the mandatory clauses for creating a reference compliant JT file. This section documents format conventions that should be followed to promote consistency in JT.

13.1 Late-Loading Data

The JT format was designed and structured to load entities from a JT file on a deferred or as-needed basis. This concept is referred to within this specification as “late-loading data”. The JT format has many structures in support of this; writers/loaders of JT data may leverage these capabilities.

Initial loading of a JT file shall require the Table of Contents and the LSG segments.

All Meta Data Node Elements, JT B-Rep Elements, XT B-Rep Elements, Wireframe Rep Elements, PMI Manager Meta Data Elements, JT ULP Elements, JT LWPA Elements, and Shape LOD Elements may be ignored until they are actually needed. These Late-Loaded data containers are accessed via a Late Loaded Property Atom Element which appears in a LSG Node's Property list. Contained in this Property is the GUID associated with the segment to be loaded. This GUID can be looked up in the TOC Segment, which will give the location in the JT from which to load the actual Element via the Data Segment convention.

13.2 TOC Segment Location

The TOC Segment should be located within the JT file immediately following the file header.

13.3 Bit Fields

All bits fields that are not defined as in use shall be set to “0”.

13.4 Empty Field

In the File Format section of this reference some data fields may be named/documented as “Empty Field” (e.g LOD Node Data “Empty Field” field). These fields should be treated as follows:

If you are writing a JT file whose data did not originate from reading a previous JT file, then Empty Fields should be set to a value a “0” when writing the field to a JT file.

If you are writing a JT file whose data originated from reading a previous JT file (i.e. rewriting a JT File), then “Empty Fields” should be written with the same value that was read from the originating JT file.

13.5 Local version numbers

The version numbers seen throughout the data collections are version numbers local to those data types. They provide a simple means by which those data collections can be extended. All version information for 10.0 JT data is included within this document.

For each data collection, data for each local version should be written in sequence. When reading the data, the local version number allows readers to read up to the maximum local version they support and then use the segment length that was read in the Segment Header to skip over additional data. For example when version one and two data is present the user can choose to read only the version one data or additionally read the version two data as required.

Local version numbers are used for conditional branching as depicted in the element figures.

13.5.1 Version numbers

“0x01”

All references to version number in this document shall be this value unless noted otherwise here.

“0x02”

Base Property Atom Element,
String Property Atom Element,
Integer Property Atom Element,
Floating Point Property Atom Element,
JT Object Reference Property Atom Element,
Date Property Atom Element,
Late Loaded Property Atom Element,
Vector4f Property Atom Element
PMI Manager Meta Data Element

“0x05”

JT B-Rep Element

13.6 Hash Value

Hashing is a means by which a large chunk of values can be represented by single value through the use of a mathematical function that provides a distinctive value for each unique set of ordered values. The hash function used within this format was published by Bob Jenkins in Dr Dobbs Journal in 1997. Its implementation is provided in Annex C. It is the same implementation that was used in JT v9.x.

The hash function takes a pointer to a set of values, the number of values, and a seed hash value. It returns the resulting hash value. Initially the seed value is set to 0, however when hashing multiple data fields together the hash of previous data field is used as the seed hash value of the next data field:

```
UInt32 uHash = 0;  
uHash = hash32( pVal0, nVal0, uHash );  
uHash = hash32( pVal1, nVal1, uHash );
```

The order that individual fields are hashed is extremely important since readers for this format should assert that the stored hash value matches the calculated hash value of the corresponding fields after reading in all the corresponding data. To this end each hash value stored within this recommendation's format carefully documents which fields it encompasses and the order in which they should be hashed.

13.7 Scene graph construction

The following guidelines apply for scenegraph construction:

1. use a Meta Data Node Element to denote a CAD “Assembly”,
2. use a Part Node Element to denote a CAD “part”.

Below is an example of a fully-fleshed out small assembly of a three-wheeled motorcycle:

Partition	(Partition Node Element)	Root node of JT file
MetaDataNode	(Meta Data Node Element)	“Three-wheeler” Top-level assembly
Instance	(Instance Node Element)	“Front wheel” assembly
Partition	(Partition Node Element)	External reference to JT file for “Wheel” part
PartNode	(Part Node Element)	“Wheel” generic part
RangeLOD	(Range LOD Node Element)	Level-of-detail node

Group	(Group Node Element)	High-LOD group node
TriStripSet	(Tri-Strip Set Shape LOD Element)	Rim geometry
TriStripSet	(Tri-Strip Set Shape LOD Element)	Tire geometry
TriStripSet	(Tri-Strip Set Shape LOD Element)	Low-LOD geometry
MetaDataNode	(Meta Data Node Element)	“Rear Axle” assembly
Instance	(Instance Node Element)	“Left rear wheel” assembly
[“Wheel” PartNode above]		This instance node’s child is same as the one above.
Instance	(6.1.1.4 Instance Node Element)	“Right rear wheel” assembly
[“Wheel” PartNode above]		This instance node’s child is same as the one above.

Instance Node Elements are used when referring to an *instanced* part but are not fundamentally different from a Group Node Element having only one child.

13.8 Metadata Conventions

Although there are not limits to what Meta Data (i.e. properties) may be attached to nodes in the LSG, the following conventions should be followed in industry when translating CAD data to the JT file format. See the Property Atom Elements section of this document for complete description of the file Elements used to attach this property information to nodes.

13.8.1 Property Key Naming Conventions

Properties in JT are named value pairs constructed of keys and values as defined in Property Proxy Meta Data Element. Properties are used to provide information to downstream applications and processes. In order to enable different applications to read and interpret properties correctly, a common understanding and treatment for naming of keys should be followed.

13.8.1.1 Uniqueness of Property Keys

No duplicate property keys are allowed in the same scene graph node.

It is allowed to create two properties with identical keys if one of them is defined as visible and the other as hidden as described below. This is possible since the visible state changes the property key string by appending a double colon.

This definition of duplicate properties using visible and hidden should be avoided.

13.8.1.2 Hidden Properties

Properties are used for a range of purposes in a JT file; some are relevant to visual interrogation by users and some not. To enable applications with the ability to differentiate properties a convention for naming key strings should be followed. The key string pattern that is used to denote the visibility of a property is a double colon (“:”). The double colon is appended to the end of the name in the property key as shown below.

“property” = “hidden”

“property:.” = “visible”

The objective of the “hidden” concept is to indicate to a viewing application that a user should not see the property in an application user interface.

For example:

The property with the key “Name:.” will list the value “body_4465” in a viewing application when property display is selected.

Property type="STRING" key="Name:." value="body_4465"

The property SUBNODE will not be listed by a viewing application.

Property type="STRING" key="SUBNODE" value="1"

Definition of key names with “:” included in the key name shall not affect visibility of that property when parsing of the JT data; i.e., “hidden” shall not be interpreted as “encrypted” or “secure” with respect to JT data.

13.8.1.3 Case-sensitivity of Property Keys

Property keys are case-sensitive; i.e. “ud_CAD_MASS” and “UD_CAD_MASS” are considered two separate properties.

13.8.1.4 Blanks (white spaces) in Property Keys

Property keys are strings, spaces are allowed. Converting blank spaces to underscores should not be followed as a convention or recommended practice.

13.8.1.5 Special Characters in Property Keys and Property Values

All strings in JT files, including property keys, are stored as Unicode (UCS-2) strings. As such, “special characters” supported by Unicode are allowed.

13.8.1.6 Maximum Length of Property Keys and Property Values

Since property keys are strings, the maximum length is theoretically 2^{31} (about 2.1 billion) bytes; i.e. 2^{30} characters. Keys this large should not be created. Applications writing or reading JT files have a significantly lower limit for the maximum property key length. The definition of overly large property keys may lead to data exchange issues.

13.8.1.7 Properties with an empty Value

Properties in JT are always <key, value>. Since blanks are valid values, the value can be an empty string. Such properties have to be handled properly by the consuming applications and shall not be ignored.

13.8.2 PMI Properties

See PMI Properties Annex for the full list of properties that can be found in JT parts that contain Generic PMI Entities.

Note: Implementers should use the descriptions found in PMI Manager Meta Data Element as opposed to working with PMI Data Segment.

13.8.3 CAD Properties

The CAD Properties table provides a description for properties that CAD data translators should follow when placing CAD information in a JT file as properties on various LSG nodes.

13.8.3.1 Required Properties

The CAD unit properties are required to properly interpret numeric data for analysis operations (e.g. measurement) and support the building of assemblies when reading JT files with disparate units.

The JT_PROP_MEASUREMENT_UNITS property is required to define model dimensions. It is relevant to the interpretation of geometrical values, such as coordinates of B-Rep and LOD data as well as certain properties. To avoid ambiguous interpretation, the property should appear only once per JT Part. If the property exists for two different nodes in the scene graph, the property of the lowest (last) node along a given path takes precedence.

By convention, the property JT_PROP_MEASUREMENT_UNITS is defined as a hidden property.

Table 80 — CAD Properties

JT Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values	Required / Optional
CAD_CENTER_OF_GRAVITY	Center of gravity of solids within part	String	F64	3 space separated numeric values	Optional See Note *
CAD_FORCE_UNITS	Defines the units for forces	String	MbString	MilliNewton Newton PoundForce	Optional
CAD_DENSITY	Density of solids within part	String	F64	numeric	Optional See Note *
CAD_MASS	Mass or weight of solids within part	String	F64	numeric	Optional See Note *
CAD_MASS_UNITS	Defines the Units of mass	String	MbString	micrograms milligrams grams kilograms ounces pounds	Required
CAD_MOMENT_OF_INERTIA	Moment of inertia value	String	F64	6 space separated numeric values ;xx,yy,zz,xy,xz,yz	Optional See Note *
CAD_PART_NAME	Component name from translator	String	MbString		Optional
CAD_PROP_MATERIAL_THICKNESS	Sheet thickness within part	String	F64	numeric	Optional
CAD_PROP_YOUNGS_MODULUS	Youngs Modulus value	String	F64	numeric	Optional
CAD_SOURCE	CAD program the Part originated from	String	MbString		Optional
CAD_SURFACE_AREA	Surface area of solids within part.	String	F64	numeric	Optional See Note *
CAD_VOLUME	Volume of solids within part	String	F64	numeric	Optional See Note *
JT_PROP_MEASUREMENT_UNITS	Defines the Model Units and is therefore relevant for the reading and interpretation of the Geometry and LOD data.	String	MbString	millimeters centimeters meters inches feet yards micrometers	Required See Note

JT Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values	Required / Optional
	<p>Note: Must be present as a hidden property using.</p> <p>If the property is in the scene graph twice on different nodes, then the definition that is the lowest (last along a specific path through the graph) takes precedence.</p>			decimeters kilometers mils miles	

Note * : These properties contain calculated values which are typically taken from the origin CAD system during conversion.

Note: CAD properties may appear with prefix “UD_”. These values are specified by the JT content harmonization group in order to allow users to pass user defined values independent on some CAD measurements.


Note: ISO 14306 Ed 1 states the JT_PROP_MEASUREMENT_UNIT property value is in lowercase. It may occur that the property is given in mixed case, upper case for the first letter. In this situation, some tools might interpret the JT_PROP_MEASUREMENT_UNITS property as unknown or not defined. Implementors should check for this property value with the first letter in both upper and lower case.


13.8.4 Tessellation Properties

The faceted graphical representations in JT are present as LODs. Three properties may be stored on Part Node Elements to indicate the tessellation tolerances used to generate each LOD. These properties are defined in the table Tessellation Property Values.

Note: Tessellation properties should be defined with the visible specifier included in their property key.

Table 81 — Tessellation Property values

JT Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values
Chordal	<p>Chordal deviation tessellation tolerance in MCS units for each LOD. The Measure of maximum allowable distance a linear approximation for a curve/surface may deviate from the true curve/surface.</p>  <p>A floating point value in the range [0.0,1.0] for relative interpretation, arbitrary range for absolute interpretation.</p>	MbString	space separated F32 values Number of values will be defined by the number of LODs	Numeric

JT Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values
Angular	<p>Angular tessellation tolerance for each LOD in degrees. Two consecutive segments in a linear approximation of a curve/surface form an angle; this value specifies the maximum angle allowed.</p>  <p>A floating point value in the range [0.0,90.0].</p>	MbString	space separated F32 values Number of values will be defined by the number of LODs	Numeric
SegLength	<p>The maximum absolute length of (tessellated) line segments in a curve approximation. A floating point value of arbitrary range</p>	MbString	F32	Numeric

13.8.5 Miscellaneous Properties

The below table documents some miscellaneous properties often placed on various nodes in the LSG to communicate specific information about the node or its contents.

Table 82 — Miscellaneous Property values

JT Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values
PMI_TYPE_TABLE	<p>May be attached to <u>Part Node Element</u> to indicate the list of PMI type values and associated names for all PMI types (basically equivalent to the Entity Type field documented in <u>Generic PMI Entities</u>). The string is a "." and "," delimited string of the following form:</p> <p>"10.Groove Weld,11.Fillet Weld,12.Plug/Slot Weld,14.Edge Weld"</p>	MbString	<string>	
JT_PROP_SHAPE_DATA_TYPE	<p>May be attached to <u>Shape Node Elements</u> to indicate what geometry type the shape data represents.</p>	MbString	<string>	"Surface" "Wire"
JT_PROP_ORIGINATING_BREPTYPE	<p>May be attached to <u>Part Node Element</u> to indicate the type of B-Rep associated with the Part.</p>	MbString	<string>	"None" "JtBrep" "XTBrep"




Figure 158 — Assembly node without SUBNODE

JT viewing systems by default do not display the trees structure for a node containing sub node definitions expanded.

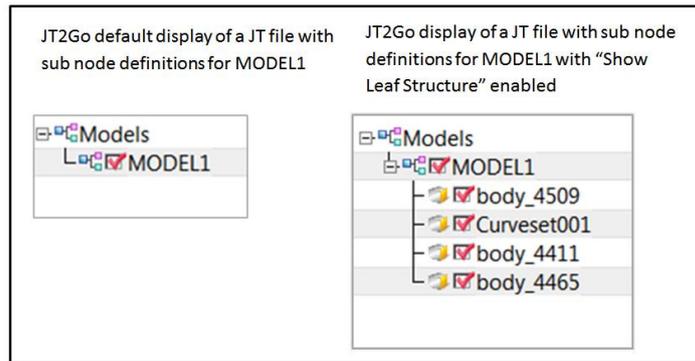


Figure 159 — Displaying Nodes that have SUBNODE properties

The node containing the SUBNODE property can be either a part node or an assembly node.

The value assigned to the SUBNODE property has no specific meaning. Implementers should set the value for the property to a string value of "1". Parts that contain the SUBNODE property must contain a string property with a name for the part.

Table 83 — SUBNODE Property

JT Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values
SUBNODE	Specifies the node as being a sub node of the parent assembly	MbString	<string>	0 or 1

13.8.6.1 Reference Sets and the Reference Set Property

Many CAD systems are able to create a modeled construct whereby a single CAD part can contain a user defined substructure of geometry and PMI. A CAD part constructed this way is said to have reference sets or reference geometry. In JT a CAD part constructed this way, by convention, is referred to as a CAD component.

A JT CAD component is a unique assembly structure whereby the top level part in the assembly is the CAD Component and the part(s) that make up the assembly are sub nodes. When this arrangement exists in a JT file the CAD Component is said to contain Reference Sets. Reference Set definitions are a JT convention made up of assembly nodes, part nodes and properties. The part or assembly nodes defined in the CAD Component assembly are the actual reference set definitions.

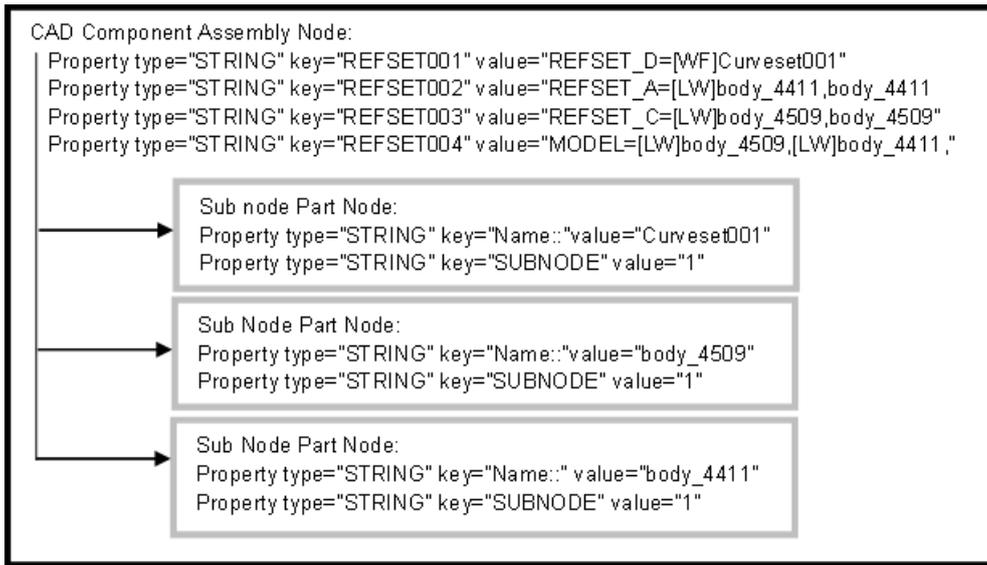


Figure 160 — CAD Component with Reference sets

This representation of the CAD Component structure is achieved through the use of the REFSET<XXX> property in the CAD Component part and the SUBNODE property in the parts that contain the reference set definitions.

The reference set property key has the form REFSETXXX with the XXX being a three digit incrementing number starting at 001. The numbers must be assigned concurrently. Up to 999 references set properties can be assigned for a CAD component. A reference set property is a comma delimited string of part names and hints. These parts can contain geometry such as solid bodies, wireframe or points that represent content relevant to the owning CAD component. To facilitate identification of the reference set content, hint strings can be combined with the part names. There are four reserved hint strings for reference sets; PMI, PT (point cloud), WF (wireframe) and LW (light weight, facet only).

Reference set encoding conventions

- Reference set names are not case sensitive
- The values = , and \ need to be escaped within the values of the property keys if they are in a part name or reference set name

The Reference Set Properties table provides a description of the Reference set property values.

Table 84 — Reference Set Properties

Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values
REFSETXXX	<p>Specifies the string of part names that are included in the reference set. The property value defines the reference set name that is displayed in viewing systems</p> <p>i.e.;</p> <pre>type="STRING" key="REFSET<XXX>" value="REFSET_A_D=[WF]<ref set name>,[LW]<ref set name>,[PT]<ref set name>,<ref set name>,[PMI]"</pre> <p>There are 3 reserved strings that can be added as prefixes to the JT part names included on the reference set string. They are;</p> <p>[PT] : precedes the referenced part name(s) that</p>	MbString	<string>	Comma delimited string of part names and hints

Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values
	<p>contain point cloud geometry</p> <p>[WF] : precedes the referenced part name(s) that contain wireframe geometry</p> <p>[LW] : precedes the referenced part name(s) that contain only facet geometry representations. B-Rep is not present.</p> <p>The reference hint string [PMI] is included without part names. When the [PMI] hint is included corresponding PMI entities with the JTTK_MULTICAD_REFSET property may exist. See table 2</p>			

The Properties table, related to the use of Reference Sets, provides a list of additional properties that assist applications with using and displaying reference sets.

Table 85 — Properties related to the use of Reference Sets

Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values
REFSET_META	<p>Contains a comma delimited list of aliased reference sets via the following convention; REFSET_META="alias_1=name_1,alias_2=name_2"</p> <p>An aliased reference sets is a reference set definition used to record a group of reference sets that crosses multiple CAD Components.</p>	MbString	<string>	Comma delimited string
JTTK_MULTICAD_REFSET	<p>This property must be set on the PMI.</p> <p>To have PMI visible within a reference it must have a JTTK_MULTICAD_REFSET property defined.</p> <p>The property is a string of Reference Set names that the PMI will be visible in. i.e. type="STRING" key="JTTK_MULTICAD_REFSET" value="<refset name>, <refset name>"</p>	MbString	<string>	Comma delimited string

The REFSET_CURRENT property is defined in instance nodes that are instances of a CAD Component. The property contains a string value that is the name of a reference set that exists in the CAD Component that has been instanced. Best practice is to use this property to determine the reference set that will become active if the model is set to the "as saved" state.

Table 86 — REFSET_CURRENT property

Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values
REFSET_CURRENT	Defines which reference set will be displayed in an instance node i.e. type="STRING" key="REFSET_CURRENT" value =<refset name>	MbString	<string>	Comma delimited string

13.9 LSG Attribute Accumulation Semantics

For applications producing or consuming JT format data, it is important that the JT format semantics of how attributes are meant to be applied and accumulated down the LSG are followed. If not followed, then consistency between the applications in terms of 3D positioning and rendering of LSG model data will not be achievable.

Although each attribute type defines its own application and accumulation LSG semantics (the details of which can be found in each attribute type sub-section under Attribute Elements), there are some general rules which apply:

Attributes at lower level in the LSG take precedence and replace or accumulate with attributes set at higher levels. When multiple Attributes of the same type are present on a Node, they accumulate in the order they are specified (i.e. from the front of the Attribute list toward the back).

Nodes with no associated attributes inherit those of their parents.

Attributes are inherited only from a node's parents. Thus a given node's attributes do not affect those on the node's siblings.

The root of a partition inherits the attributes in effect at the referring partition node.

Attributes can be marked "final", which terminates accumulation of that attribute type at that marked attribute and propagates the accumulated value at that point to all descendants of the associated node. Descendants can override a "final" attribute using the "force" flag. Note that "force" does not turn OFF "final" – it is simply a one-shot override of "final" for the specific attribute marked as "forcing." Multiple attributes of the same type may be marked as "forcing" and in this case, the last one wins. Both of these flags are OFF by default. An analogy for this "force" and "final" interaction is that "final" is a back-door in the attribute accumulation semantics and that "force" is the doggy-door in the back-door!

13.10 LSG Part Structure

The JT Format Reference does not mandate that a particular node hierarchy be used for modeling physical Parts within a LSG structure. In fact there are many node hierarchies for representing Parts in LSG that will function correctly in most JT enabled applications. Still, there is a convention that most JT translators follow (and some JT enabled applications may assume exists) for modeling Parts within a LSG. The convention is to model each Part within a LSG structure with the following node hierarchy:

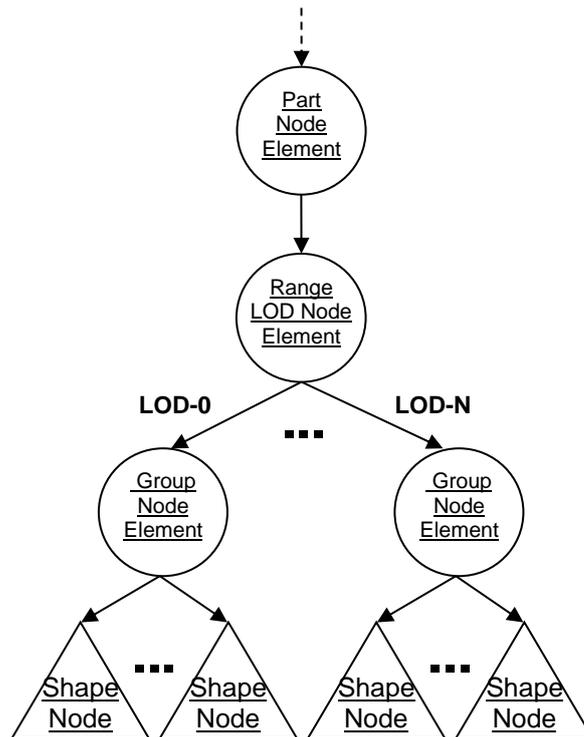


Figure 161 — JT Format Convention for Modeling each Part in LSG

13.11 Range LOD Node Alternative Rep Selection

Best practices suggest that LSG traversers apply the following strategy, at Range LOD Nodes (see Range LOD Node Element), when making alternative representation selection decisions based on Range Limits: The first alternate representation is valid when the world coordinate distance between the centre and the eye point is less than or equal to the first range limit (and when no range limits are specified). The second alternate representation is valid when the distance is greater than the first limit and less than or equal to the second limit, and so on. The last alternate representation is valid for all distances greater than the last specified limit.

13.12 B-Rep Face Group Associations

The original purpose of the face group concept was to provide associativity between B-Rep faces and geometry. Exactly how a B-Rep face associates to a face group number is the topic of this section. An implicit scheme has been chosen for face group associativity, rather than storing some kind of explicit data on either the Vertex Shape LOD Data or the B-Rep. The primary motivation for this implicit scheme is to keep the JT files simple and small; additional association information would not only be redundant, but also wasteful. Tessellators shall exercise this policy when producing Vertex Shape LOD Data from B-Reps, grouping the triangles into face groups according to its rules. Tristrips may not cross face groups. Applications shall be able to count on this policy so that, for example, they can map a picking action back to its corresponding B-Rep face reliably.

JT B-Rep/ULP: In the case of JT B-Rep and ULP reps, the mapping is simple. These Reps have a consistent sequential index origin-0 numbering scheme for their regions, shells, and faces. So the B-Rep faces are simply assigned sequentially to face group by increasing region and shell. For example, suppose we have a JT B-Rep with 2 regions, each with 2 shells, each with 2 faces.

The Face Group ⇔ Region/Shell/Face mapping will be as follows:

FG0 ⇔ R0 S0 F0
 FG1 ⇔ R0 S0 F1
 FG2 ⇔ R0 S1 F0
 FG3 ⇔ R0 S1 F1
 FG4 ⇔ R1 S0 F0
 FG5 ⇔ R1 S0 F1
 FG6 ⇔ R1 S1 F0
 FG7 ⇔ R1 S1 F1

XT B-Rep: In the case of XT B-Rep, the mapping is based on an identifier of each XT face that is persisted on disk. The identifier is unique within each XT body, but it is not an index. XT B-Rep maintains a zero-based contiguous index of XT face based on increasing identifier value within the same XT body. In the case when multiple bodies are present in XT B-Rep, face index is assigned sequentially by increasing XT body index. For example, suppose we have a XT B-Rep with 2 bodies, each with 2 faces, then the Face Group to Body/Face mapping will be as follows:

FG0 ⇔ B0 F0
 FG1 ⇔ B0 F1
 FG2 ⇔ B1 F0
 FG3 ⇔ B1 F1

13.13 Watermark Image

A watermark image can be added to a JT file as a texture. Textures are stored as Attribute Elements in JT. Attribute Elements are placed in the Logical Scene Graph (LSG) as objects associated with nodes. For more information on Attribute Elements, see Attribute Elements.

Use of a JT texture to represent a watermark is implementation de-pendent. When a texture contains specific properties, an application shall display the texture image on top of any other graphics, effectively displaying it as a watermark.

This implementation requires properties that follow a defined convention. These properties alert the application that the texture information should be displayed in a unique way and at which locations on the display screen the texture should appear. Properties on textures are defined as Property Atom Elements. These properties are meta-data objects associated with attributes. Each attribute element in an LSG may hold zero or more property atom elements.

Table 87 — Texture watermark properties

Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values
WATERMARK / Watermark (*)	Alerts to the application that the texture containing this property is meant to be displayed as a watermark	String	MbString	Watermark
LOCATION / Location (*)	Defines a region on the display for the watermark to appear top left = 1, top center = 2, top right = 3, mid left = 4, mid center = 5, mid right = 6, bottom left = 7, bottom center = 8, bottom_right = 9	Integer	Integer	1-9

Property Key	Meaning	JT File Data Type	Encoded Data Type	Valid Values
Y_DPI	DPI for the output image in Y direction	Float	F32 value	
X_DPI	DPI for the output image in X direction	Float	F32 value	

(*) Property key may appear in upper case or camel style.

13.14 State Flags

State Flags are defined within the Base Property Atom Element definition this way;

State Flags are a collection of flags. The flags are combined using the binary OR operator and store various state information for property atoms. Bits 0 – 7 are freely available for an application to store whatever property atom information desired. All other bits are reserved for future expansion of the file format.

Tests have shown that there are problems with interoperability when Bits 0-7 are freely used. State Flags bits 0-7 shall be defaulted to 0x40000000.

Annex A Object Type Identifiers

All objects stored in a JT file are classified by type and thus include an object type identifier as part of their persisted data. The data format for these Object Type identifiers is a GUID. These Object Type identifiers are consistent for all objects, of a particular type.

Table A 1: Object Type Identifiers

GUID	Object Type
0xffffffff, 0xffff, 0xffff, 0xff, 0xff, 0xff, 0xff, 0xff, 0xff, 0xff, 0xff	Identifier to signal End-Of-Elements.
Types Stored Within LSG Segment (Segment Type = 1)	
0x10dd1035, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Base Node Element
0x10dd101b, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Group Node Element
0x10dd102a, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Instance Node Element
0x10dd102c, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	LOD Node Element
0xce357245, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1	Meta Data Node Element
0xd239e7b6, 0xdd77, 0x4289, 0xa0, 0x7d, 0xb0, 0xee, 0x79, 0xf7, 0x94, 0x94	NULL Shape Node Element
0xce357244, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1	Part Node Element
0x10dd103e, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Partition Node Element
0x10dd104c, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Range LOD Node Element
0x10dd10f3, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Switch Node Element
0x10dd1059, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Base Shape Node Element
0x98134716, 0x0010, 0x0818, 0x19, 0x98, 0x08, 0x00, 0x09, 0x83, 0x5d, 0x5a	Point Set Shape Node Element
0x10dd1048, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Polygon Set Shape Node Element
0x10dd1046, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Polyline Set Shape Node Element
0xe40373c1, 0x1ad9, 0x11d3, 0x9d, 0xaf, 0x0, 0xa0, 0xc9, 0xc7, 0xdd, 0xc2	Primitive Set Shape Node Element
0x10dd1077, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Tri-Strip Set Shape Node Element
0x10dd107f, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Vertex Shape Node Element
0x10dd1001, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Base Attribute Data
0x10dd1014, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Draw Style Attribute Element
0x10dd1083, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Geometric Transform Attribute Element

GUID	Object Type
0x10dd1028, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Infinite Light Attribute Element
0x10dd1096, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Light Set Attribute Element
0x10dd10c4, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Linestyle Attribute Element
0x10dd1030, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Material Attribute Element
0x10dd1045, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Point Light Attribute Element
0x8d57c010, 0xe5cb, 0x11d4, 0x84, 0xe, 0x00, 0xa0, 0xd2, 0x18, 0x2f, 0x9d	Pointstyle Attribute Element
0x10dd1073, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Texture Image Attribute Element
0xaa1b831d, 0x6e47, 0x4fee, 0xa8, 0x65, 0xcd, 0x7e, 0x1f, 0x2f, 0x39, 0xdc	Texture Coordinate Generator Attribute Element
0x10dd1106, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	PaletteMap Attribute Element
0xa3cfb921, 0xbdeb, 0x48d7, 0xb3, 0x96, 0x8b, 0x8d, 0xe, 0xf4, 0x85, 0xa0	Mapping Plane Element
0x3e70739d, 0x8cb0, 0x41ef, 0x84, 0x5c, 0xa1, 0x98, 0xd4, 0x0, 0x3b, 0x3f	Mapping Cylinder Element
0x72475fd1, 0x2823, 0x4219, 0xa0, 0x6c, 0xd9, 0xe6, 0xe3, 0x9a, 0x45, 0xc1	Mapping Sphere Element
0x92f5b094, 0x6499, 0x4d2d, 0x92, 0xaa, 0x60, 0xd0, 0x5a, 0x44, 0x32, 0xcf	Mapping TriPlanar Element
0x10dd104b, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Base Property Atom Element
0xce357246, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1	Date Property Atom Element
0x10dd102b, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Integer Property Atom Element
0x10dd1019, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Floating Point Property Atom Element
0xe0b05be5, 0xfbbd, 0x11d1, 0xa3, 0xa7, 0x00, 0xaa, 0x00, 0xd1, 0x09, 0x54	Late Loaded Property Atom Element
0x10dd1004, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	JT Object Reference Property Atom Element
0x10dd106e, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	String Property Atom Element
Types Stored Within JT B-Rep Segment (Segment Type = 2)	
0x873a70c0, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	JT B-Rep Element
Types Stored Within Meta Data Segment (Segment Type = 4)	
0xce357249, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1	PMI Manager Meta Data Element
0xce357247, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1	Property Proxy Meta Data Element
Types Stored Within Shape LOD Segment (Segment Type = 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16)	
0x3e637aed, 0x2a89, 0x41f8, 0xa9, 0xfd, 0x55, 0x37, 0x37, 0x3, 0x96, 0x82	Null Shape LOD Element
0x98134716, 0x0011, 0x0818, 0x19, 0x98, 0x08, 0x00, 0x09,	Point Set Shape LOD Element

GUID	Object Type
0x83, 0x5d, 0x5a	
0x10dd10a1, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Polyline Set Shape LOD Element
0xe40373c2, 0x1ad9, 0x11d3, 0x9d, 0xaf, 0x0, 0xa0, 0xc9, 0xc7, 0xdd, 0xc2	Primitive Set Shape Element
0x10dd10ab, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Tri-Strip Set Shape LOD Element
0x10dd109f, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Polygon Set LOD Element
0x10dd10b0, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Vertex Shape LOD Element
Types Stored Within XT B-Rep Segment (Segment Type = 17)	
0x873a70e0, 0x2ac9, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	XT B-Rep Element
Types Stored Within Wireframe Segment (Segment Type = 18)	
0x873a70d0, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97	Wireframe Rep Element
0xf338a4af, 0xd7d2, 0x41c5, 0xbc, 0xf2, 0xc5, 0x5a, 0x88, 0xb2, 0x1e, 0x73	JT ULP Element
Types Stored Within JT LWPA Segment (Segment Type = 24)	
0xd67f8ea8, 0xf524, 0x4879, 0x92, 0x8c, 0x4c, 0x3a, 0x56, 0x1f, 0xb9, 0x3a	JT LWPA Element
Type Stored Within Info Segment (Segment Type = 31)	
0x84c2112a, 0x0001, 0x11e7, 0x80, 0x00, 0xa4, 0x24, 0x9a, 0x27, 0x47, 0x70	JT Info Element
Type Stored Within STT (Segment Type = 32)	
0xca7e6f89, 0x97c8, 0x47f0, 0x9f, 0xca, 0x16, 0x99, 0xc, 0xfb, 0xe2, 0x17	JT STT Element
Type Stored Within STEP-B-Rep Segment (Segment Type = 33)	
0x869c7d53, 0xccb0, 0x451b, 0xb2, 0x3, 0xd1, 0x42, 0x81, 0x56, 0x14, 0x56	STEP B-Rep Element

Annex B

STEP B-Rep

STEP B-Rep Segment contains an Element that defines the precise geometric Boundary Representation data for a particular Part in STEP boundary representation format (ISO 10303-42).

STEP B-Rep Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element). The STEP B-Rep Segment type supports compression methods described in on all element data. The main component of the STEP B-Rep segment is an ISO 10303-21 file with the compression options as defined by the compression flag in Compression Flag Data for the data segments.

B.1 STEP B-Rep Element

Object Type ID: 0x869c7d53, 0xccb0, 0x451b, 0xb2, 0x3, 0xd1, 0x42, 0x81, 0x56, 0x14, 0x56

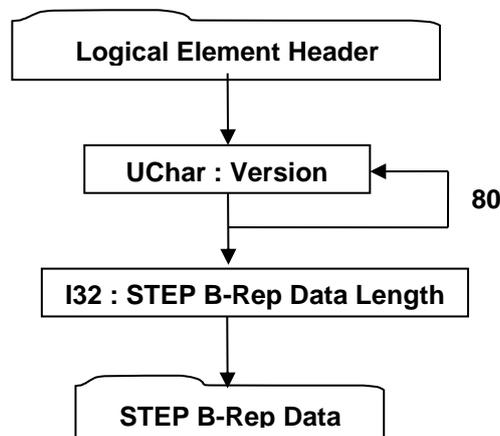


Figure B 1: — STEP B-Rep Element data collection

Logical Element Header

Complete description for Logical Element Header Compressed can be found in the File Header section of Base Format Description under Data Segment, Data

UChar: Version

An 80-character version string defining the version of the file format used to write this file. The Version string is based on the ISO 10303-21 schema_name format:

EXAMPLE {1 0 10303 243 1 1 1}'

I32: STEP B-Rep Data Length

STEP B-Rep Data Length specifies the length in bytes of the STEP B-Rep Data.

B.1.1 STEP B-Rep Data

The STEP B –Rep collection specifies the raw stream of ASCII characters used to represent a Part's STEP B- Rep Body(s) in ISO 10303-21 format based on the iso_14306_schema schema.

The detailed description of all entities is available in ISO 10303-42:2014, Industrial automation systems and integration -- Product data representation and exchange -- Part 42: Integrated generic resource: Geometric and topological representation.

B.1.2 STEP schema

The iso_14306_schema schema describes the data model of the STEP B-Rep for JTIAP Edition 3. The complete schema is available on the ISO website: https://standards.iso.org/iso/14306/ed-2/en/iso_14306_schema.exp.

B.1.3 STEP format

The file format shall be encoded according to the syntax and EXPRESS language mapping defined in ISO 10303-21 and to the MIM schema specified in Annex C Computer interpretable listing.

The FILE_SCHEMA element of the header shall specify the name of the EXPRESS schema used and include its object information identifier.

EXAMPLE The instance below identifies the iso_14306_schema extended schema:

```
FILE_SCHEMA (('ISO_14306_SCHEMA {1 0 10303 243 1 1 1}))
```

B.1.4 STEP external element reference in ISO 10303-21

ISO 10303-21 ed3 provide anchor and reference sections to allow entities and values to be defined in external files.

Anchor section structure

The anchor section defines external names for instances in the exchange structure so that they can be referenced.

The anchor section is optional. If an anchor section is included in the exchange structure then it shall be given after the header section and before any reference, data or signature section. The section shall begin with the special token "ANCHOR;" and shall terminate with the special token "ENDSEC;".

Each entry in the anchor section shall define one external name. The anchor name shall not be used for any other anchor in the same exchange structure. The anchor name shall meet the requirements defined in clause 6.5.4.

EXAMPLE

Anchor section structure	Comment
ANCHOR;	
.	
<first> = #10;	/* Anchor defined by an entity instance name */
<second> = @20;	/* Anchor defined by a value instance name */
<third> = 30;	/* Anchor defined by a simple data type */
<fourth> = \$;	/* Anchor defined by a null_value */
<fifth> = (1.1, 2.1, 3.1);	/* Anchor defined by a list */
<sixth> = <picture.jpg>;	/* Anchor defined by a resource */
<seventh> = #INCH;	/* Anchor defined by an EXPRESS constant */
<eighth> = #10 {ratio:196.73};	/* Anchor with a tag */
.	
ENDSEC;	

Detail specifications and descriptions of the anchor section are available in ISO 10303-21 ed3

Reference section structure

The reference section is optional. If a reference section is included in the exchange structure then it shall be given after the header section and any anchor section and before any data section or signature section. The section shall begin with the special token "REFERENCE;" and shall terminate with the special token "ENDSEC;".

Each entry in the reference section shall associate an LHS_OCCURRENCE_NAME with a RESOURCE. If the occurrence name is an ENTITY_INSTANCE_NAME then the resource shall

identify an entity. If the occurrence name is a VALUE_INSTANCE_NAME then the resource shall identify a value.

Each occurrence name shall have one association only and it shall not be defined in the data sections of the exchange structure.

EXAMPLE

Reference section structure

Comment

REFERENCE;

.

#10 = <http://www.giant.com/product.stp#shape>;	/* Reference to a URI with fragment identifier */
#20 = <building_698.ifc>;	/* Reference to a URI without fragment identifier */
#30 = <#wheel>;	/* Reference to a fragment identifier defined in same file */
#40 = <http://www.giant.com/product.jt#shape>;	/* Reference to a file in another format */
#50 = <http://www.giant.com/product.stp#entity>;	/* Reference to an entity instance */
@60 = <http://www.giant.com/product.stp#value>;	/* Reference to a value */
#50 = <http://www.giant.com/product.stp#100>;	/* Reference using entity instance name */
@50 = <http://www.giant.com/product.stp#100>;	/* Reference using value instance name */

.
ENDSEC;

Detail specifications and descriptions of the reference section are available in ISO 10303-21 ed3

Annex C

STEP schema

Reference link to the EXPRESS schema file on the ISO website:
https://standards.iso.org/iso/14306/ed-2/en/iso_14306_schema.exp

Reference parts:

ISO 10303-41:2014, Industrial automation systems and integration -- Product data representation and exchange -- Part 41: Integrated generic resource: Fundamentals of product description and support.

ISO 10303-42:2014, Industrial automation systems and integration -- Product data representation and exchange -- Part 42: Integrated generic resource: geometric and topological representation.

ISO 10303-43:2011, Industrial automation systems and integration -- Product data representation and exchange -- Part 43: Integrated generic resource: Representation structures.

ISO 10303-44:2014, Industrial automation systems and integration -- Product data representation and exchange -- Part 44: Integrated generic resource: Product structure configuration.

Annex D

Coding Algorithms – An Implementation

This Appendix provides a sample C++ implementation for the encoding and decoding portion of the various compression CODECs used in the JT format. This sample code is not intended to be fully functional encoder/decoder class implementations, but is instead intended to demonstrate the fundamentals of implementing the encoding/decoding portion of the CODEC algorithms used in the JT format.

D.1 Common classes

The following sub-sections define some general classes used by all the coding algorithms.

D.1.1 CntxEntryBase class

```
//  
// Type used to build probability context tables.  
// Used by ProbabilityContext class.  
//  
class CntxEntryBase  
{  
public:  
  
    // ----- Housekeeping -----  
    CntxEntryBase() : _bIsEscape(false), _cCount(-1), _cCumCount(-1) {};  
    CntxEntryBase(Bool bIsEsc, Int32 cCount)  
        : _bIsEscape(bIsEsc), _cCount(cCount), _cCumCount(-1) {};  
    CntxEntryBase(const CntxEntryBase &rhs) { *this = rhs; }  
    ~CntxEntryBase() {};  
    CntxEntryBase &operator=(const CntxEntryBase &rhs)  
    {  
        _bIsEscape = rhs._bIsEscape;  
        _cCount = rhs._cCount;  
        _cCumCount = rhs._cCumCount;  
        return *this;  
    }  
  
    // ----- Operations Interface -----  
    Bool isEscape() const  
    { return _bIsEscape; }  
    Int32 operator==(const CntxEntryBase2 &rhs) const  
    { return (_iSym == rhs._iSym); }  
  
public:  
  
    // ----- Member Variables -----  
    Int32 _cCount; // Number of occurrences  
    Int32 _cCumCount; // Cumulative number of occurrences  
    Bool _bIsEscape; // True if this symbol is the escape symbol  
};  
  
template <class ValueType>  
class CntxEntry : public CntxEntryBase  
{  
public:  
  
    // ----- Housekeeping -----  
    CntxEntry() : CntxEntryBase(), _val(ValueType()) {};  
  
    CntxEntry( Bool bIsEsc, Int32 cCount, const ValueType &val ) :  
        CntxEntryBase(bIsEsc, cCount), _val(val) {};
```

```

  CntxEntry( const CntxEntry &rhs ) { *this = rhs; }
  ~CntxEntry() {};
  CntxEntry &operator=(const CntxEntry &rhs)
  {
    _val = rhs._val;
    CntxEntryBase::operator= (rhs);
    return *this;
  }
  Int32 operator==(const CntxEntry &rhs) const
  { return (_iSym == rhs._iSym); };

public:

  // ----- Member Variables -----
  ValueType      _val;      // Associated value
};

```

D.1.2 ProbContext class

```

//
// Type used to build probability context tables.
// Used by CodecDriver class.
//
template <class ValueType>
class ProbContext
{
public:
  typedef CntxEntry< ValueType > CntxEntryV;

  // ----- Housekeeping -----
  ProbContext();
  ProbContext(const ProbContext &rhs);
  ~ProbContext();
  ProbContext &operator=(const ProbContext &rhs);
  Bool operator==(const ProbContext &rhs) const;
  enum { cMaxCntxCount = 8192 };

  // ----- Accessor Interface -----
  Int32 totalCount() const
  { return _cTotalCount; }
  Int32 numEntries() const
  { return _vEntries.length(); }
  Bool getEntry(Int32 iEntry, const CntxEntryBase *&rpEntry) const
  { const CntxEntryV *aEntries = _vEntries.ptr();
    rpEntry = &aEntries[iEntry]; return True; }
  Bool getEntryV(Int32 iEntry, const CntxEntryV *&rpEntry) const
  { const CntxEntryV *aEntries = _vEntries.ptr();
    rpEntry = &aEntries[iEntry]; return True; }
  Bool getEntryV(Int32 iEntry, CntxEntryV *&rpEntry)
  { CntxEntryV *aEntries = _vEntries.ptr();
    rpEntry = &aEntries[iEntry]; return True; }

  // ----- Lookup Interface -----
  Bool lookupValue(const ValueType &rValue, const CntxEntryV *&opCntxEntry)
const;
  Bool lookupEntryByCumCount(Int32 iCount, const CntxEntryV *&opCntxEntry) const;

  // ----- Reorganizing Interface -----
  Bool accumulateCounts();
  Bool sortByValue();

protected:
  Vec< CntxEntryV >  _vEntries;
  Int32              _cTotalCount;
  Int32              _iEscPosCache;
};

```

```
static int _compareCounts(const void *pVal1,
                          const void *pVal2,
                          const void *uData);
};

template <class ValueType>
Bool ProbContext::lookupValue( const ValueType &rValue,
                              const CntxEntryV *opCntxEntry ) const
{
    // If we do not find the value, then return NULL for the entry
    opCntxEntry = NULL;

    // If the escape position is not cached, sort the context by value
    // and then set it. Then, we can binary search for values. We do
    // this because translateValuesToSymbols() will call this method in
    // a tight loop. Anything is better than linear search!
    ProbContext *pThis = (ProbContext*) this;
    CntxEntryV *pEntries = pThis->_vEntries.ptr();
    Int32 nEntries = _vEntries.length();
    if ( _iEscPosCache == -1 ) {
        // Search for the escape symbol
        Bool bFoundEsc = False;
        for ( Int32 i = 0 ; i < nEntries ; i++ ) {
            if ( pEntries[i].isEscape() ) {
                // Move the escape symbol to context slot 0
                ::swap(pEntries[0], pEntries[i]);
                bFoundEsc = True;
                break;
            }
        }
        // Sort by value
        if ( bFoundEsc ) {
            // Sort by value _except_ leave the escape symbol in slot 0
            ::sort(&pEntries[1], nEntries-1, FtorCntxValue<ValueType>());
            pThis->accumulateCounts();
            pThis->_iEscPosCache = 0;
        }
        else {
            pThis->sortByValue();
            pThis->_iEscPosCache = -2;
        }
    }

    // Binary search for rValue!
    Int32 l = ( _iEscPosCache == 0 ),
        h = nEntries - 1,
        m;
    while ( l <= h ) {
        m = ( l + h ) >> 1;
        if ( pEntries[m]._val == rValue ) {
            opCntxEntry = &pEntries[m];
            return True;
        }
        else if ( pEntries[m]._val < rValue )
            l = m + 1;
        else
            h = m - 1;
    }

    // If we don't find the value, then we return the position of
    // the escape symbol.
    if ( _iEscPosCache >= 0 )
        opCntxEntry = &pEntries[_iEscPosCache];

    return True;
}
```

```
template <class ValueType>
Bool ProbContext2::lookupEntryByCumCount( Int32 iCount, const CntxEntryV
*&opCntxEntry ) const
{
    const CntxEntryV *aEntries = _vEntries.ptr();
    const Int32      nEntries = _vEntries.length();

    const Int32      seqSearchLen = 4;
    Int32 ii=0;
    opCntxEntry = NULL;

    // For short lists, do sequential search
    if ( nEntries <= (seqSearchLen*2) ) {
        ii = 0;
        while ((iCount>=(aEntries[ii]._cCumCount + aEntries[ii]._cCount)) &&
            (ii<nEntries))
        {
            ii++;
        }

        if ( ii >= nEntries ) {
            Assert( 0 && "Bad probability table" );
        }
        opCntxEntry = &aEntries[ii];
    }

    // For long lists, do a short sequential searches through most likely
    // elements, then do a binary search through the rest.
    else {
        for (ii=0; ii<seqSearchLen; ii++) {
            if (iCount < (aEntries[ii]._cCumCount + aEntries[ii]._cCount)) {
                opCntxEntry = &aEntries[ii];
                return True;
            }
        }

        Int32 low=ii, high=nEntries-1, mid;
        while(1) {
            if ( high < low ) {
                break;
            }
            mid = low + ((high-low)>>1);

            if ( iCount < aEntries[mid]._cCumCount ) {
                high = mid-1;
                continue;
            }
            if ( iCount >= (aEntries[mid]._cCumCount + aEntries[mid]._cCount) ) {
                low = mid+1;
                continue;
            }

            opCntxEntry = &aEntries[mid];
            return True;
        }
        Assert( 0 && "Bad probability table" );
    }

    return True;
}

template <class ValueType>
Bool ProbContext2::accumulateCounts()
{
    // Check for zero length context
    CntxEntryV *aEntries = _vEntries.ptr();
```

```

    Int32      nEntries = _vEntries.length();
    if ( nEntries == 0 ) {
        _cTotalCount = 0;
        return True;
    }

    // Accumulate counts in _cCumCount for entries 1 and higher
    aEntries[0]._cCumCount = 0;
    Int32 ii;
    for ( ii=1 ; ii<nEntries ; ii++ ) {
        aEntries[ii]._cCumCount = aEntries[ii-1]._cCount + aEntries[ii-1]._cCumCount;
    }

    // Set the total count for the context
    _cTotalCount = aEntries[ii-1]._cCount + aEntries[ii-1]._cCumCount;

    return True;
}

template <class ValueType>
struct FtorCntxValue
{
    Bool operator () (const CntxEntry<ValueType>& l, const CntxEntry<ValueType>& r)
    const
    { return (l._val < r._val); }
};

template <class ValueType>
Bool ProbContext2::sortByValue()
{
    // Sort the entries in order of values from smallest to largest
    ProbContextV *pThis = (ProbContextV*) this;
    sort( _vEntries.ptr(), (size_t)_vEntries.length(), FtorCntxValue<ValueType>() );

    pThis->_iEscPosCache = -1;
    pThis->accumulateCounts();

    return True;
}

```

D.1.3 CodecDriver class

```

//
// A class that deals with the conversions from SYMBOL to VALUE and
// provides end-consumer APIs for using the codecs.
//
template <class ValueType>
class CodecDriver
{
public:

    // ----- Internal Types -----
    typedef enum {
        CodecNull          = 0,    // Null Codec
        CodecBitLength     = 1,    // Bitlength Codec
        CodecArithmetic    = 3,    // Arightmetic Codec
        CodecChopper       = 4,    // Chopper Pseudo-codec
        CodecMTF           = 5,    // Move-to-front Pseudo-codec
    } CodecType;
    // Type of value predictor
    typedef enum {
        PredLag1          = 0,    // Predicts as last values
        PredXor1          = 1,    // Predict as last, but use xor instead of subtract
    }

```

```

        PredNULL      = 2, // No prediction.
    } PredictorType;

    static Bool unpackResiduals(const Veci      &rvResidual,
                               Veci          &rvVals,
                               PredictorType  ePredType);
    static Bool unpackResiduals(const Vecu      &rvResidual,
                               Vecu          &rvVals,
                               PredictorType  ePredType);

    static Float64 log2( Float64 x ) { return (log(x) / 0.6931471805599453); }

    //////////////////////////////////////
    // Convenience Methods
    //////////////////////////////////////

protected:
    static Int32 _predictValue( const Int32 *vVal, Int32 iIndex,
                               PredictorType ePredType );
};

Bool CodecDriver::unpackResiduals( const Veci      &rvResidual,
                                   Veci          &rvVals,
                                   PredictorType  ePredType )
{
    const Int32 len = rvResidual.length();
    Int32 iPredicted;
    rvVals.setLength(len);
    Int32 *aVals = rvVals.ptr();
    const Int32 *aResidual = rvResidual.ptr();
    for ( Int32 i = 0 ; i < len ; i++ ) {
        if ( i < 4 ) {
            // The first four values are just primers
            aVals[i] = aResidual[i];
        } else {
            // Get a predicted value
            iPredicted = _predictValue(rvVals.ptr(), i, ePredType);

            if ( ePredType == PredXor1 ) {
                // Encode the residual as the current value XOR predicted
                aVals[i] = aResidual[i] ^ iPredicted;
            } else {
                // Encode the residual as the current value plus predicted
                aVals[i] = aResidual[i] + iPredicted;
            }
        }
    }

    return True;
}

Bool
CodecDriver2::unpackResiduals( const Vecu      &rvResidual,
                               Vecu          &rvVals,
                               PredictorType  ePredType )
{
    return unpackResiduals(*((const Veci*)&rvResidual),
                           *((Veci*) &rvVals),
                           ePredType);
}

Int32
CodecDriver2::_predictValue( const Int32*  paVals,
                            Int32        iIndex,
                            PredictorType  ePredType )
{
    Int32 iPredicted = 0;

```

```

switch (ePredType) {

    default:
    case PredLag1:      // Predicts as last value
    case PredXor1:     // Predicts as last value
        iPredicted = paVals[iIndex-1];
        break;
}

return iPredicted;
}

```

D.2 Bitlength decoding class

The following sub-section contains a sample implementation of the decoding portion of the Bitlength CODEC algorithm. A summary technical explanation of the Bitlength CODEC can be found in Bitlength CODEC description.

D.2.1 BitLengthCodec class

```

template <class ValueType>
class BitLengthCodec : public Codec<ValueType>
{
public:
    typedef Vec< ValueType >          VecValue;
    typedef ProbContext< ValueType >  ProbContextV;
    typedef CodecDataCntx< ValueType > CodecDataCntxV;

    Bool encode( const VecValue &vValues,
                 VecValue      &ovOOBValues,
                 Vecu          &ovCodeText,
                 Int32         &onBitsCodeText,
                 ProbContextV  *pProbCntx      );

    Bool decode( Int32         nValues,
                 VecValue     &ovOOBValues,
                 const Vecu   &vCodeText,
                 Int32        nBitsCodeText,
                 VecValue     &ovValues,
                 ProbContextV *pProbCntx      );

protected:
    Int32 _nBitsInSymbol(Int32 iSymbol) const;
    Bool getNextCodeText (UInt32 &uCodeText, Int32 &nBits);

    Vecu   *_pvCodeText;
    Int32  *_pcCodeTextLen;
    Int32  _iCurCodeText;
    Vecus  _vnValBits;
};

template <class ValueType> void
BitLengthCodec3T<ValueType>::GetSignedBits(Int32 &iOut, UInt32 n)
{
    GetUnsignedBits(*(UInt32*)&iOut, n);
    iOut <<= (32 - n);
    iOut >>= (32 - n);
}

template <class ValueType> void
BitLengthCodec3T<ValueType>::GetUnsignedBits(UInt32 &uOut, UInt32 n)
{
    if (n == 0) uOut = 0;
    else if (_nValBits >= n) {
        uOut = _uVal >> (32 - n);
        _uVal <<= n;
        _uVal &= (n==32)-1;
    }
}

```

```
        _nValBits -= n;
        _nBits    += n;
    }
    else {
        Int32 _nLBits = _nValBits;
        uOut = _uVal >> (32 - n);
        _nBits    += _nLBits;
        getNextCodeText (_uVal, _nValBits);
        Int32 _nRBits = (n - _nLBits);
        uOut |= _uVal >> (32 - _nRBits);
        _uVal    <<= _nRBits;
        _uVal &= (_nRBits==32)-1;
        _nValBits -= _nRBits;
        _nBits    += _nRBits;
    }
}

template <class ValueType> void
BitLengthCodec3T<ValueType>::GetUnsignedBits(UInt64 &ulOut, UInt32 n)
{
    UInt32 low32 = 0, high32 = 0;
    GetUnsignedBits(low32, ::min(n, (UInt32)32));
    GetUnsignedBits(high32, ::max((Int32)n-32, (Int32)0));
    UInt64 ulHigh32 = high32;
    ulHigh32 <<= 32;
    ulOut = ulHigh32 | low32;
}

template <class ValueType> void
BitLengthCodec3T<ValueType>::GetSignedBits(Int64 &lOut, UInt32 n)
{
    GetUnsignedBits(*(UInt64*)&lOut, n);
    lOut <<= (64 - n);
    lOut >>= (64 - n);
}

template <class ValueType> void
BitLengthCodec3T<ValueType>::nibblerEmit(UInt32 iVal)
{
    return _nibblerEmit(iVal, ::bitsize(iVal));
}

template <class ValueType> void
BitLengthCodec3T<ValueType>::nibblerEmit(Int32 iVal)
{
    return _nibblerEmit(*(const UInt32*)&(iVal), ::bitsize(iVal));
}

template <class ValueType> void
BitLengthCodec3T<ValueType>::_nibblerEmit(UInt32 uVal, UInt32 nBits)
{
    //uVal &= ((1 << nBits) - 1);    // Eliminate any upper bits
    while (nBits > 0) {
        addCodeText(uVal, cNibbleWidth);
        UInt32 n = min(UInt32(cNibbleWidth), nBits);
        uVal >>= n;
        nBits -= n;
        addCodeText((nBits > 0), 1);    // 1 if more bits, 0 if not
    }
    return;
}

template <class ValueType> void
BitLengthCodec3T<ValueType>::nibblerGet(UInt32 &oiVal)
{
    oiVal = 0;
    UInt32 bMoreBits, uTmp, cNibbles = 0;
```

```
do {
    GetUnsignedBits(uTmp, cNibbleWidth);
    uTmp <<= cNibbles * UInt32(cNibbleWidth);
    oiVal |= uTmp;
    GetUnsignedBits(bMoreBits, 1);
    cNibbles++;
} while (bMoreBits);
return;
}

template <class ValueType> void
BitLengthCodec3T<ValueType>::nibblerGet(Int32 &oiVal)
{
    oiVal = 0;
    UInt32 bMoreBits, uTmp, cNibbles = 0;
    do {
        GetUnsignedBits(uTmp, cNibbleWidth);
        uTmp <<= cNibbles * UInt32(cNibbleWidth);
        oiVal |= uTmp;
        GetUnsignedBits(bMoreBits, 1);
        cNibbles++;
    } while (bMoreBits);
    // Sign-extend the resulting bits
    UInt32 sw = cNibbles * UInt32(cNibbleWidth);
    if (sw < 32) {
        oiVal <<= 32 - sw;
        oiVal >>= 32 - sw;
    }
    return;
}

// Simply write out all the bits for 64 bit
template <class ValueType> void
BitLengthCodec3T<ValueType>::nibblerEmit(Int64 lVal)
{
    #if 1
        addCodeText(*(const UInt64*)&lVal, 64);
    #else
        _nibblerEmit(*(const UInt64*)&lVal, ::bitsize(lVal));
    #endif
}

template <class ValueType> void
BitLengthCodec3T<ValueType>::nibblerGet(Int64 &olVal)
{
    #if 1
        GetUnsignedBits(*(UInt64*)&olVal, 64);
    #else
        olVal = 0;
        UInt32 bMoreBits, cNibbles = 0;
        UInt64 uTmp, uTmp64;
        do {
            GetUnsignedBits(uTmp, cNibbleWidth);
            uTmp64 = uTmp;
            uTmp64 <<= cNibbles * UInt32(cNibbleWidth);
            olVal |= uTmp64;
            GetUnsignedBits(bMoreBits, 1);
            cNibbles++;
        } while (bMoreBits);
        // Sign-extend the resulting bits
        UInt32 sw = cNibbles * UInt32(cNibbleWidth);
        if (sw < 64) {
            olVal <<= 64 - sw;
            olVal >>= 64 - sw;
        }
    #endif
}
```

```

template <class ValueType> void
BitLengthCodec3T<ValueType>::_nibblerEmit(UInt64 uVal, UInt32 nBits)
{
    while (nBits > 0) {
        addCodeText(uVal, cNibbleWidth);
        UInt32 n = min(UInt32(cNibbleWidth), nBits);
        uVal >>= n;
        nBits -= n;
        addCodeText((nBits > 0), 1);    // 1 if more bits, 0 if not
    }
    return;
}

Template <class ValueType>
Bool BitLengthCodec::encode(const VecValue    &vValues,
                           VecValue          &ovOOBValues,
                           Vecu              &ovCodeText,
                           Int32            &onBitsCodeText,
                           ProbContextV     *)
{
    Int32  i, j, k;
    Int32  iSymbol;           // Symbol value to encode
    Int32  cSymBits = 0,      // Number of bits in iSymbol
           nValues;          // Number of values to encode
    // Initialize output state
    ovOOBValues.setLength(0);
    ovCodeText.setLength(0);
    onBitsCodeText = 0;
    _pvCodeText = &ovCodeText;
    _pcCodeTextLen = &onBitsCodeText;

    // Short circuit for null array of values
    nValues = vValues.length();
    if (nValues <= 0)
        return True;

    _vnValBits.setLength(nValues);
    UInt16 *paiSymBits = _vnValBits.ptr();
    const ValueType *paiValues = vValues.ptr();
    // Find the minimum value and compute how many bits each value takes
    ValueType iMinSymbol = Limits<ValueType>::maxValue();
    ValueType iMaxSymbol = Limits<ValueType>::maxNegValue();
    Float64 fMean = 0.0;
    for (i = 0 ; i < nValues ; i++) {
        iMinSymbol = ::min(iMinSymbol, paiValues[i]);
        iMaxSymbol = ::max(iMaxSymbol, paiValues[i]);
        fMean += Float64(paiValues[i]);
    }
    fMean /= nValues;
    ValueType iMean = Int32(fMean);
    for (i = 0 ; i < nValues ; i++) {
        paiSymBits[i] = bitsize(paiValues[i] - iMean);
    }
    // A "block" is: 3 bits of number of bits (repeats while value is either 3 or -
    4 for
    larger width changes)
    //           4 bits of block length
    Int32 cBlkLenBits = 4; // Number of bits used to express a block length. 0
    means 0.
    Int32 cBlkValBits = 4; // *Delta* number of bits to express the current field
    width
    Int32 cBlkHdrBits = cBlkLenBits + cBlkValBits;
    Bool bMerged;
    // Block-forming: Merge Down/Up blocks
    do {

```

```
bMerged = JtFalse;
Int32 iPrevRunPos = 0,
      iCurRunPos = 0,
      iNextRunPos = 0;
while (iCurRunPos < nValues - 1) {
    // Advance the next run
    iNextRunPos++;
    while (iNextRunPos < nValues - 1 &&
           paiSymBits[iNextRunPos] == paiSymBits[iNextRunPos-1])
    {
        iNextRunPos++;
    }
    if (iNextRunPos >= nValues)
        break;
    Int32 wab = (iCurRunPos - iPrevRunPos),
          wbc = (iNextRunPos - iCurRunPos);
    if (wab == 0) {
        iCurRunPos = iNextRunPos;
        continue;
    }
    else if (wbc == 0) {
        continue;
    }
    // If we've bitten off more than one block's worth of data
    // we must start a new block. Length 0 is allowed because
    // we may need to insert multiple consecutive block headers
    // in order to change the field width more bits than can be
    // represented in cBlkValBits.
    if (wab > (1 << cBlkLenBits)) {
        iPrevRunPos += (1 << cBlkLenBits);
    }
    else if (wab == (1 << cBlkLenBits)) {
        iPrevRunPos = iCurRunPos;
        iCurRunPos = iNextRunPos;
        continue;
    }
    UInt16 &ua = paiSymBits[iPrevRunPos],
           &ub = paiSymBits[iCurRunPos],
           &uc = paiSymBits[iNextRunPos];
    // If the runs go "down-up"
    if (ua > ub && ub < uc) {
        // Test if we should increase ub to the lesser of ua and uc
        if (ua < uc) {
            // Test if we should increase ub to ua
            if (wbc * (ua - ub) <= cBlkHdrBits) {
                for (j = iCurRunPos ; j < iNextRunPos ; j++)
                    paiSymBits[j] = ua;
                iCurRunPos = iNextRunPos;
                continue;
            }
        }
        else if (ua > uc) {
            // Test if we should increase ub to uc
            if (wbc * (uc - ub) <= cBlkHdrBits) {
                for (j = iCurRunPos ; j < iNextRunPos ; j++)
                    paiSymBits[j] = uc;
                iNextRunPos = iCurRunPos;
                bMerged = True;
                continue;
            }
        }
        else { // ua == uc
            // Test if we should increase ub to ua/uc
            if (wbc * (ua - ub) <= 2 * cBlkHdrBits) {
                for (j = iCurRunPos ; j < iNextRunPos ; j++)
                    paiSymBits[j] = ua;
                iCurRunPos = iPrevRunPos;
            }
        }
    }
}
```

```
        iNextRunPos = iPrevRunPos;
        bMerged = True;
        continue;
    }
}

// Shift down the runs
iPrevRunPos = iCurRunPos;
iCurRunPos = iNextRunPos;
}
} while (bMerged);
// Block forming: Merge down/down and up/up runs
do {
    bMerged = JtFalse;
    Int32 iPrevRunPos = 0,
        iCurRunPos = 0,
        iNextRunPos = 0;
    while (iCurRunPos < nValues - 1) {
        // Advance the next run
        iNextRunPos++;
        while (iNextRunPos < nValues - 1 &&
            paiSymBits[iNextRunPos] == paiSymBits[iNextRunPos-1])
        {
            iNextRunPos++;
        }
        if (iNextRunPos >= nValues)
            break;
        Int32 wab = (iCurRunPos - iPrevRunPos),
            wbc = (iNextRunPos - iCurRunPos);
        if (wab == 0) {
            iCurRunPos = iNextRunPos;
            continue;
        }
        else if (wbc == 0) {
            continue;
        }
        // If we've bitten off more than one block's worth of data
        // we must start a new block. Length 0 is allowed because
        // we may need to insert multiple consecutive block headers
        // in order to change the field width more bits than can be
        // represented in cBlkValBits.
        if (wab > (1 << cBlkLenBits)) {
            iPrevRunPos += (1 << cBlkLenBits);
        }
        else if (wab == (1 << cBlkLenBits)) {
            iPrevRunPos = iCurRunPos;
            iCurRunPos = iNextRunPos;
            continue;
        }
        UInt16 &ua = paiSymBits[iPrevRunPos],
            &ub = paiSymBits[iCurRunPos],
            &uc = paiSymBits[iNextRunPos];
        // If the runs go "up-up"
        if (ua < ub && ub < uc) {
            // Test if we should increase ua to ub
            if (wab * (ub - ua) < cBlkHdrBits) {
                for (j = iPrevRunPos ; j < iCurRunPos ; j++)
                    paiSymBits[j] = ub;
                iCurRunPos = iNextRunPos;
                bMerged = True;
                continue;
            }
            // Test if we should increase ub to uc
            else if (wbc * (uc - ub) < cBlkHdrBits) {
                for (j = iCurRunPos ; j < iNextRunPos ; j++)
                    paiSymBits[j] = uc;
            }
        }
    }
}
```

```
        iNextRunPos = iCurRunPos;
        bMerged = True;
        continue;
    }
}
// If the runs go "down-down"
else if (ua > ub && ub > uc) {
    // Test if we should increase ub to ua
    if (wbc * (ua - ub) < cBlkHdrBits) {
        for (j = iCurRunPos ; j < iNextRunPos ; j++)
            paiSymBits[j] = ua;
        iCurRunPos = iNextRunPos;
        continue;
    }
}

// Shift down the runs
iPrevRunPos = iCurRunPos;
iCurRunPos = iNextRunPos;
}
} while (bMerged);

// Compute the total bits
UInt32 cMaxBlkLen = (1 << cBlkLenBits) - 1;
UInt32 iLastRunPos = 0;
Int32 cTotalBits = paiSymBits[0] + cBlkHdrBits;
for (UInt32 iCurRunPos = 1 ; iCurRunPos < nValues ; iCurRunPos++) {
    cTotalBits += paiSymBits[iCurRunPos];
    if (paiSymBits[iCurRunPos] != paiSymBits[iCurRunPos - 1]) {
        UInt32 cNumBlks = ((iCurRunPos - iLastRunPos) + (cMaxBlkLen - 1)) /
cMaxBlkLen;
        cTotalBits += cNumBlks * cBlkHdrBits;
        iLastRunPos = iCurRunPos;
    }
}
UInt32 cValSpanBits = bitsize(UInt32(iMaxSymbol - iMinSymbol));
UInt32 cFixedWidBits = nValues * cValSpanBits + (13 + 2 * (cValSpanBits + 1));

/////
// If the fixed-width total bits are better, then write out the values
// in a single fixed-width format.
/////
if (cFixedWidBits < cTotalBits) {
    // Write the fixed-width tag
    addCodeText(0, 1);

    // Write the min and max symbols into the stream
    nibblerEmit (iMinSymbol);
    nibblerEmit (iMaxSymbol);

    // Iterate over the remaining symbols
    UInt32 uCodeText = 0;
    for (Int32 i = 0; i < nValues; i++ ) {

        // Get the next symbol
        iSymbol = paiValues[i];

        // Write it
        uCodeText = iSymbol - iMinSymbol;
        addCodeText(uCodeText, cValSpanBits);
    }
}
/////
// Otherwise, encode with variable-length fields
/////
else {
    // Write the variable-width tag
```

```

    addCodeText(1, 1);

    // Write out the mean value
    nibblerEmit(iMean);

    // Set the initial field-width
    Int32 cMaxFieldDecr = -(1 << (cBlkValBits - 1)), // -ve number
          cMaxFieldIncr = (1 << (cBlkValBits - 1)) - 1; // +ve number
    Int32 cCurFieldWidth = 0;
    Int32 cTargFieldWidth;
    for (Int32 ii = 0 ; ii < nValues ;) {
        // Adjust the current field width to the target field width
        cTargFieldWidth = paiSymBits[ii];
        {
            if (cCurFieldWidth <= cTargFieldWidth) {
                while (cTargFieldWidth - cCurFieldWidth >= cMaxFieldIncr) {
                    addCodeText(cMaxFieldIncr, cBlkValBits);
                    cCurFieldWidth += cMaxFieldIncr;
                }
            }
            else {
                while (cTargFieldWidth - cCurFieldWidth <= cMaxFieldDecr) {
                    addCodeText(cMaxFieldDecr, cBlkValBits);
                    cCurFieldWidth += cMaxFieldDecr;
                }
            }
            addCodeText(cTargFieldWidth - cCurFieldWidth, cBlkValBits);
            cCurFieldWidth = cTargFieldWidth;
        }

        // Write out the run length
        for (j = ii+1 ; j < ii + (1 << cBlkLenBits) - 1 && j < nValues ; j++)
            if (paiSymBits[ii] != paiSymBits[j])
                break;
        addCodeText(j - ii, cBlkLenBits);

        // Write out the data bits for the run
        for (k = ii ; k < j ; k++)
            addCodeText(paiValues[k] - iMean, cCurFieldWidth);

        // Advance to the end of the run
        ii = j;
    }
}

return True;
}

template <class ValueType>
Bool BitLengthCodec2::decode( Int32          nValues,
                             const VecValue &,
                             const Vecu    &vCodeText,
                             Int32          nBitsCodeText,
                             VecValue      &ovValues,
                             ProbContextV   *)
{
    Int32 nTotalBits = 0; // Total number of codetext bits expected
    ValueType iSymbol; // Decoded symbol value
    Int32 cNumCurBits = 0; // Current field width in bits
    ValueType iMinSymbol = 0; // The minimum symbol value. Used as bias.
    ValueType iMaxSymbol = 0; // The maximum symbol value. Used as bias.
    Int32 nSyms = 0; // Number of symbols read so far
    ValueType *paiValues; // Pointer into ovValues where we write decoded
    values

    // Get codetext from the driver and loop over it until it's gone!
    ovValues.setLength(nValues);

```

```
    paiValues = ovValues.ptr();

    _iCurCodeText = 0;
    _pvCodeText = (Vecu*) &vCodeText;
    _pcCodeTextLen = &nBitsCodeText;

    /////
    // If the fixed-width total bits are better, then write out the values
    // in a single fixed-width format.
    /////
    // Read the variable-width tag
    Int32 iTmp;
    GetUnsignedBits(iTmp, 1); // 0 = Fixed-width, 1 = Variable width
    if (iTmp == 0) {
        // Read the min and max symbols from the stream
        nibblerGet(iMinSymbol);
        nibblerGet(iMaxSymbol);
        cNumCurBits = bitsize(UInt32(iMaxSymbol - iMinSymbol));

        // Read each fixed-width field and output the value
        while (nBits < nTotalBits || nSyms < nValues) {
            GetUnsignedBits(iSymbol, cNumCurBits);
            iSymbol += iMinSymbol;
            *paiValues++ = iSymbol;
            nSyms++;
        }
    }
    /////
    // Otherwise, encode with variable-length fields
    /////
    else {
        // Write out the mean value
        ValueType iMean;
        nibblerGet(iMean);

        // Set the initial field-width
        Int32 cMaxFieldDecr = -(1 << (cBlkValBits - 1)), // -ve number
            cMaxFieldIncr = (1 << (cBlkValBits - 1)) - 1; // +ve number
        UInt32 cCurFieldWidth = 0, cRunLen, k;
        Int32 cDeltaFieldWidth;
        ValueType iTmp;
        for (Int32 ii = 0 ; ii < nValues ;) {
            // Adjust the current field width to the target field width
            do {
                GetSignedBits(cDeltaFieldWidth, cBlkValBits);
                cCurFieldWidth += cDeltaFieldWidth;
            } while (cDeltaFieldWidth == cMaxFieldDecr || cDeltaFieldWidth ==
cMaxFieldIncr);

            // Read in the run length
            GetUnsignedBits(cRunLen, cBlkLenBits);

            // Read in the data bits for the run
            for (k = ii ; k < ii + cRunLen ; k++) {
                GetSignedBits(iTmp, cCurFieldWidth);
                *paiValues++ = iTmp + iMean;
            }

            // Advance to the end of the run
            ii += cRunLen;
        }
    }

    // Assert that we have consumed exactly all of the bits
    Assert(nValBits == 0);
    Assert(uVal == 0);
```

```

    return True;
}

// Number of bits necessary to encode a SIGNED integer
UInt32 bitsize(Int32 x) const
{
    x = x ^ (x >> 31);
    return 33 - nlz(UInt32(x));
}

// Number of bits necessary to encode an UNsigned integer
UInt32 bitsize(UInt32 x) const
{
    return 32 - nlz(x);
}

// Number of Leading Zeros
UInt32 nlz(UInt32 x)
{
    x = x | (x >> 1);
    x = x | (x >> 2);
    x = x | (x >> 4);
    x = x | (x >> 8);
    x = x | (x >> 16);
    return popcnt(~x);
}

// Population count - # of 1 bits in x
UInt32 popcnt(UInt32 x)
{
    x = x - ((x >> 1) & 0x55555555);
    x = (x & 0x33333333) + ((x >> 2) & 0x33333333);
    x = (x + (x >> 4)) & 0x0f0f0f0f;
    x = x + (x >> 8);
    x = x + (x >> 16);
    return x & 0x3f;
}

Bool BitLengthCodec2::getNextCodeText (UInt32 &uCodeText, Int32 &nBits)
{
    uCodeText = _pvCodeText->value(_iCurCodeText);
    nBits = ::min(32, *_pcCodeTextLen - 32 * _iCurCodeText);
    _iCurCodeText++;
    return True;
}

```

D.3 Arithmetic decoding classes

The following sub-sections contain a sample implementation of the decoding portion of the Arithmetic CODEC algorithm. A summary technical explanation of the Arithmetic CODEC can be found in the 11.2.3 Arithmetic CODEC description.

D.3.1 ArithmeticCodec class

```

template <class ValueType>
class ArithmeticCodec: public Codec
{
public:
    Bool encode( const VecValue &vValues,
                VecValue      &ovOOBValues,
                Vecu          &ovCodeText,
                Int32         &onBitsCodeText,
                ProbContextV  *pProbCntx      );
    Bool decode( Int32      nValues,
                VecValue   &ovOOBValues,
                const Vecu &vCodeText,

```

```

        Int32          nBitsCodeText,
        VecValue      &ovValues,
        ProbContextV  *pProbCntx    );

protected:
    Bool _encodeSymbol(UInt16 uLowCt, UInt16 uHighCt, UInt16 uScale );
    Bool _flushEncoder();
    Bool _removeSymbolFromStream( UInt16 uLowCt, UInt16 uHighCt, UInt16 uScale );
    Bool _flushDecoder();

    Bool getNextCodeText (UInt32 &uCodeText, Int32 &nBits);

    UInt16 _code;           // Present input code value, for decoding only
    UInt16 _low;           // Start of the current code range
    UInt16 _high;          // End of the current code range
    Int32  _nUnderflowBits; // Number of underflow bits pending

    Vecu   *_pvCodeText;
    Int32   *_pcCodeTextLen;
    Int32   _iCurCodeText;

    UInt32  _uBitBuff;
    Int32   _nBitBuff;
};

// Reads a bit and places it into ouBit
#define ReadBit(ouBit) \
    if (_nBitBuff==0) { \
        getNextCodeText(_uBitBuff, _nBitBuff); \
    } \
    ouBit = (_uBitBuff >> 31); \
    _uBitBuff <<= 1; \
    _nBitBuff--;

// Reads a bit and ORs it into bit 0 of ouBit
#define ReadBit0(ouBit) \
    if (_nBitBuff==0) { \
        getNextCodeText(_uBitBuff, _nBitBuff); \
    } \
    ouBit |= (_uBitBuff >> 31); \
    _uBitBuff <<= 1; \
    _nBitBuff--;

// Writes bit 0 of uBit
#define WriteBit(uBit) \
    if (_nBitBuff==32) { \
        addCodeText(_uBitBuff, 32); \
        _uBitBuff = _nBitBuff = 0; \
    } \
    _uBitBuff <<= 1; \
    _uBitBuff |= (UInt32(uBit) & 0x1); \
    _nBitBuff++;

Bool ArithmeticCodec::encode(const VecValue &vValues,
                             Veci          &ovOOBValues,
                             Vecu          &ovCodeText,
                             Int32         &onBitsCodeText,
                             ProbContextV  *pProbCntx)
{
    // Initialize output state
    ovOOBValues.setLength(0);
    ovCodeText.setLength(0);
    onBitsCodeText = 0;
    _pvCodeText = &ovCodeText;
    _pcCodeTextLen = &onBitsCodeText;

    // Initialize the encoder state
    _low = 0x0000;

```

```
    _high = 0xffff;
    _nUnderflowBits = 0;

    // Prime the bit buffer
    _uBitBuff = 0;
    _nBitBuff = 0;

    const ValueType *paiValues = vValues.ptr();
    const CntxEntry *pEntry;
    Int32 nValues = vValues.length();
    Int32 cTotalCount = pProbCntx->totalCount();
    for (Int32 i = 0; i < nValues; i++ ) {
        // Look up the value in the prob context
        pProbCntx->lookupValue(paiValues[i], pEntry );

        // If this is not the null context, then we emit an escape symbol,
        // move the context it specifies, and restart the translation of
        // the same value. Thus, a value may emit more than one symbol.
        if (pEntry->isEscape()) {
            ovOOBValues.append(paiValues[i]);
        }

        _encodeSymbol(pEntry->_cCumCount,
                    pEntry->_cCumCount + pEntry->_cCount,
                    cTotalCount);
    }

    _flushEncoder();

    return True;
}

Bool ArithmeticCodec2::_encodeSymbol(UInt16 uLowCt, UInt16 uHighCt, UInt16 uScale )
{
    // These three lines rescale _high and _low for the new symbol.
    UInt32 uRange = UInt32(_high - _low) + 1;
    _high = _low + (uRange * uHighCt) / uScale - 1;
    _low = _low + (uRange * uLowCt) / uScale;

    // This loop turns out new bits until _high and _low are far enough
    // apart to have stabilized.
    for (;;) {
        // If this test passes, it means that the most signif digits match,
        // and can be sent to the output stream.
        if ( (_high & 0x8000) == (_low & 0x8000) )
        {
            // Flush the bit buff if the MSB and underflow bits
            // won't all fit in what's left
            if (1+ _nUnderflowBits > 32 - _nBitBuff) {
                addCodeText(_uBitBuff, _nBitBuff);
                _uBitBuff = 0;
                _nBitBuff = 0;
            }
            // Write the MSB and all uflow bits at once
            if (1+ _nUnderflowBits <= 32 - _nBitBuff) {
                _uBitBuff <<= (1 + _nUnderflowBits);
                _uBitBuff |= (1 << _nUnderflowBits)
                    + (Int32(Int16(~_high)) >> 15);
                _nBitBuff += 1 + _nUnderflowBits;
                _nUnderflowBits = 0;
            }
            else {
                // We're writing more than 32 bits!
                _uBitBuff = (1 << 31)
                    + (Int32(Int16(~_high)) >> 15);
                addCodeText(_uBitBuff, 32);
                _nBitBuff = 0;
            }
        }
    }
}
```

```

        _nUnderflowBits -= 31;
        // Emit the rest of the underflow bits
        _uBitBuff = (_uBitBuff << 1) | (_uBitBuff & 1);
        while ( _nUnderflowBits >= 32) {
            addCodeText(_uBitBuff, 32);
            _nUnderflowBits -= 32;
        }
        addCodeText(_uBitBuff, _nUnderflowBits);
        _nUnderflowBits = 0;
        _uBitBuff = 0;
    }
}

// If this test passes, the numbers are in danger of underflow, because
// the most sigif digits don't match, and the 2nd digits are just one
apart.
//
// _low = 01... and _high = 10...
else if ( ( _low & 0x4000 ) && !( _high & 0x4000 ) )
{
    _nUnderflowBits++;
    _low  &= 0x3fff;
    _high |= 0x4000;
}
else
    break;

//Shift all bits left.  Move 0 into _low and 1 into _high.
_low <<= 1;
_high <<= 1;
_high |= 1;
}

return True;
}

Bool ArithmeticCodec2::_flushEncoder()
{
    // Write out some underflow bits and misc.
    WriteBit((_low & 0x4000)>>14)
    _nUnderflowBits++;
    while ( _nUnderflowBits-- > 0)
        WriteBit((~_low & 0x4000)>>14)

    //Need 16 zeros at the end, for this decoding algorithm
    UInt32 zeroBit = 0x0000;
    for (Int32 ii=0; ii<16; ii++) {
        WriteBit(zeroBit)
    }

    // Flush out the local buffer
    addCodeText(_uBitBuff, _nBitBuff);

    return True;
}

template <class ValueType>
Bool ArithmeticCodec2::decode( Int32          nValues,
                              const VecValue &vOOBValues,
                              const Vecu    &vCodeText,
                              Int32          nBitsCodeText,
                              Veci           &ovValues,
                              ProbContextV  *pProbCntx      )
{
    ovValues.setLength(0);
    const ValueType *paiOOBValues = vOOBValues.ptr();
    ovValues.setLength(nValues);

```

```
ValueType *paiValues = ovValues.ptr();
Int32 cSymbolsCurrCtx = pProbCntx->totalCount();
const CntxEntryV *pCntxEntry = 0;

// Initialize the arithmetic decoder state
_iCurCodeText = 0;
_pvCodeText = (Vecu*) &vCodeText;
_pcCodeTextLen = &nBitsCodeText;
getNextCodeText(_uBitBuff, _nBitBuff);
_low = 0;
_high = 0xffff;
_code = (_uBitBuff >> 16);
_uBitBuff <<= 16;
_nBitBuff -= 16;

// Decode each symbol
for (Int32 i = 0 ; i < nValues ; i++) {
    // Scale the current "code" into the range of counts presented by
    // the probcontext so we can look up the code.
    UInt16 rescaledCode = (((UInt32)(_code - _low) + 1) *
(UInt32)cSymbolsCurrCtx -
1)
        / ((UInt32)(_high - _low) + 1);
    pProbCntx->lookupEntryByCumCount( (Int32)rescaledCode, pCntxEntry );

    // Emit the value corresponding to the symbol we just decoded
    if (!pCntxEntry->isEscape())
        *paiValues++ = pCntxEntry->_val;
    else
        *paiValues++ = *paiOOBValues++;

    // Set up the symbol's range and adjust the decoder state
    // to "remove" it.
    _removeSymbolFromStream( pCntxEntry->_cCumCount,
        pCntxEntry->_cCumCount + pCntxEntry->_cCount,
        cSymbolsCurrCtx );
}

_flushDecoder();

return True;
}

Bool ArithmeticCodec2::_flushDecoder()
{
    UInt32 dummyBit;
    ReadBit(dummyBit)
    ReadBit(dummyBit)

    Assert( _uBitBuff == 0 );
    _nBitBuff = 0;

    return True;
}

Bool ArithmeticCodec2::_removeSymbolFromStream( UInt16 uLowCt, UInt16 uHighCt,
UInt16
uScale )
{
    // First, the range is expanded to account for the symbol removal.
    UInt32 uRange = UInt32(_high - _low) + 1;
    _high = _low + (UInt32)((uRange * uHighCt) / uScale - 1);
    _low = _low + (UInt32)((uRange * uLowCt) / uScale);

    //Next, any possible bits are shipped out.
    for (;;) {
        // If the most signif digits match, the bits will be shifted out.

```

```

    if (UInt16(~(_high ^ _low)) >> 15){
    }
    // Else, if underflow is threatening, shift out the 2nd most signif digit.
    //else if ((_low & 0x4000) && !(_high & 0x4000))
    // If high=10xx and low=01xx
    else if (((_low >> 14) == 1) & ((_high >> 14) == 2)) {
        _code ^= 0x4000;
        _low  &= 0x3fff;
        _high |= 0x4000;
    }
    // Otherwise, nothing can be shifted out, so return.
    else {
        return True;
    }

    _low <<= 1;
    _high <<= 1;
    _high |= 1;
    _code <<= 1;

    ReadBit0( _code )
}
}

```

D.4 Deering Normal decoding classes

The following sub-sections contain a sample implementation of the decoding portion of the Deering Normal CODEC algorithm. A summary technical explanation of the Deering Normal CODEC can be found in Deering Normal CODEC description.

D.4.1 DeeringNormalLookupTable class

The DeeringNormalLookupTable class represents a lookup table used by the DeeringNormalCodec class for faster conversion from the compressed normal representation to the standard 3-float representation. The tables hold precomputed results of the trig functions called during conversion.

```

class DeeringNormalLookupTable
{
public:
    DeeringNormalLookupTable();

    // Lookup and return the result of converting iTheta and iPsi to
    // real angles and taking the sine and cosine of both. This gives
    // a slight speedup for normal decoding.
    Bool lookupThetaPsi(Int32 iTheta,
                        Int32 iPsi,
                        UInt32 numberBits,
                        Float32 outCosTheta,
                        Float32 outSinTheta,
                        Float32 outCosPsi,
                        Float32 outSinPsi );

    UInt32 numBitsPerAngle() {return nBits;}

private:
    UInt32 nBits;
    Vector vCosTheta;
    Vector vSinTheta;
    Vector vCosPsi;
    Vector vSinPsi;
};

DeeringNormalLookupTable::DeeringNormalLookupTable()
{
    UInt32 numberbits = 8;
    nBits = min(numberbits, (UInt32)31);
}

```

```
Int32 tableSize = (1 << nBits);

vCosTheta.setLength(tableSize+1);
vSinTheta.setLength(tableSize+1);
vCosPsi.setLength(tableSize+1);
vSinPsi.setLength(tableSize+1);

Float32 fPsiMax = 0.615479709;
Float32 fTableSize = (Float32)tableSize;

for( Int32 ii = 0; ii <= tableSize; ii++ )
{
Float32 fTheta =
    asin(tan(fPsiMax * Float32(tableSize - ii) / fTableSize));

    Float32 fPsi = fPsiMax * (((Float32)ii) / fTableSize);
    vCosTheta[ii] = cos(fTheta);
    vSinTheta[ii] = sin(fTheta);
    vCosPsi[ii] = cos(fPsi);
    vSinPsi[ii] = sin(fPsi);
}
}

Bool DeeringNormalLookupTable::lookupThetaPsi(Int32 iTheta,
                                                Int32 iPsi,
                                                UInt32 numberBits,

        Float32 outCosTheta,
        Float32 outSinTheta,
        Float32 outCosPsi,
        Float32 outSinPsi)
{
    Int32 offset = nBits - numberBits;

    outCosTheta = vCosTheta[iTheta << offset];
    outSinTheta = vSinTheta[iTheta << offset];
    outCosPsi = vCosPsi[iPsi << offset];
    outSinPsi = vSinPsi[iPsi << offset];

    return True;
}
```

D.4.2 DeeringNormalCodec class

The `DeeringNormalCodec` class converts a normal vector to and from the standard 3-float representation and a lower-precision representation. The precision can be adjusted using the `nbits` parameter.

```
class DeeringNormalCodec
{
public:
    DeeringNormalCodec(Int32 numberbits = 6)
    {
        numBits = numberbits;
    }

    // Converts a compressed normal into a vector.
    Bool convertCodeToVec(UInt32 code, Vector& outVec);

    // Converts a compressed normal into a vector.
    Bool convertCodeToVec (UInt32 iSextant,
                          UInt32 iOctant,
                          UInt32 iTheta,
                          UInt32 iPsi,
                          Vector& outVec);

    // Separates an encoded normal into its 4 pieces
```

```

    Bool unpackCode (UInt32 code,
                    UInt32& outSextant,
                    UInt32& outOctant,
                    UInt32& outTheta,
                    UInt32& outPsi );

private:
    Int32 numBits;
}

Bool DeeringNormalCodec::convertCodeToVec(UInt32 code, Vector& outVec)
{
    UInt32 s=0, o=0, t=0, p=0;
    unpackCode(code, s, o, t, p);
    convertCodeToVec(s, o, t, p, outVec);
    return True;
}

Bool DeeringNormalCode::convertCodeToVec(UInt32 iSextant,
                                          UInt32 iOctant,
                                          UInt32 iTheta,
                                          UInt32 iPsi,
                                          Vector& outVec)
{
    // Size of code = 6+2*numBits, and max code size is 32 bits,
    // so numBits shall be <= 13.

    // Code layout: [sextant:3][octant:3][theta:numBits][psi:numBits]

    outVec.setValues(0,0,0);
    Float32 fPsiMax = 0.615479709;

    UInt32 iBitRange = 1<<numBits;
    Float32 fBitRange = Float32(iBitRange);

    // For sextants 1, 3, and 5, iTheta needs to be incremented
    iTheta += (iSextant & 1);

    Float32 fCosTheta, fSinTheta, fCosPsi, fSinPsi;

    DeeringNormalLookupTable LookupTable;

    if( (LookupTable.numBitsPerAngle() < (UInt32)numBits) ||
        !LookupTable.lookupThetaPsi(iTheta, iPsi, numBits,
                                    fCosTheta, fSinTheta,
                                    fCosPsi, fSinPsi) )
    {
        Float32 fTheta = asin(tan(fPsiMax * Float32(iBitRange - iTheta) /
                                                fBitRange));

        Float32 fPsi = fPsiMax * (iPsi / fBitRange);
        fCosTheta = cos(fTheta);
        fSinTheta = sin(fTheta);
        fCosPsi = cos(fPsi);
        fSinPsi = sin(fPsi);
    }

    Float32 x,y,z;
    Float32 xx = x = fCosTheta * fCosPsi;
    Float32 yy = y = fSinPsi;
    Float32 zz = z = fSinTheta * fCosPsi;

    //Change coordinates based on the sextant
    switch( iSextant )
    {
        case 0: // No op
            break;
    }
}

```

```
        case 1:      // Mirror about x=z plane
            z = xx;
            x = zz;
            break;

        case 2:      // Rotate CW
            z = xx;
            x = yy;
            y = zz;
            break;

        case 3:      // Mirror about x=y plane
            y = xx;
            x = yy;
            break;

        case 4:      // Rotate CCW
            y = xx;
            z = yy;
            x = zz;
            break;

        case 5:      // Mirror about y=z plane
            z = yy;
            y = zz;
            break;
    };

    //Change some more based on the octant

    //if first bit is 0, negate x component
    if( !(iOctant & 0x4) )
        x = -x;

    //if second bit is 0, negate y component
    if( !(iOctant & 0x2) )
        y = -y;

    //if third bit is 0, negate z component
    if( !(iOctant & 0x1) )
        z = -z;

    outVec.setValues(x,y,z);

    return True;
}

Bool DeeringNormalCodec::unpackCode(UInt32 code,
                                     UInt32& outSextant,
                                     UInt32& outOctant,
                                     UInt32& outTheta,
                                     UInt32& outPsi)
{
    UInt32 mask = (1<<numBits)-1;

    outSextant = (code >> (numBits+numBits+3)) & 0x7;
    outOctant  = (code >> (numBits+numBits))   & 0x7;
    outTheta   = (code >> (numBits))           & mask;
    outPsi     = (code)                        & mask;

    return True;
}
```

Annex E

Hashing – An Implementation

This Appendix provides a sample C++ implementation for the creation of hash values (as detailed in Encoding Algorithms) used in the JT format.

```
unsigned int hash32( const unsigned int *pWords,
                    int nWords,
                    unsigned int uSeedHashValue )
{ return hash2(pWords, nWords, uSeedHashValue); }

unsigned int jthash16(const unsigned short *pBytes,
                    int nShort,
                    unsigned int uSeedHashValue)
{ return hash3(pBytes, nShort, uSeedHashValue); }

//-----
// mix -- mix 3 32-bit values reversibly.
// For every delta with one or two bit set, and the deltas of all three
// high bits or all three low bits, whether the original value of a,b,c
// is almost all zero or is uniformly distributed,
// * If mix() is run forward or backward, at least 32 bits in a,b,c
// have at least 1/4 probability of changing.
// * If mix() is run forward, every bit of c will change between 1/3 and
// 2/3 of the time. (Well, 22/100 and 78/100 for some 2-bit deltas.)
// mix() was built out of 36 single-cycle latency instructions in a
// structure that could supported 2x parallelism, like so:
//     a -= b;
//     a -= c; x = (c>>13);
//     b -= c; a ^= x;
//     b -= a; x = (a<<8);
//     c -= a; b ^= x;
//     c -= b; x = (b>>13);
//     ...
// Unfortunately, superscalar Pentiums and Sparcs can't take advantage
// of that parallelism. They've also turned some of those single-cycle
// latency instructions into multi-cycle latency instructions. Still,
// this is the fastest good hash I could find. There were about 2^68
// to choose from. I only looked at a billion or so.
//-----

#define mix(a,b,c) \
{ \
  a -= b; a -= c; a ^= (c>>13); \
  b -= c; b -= a; b ^= (a<<8); \
  c -= a; c -= b; c ^= (b>>13); \
  a -= b; a -= c; a ^= (c>>12); \
  b -= c; b -= a; b ^= (a<<16); \
  c -= a; c -= b; c ^= (b>>5); \
  a -= b; a -= c; a ^= (c>>3); \
  b -= c; b -= a; b ^= (a<<10); \
  c -= a; c -= b; c ^= (b>>15); \
}

//-----
// hash() -- hash a variable-length key into a 32-bit value
// k      : the key (the unaligned variable-length array of bytes)
// len   : the length of the key, counting by bytes
// level : can be any 4-byte value
// Returns a 32-bit value. Every bit of the key affects every bit of
// the return value. Every 1-bit and 2-bit delta achieves avalanche.
// About 36+6len instructions.
```

```
// The best hash table sizes are powers of 2.  There is no need to do
// mod a prime (mod is sooo slow!).  If you need less than 32 bits,
// use a bitmask.  For example, if you need only 10 bits, do
//   h = (h & hashmask(10));
// In which case, the hash table should have hashsize(10) elements.
//
// If you are hashing n strings (JtUInt8 **)k, do it like this:
//   for (i=0, h=0; i<n; ++i) h = hash( k[i], len[i], h);
//
// By Bob Jenkins, 1996.  bob_jenkins@burtleburtle.net.  You may use this
// code any way you wish, private, educational, or commercial.  It's free.
//
// See http://burtleburtle.net/bob/           // 2010/02/12
// See http://burtleburtle.net/bob/hash/doobs.html // 2010/02/12
//
// Use for hash table lookup, or anything where one collision in 2^32 is
// acceptable.  Do NOT use for cryptographic purposes.
//-----
//-----
// This works on all machines.  hash2() is identical to hash() on
// little-endian machines, except that the length has to be measured
// in ub4s instead of bytes.  It is much faster than hash().  It
// requires
// -- that the key be an array of UInt32's, and
// -- that all your machines have the same endianness, and
// -- that the length be the number of UInt32's in the key
//-----
unsigned int hash(const unsigned char *k,          // key
                 unsigned int      length,       // length of the key
                 unsigned int      initval)      // prev hash, or an arbitrary value
{
    register unsigned int a,b,c,len;

    /* Set up the internal state */
    len = length;
    a = b = 0x9e3779b9; /* the golden ratio; an arbitrary value */
    c = initval;        /* the previous hash value */
    /*----- handle most of the key */
    while (len >= 12) {
        a += (k[0] + ((UInt32)k[1]<<8) + ((UInt32)k[2]<<16) + ((UInt32)k[3]<<24));
        b += (k[4] + ((UInt32)k[5]<<8) + ((UInt32)k[6]<<16) + ((UInt32)k[7]<<24));
        c += (k[8] + ((UInt32)k[9]<<8) + ((UInt32)k[10]<<16) + ((UInt32)k[11]<<24));
        mix(a,b,c);
        k += 12; len -= 12;
    }
    /*----- handle the last 11 bytes */
    c += length;
    switch(len) { /* all the case statements fall through */
        case 11: c+=((UInt32)k[10]<<24);
        case 10: c+=((UInt32)k[9]<<16);
        case 9 : c+=((UInt32)k[8]<<8);
            /* the first byte of c is reserved for the length */
        case 8 : b+=((UInt32)k[7]<<24);
        case 7 : b+=((UInt32)k[6]<<16);
        case 6 : b+=((UInt32)k[5]<<8);
        case 5 : b+=k[4];
        case 4 : a+=((UInt32)k[3]<<24);
        case 3 : a+=((UInt32)k[2]<<16);
        case 2 : a+=((UInt32)k[1]<<8);
        case 1 : a+=k[0];
            /* case 0: nothing left to add */
    }
    mix(a,b,c);
    /*----- report the result */
    return c;
}
```

```
}

unsigned int hash3(const unsigned short *k,      /* the key */
                  unsigned int      length,    /* the length of the key */
                  unsigned int      initval) /* the previous hash, or an
arbitrary value */
{
    unsigned int a,b,c,len;

    /* Set up the internal state */
    len = length;
    a = b = 0x9e3779b9; /* the golden ratio; an arbitrary value */
    c = initval;       /* the previous hash value */

    /*----- handle most of the key */
    while (len >= 6)
    {
        a += (k[0] + (UInt32(k[1]) << 16));
        b += (k[2] + (UInt32(k[3]) << 16));
        c += (k[4] + (UInt32(k[5]) << 16));
        mix(a,b,c);
        k += 6; len -= 6;
    }

    /*----- handle the last 2 uint32s */
    c += length;
    switch(len) /* all the case statements fall through */
    {
        case 5 : c+=(UInt32(k[4]) << 16);
        /* c is reserved for the length */
        case 4 : b+=(UInt32(k[3]) << 16);
        case 3 : b+=k[2];
        case 2 : a+=(UInt32(k[1]) << 16);
        case 1 : a+=k[0];
        /* case 0: nothing left to add */
    }
    mix(a,b,c);
    /*----- report the result */
    return c;
}
```

Annex F

Polygon Mesh Topology Coder

The topology coding algorithm described here is used to code the *dual* of the desired mesh. Thus, for example, the reader will need to take the dual of the decoded mesh in order to obtain the original primal mesh. Presented below are classes suitable for representing the dual of a polygon mesh and the dual topology decoding algorithm.

At a high level, the topology coder works by traversing the dual mesh to be encoded one vertex and one face at a time. The coder maintains a queue of faces to be processed; the initial queue is created using the valence of an arbitrary vertex of the mesh followed by the degrees of the faces adjacent to that vertex, and adds the adjacent faces to the face queue. Each time it visits a face, it encodes the *degree* of that face and emits any incident vertices that have not yet been visited. Each time the coder visits a vertex, it encodes the *valence* of the vertex (usually 3 in the current case), and emits any incident faces that have not yet been visited. It works its way through the mesh in this fashion until all vertices and faces have been encoded. Thus, the primary output from the topology coder is a list of vertex valences and face degrees. These two fields plus two more encoding so-called *split faces*, coupled with the exact coder implementation completely encode the mesh topology in a very compact manner¹.

In addition to these two basic fields are added a number of other fields that organize the dual vertices into *vertex groups*, and also encode the *vertex attributes* (e.g. normals, colours, and texture coordinates) around each dual face's *degree ring*.

The topological coder can only encode *closed, manifold* meshes. It cannot encode *boundaries*; it can only encode edges with exactly two incident faces. But, as we know, real-world data is chock full of meshes with boundaries. In order to encode these types of meshes, it is necessary to add *cover faces* incident to all boundary loops whose sole job is to turn the mesh into a *closed* mesh. It is the dual of this closed, manifold mesh that is actually encoded. Thus, most meshes encoded in JT files contain a few cover faces. These faces may be of arbitrarily high degree, and they represent the only exceptions to the general rule that the numbers in the dual vertex valence array are usually three. It is necessary to flag all such artificially introduced cover faces so that they can be removed by the loader. These flags are encoded below in the Face Flags array. Primal faces are flagged with zero, while cover faces are flagged with one.

Now, let us make the connection between topological vertices and how vertex attributes relate to them. Several faces may be incident on the same topological mesh vertex. While this topological vertex has only a single 3D coordinate, it may have a different set of *vertex attributes* for each incident face. Vertex attributes include colour, normal, and texture coordinates. An important observation in real-world data is that adjacent faces tend to share the same vertex attributes. Thus, a natural way to encode which vertex attributes map to which faces within a given valence ring (the counter-clockwise ordered set of faces incident on a given vertex) is by way of a bit vector. The bit vector begins at the first face the coder encounters that is incident to the vertex, and proceeds counter clockwise around the vertex, allocating one bit per incident face. A value of 0 is assigned to the bit if all vertex attributes for the face are the same as the face immediately clockwise. A value of 1 is assigned if the vertex attributes for the face are different. Recall that these bits from the original primal mesh are encoded as face attributes in the dual mesh.

Thus, at the end of the coding process, there will be one such bit vector per topological vertex in the mesh. These bit vectors will be of disparate lengths because all vertex valences are not the same. Though there is no theoretical limit to the valence of any given vertex, in practice, the vertex valences seldom rise above six, and only rarely rise into the dozens. As a matter of practicality, then, we break

¹ Similar methods of topology coding are described in 0 and US patent # 7,098,916. The topology coding algorithm described herein differs from such methods in that while they utilize a queue of active *vertices*, the instant algorithm utilizes a queue of active *faces*. Other differences include the tracking of face group numbers and per-vertex attributes such as normals, colours, and texture coordinates.

this list of bit vectors into those of length 64 and smaller into one group, and all others into a list of so-called “high-valence” bit vectors. The low-valence bit vectors are encoded into two fields of 32 bits each. The high-valence bit vectors are adjoined end-to-end into a single long bit vector, and encoded as a single array of integers. As an additional optimization, the low-valence bit vectors are grouped into 8 “context groups” depending on the valence of the vertex being coded. This is done in order to improve compression performance because the valence bit vectors in each of the most common groups typically share similar statistics. Context group number 8 is the only one that encodes valence rings up to valence 64. Again, recall that these attribute bits from the original primal mesh are encoded as face attribute bits in the dual mesh.

F.1 DualVFMesh

The DualVFMesh (Dual Vertex-Facet Mesh) is a support class paired with the topology decoder itself, and represents a closed two-manifold polygon mesh. The topology decoder reconstructs the encoded dual mesh into a DualVFMesh, building it one vertex and one facet at a time. When the decoder is finished, it will have visited each vertex and each face of the dual mesh exactly once. DualVFMesh is not intended as a work-horse in-memory storage container because its way of encoding the topological connections between faces and vertices is memory-intensive.

```
class DualVFMesh
{
public:
    // ===== Housekeeping Interface =====
    DualVFMesh();
    DualVFMesh (const DualVFMesh &rhs);
    DualVFMesh &operator=(const DualVFMesh &rhs);

    // ===== Topology Interface =====

    // Vtx creation
    bool        isValidVtx (Int32  iVtx) const;
    bool        newVtx      (Int32  iVtx,
                            Int32  iValence,
                            UInt16 uFlags = 0);
    bool        setVtxFlags (Int32  iVtx,
                            UInt16 uFlags);
    bool        setVtxGrp   (Int32  iVtx,
                            Int32  iVGrp);
    UInt16      vtxFlags    (Int32  iVtx) const;
    Int32       vtxGrp      (Int32  iVtx) const;

    // Face creation
    bool        isValidFace (Int32  iFace) const;
    bool        newFace     (Int32  iFace,
                            Int32  cDegree,
                            Int32  cFaceAttrs = 0,
                            UInt64 uFaceAttrMask = 0,
                            UInt16 uFlags = 0);
    bool        newFace     (Int32  iFace,
                            Int32  cDegree,
                            Int32  cFaceAttrs,
                            const BitVec *pvbFaceAttrMask,
                            UInt16 uFlags);
    bool        setFaceFlags (Int32  iFace,
                            UInt16 uFlags);
    UInt16      faceFlags    (Int32  iVtx) const;
    bool        setFaceAttr  (Int32  iFace,
                            Int32  iAttrSlot,
                            Int32  iFaceAttr);
    Int32       faceAttr     (Int32  iFace,
                            Int32  iAttrSlot) const;

    // Topology connection
    bool        setVtxFace (Int32  iVtx,
```

```

        Int32 iFaceSlot,
        Int32 iFace);
bool      setFaceVtx(Int32 iFace,
                   Int32 iVtxSlot,
                   Int32 iVtx);

// Queries
Int32     valence      (Int32 iVtx) const
  { return _vVtxEnts[iVtx].cVal; }
Int32     degree      (Int32 iFace ) const
  { return _vFaceEnts[iFace].cDeg; }
Int32     face        (Int32 iVtx,
                       Int32 iFaceSlot) const
  { return _viVtxFaceIndices[(iVtx).iVFI + iFaceSlot]; }
Int32     vtx         (Int32 iFace,
                       Int32 iVtxSlot) const
  { return _viFaceVtxIndices[_vFaceEnts[iFace].iFVI + iVtxSlot]; }
Int32     numVts      () const
  { return _vVtxEnts.length(); }
Int32     numFaces    () const
  { return _vFaceEnts.length(); }
Int32     numAttrs    () const
  { return _viFaceAttrIndices.length(); }
Int32     numAttrs    (Int32 iFace) const
  { return _vFaceEnts[iFace].cFaceAttrs; }
UInt64    attrMask    (Int32 iFace) const
  { return _vFaceEnts[iFace].u.uAttrMask; }
const BitVec *attrMaskV (Int32 iFace) const
  { return _vFaceEnts[iFace].u.pvbAttrMask; }
Int32     findVtxSlot (Int32 iFace,
                       Int32 iTargVtx) const;
Int32     findFaceSlot (Int32 iVtx,
                       Int32 iTargFace) const;
Int32     emptyFaceSlots (Int32 iFace) const
  { return _vFaceEnts[iFace].cEmptyDeg; }

// ===== VFMesh Data Members =====
public:
class VtxEnt {
public:
  VtxEnt() : cVal(0), uFlags(0), iVGrp(-1), iVFI(-1) {}
  UInt16 cVal; // Vtx valence
  UInt16 uFlags; // User flags
  Int32 iVGrp; // Vtx group
  Int32 iVFI; // Idx into _viVtxFaceIndices of cVal incident faces
};

// Number of optimized mask bits.
static const Int32 cMBits = 64;

class FaceEnt {
public:
  FaceEnt() : cDeg(0), uFlags(0), cEmptyDeg(0),
             cFaceAttrs(0), iFVI(-1), iFAI(-1) { u.uAttrMask = 0; }
  FaceEnt(const FaceEnt &rhs) : cDeg(rhs.cDeg), cEmptyDeg(rhs.cEmptyDeg),
                               cFaceAttrs(rhs.cFaceAttrs), iFVI(rhs.iFVI),
                               iFAI(rhs.iFAI)
  {
    if (cDeg <= cMBits)
      u.uAttrMask = rhs.u.uAttrMask;
    else
      JtWrapNew(u.pvbAttrMask, new BitVec(*rhs.u.pvbAttrMask));
  }
  ~FaceEnt() { if (cDeg > cMBits && u.pvbAttrMask) delete u.pvbAttrMask; }
  UInt16 cDeg; // Face degree
  UInt16 cEmptyDeg; // Empty degrees (opt for emptyFaceSlots())
  UInt16 cFaceAttrs; // Number of face attributes

```

```

    UInt16    uFlags;        // User flags
    union {
        UInt64    uAttrMask;    // Degree-ring attr mask as a UInt64
        BitVec    *pvbAttrMask; // Degree-ring attr mask as a BitVec
    } u;
    Int32     iFVI; // Idx into _viFaceVtxIndices of cDeg incident vts
    Int32     iFAI; // Idx into _viFaceAttrIndices of cAttr attributes
};

protected:
// Subscripted by atom number, the entry contains the vtx valence and
// points to the location in _viVtxFaceIndices of valence consecutive
// integers that in turn contain the indices of the incident faces
// in _vFaceRecs to the vtx.
JtVec<VtxEnt>    _vVtxEnts;

// Subscripted by unique vertex record number, the entry contains the
// face degree and points to the location in _viFaceVtxIndices of
// cDeg consecutive integers that in turn contain the indices of the
// vertices indicent upon the face, in CCW order, in _vVtxRecs.
JtVec<FaceEnt>    _vFaceEnts;

// Combined storage for all vtxs.
JtVeci            _viVtxFaceIndices;

// Combined storage for all faces.
JtVeci            _viFaceVtxIndices;

// Combined storage for all face attribute record identifiers
JtVeci            _viFaceAttrIndices;
};

bool
DualVFMesh::isValidVtx(Int32 iVtx) const
{
    bool bRet = JtFalse;
    if (iVtx >= 0 && iVtx < _vVtxEnts.length()) {
        const VtxEnt &rFE = _vVtxEnts[iVtx];
        bRet = (rFE.cVal != 0);
    }
    return bRet;
}

bool
DualVFMesh::newVtx(Int32 iVtx,
                  Int32 iValence,
                  UInt16 uFlags)
{
    VtxEnt &rFE = _vVtxEnts[iVtx];
    if (rFE.cVal != iValence) {
        rFE.cVal = iValence;
        rFE.uFlags = uFlags;
        rFE.iVFI = _viVtxFaceIndices.length();
        _viVtxFaceIndices.verify(rFE.iVFI + iValence - 1);
        for (Int32 i = rFE.iVFI ; i < rFE.iVFI + iValence ; i++)
            _viVtxFaceIndices[i] = -1;
    }
    return true;
}

bool
DualVFMesh::setVtxGrp(Int32 iVtx,
                    Int32 iVGrp)
{
    VtxEnt &rFE = _vVtxEnts[iVtx];
    rFE.iVGrp = iVGrp;
    return true;
}

```

```

}

bool
DualVFMesh::setVtxFlags(Int32 iVtx,
                        UInt16 uFlags)
{
    VtxEnt &rFE = _vVtxEnts[iVtx];
    rFE.uFlags = uFlags;
    return true;
}

Int32
DualVFMesh::vtxGrp (Int32 iVtx) const
{
    Int32 u = -1;
    if (iVtx >= 0 && iVtx < _vVtxEnts.length()) {
        const VtxEnt &rFE = _vVtxEnts[iVtx];
        u = rFE.iVGrp;
    }
    return u;
}

UInt16
DualVFMesh::vtxFlags (Int32 iVtx) const
{
    UInt16 u = 0;
    if (iVtx >= 0 && iVtx < _vVtxEnts.length()) {
        const VtxEnt &rFE = _vVtxEnts[iVtx];
        u = rFE.uFlags;
    }
    return u;
}

bool
DualVFMesh::isValidFace(Int32 iFace) const
{
    bool bRet = JtFalse;
    if (iFace >= 0 && iFace < _vFaceEnts.length()) {
        const FaceEnt &rVE = _vFaceEnts[iFace];
        bRet = (rVE.cDeg != 0);
    }
    return bRet;
}

bool
DualVFMesh::newFace(Int32 iFace,
                    Int32 cDegree,
                    Int32 cFaceAttrs,
                    UInt64 uFaceAttrMask,
                    UInt16 uFlags)
{
    FaceEnt &rVE = _vFaceEnts[iFace];
    if (rVE.cDeg != cDegree) {
        rVE.cDeg = cDegree;
        rVE.cEmptyDeg = cDegree;
        rVE.cFaceAttrs = cFaceAttrs;
        rVE.uFlags = uFlags;
        rVE.uAttrMask = uFaceAttrMask;
        rVE.iFVI = _viFaceVtxIndices.length();
        rVE.iFAI = _viFaceAttrIndices.length();
        _viFaceVtxIndices.verify(rVE.iFVI + cDegree - 1);
        if (cFaceAttrs > 0)
            _viFaceAttrIndices.verify(rVE.iFAI + cFaceAttrs - 1);
        for (Int32 i = rVE.iFVI ; i < rVE.iFVI + cDegree ; i++)
            _viFaceVtxIndices[i] = -1;
        for (Int32 i = rVE.iFAI ; i < rVE.iFAI + cFaceAttrs ; i++)

```

```

        _viFaceAttrIndices[i] = -1;
    }
    return true;
}

bool
DualVFMesh::newFace(Int32 iFace,
                    Int32 cDegree,
                    Int32 cFaceAttrs,
                    const BitVec *pvbFaceAttrMask,
                    UInt16 uFlags)
{
    FaceEnt &rVE = _vFaceEnts[iFace];
    if (rVE.cDeg != cDegree) {
        rVE.cDeg = cDegree;
        rVE.cEmptyDeg = cDegree;
        rVE.cFaceAttrs = cFaceAttrs;
        rVE.uFlags = uFlags;
        rVE.u.pvbAttrMask = new BitVec(*pvbFaceAttrMask);
        rVE.iFVI = _viFaceVtxIndices.length();
        rVE.iFAI = _viFaceAttrIndices.length();
        _viFaceVtxIndices.verify(rVE.iFVI + cDegree - 1);
        if (cFaceAttrs > 0)
            _viFaceAttrIndices.verify(rVE.iFAI + cFaceAttrs - 1);
        for (Int32 i = rVE.iFVI ; i < rVE.iFVI + cDegree ; i++)
            _viFaceVtxIndices[i] = -1;
        for (Int32 i = rVE.iFAI ; i < rVE.iFAI + cFaceAttrs ; i++)
            _viFaceAttrIndices[i] = -1;
    }
    return true;
}

bool
DualVFMesh::setFaceFlags(Int32 iFace,
                          UInt16 uFlags)
{
    FaceEnt &rVE = _vFaceEnts[iFace];
    rVE.uFlags = uFlags;
    return true;
}

UInt16
DualVFMesh::faceFlags (Int32 iFace) const
{
    UInt16 u = 0;
    if (iFace >= 0 && iFace < _vFaceEnts.length()) {
        const FaceEnt &rVE = _vFaceEnts[iFace];
        u = rVE.uFlags;
    }
    return u;
}

bool
DualVFMesh::setFaceAttr(Int32 iFace,
                         Int32 iAttrSlot,
                         Int32 iFaceAttr)
{
    FaceEnt &rVE = _vFaceEnts[iFace];
    Int32 *paiFAI = _viFaceAttrIndices.ptr();
    paiFAI[rVE.iFAI + iAttrSlot] = iFaceAttr;
    return true;
}

Int32
DualVFMesh::faceAttr(Int32 iFace,
                      Int32 iAttrSlot) const
{

```

```

    Int32 u = 0;
    if (iFace >= 0 && iFace < _vFaceEnts.length()) {
        const FaceEnt &rVE = _vFaceEnts[iFace];
        if (iAttrSlot >= 0 && iAttrSlot < rVE.cDeg) {
            const Int32 *paiFAI = _viFaceAttrIndices.ptr();
            u = paiFAI[rVE.iFAI + iAttrSlot];
        }
    }
    return u;
}

// Attaches VF face iFace to VF vertex iVtx in the vertex's
// face slot iFaceSlot
bool
DualVFMesh::setVtxFace(Int32 iVtx,
                       Int32 iFaceSlot,
                       Int32 iFace)
{
    VtxEnt &rFE = _vVtxEnts[iVtx];
    _viVtxFaceIndices[rFE.iVFI + iFaceSlot] = iFace;
    return true;
}

// Attaches VF vertex iVtx to VF face iFace in the face's
// vertex slot iVtxSlot
bool
DualVFMesh::setFaceVtx(Int32 iFace,
                       Int32 iVtxSlot,
                       Int32 iVtx)
{
    FaceEnt &rVE = _vFaceEnts[iFace];
    Int32 *paiFVI = _viFaceVtxIndices.ptr();
    rVE.cEmptyDeg -- (paiFVI[rVE.iFVI + iVtxSlot] != iVtx);
    paiFVI[rVE.iFVI + iVtxSlot] = iVtx;
    return true;
}

// Searches the list of incident vts to face iFace for
// iTargVtx and returns the vtx slot at which it is found
// or -1 if iTargVtx is not found.
Int32
DualVFMesh::findVtxSlot(Int32 iFace,
                        Int32 iTargVtx) const
{
    const FaceEnt &rVE = _vFaceEnts[iFace];
    const Int32 *const pFaceVtxIndices = _viFaceVtxIndices.ptr() + rVE.iFVI;
    Int32 cDeg = rVE.cDeg;
    Int32 iSlot = -1;
    for (Int32 iVtxSlot = 0 ; iVtxSlot < cDeg ; iVtxSlot++) {
        if (pFaceVtxIndices[iVtxSlot] == iTargVtx) {
            iSlot = iVtxSlot;
            break;
        }
    }
    return iSlot;
}

// Searches the list of incident faces to vertex iVtx for
// iTargFace and returns the face slot at which it is found
// or -1 if iTargFace is not found.
Int32
DualVFMesh::findFaceSlot (Int32 iVtx,
                          Int32 iTargFace) const
{
    const VtxEnt &rFE = _vVtxEnts[iVtx];
    const Int32 *const pVtxFaceIndices = _viVtxFaceIndices.ptr() + rFE.iVFI;
    for (Int32 iFaceSlot = 0 ; iFaceSlot < rFE.cVal ; iFaceSlot++) {

```

```

    if (pVtxFaceIndices[iFaceSlot] == iTargFace) {
        return iFaceSlot;
    }
}
return -1;
}

```

F.2 Topology Decoder

Partial implementations of three classes are given here for MeshCoderDriver, MeshCodec, and MeshDecoder. MeshCodec contains the abstract implementation of the topology coder. MeshDecoder implements the functionality needed to *decode* a mesh from the input data read from a JT file (see Topologically Compressed Rep Data). MeshCoderDriver manages the input data, the output VFMesh, and the MeshDecoder itself, providing a simple three-step API.

F.2.1 MeshCoderDriver class

```

// This class serves as a coordinating driver for mesh coding and decoding.
class MeshCoderDriver
{
public:
    MeshCoderDriver ();

    // ===== Operations Interface =====
    void      setInputData(const Veci   vviOutValSyms[/*8*/],
                          const Veci   &viOutDegSyms,
                          const Veci   &viOutFGrpSyms,
                          const Vecus   &vuOutFaceFlags,
                          const Vecclu  vvuOutAttrMasks[/*8*/],
                          const Vecu    &vuOutAttrMasksLrg,
                          const Veci    &viOutSplitVtxSyms,
                          const Veci    &viOutSplitPosSyms)
        { /* Copy into 22 fields below */ }

    void      decode();
    VFMesh    *vfm() const { return _pOutVFM; }

    // ===== Utility Methods =====
    Int32     _nextDegSymbol      (Int32 iCCntx);
    Int32     _nextValSymbol      ();
    Int32     _nextFGrpSymbol     ();
    UInt16    _nextVtxFlagSymbol  ();
    UInt64    _nextAttrMaskSymbol(Int32 iCCntx); // <= 64-bit attrmask
    void      _nextAttrMaskSymbol(BitVec *iopvbAttrMask,
                                  Int32   cDegree); // > 64 bit attrmask

    Int32     _nextSplitFaceSymbol();
    Int32     _nextSplitPosSymbol();
    Int32     _faceCntxt(Int32 iVtx, JtDualVFMesh *pVFM);

    // ===== Member Data =====
protected:
    SharedPtr<MeshCodec>    _pMC; // The mesh coder or decoder being used
    SharedPtr<JtDualVFMesh> _pOutVFM; // Back-end VFMesh built by decoder
    SharedPtr<MeshDecoder> _pMeshDecoder;

    // Coding symbols generated by encoding operation, auxiliary data such as
    // offsets, etc.
    Veci      _vviOutDegSyms[8]; // Face degree + SPLIT symbols for multiple
contexts
    Veci      _viOutValSyms; // Vtx valence symbols
    Veci      _viOutVGrpSyms; // Vtx group of each encoded vtx
    Vecus     _vuOutVtxFlags; // Vtx flags; parallel to _viOutValSyms.
    Vecclu    _vvuOutAttrMasks[8]; // Attribute bitmasks per face for multiple
contexts.
    Vecu      _vuOutAttrMasksLrg; // One per non-split entry in _viOutValSyms.
// > 64-bit attrmasks
}

```

```

Veci      _viOutSplitFaceSyms;// Split face offsets
Veci      _viOutSplitPosSyms; // Split face vtx slots

// The next symbol to be consumed by _next*Symbol()
Int32     _iValReadPos[8];
Int32     _iDegReadPos;
Int32     _iVGrpReadPos;
Int32     _iFFlagReadPos;
Int32     _iAttrMaskReadPos[8];
Int32     _iAttrMaskLrgReadPos;
Int32     _iSplitFaceReadPos;
Int32     _iSplitPosReadPos;
};

void MeshCoderDriver::decode()
{
  // Allocate a coder
  if (!_pMeshDecoder) {
    _pMeshDecoder = new MeshDecoder(this);
  }
  _pMC = _pMeshDecoder;
  _pMC->setTopoDualMeshCoder(this);

  // Reset the symbol counters
  for (Int32 i = 0 ; i < 8 ; i++) {
    _iValReadPos[i] = 0;
    _iAttrMaskReadPos[i] = 0;
  }
  _iDegReadPos = 0;
  _iVGrpReadPos = 0;
  _iFFlagReadPos = 0;
  _iAttrMaskLrgReadPos = 0;
  _iSplitFaceReadPos = 0;
  _iSplitPosReadPos = 0;

  // Run the decoder
  _pMC->run();

  // Assert that ALL symbols have been consumed
  for (Int32 i = 0 ; i < 8 ; i++) {
    Assert(_iValReadPos[i]      == _vviOutDegSyms[i].length());
    Assert(_iAttrMaskReadPos[i] == _vvuOutAttrMasks[i].length());
  }
  Assert(_iDegReadPos      == _viOutValSyms.length());
  Assert(_iVGrpReadPos    == _viOutVGrpSyms.length());
  Assert(_iFFlagReadPos   == _vuOutVtxFlags.length());
  Assert(_iAttrMaskLrgReadPos == _vuOutAttrMasksLrg.length());
  Assert(_iSplitFaceReadPos == _viOutSplitFaceSyms.length());
  Assert(_iSplitPosReadPos == _viOutSplitPosSyms.length());

  // Set output VFMesh
  _pOutVFM = _pMC->vfm();
}

Int32 MeshCoderDriver::_nextDegSymbol (Int32 iCCntx)
{
  Int32 eSym = -1;
  if (_iValReadPos[iCCntx] < _vviOutDegSyms[iCCntx].length())
    eSym = _vviOutDegSyms[iCCntx].value(_iValReadPos[iCCntx]++);
  return eSym;
}

Int32
MeshCoderDriver::_nextValSymbol ()
{
  Int32 eSym = -1;
  if (_iDegReadPos < _viOutValSyms.length())

```

```
        eSym = _viOutValSyms.value(_iDegReadPos++);
    return eSym;
}

Int32 MeshCoderDriver::_nextFGrpSymbol()
{
    Int32 eSym = -1;
    if (_iVGrpReadPos < _viOutVGrpSyms.length())
        eSym = _viOutVGrpSyms.value(_iVGrpReadPos++);
    return eSym;
}

UInt16 MeshCoderDriver::_nextVtxFlagSymbol ()
{
    UInt16 eSym = 0;
    if (_iFFlagReadPos < _vuOutVtxFlags.length())
        eSym = _vuOutVtxFlags.value(_iFFlagReadPos++);
    return eSym;
}

UInt64 MeshCoderDriver::_nextAttrMaskSymbol (Int32 iCCntx)
{
    UInt64 eSym = 0;
    if (_iAttrMaskReadPos[iCCntx] < _vvuOutAttrMasks[iCCntx].length())
        eSym = _vvuOutAttrMasks[iCCntx].value(_iAttrMaskReadPos[iCCntx]++);
    return eSym;
}

void MeshCoderDriver::_nextAttrMaskSymbol(BitVec *iopvbAttrMask, Int32 cDegree)
{
    if (_iAttrMaskLrgReadPos < _vuOutAttrMasksLrg.length()) {
        iopvbAttrMask->setLength(cDegree);
        UInt32 *pu = iopvbAttrMask->ptr();
        Int32 nWords = (cDegree + BitVec::cWordBits - 1) >> BitVec::cBitsLog2;
        memcpy(pu, &_vuOutAttrMasksLrg.value(_iAttrMaskLrgReadPos), nWords *
sizeof(UInt32));
        _iAttrMaskLrgReadPos += nWords;
    }
    else {
        iopvbAttrMask->setLength(0);
    }
}

Int32 MeshCoderDriver::_nextSplitFaceSymbol ()
{
    Int32 eSym = -1;
    if (_iSplitFaceReadPos < _viOutSplitFaceSyms.length())
        eSym = _viOutSplitFaceSyms.value(_iSplitFaceReadPos++);
    return eSym;
}

Int32 MeshCoderDriver::_nextSplitPosSymbol ()
{
    Int32 eSym = -1;
    if (_iSplitPosReadPos < _viOutSplitPosSyms.length())
        eSym = _viOutSplitPosSyms.value(_iSplitPosReadPos++);
    return eSym;
}

// Computes a "compression context" from 0 to 7 inclusive for
// faces on vertex iVtx. The context is based on the vertex's
// valence, and the total _known_ degree of already-coded
// faces on the vertex at the time of the call.
Int32 MeshCoderDriver::_faceCntxt(JtInt32 iVtx, JtDualVFMesh *pVFM)
{
    // Here, we are going to gather data to be used to determine a
    // compression contest for the face degree.

```

```

JtInt32 cVal = pVFM->valence(iVtx);
JtInt32 nKnownFaces = 0;
JtInt32 cKnownTotDeg = 0;
for (JtInt32 i = 0 ; i < cVal ; i++) {
  JtInt32 iTmpFace = pVFM->face(iVtx, i);
  if (!pVFM->isValidFace(iTmpFace))
    continue;
  nKnownFaces++;
  cKnownTotDeg += pVFM->degree(iTmpFace);
}
JtInt32 iCCntxt = 0;
if (cVal == 3) {
  // Regular trisrip-like meshes tend to have degree 6 faces
  iCCntxt = (cKnownTotDeg < nKnownFaces * 6) ? 0 :
            (cKnownTotDeg == nKnownFaces * 6) ? 1 : 2;
}
else if (cVal == 4) {
  // Regular quadstrip-like meshes tend to have degree 4 faces
  iCCntxt = (cKnownTotDeg < nKnownFaces * 4) ? 3 :
            (cKnownTotDeg == nKnownFaces * 4) ? 4 : 5;
}
else if (cVal == 5)
  // Pentagons are all lumped into context 6
  iCCntxt = 6;
else
  // All other polygons are lumped into context 7
  iCCntxt = 7;

return iCCntxt;
}

```

F.2.2 MeshCodec class

```

// This class serves as the abstract base class from which two concrete classes
// are derived to implement the core operations for a polygonal
// mesh coder or decoder. An instance of this object is used by the
// MeshCoderDriver to encode and decode polygonal meshes.
//
// This class makes extensive use of DualVFMesh objects as the primary source and
// destination mesh topology storage data structures. This mediating data
// structure is necessary because the mesh coding scheme is deeply cooperative
// with and dependent upon such a vertex-facet data structure. Please refer to
// DualVFMesh for more information.
class MeshCodec {
public:
  // ===== Housekeeping Interface =====
  MeshCodec (MeshCoderDriver *pTMC = NULL);
protected:
  virtual ~MeshCodec() {}
public:

  // ===== Setup and Apply Interface =====
  void setMeshCoderDriver(MeshCoderDriver *pTMC) { _pTMC = pTMC; }
  JtDualVFMesh *vfm() const { return _pDstVFM; }
  void run();

  // ===== Generic encode/decode Driver Chain =====
  void clear();
  void runComponent(bool &obFoundComponent);
  void initNewComponent(bool &obFoundComponent);
  void completeV(Int32 iFace);
  Int32 activateV(Int32 iVtx, Int32 iVSlot);
  Int32 activateF(Int32 iFace, Int32 iFSlot);
  void completeF(Int32 iVtx, Int32 jFSlot);
  void addVtxToFace (Int32 iVtx, Int32 iVSlot,
                    Int32 iFace, Int32 iFSlot);
}

```

```

// Active face list management
void addActiveFace(Int32 iFace);
Int32 nextActiveFace();
void removeActiveFace(Int32 iFace);
Int32 activeFaceOffset(Int32 iFace) const;

private:
// ===== Polymorphic I/O Interface =====
virtual Int32 ioVtxInit    ()                = 0;
virtual Int32 ioVtx      (Int32 iFace, Int32 jFSlot) = 0;
virtual Int32 ioFace     (Int32 iVtx,  Int32 iVSlot) = 0;
virtual Int32 ioSplitFace (Int32 iVtx,  Int32 iVSlot) = 0;
virtual Int32 ioSplitPos  (Int32 iVtx,  Int32 iVSlot) = 0;

// ===== Member Data =====
protected:
  MeshCoderDriver      *_pTMC;           // TopoDualMeshCoder this codec is
attached to
  SharedPtr<JtDualVFMesh> _pSrcVFM;      // Input VFMesh
  SharedPtr<JtDualVFMesh> _pDstVFM;      // Output VFMesh
  Veci                  _viActiveFaces; // Stack of incomplete "active faces"
  BitVec                 _vbRemovedActiveFaces; // Helper bitvec parallel to
above
  // Used by decoder to assign running attr indices
  Int32                  _iFaceAttrCtr;
};

// Runs the mesh encoder/decoder machine.
// If decoding is being performed, it consumes the mesh
// coding symbols from pre-filled member variables to produce
// the output VFMesh _pDstVFM.
void MeshCodec::run()
{
  // Assert state is consistent and ready to co/dec
  if (!_pDstVFM)
    _pDstVFM = new JtDualVFMesh();
  Assert(_pDstVFM);
  _pDstVFM->clear();
  clear();

  // Co/dec connected mesh components one at a time
  bool bFoundComponent = JtTrue;
  while (bFoundComponent) {
    Bool bRetVal = runComponent(bFoundComponent);
    Assert (bRetVal);
  }
}

void MeshCodec::clear()
{
  // Setup
  _viActiveFaces.setLength(0);
  _vbRemovedActiveFaces.setLength(0);
  _iFaceAttrCtr = 0;
}

// Decodes one "connected component" (contiguous group of polygons) into
// _pDstVFM. Because the polygonal model may be formed of multiple
// disconnected mesh components, it may be necessary for run() to call this
// method multiple times. This method returns obFoundComponent = True
// if it actually encoded a new mesh component, and obFoundComponent = False
// if it did not.
void MeshCodec::runComponent(bool &obFoundComponent)
{
  Int32 iFace;
  initNewComponent(obFoundComponent);
}

```

```

    if (!obFoundComponent)
        return;
    while ((iFace = nextActiveFace()) != -1) {
        completeF(iFace);
        removeActiveFace(iFace);
    }
}

// Locates an unencoded vertex and begins the encoding
// process for the newly-found mesh component.
void MeshCodec::initNewComponent(bool &obFoundComponent)
{
    obFoundComponent = JtTrue;

    // Call ioVtxInit() to start us off with the seed face
    // from a new "connected component" of polygons.
    Int32 iVtx, i;
    if ((iVtx = ioVtxInit()) == -1) {
        obFoundComponent = JtFalse; // All vtxs are processed
        return;
    }
    Int32 cVal = _pDstVFM->valence(iVtx);
    for (i = 0 ; i < cVal ; i++) {
        Int32 iFace = activateF(iVtx, i); // Process all faces
        if (iFace == -2) {
            Assert(0 && "Mesh traversal failed");
            return false;
        }
    }
}

// Completes the VFMesh face iFace on _pDstVFM by calling activateV() and
// completeV() for each as-yet inactive incident vertexes in the face's
// degree ring.
void MeshCodec::completeF(Int32 iFace)
{
    // While there is an empty vtx slot on the face
    Int32 jVtxSlot, iVtx;
    Int32 iVSlot = 0;
    while ((jVtxSlot = _pDstVFM->findVtxSlot(iFace, -1)) != -1) {
        // Create and return a vtx iVtx, attaching it to iFace at vtx
        // slot jVtxSlot.
        iVtx = activateV(iFace, jVtxSlot);

        // Assert FV consistency
        Assert(_pDstVFM->vtx (iFace, jVtxSlot) == iVtx &&
            _pDstVFM->face(iVtx, iVSlot) == iFace );

        // Process the faces of iVtx starting from face slot
        // jVtxSlot where iVtx is incident on iFace.
        completeV(iVtx, jVtxSlot);

        // Invariant "VF": vtx(iVtx).face(iVSlot) == iFace &&
        // face(iFace).vtx(jVtxSlot) == iVtx
    }
}

// "Activates" the VFMesh face, on _pDstVFM, at face iFace vertex slot iVSlot
// by calling ioFace() to obtain a new vertex number and hooking it up to the
// topological structure. If the face is a SPLIT face, then call
// ioSplitFace() and ioSplitPos() to get the information necessary to connect
// to an already-active face. Note that we use the term "activate" here to
// mean "read" for mesh decoding.
Int32 MeshCodec::activateF(Int32 iVtx, Int32 iVSlot)
{
    Int32 jFSlot;
    // ioFace might return -2 as an error condition

```

```

    Int32 iFace = ioFace(iVtx, iVSlot);
    if (iFace >= 0) { // If a new active face
        if (!_pDstVFM->setVtxFace(iVtx, iVSlot, iFace) ||
            !_pDstVFM->setFaceVtx(iFace, 0, iVtx) ||
            !_addActiveFace(iFace) )
        {
            return -2;
        }
    }
    else if (iFace == -1) { // Face already exists, so Split
        iFace = ioSplitFace(iVtx, iVSlot); // v's index in ActiveSet, returns v
        jFSlot = ioSplitPos(iVtx, iVSlot); // Position of iVtx in v
        if (iFace == -2 || iVSlot == -1)
            return -2;
        _pDstVFM->setVtxFace(iVtx, iVSlot, iFace);
        addVtxToFace(iVtx, iVSlot, iFace, jFSlot);
    }
    return iFace;
}

// "Activates" the VFMesh vertex, on _pDstVFM, at face iFace vertex slot iVSlot
// by calling ioFace() to obtain a new face number and hooking it up to the
// topological structure. Note that we use the term "activate" here to
// mean "read" for mesh decoding.
Int32 MeshCodec::activateV(Int32 iFace, Int32 iVSlot)
{
    Int32 iVtx = ioVtx(iFace, iVSlot); // I/O valence; create a vtx
    _pDstVFM->setVtxFace(iVtx, 0, iFace);
    addVtxToFace (iVtx, 0, iFace, iVSlot);
    return iVtx;
}

// Completes the vertex iVtx on _pDstVFM by activating all inactive faces
// incident upon it. As an optimization, the user shall also pass in iVSlot
// which is the vertex slot on face 0 of iVtx where iVtx is located. This
// method begins its examination of iVtx's faces at face 0 by working its
// way around the vertex in both CCW and CW directions, checking to see if there
// are any faces that can be hooked into iVtx without calling activateF().
// This can happen when a face is completed by a nearby vertex before coming
// here. The situation can be detected by traversing the topology of the
// _pDstVFM over to the neighboring vertex and checking if it already has a
// face number for the corresponding face entry on iVtx. If so, then
// iVtx and the already completed face are connected together, and the
// next face around iVtx is examined. When the process can go no further,
// this method calls _activateF() on the remaining unresolved span of faces
// around the vertex.
void MeshCodec::completeF(Int32 iVtx, Int32 iVSlot)
{
    JtDualVFMesh *pDstVFM = _pDstVFM;
    Int32 i, vp, vn, jp, jn,
        iVtx2,
        cVal = pDstVFM->valence(iVtx);

    // Walk CCW from face slot 0, attempting to link in as many
    // already-reachable faces as possible until we reach one
    // that is inactive.
    vp = pDstVFM->face(iVtx, 0);
    jp = iVSlot;
    i = 1;
    JtDebugOnly(_assertParallelValRings(vp));
    while ((vn = pDstVFM->face(iVtx, i)) != -1) { // Forces "FV" in the "next"
direction
        DecModN(jp, pDstVFM->degree(vp));
        iVtx2 = pDstVFM->vtx(vp, jp);
        if (iVtx2 == -1)
            break;
        jn = pDstVFM->findVtxSlot(vn, iVtx2);
    }
}

```

```

    Assert(jn > -1);
    DecModN(jn, pDstVFM->degree(vn));
    addVtxToFace(iVtx, i, vn, jn);
    vp = vn;
    jp = jn;
    i++;
    if (i >= cVal)
        return;
}

// Walk CW from face slot 0, attempting to link in as many
// already-reachable faces as possible until we reach one
// that is inactive.
Int32 ilast = i;
vp = pDstVFM->face(iVtx, 0);
jp = iVSlot;
i = pDstVFM->valence(iVtx) - 1;
while ((vn = pDstVFM->face(iVtx, i)) != -1) { // Forces "VF" in "prev"
direction
    IncModN(jp, pDstVFM->degree(vp));
    iVtx2 = pDstVFM->vtx(vp, jp);
    if (iVtx2 == -1)
        break;
    jn = pDstVFM->findVtxSlot(vn, iVtx2);
    Assert(jn > -1);
    IncModN(jn, pDstVFM->degree(vn));
    addVtxToFace(iVtx, i, vn, jn);
    vp = vn;
    jp = jn;
    i--;
    if (i < ilast)
        return;
}

// Activate the remaining faces on iVtx that cannot be deduced from
// the already-assembled topology in the destination VFMesh.
for (; ilast <= i ; ilast++) {
    Int32 iFace = activateV(iVtx, ilast);
    JtDemandState(iFace >= -1);
}
}

// This method connects vertex iVtx into the topology of
// _pDstVFM at and around iFace. First, it connects iVtx
// to iFace's degree ring at position iVSlot. Next, it
// will connect iVtx into the faces at the other ends of
// the shared edges between iVtx and the next vertices CS and
// CCW about iFace if necessary.
void MeshCodec::addVtxToFace (Int32 iVtx, Int32 jFSlot,
                             Int32 iFace, Int32 iVSlot)
{
    Int32 iVSlotCW = iVSlot,
          iVSlotCCW = iVSlot,
          fp, ip,
          fn, in;
    JtDualVFMesh *pDstVFM = _pDstVFM;
    IncModN(iVSlotCCW, pDstVFM->degree(iFace));
    DecModN(iVSlotCW, pDstVFM->degree(iFace));

    // Connect iVtx to iFace/iVSlot
    JtRethrow(pDstVFM->setFaceVtx(iFace, iVSlot, iVtx));

    // Connect iVtx across the shared edge between iVtx and the vtx CW
    // from iVtx at iFace. Connect iVtx into the face at the other
    // end of this edge if it is not already connected there.
    if ((fp = pDstVFM->vtx(iFace, iVSlotCW)) != -1) {
        ip = pDstVFM->findFaceSlot(fp, iFace);
    }
}

```

```

    Int32 iVSlotCCW = jFSlot;
    IncModN(iVSlotCCW, pDstVFM->valence (iVtx));
    if (pDstVFM->face(iVtx, iVSlotCCW) == -1) {
        DecModN(ip, pDstVFM->valence(fp));
        pDstVFM->setVtxFace(iVtx, iVSlotCCW, pDstVFM->face(fp, ip));
    }
}

// Connect iVtx across the shared edge between iVtx and the vtx CCW
// from iVtx at iFace. Connect iVtx into the face at the other
// end of this edge if it is not already connected there.
if ((fn = pDstVFM->vtx(iFace, iVSlotCCW)) != -1) {
    in = pDstVFM->findFaceSlot(fn, iFace);
    Int32 iVSlotCW = jFSlot;
    DecModN(iVSlotCW, pDstVFM->valence (iVtx));
    if (pDstVFM->face(iVtx, iVSlotCW) == -1) {
        IncModN(in, pDstVFM->valence(fn));
        pDstVFM->setVtxFace(iVtx, iVSlotCW, pDstVFM->face(fn, in));
    }
}
}

void MeshCodec::addActiveFace(Int32 iFace)
{
    JtRethrow(_viActiveFaces.pushBack(iFace));
}

// Returns a face from the active queue to be completed. This needn't be the
// one at the end of the queue, because the choice of the next active face
// can affect how many SPLIT symbols are produced. This method employs a
// fairly simple scheme of searching the most recent 16 active faces for the
// first one with the smallest number of incomplete slots in its degree ring.
Int32 MeshCodec::nextActiveFace()
{
    Int32 iFace = -1;
    // Search the 16 face record at the end of the
    // queue for the one with lowest remaining degree.
    while (_viActiveFaces.length() > 0 &&
    _vbRemovedActiveFaces.test(_viActiveFaces.back()))
        _viActiveFaces.popBack();
    Int32 cLowestEmptyDegree = 9999999;
    Int32 i, iFace0, cEmptyDeg;
    const Int32 cWidth = 16;
    JtDualVFMesh *pDstVFM = _pDstVFM;
    for (i = _viActiveFaces.length() - 1 ;
        i >= ::jtmax(0, _viActiveFaces.length() - cWidth) ;
        i--)
    {
        iFace0 = _viActiveFaces[i];
        if (_vbRemovedActiveFaces.test(iFace0)) {
            _viActiveFaces.remove(i); // TOXIC: O(N^2)
            continue;
        }
        cEmptyDeg = pDstVFM->emptyFaceSlots(iFace0);
        if (cEmptyDeg < cLowestEmptyDegree) {
            cLowestEmptyDegree = cEmptyDeg;
            iFace = iFace0;
        }
    }

    // Return the selected active face
    return iFace;
}

// Removes iFace from the active face queue.
void MeshCodec::removeActiveFace(Int32 iFace)
{

```

```

    _vbRemovedActiveFaces.set(iFace);
}

// Searches the active face queue for iFace and returns
// its index position from the _end_ of the queue. This is
// needed by the ioFace() method when encoding a SPLIT
// symbol.
Int32 MeshCodec::activeFaceOffset(Int32 iFace) const
{
    Int32 iOffset = -1;
    Int32 i, cLen = _viActiveFaces.length();
    const Int32 *paiActiveFaces = _viActiveFaces.ptr();
    for (i = cLen - 1 ; i >= 0 ; i--) {
        if (paiActiveFaces[i] == iFace) {
            // The offset is how far FROM THE END of the active
            // face list we found iFace. This serves the make
            // the iOffset a much smaller number, which is better
            // for compression!
            iOffset = cLen - i;
            break;
        }
    }
    return iOffset;
}

```

F.2.3 MeshDecoder class

```

// This class implements the five abstract methods from
// MeshCodec to realize a mesh decoder.
class MeshDecoder : public MeshCodec {
public:
    // ===== Housekeeping Interface =====
    MeshDecoder (MeshCoderDriver *pTMC = NULL);
protected:
    virtual ~MeshDecoder() {}

private:
    // ===== Polymorphic I/O Interface =====
    virtual Int32 ioVtxInit () ;
    virtual Int32 ioVtx (Int32 iFace, Int32 iVSlot);
    virtual Int32 ioFace (Int32 iVtx , Int32 jFSlot);
    virtual Int32 ioSplitFace(Int32 iVtx , Int32 jFSlot);
    virtual Int32 ioSplitPos (Int32 iVtx , Int32 jFSlot);
};

// Begins decoding a new connected mesh component by calling
// ioVtx() to read the next vertex from the symbol stream.
Int32 MeshDecoder::ioVtxInit()
{
    return ioVtx(-1, -1);
}

// Read a vertex valence symbol, vertex group number, and vertex
// flags from the input symbols stream. Create a new vertex
// on _pDstVFM with this data, and return the new vertex number.
// It is this method's responsibility to detect the end of
// the input symbol stream by returning -1 when that happens.
Int32 MeshDecoder::ioVtx (Int32 /*iFace*/ , Int32 /*iVSlot*/)
{
    // Obtain a VERTEX VALENCE symbol
    Int32 eSym = _pTMC->_nextValSymbol();
    Int32 iVtxVal, iVtx = -1;
    if (eSym > -1) {
        // Create a new vtxt on the VFMesh
        iVtx = _pDstVFM->numVtxs();
        iVtxVal = eSym;
        _pDstVFM->newVtx (iVtx, iVtxVal);
    }
}

```

```

    _pDstVFM->setVtxGrp (iVtx, _pTMC->_nextFGrpSymbol());
    _pDstVFM->setVtxFlags(iVtx, _pTMC->_nextVtxFlagSymbol());
  }

  return iVtx;
}

// Read a face degree symbol, and attribute mask bit
// vector, create a new DualVFMesh face, initialize the
// face attribute record numbers from a running counter,
// and return the new face number. If the degree symbol
// read from the input symbol stream is 0, signify this by
// returning -1.
Int32
MeshDecoder::ioFace      (Int32 iVtx, Int32 /*jFSlot*/)
{
  // Obtain a FACE DEGREE symbol
  Int32 iCntxt = _pTMC->_faceCntxt(iVtx, _pDstVFM);
  Int32 eSym = _pTMC->_nextDegSymbol(iCntxt);
  Int32 cDeg, iFace = -1;
  if (eSym != 0) {
    // Create a new face on the VFMesh
    iFace = _pDstVFM->numFaces();
    cDeg = eSym;
    Int32 nFaceAttrs = 0;
    if (cDeg <= JtDualVFMesh::cMBits) {
      UInt64 uAttrMask = _pTMC-
>_nextAttrMaskSymbol(/*iCntxt*/::jtmin(7,::jtmax(0,cDeg-2)));
      for (UInt64 uMask = uAttrMask ; uMask ; nFaceAttrs += (uMask & 1),
uMask >>= 1);
      _pDstVFM->newFace(iFace, cDeg, nFaceAttrs, uAttrMask);
    }
    else {
      BitVec vbAttrMask;
      _pTMC->_nextAttrMaskSymbol(&vbAttrMask, cDeg);
      for (Int32 i = 0 ; i < cDeg ; i++) {
        if (vbAttrMask.test(i))
          nFaceAttrs++;
      }
      _pDstVFM->newFace(iFace, cDeg, nFaceAttrs, &vbAttrMask, 0);
    }

    // Error check for a corrupt degree or attrmask
    if (nFaceAttrs > cDeg) {
      Assert (nFaceAttrs <= cDeg);
      return -2;
    }

    // Set up the face attributes
    for (Int32 iAttrSlot = 0 ; iAttrSlot < nFaceAttrs ; iAttrSlot++) {
      _pDstVFM->setFaceAttr(iFace, iAttrSlot, _iFaceAttrCtr++);
    }
  }
}

// Consumes a split offset symbol from the SPLIT offset
// symbol stream, and determines the face number referenced
// by the offset. Returns the referenced face number.
Int32 MeshDecoder::ioSplitFace(Int32 /*iVtx*/, Int32 /*jFSlot*/)
{
  // Obtain a SPLITFACE symbol
  Int32 eSym = _pTMC->_nextSplitFaceSymbol();
  Assert(eSym >= -1);
  Int32 iOffset = -1, iFace = -1;
  if (eSym > -1) {
    // Use the offset to index into the active face queue

```

```
        // to determine the actual face number.
        iOffset = eSym;
        Int32 cLen = _viActiveFaces.length();
        // Error check for a corrupt offset
        if (iOffset <= 0 || iOffset > cLen) {
            Assert(iOffset > 0 && iOffset <= cLen);
            return -2;
        }
        iFace = _viActiveFaces[cLen - iOffset];
    }

    return iFace;
}

// Consumes a split position symbol from the associated symbol
// stream, and returns the vertex slot number on the current
// split face at which the topological split/merge occurred.
Int32 MeshDecoder::ioSplitPos (Int32 /*iVtx*/, Int32 /*jFSlot*/)
{
    // Obtain a SPLITVTX symbol
    Int32 eSym = _pTMC->_nextSplitPosSymbol();
    Assert(eSym >= -1);
    Int32 iVSlot = -1;
    if (eSym > -1) {
        // Return the vtx slot number
        iVSlot = eSym;
    }

    return iVSlot;
}
```

Annex G

Per Face Group Attributes

With JTIAP Edition 3 the ability to apply attributes, such as material and texture image, to a group of faces in the Logical Scene Graph (LSG) is introduced. This is referred to as per face group attributes. An Attribute Element in the logical scene graph (LSG) may be scoped so that it applies only to the geometry contained in a specific subset of grouped faces. Previous versions of the JT file format were capable of only applying Attributes to an entire Shape node.

A Palette Map Attribute is used on a shape such that any face group can be rendered with a chosen entry from the palette. Each Attribute entry in the palette is inherited down the scene graph independent from any other palette entry. Attributes Elements in the scene graph are able to specify to which palette entry they apply.

There are two pieces of information involved in scoping a Palette Map Attribute Element to a face group: The U32:Palette Index field in the Base Attribute Data Fields V2 logical collection, and the PaletteMap Attribute Element.

G.1 U32:Palette Index field description

The U32:Palette Index field is used to implicitly create a State Palette that may later be indexed by a PaletteMap Attribute.

Three rules are used to accumulate the state for each explicitly mentioned palette index:

- Rule 1: The palette index value -1 is regarded as the "fallback palette entry". All Attributes are by default created with palette index -1.
- Rule 2: All Attributes sharing the same Palette Index value are accumulated separately, and constitute an entry in the State Palette.
- Rule 3: The fallback palette entry serves as the initial basis for each other distinct palette entry when the first Attribute of a given Palette Index is encountered during Attribute accumulation.

Rule 3 is best understood by example.

With the example case a user has a scene graph consisting of three nodes organized vertically in a depth 3 scene graph, each bearing various Attributes. The three attribute types are chosen because each accumulates differently in the scene graph.

- N is used to number the nodes, as the type of node is immaterial,
 - N2 is the child of N1,
 - N3 is the child of N2.
 - M represents a Material attribute,
 - X represents a Geometric Transform attribute,
 - T represents a Texture Image attribute.
3. PI denotes the Palette Index setting on an Attribute.
 4. TC denotes the Texture Channel index on a Texture Image.

N1: JtPartition - M1 (PI:-1), X1 (PI:-1), T0 (PI:-1, TC:0)

N2: VisPartNode - M2 (PI:0), M3 (PI:1), X2 (PI:1), X4(PI:3), T1 (PI:0, TC:1), T2 (PI:0, TC:2)

N3: TriStripSet - M4 (PI:2), M5(PI:0), X3 (PI:2), T3(PI:1, TC:1), T4 (PI:2, TC:0)

The table below shows the accumulated State Palette at node N3 in the example. Each row in the table represents the full accumulated state for a single palette entry.

Table G 1 — N3: Tristrip Set Accumulation

N3: TriStripSet - M4 (PI:2), M5 (PI:0), X3 (PI:2), T3(PI:1, TC:1), T4 (PI:2, TC:0)

Palette Index	Material	Transform	Texture(s)
-1 (Fallback)	M1	X1	T0 (TC:0)
0	M5	X1	T0 (TC:0) T1 (TC:1) T2 (TC:2)
1	M3	X1*X2	T0 (TC:0) T3 (TC:1)
2	M4	X1*X3	T4 (TC:0)
3	M1	X1*X4	T0 (TC:0)

The table entries are obtained the following way:

Palette Entry -1 (the fallback): this entry comes directly from the two attributes on node N1 (i.e. M1 and X1). Since there are no other Attributes in the scene graph bearing palette index -1 below them, these two attributes stand as the fallback state on all three nodes. (Rule 1)

Transform state for palette entry 0: Because there is no Transform tagged with Palette Index 0 at or below N1, the fallback entry's Transform state also stands for this palette entry. (Rule 3).

Material state for palette entry 0: The Material attributes involved in this entry are M1, M2, and M5. M1 is a fallback (PI = -1) and so by Rule 3 serves as the basis for all material palette entries. M2 and M5 are explicitly tagged with PI=0 (Rule 2). Since Material attributes accumulate via replacement, M5 is left as the surviving Material. All other Material and Transform entries in the table follow this same logic.

Texture Image accumulation is slightly more subtle because it involves the independent concept of Texture Channel. Palette Index is conceptually similar to the way that multiple Texture Images accumulate via their Texture Channel, however, the two concepts are orthogonal to one another. Each entry in the State Palette can have a set of accumulated Texture Images.

Now draw special attention to Rule 1 above (this rule specifies how an Attribute with Palette Index -1 is accumulated). How would adding Material M6 (PI:-1) to Node N3 affect the State Palette at N3? The answer is that M6 would replace the previously accumulated Material entries in all palette entries. This addition would result in the palette described in the table below.

Table G 2 — N3: Tristrip Set Accumulation Updated

N3: TriStripSet - M4 (PI:2), M5 (PI:0), X3 (PI:2), T3(PI:1, TC:1), T4 (PI:2, TC:0), M6 (PI: -1)

Palette Index	Material	Transform	Texture(s)
-1 (Fallback)	M6	X1	T0 (TC:0)
0	M6	X1	T0 (TC:0) T1 (TC:1) T2 (TC:2)
1	M6	X1*X2	T0 (TC:0) T3 (TC:1)
2	M6	X1*X3	T4 (TC:0)
3	M6	X1*X4	T0 (TC:0)

This is how a default-constructed Attribute behaves. A default/fallback Attribute is assertive with respect to any specific palettized state above it in the scene graph.

As a final example of this behavior, it is important to emphasize that a fallback does not override the state that came before it, but rather asserts itself into the normal accumulation mechanism. To

illustrate this point, consider the addition of a Transform X5 (PI:-1) to node N2 after the existing attributes:

N1: JtPartition: M1 (PI:-1), X1 (PI:-1), T0 (PI:-1, TC:0)

N2: VisPartNode: M2(PI:0), M3(PI:1), X2(PI:1), X4(PI:3), T1(PI:0,TC:1), T2(PI:0,TC:2), X5 (PI:-1)

N3: TriStripSet: M4 (PI:2), M5(PI:0), X3 (PI:2), T3(PI:1, TC:1), T4 (PI:2, TC:0)

In this case, the new State Palette would appear as in the table below:

Table G 3 — N2 Accumulation Updated

N2: VisPartNode: M2(PI:0), M3(PI:1), X2(PI:1), X4(PI:3), T1(PI:0,TC:1), T2(PI:0,TC:2), X5 (PI:-1)

Palette Index	Material (M)	Transform	Texture(s)
-1 (Fallback)	M1	X1*X5	T0 (TC:0)
0	M5	X1*X5	T0 (TC:0) T1 (TC:1) T2 (TC:2)
1	M3	X1*X2*X5	T0 (TC:0) T3 (TC:1)
2	M4	X1*X5*X3	T4 (TC:0)
3	M1	X1*X4*X5	T0 (TC:0)

G.2 PaletteMap Attribute

The PaletteMap attribute maps some or all of the Palette Entries onto the facegroups of a Shape.

Note that even though the PaletteMap is an attribute, its own Palette Index is ignored and must have a value of -1.

Also note that a PaletteMap attribute accumulates (by replacement) down the logical scene graph just like other Attributes. As such it need not be attached directly to a Shape node. It can be placed higher up in the scene graph, for example on a Part Node where all Shapes below it are expected to have the same number of facegroups.

The palette mapping vector is indexed by facegroup number, and contains a Palette Index. The face group geometry will be rendered with the Attribute state obtained by indexing the State Palette with this retrieved Palette Index.

The length of the Palette Map vector must be exactly equal to the number of facegroups in the Shape to which it is applied. If this is not the case, then the PaletteMap is ignored, and the Shape will be rendered using the fallback state as if the PaletteMap did not exist.

Two values have special significance in the palette mapping vector.

- The value -1 refers to the fallback state.
- The value -2 is used to denote that a given facegroup should be inhibited and not rendered at all.

The render-inhibit value affects nothing other than rendering. It does not make the facegroup unpickable, nor does it cause any change to the Node's bounding box, vertex count, or any other quantity.

G.3 Additional information on per face group attributes

Field-final flags, field-inhibit flags, and the force flag all behave as normal for palettized Attributes.

G.4 Addressing Forward Compatibility

To deal with proper forward compatability as it relate to scengraph attributes of JT content the attribute Sabot V104 is added is introduced with JTIAP Edition 3. See Sabot V104 definitioin in this document for full details

Annex H

XT B-Rep data segment

The XT B-Rep Segment contains an Element that defines the precise geometric Boundary Representation data for a particular Part in XT boundary representation format.

XT B-Rep segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element). The XT B-Rep Segment type supports LZMA compression on all element data, so all elements in XT B-Rep Segment use the Logical Element Header Compressed form of element header data.

H.1 XT B-Rep Element

Object Type ID: 0x873a70e0, 0x2ac9, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

XT B-Rep Element represents a particular part's precise data in XT boundary representation) format.

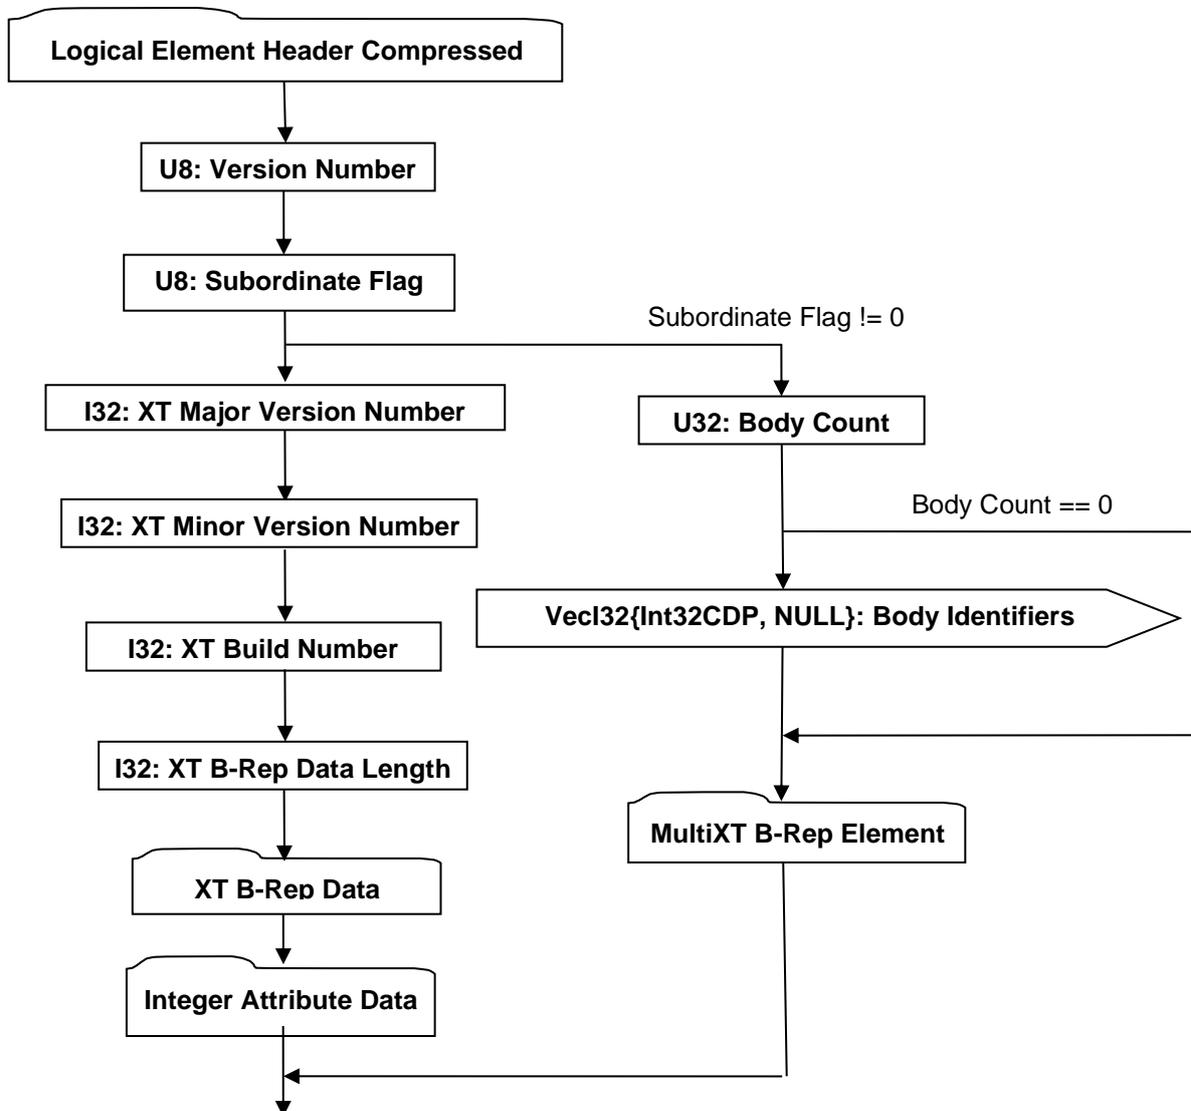


Figure H 1— XT B-Rep Element data collection

Complete description for Logical Element Header Compressed can be found in the File Header section of Base Format Description under Data Segment, Data.

U8: Version Number

Version Number is the version identifier for this XT B-Rep Element. For information on local version numbers see Common Data Conventions and Construct Local version numbers.

U8: Subordinate Flag

Subordinate Flag indicates if this XT B-Rep segment is a subordinate of a XT B-Rep segment. If its value is set to be 0, then this XT B-Rep segment contains complete Parasolid data representation and therefore is not a subordinate. Otherwise if this XT B-Rep segment is a subordinate, meaning that its Parasolid data representation resides in a XT B-Rep segment.

I32: XT Major Version Number

XT Major Version Number specifies the major version number for the XT B-Rep data in the JT File. Major version number is an informative field which can be set to 0 without negative impact to implementation.

I32: XT Minor Version Number

XT Minor Version Number specifies the minor version number for the XT B-Rep data in the JT File. Minor version number is an informative field which can be set to 0 without negative impact to implementation.

I32: XT Build Number

XT Build Number specifies the build number for the XT B-Rep data in the JT File. XT build number is an informative field which can be set to 0 without negative impact to implementation.

I32: XT B-Rep Data Length

XT B-Rep Data Length specifies the length in bytes of the XT B-Rep Element collection. A JT file loader/reader may use this information to compute the end position of the XT B-Rep Data within the JT file and thus skip (for whatever reason) reading the remaining XT B-Rep Data.

U32: Body Count

Body Count specifies the number of XT bodies in this XT B-Rep Element.

VecI32{Int32CDP, NULL}: Body Identifiers

Body Identifiers is an integer array with its length equal to Body Count. The value of each element in this array represents the persisted identifier of the corresponding XT entity. This array is a subset of Body Identifiers array described in MultiXT B-Rep Element, and is used to indicate which XT bodies in MultiXT B-Rep Element belong to this XT B-Rep Element.

H.1.1 XT B-Rep Data

The XT B-Rep Data collection specifies the raw stream of bytes used to represent a Part's XT B-Rep Body(s).

H.1.2 Integer Attribute Data

Integer Attribute Data represents the collection of integer values that may be associated with each face and edge in the XT B-Rep representation.

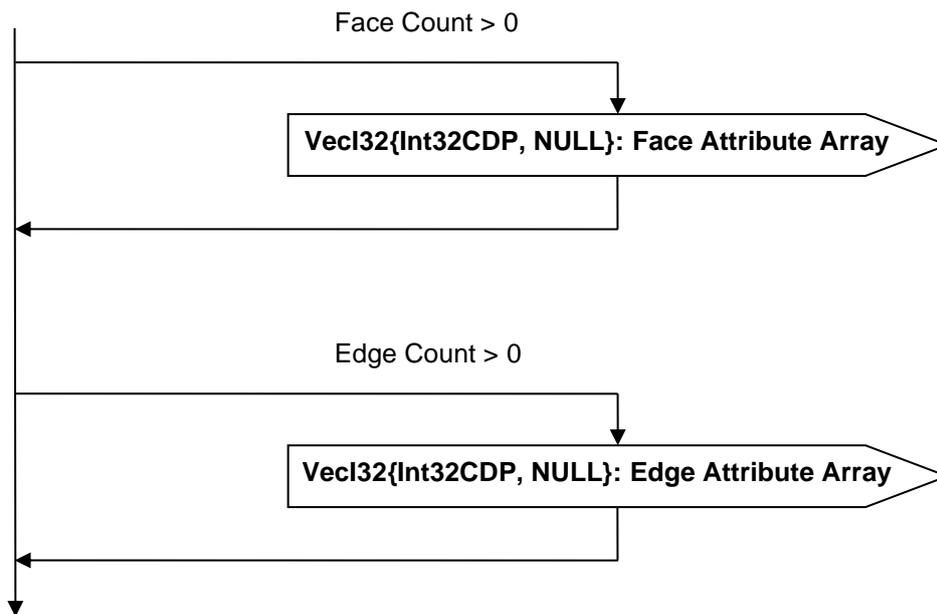


Figure H 2 — Integer Attribute Data collection

Face Count

Face Count specifies the number of XT B-Rep faces, which can be found from XT B-Rep Data.

VecI32{Int32CDP, NULL}: Face Attribute Array

Face Attribute Array specifies the collection of integer attributes, one for each XT B-Rep face. The attributes are arranged according to XT B-Rep face index as described in B-Rep Face Group Associations.

Edge Count

Edge Count specifies the number of XT B-Rep edges, which can be found from XT B-Rep Data.

VecI32{Int32CDP, NULL}: Edge Attribute Array

Edge Attribute Array specifies the collection of integer attributes, one for each XT B-Rep edge. The attributes are arranged in the same sequence according XT B-Rep edge index, decided in a similar way as XT B-Rep face index as described in B-Rep Face Group Associations.

H.1.3 MultiXT B-Rep Segment

MultiXT B-Rep Segment contains an Element that defines the precise geometric Boundary Representation data in XT boundary representation format, combined together for one or more Parts. These Parts that refer to a common MultiXT B-Rep Segment typically have similar geometry such that the JT file size can be reduced by this practice. MultiXT B-Rep Segments are typically referenced by all the Part Node Elements (see [Part Node Element](#)) that refer to them using Late Loaded Property Atom Elements (see [Late Loaded Property Atom Element](#)). The MultiXT B-Rep Segment type supports LZMA compression on all element data, so all elements in MultiXT B-Rep Segment use the Logical Element Header Compressed form of element header data.

MultiXT B-Rep Element

Object Type ID: 0x49829521, 0x1835, 0x49c3, 0x8b, 0xef, 0xdd, 0xc4, 0x3b, 0xfe, 0x5e, 0x88

MultiXT B-Rep Element represents precise data in XT boundary representation format, combined together for one or more Parts of similar geometry for better compression.

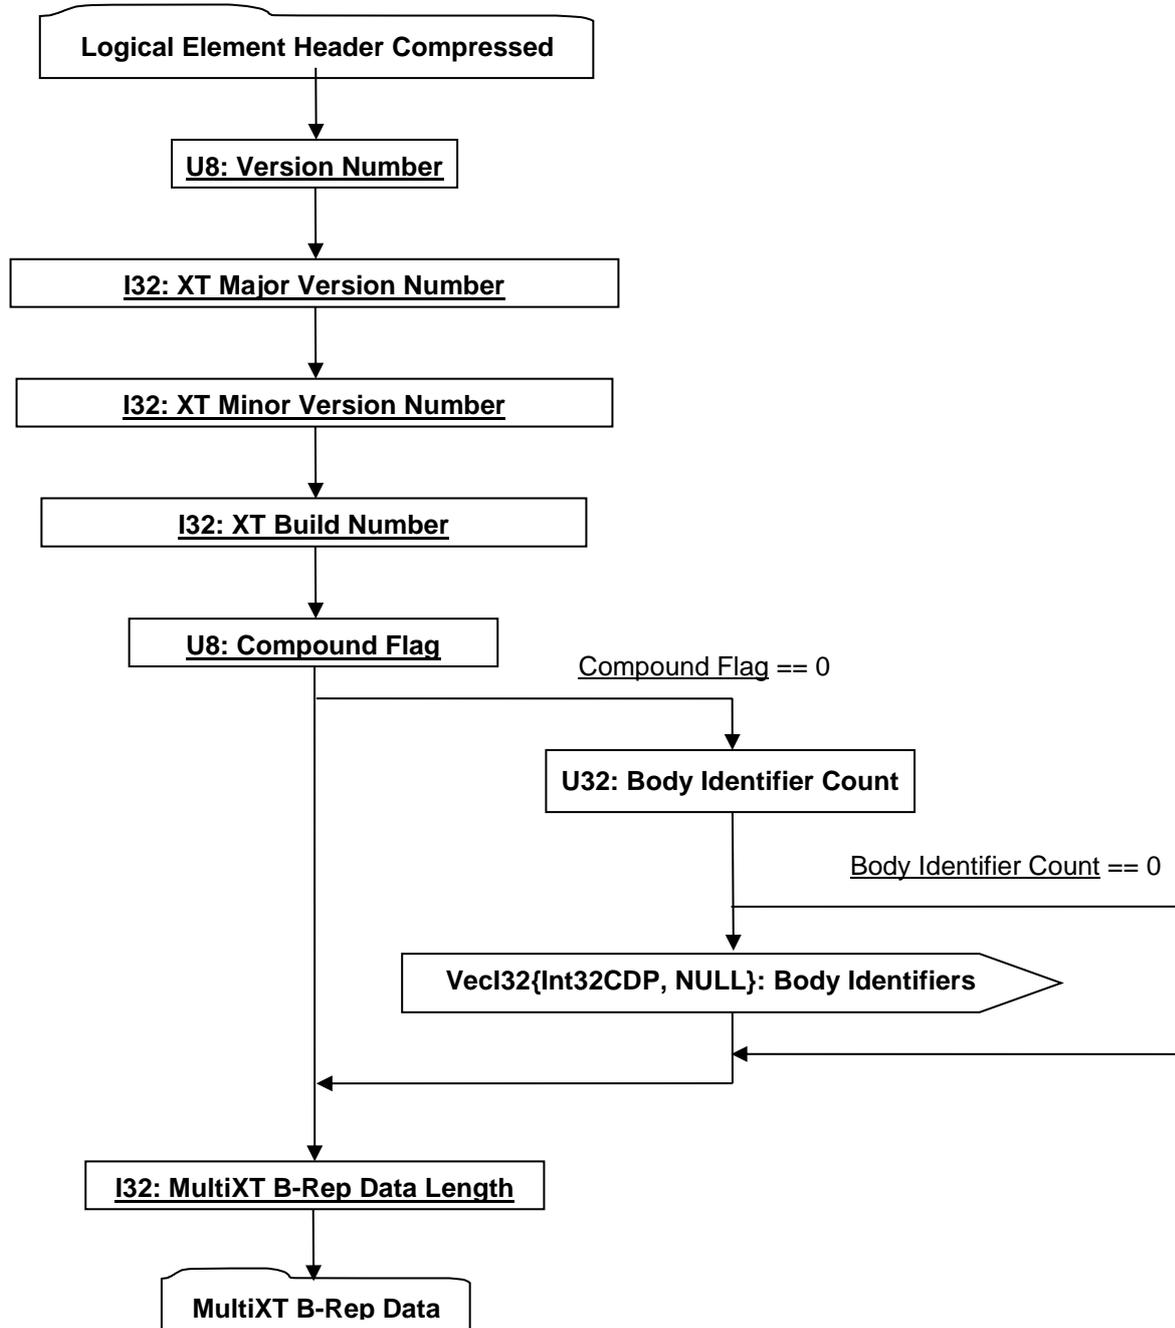


Figure H 3 — MultiXT B-Rep Element data collection

U8: Version Number

Version Number is the version identifier for this XT B-Rep Element. For information on local version numbers see Common Data Conventions and Construct Local version numbers.

I32: XT Major Version Number

XT Major Version Number specifies the major version number for the for the XT B-Rep data in the JT File. Major version number is an informative field which can be set to 0 without negative impact to implementation.

I32: XT Minor Version Number

XT Minor Version Number specifies the minor version number for the XT B-Rep data in the JT File. Minor version number is an informative field which can be set to 0 without negative impact to implementation.

I32: XT Build Number

XT Build Number specifies the build number for the XT B-Rep data in the JT File. XT build number is an informative field which can be set to 0 without negative impact to implementation.

U8: Compound Flag

Compound Flag specifies if the XT boundary representation has been turned into compound type. If the compound flag is not zero, then the XT B-Rep Body read from MultiXT B-Rep Data is of compound type. The compound body can be decomposed into multiple XT B-Rep bodies, and a Parasolid entity identifier can be retrieved from each Parasolid body using Parasolid library. The retrieved XT entity identifiers can be used to formulate Body Identifiers array, which is explicitly stored when the compound flag is zero, in order for each Part that refers to this MultiXT B-Rep Segment to know its XT B-Rep body(s).

U32: Body Identifier Count

Body Identifier Count specifies the number of entity identifiers in this **MultiXT B-Rep Element**.

VecI32{Int32CDP, NULL} : Body Identifiers

Body Identifiers is an integer array with its length equal to Body Identifier Count. The array is parallel to the XT B-Rep Body array read from MultiXT B-Rep Data, and each element specifies the identifier for the corresponding XT body.

I32: MultiXT B-Rep Data Length

MultiXT B-Rep Data Length specifies the length in bytes of the MultiXT B-Rep Data collection. A JT file loader/reader may use this information to compute the end position of the MultiXT B-Rep Data within the JT file and thus skip (for whatever reason) reading the remaining MultiXT B-Rep Data.

MultiXT B-Rep Data

The MultiXT B-Rep Data collection specifies the raw stream of bytes used to represent XT B-Rep Body(s), that are the super set of all the XT B-Rep Body(s) in all the Parts that refer to this MultiXT B-Rep Segment.

H.2 XT B-Rep Data Segment Description

The XT B-Rep data segment in a JT file is a neutral binary definition of the solid body. A proprietary kernel is not required to read the XT B-Rep data segment. The model definition in the XT B-Rep data segment of a JT file is a fully described geometric and topological representation.

H.2.1 Logical Layout

The logical layout of a XT B-Rep data segment is:

- A short flag sequence describing the data format, followed by modeller identification information and user field size.
 - The various flag sequences (mixtures of text and numbers) are documented under 'Physical layout'.
 - The content of the modeller identification information is:
 - The version of the Parasolid Kernel (if applicable) used to write the data, as a text string of the form:
 - TRANSMIT FILE created by modeler version 30000. The schema version describing the field sequences of the part nodes as a text string of the form:
 - SCH_3000000_30000

- This example above denotes XT data written by the Parasolid Kernel V30.0.000 using schema number 30000.
 - Applications writing XT data segments should use version 3000000 and schema number 30000 (i.e.):
 - TRANSMIT FILE created by modeler version 30000 SCH_3000000_30000
 - The user field size is a simple integer.
- The objects (known as ‘nodes’) in the XT data in an unordered sequence, followed by a terminator.
- Every node in the XT data is assigned an integer index from 1 upwards (some indices may not be used). Pointer fields are output as these indices, or as zero for a null pointer.
 - Each node entry begins with the node type. If the node is of variable length (see below), this is followed by the length of the variable field. The index of the node is then output, followed by the fields of the node.
 - The terminator which follows the sequence of nodes is a two-byte integer with value 1, followed by an index with value 0. The index is output as a 2-byte integer with value 1 in binary XT data.
 - The node with index 1 is the root node of the data as follows:

Table H 1 — Object Nodes

Contents of XT data	Type of root node
Body	BODY
Assembly	ASSEMBLY
Array of parts	POINTER_LIS_BLOCK
Partition	WORLD

H.2.1.1 Schema

XT permanent structures are defined in a language akin to C which generates the appropriate files for a C compiler, the runtime information used by the Parasolid Kernel, along with an optional schema file that can be used during transmit and receive. The schema file for version 30000 is named SCH_3000000_30000 and is distributed with the Parasolid kernel. However, it is not necessary for applications reading and writing XT data directly to have a copy of this schema file to understand the XT.

H.2.1.2 Embedded schemas

XT parts, partitions and deltas can be transmitted with extra information that is intended to replace the schema used to describe the data layout. This information contains the differences between its schema and a defined base schema. The only fields that are included in this information are those which can be referenced in a cut-down version of the schema pertaining only to the XT part data that is present. Specifically, a full schema definition can contain fields that are not relevant in the context of the transmitted data and these fields are excluded.

Fields that are included are referred to as effective fields, and are either transmittable (`xmt_code == 1`) or have variable-length (`n_elts == 1`).

H.2.1.3 Physical layout

Most of the XT data are composed of integers, logical flags, and strings, but are of restricted ranges and so transmitted specially in binary format. The binary representation is given in bold type, such as “integer (**byte**)”. This is relevant to applications that attempt to read or write XT data directly. Two important elements are

- short strings

These are transmitted as an integer length (byte) followed by the characters (without trailing zero).

- positive integers

These are transmitted similarly to the pointer indices which link individual objects together, i.e., small values 0..32766 are transmitted as a single **short** integer, larger ones encoded into two.

H.2.2 XT format

Presence of the new format is indicated by a change to the standard header: the archive name is extended by the number of the base schema, e.g., SCH_1400068_14000_13006, and then the maximum number of node types is inserted (short).

Transmission then continues as normal, except that when transmitting the first node of any particular type, extra information is inserted between the nodetype and the variable-length, index data as follows:

- The arrays of effective fields in the base schema node and the current schema node are assembled.
- If the nodetype does not exist in the base schema then it is output as follows:
 - number of fields (byte),
 - name and description (short strings), and
 - fields one by one as shown in the Table H 2.

Table H 2 — Field types in order one by one

Name	Short String	Notes
ptr_class	Short	
n_elts	Positive integer	
type	short string	The field type. Allowed values are described in “Field types”, below. Omitted if ptr_class non-zero
xmt_code	logical (byte)	Omitted for fixed-length (n_elts != 1)

- If the two arrays match (equal length and all fields match in name, xmt_code, ptr_class, n_elts and type) then output the flag value 255 (**byte 0xff**).
- If the two arrays do not match, output the number of effective fields in the current schema (byte), and an edit sequence as follows:
 - Initialize pointers to the first base field and first current field, then while there are still unprocessed base and current fields, output a sequence of Copy, Delete and Insert instructions.
 - If the base field matches the current field, output 'C' (char) to indicate an unchanged (Copied) field and advance to the next base and current fields.
 - If the base field does not match any unprocessed current field, output 'D' (char) to indicate a Deleted field and advance to the next base field.
 - Otherwise, output 'I' (char) to indicate an Inserted field, followed by the current field in the above format, and advance to the next current field.
 - If there are any unprocessed current fields, then output an Append sequence, each instruction being 'A' (**char**) followed by the field.
- Finally, output 'Z' (**char**) to signal the end.

H.2.2.1 Field types

The XT format is not itself a binary protocol, and so does not define data sizes; the only requirement is that a runtime implementation has sufficient room for the information. The available implementations run with 8bit ASCII characters, 8bit unsigned bytes (0..255), 16bit short integers (0..65535 or -32768..32767), 32bit integers (0..4G-1, -2G..2G-1) and IEEE reals. The implementation used in the given binary XT data is specified by the "PS<code>" at the start of the XT data. See the chapter on "Physical Layout" for more information.

The full list of field types used in XT segment data is as follows:

u unsigned byte 0-255

c char

l unsigned byte 0-1 (i.e. logical)

```
[1] typedef char logical;
```

n short int

w unicode character, output as a short int

d Int

p pointer-index

Small indices (less than 32767) are treated specially in binary XT data to save space. See the section below on binary format.

f double

i These correspond to a region of the real line:

```
typedef struct { double low, high; } interval;
```

v array [3] of doubles

These correspond to a 3-space position or direction:

```
typedef struct { double x,y,z; } vector;
```

b array [6] of doubles

These correspond to a 3-spce region:

```
typedef struct { interval x,y,z; } box;
```

h array [3] of doubles

These represent points of intersection between two surfaces; only the position vector is written to the XT data. The structure is documented further in the section on intersection curves.

H.2.2.2 Variable-length nodes

Variable-length nodes differ from fixed-length nodes in that their last field is of variable length, i.e. different nodes of the same type may have different lengths.

The number of entries in each such node is indicated by an integer in the XT data between its nodetype and index, so an example might be

```
83 3 15 1 2 3
```

H.2.2.3 Unresolved indices

In some cases a node will contain an index field which does not correspond to a node in the XT data, in this case the index is to be interpreted as zero.

H.2.3 Physical Layout

Binary

The flag sequence is followed by the length of the modeller version as a 2-byte integer, the characters of the modeller version, the length of the schema version as a 4-byte integer, the characters of the schema version, and finally the userfield size as a 4-byte integer.

There are two special numeric values (-32764 for integral values, -3.14158e13 for floating point) which are used to mark an 'unset' or 'null' value.

Neutral Binary

In the XT Segment neutral binary, data is represented in big-endian format, with IEEE floating point numbers and ASCII characters. The flag sequence is the 4-byte sequence "PS" followed by two zero bytes, i.e., 'P' 'S' '\0' '\0'. The initial letters are ASCII, thus '\120' '\123'. The nodetype at the start of a node is a 2-byte integer, the variable length which may follow it is a 4-byte integer.

Logical values (0,1) are represented as themselves in 1 byte.

Small pointer indices (in the range 0-32766) are implemented as a 2-byte integer, larger indices are represented as a pair, thus:

```
if (index < 32767)
{
    op_short( index + 1 );          // case: small index
    // offset so is > 0
}
else
{
    op_short( -(index % 32767 +    // case: big index
1) );          // remainder: add 1 so > 0
    op_short( index / 32767 );    // nonzero quotient
}
```

where op_short outputs a 2-byte integer.

The inverse is performed on reading:

```
short q = 0, r;
ip_short( &r );
if (r < 0)
{
    ip_short( &q );
    r = -r;
}
index = q * 32767 + r - 1;
```

where ip_short reads a 2-byte integer.

H.2.4 Model Structure

H.2.4.1 Topology

This section describes the XT Topology model, it gives an overview of how the nodes in the XT data are joined together.

The topological representation allows for:

- non-manifold solids,
- solids with internal partitions,
- bodies of mixed dimension (i.e. with wire, sheet, and solid `bits'),
- pure wire-frame bodies, and
- disconnected bodies.

Each entity is described, and its properties and links to other entities given.

General points

In this section a set is called finite if it can be enclosed in a ball of finite radius - not that it has a finite number of members.

A set of points in 3-dimensional space is called open if it does not contain its boundary.

Back-pointers, next and previous pointers in a chain, and derived pointers are not described explicitly here. For information on this see the following description of the schema-level model.

H.2.4.2 Entity definitions

Assembly

An assembly is a collection of instances of bodies or assemblies. It may also contain construction geometry. An assembly has the following fields:

- a set of instances, and
- a set of geometry (surfaces, curves and points).

Instance

An instance is a reference to a body or an assembly, with an optional transform:

- Body or assembly.
- Transform. If null, the identity transform is assumed.

Body

A body is a collection of faces, edges and vertices, together with the 3-dimensional connected regions into which space is divided by these entities. Each region is either **solid** or **void** (indicating whether it represents material or not).

The point-set represented by the body is the disjoint union of the point-sets represented by its solid regions, faces, edges, and vertices. This point-set need not be connected, but it shall be finite.

A body has the following fields:

- A set of regions.
 - A body has one or more regions. These, together with their boundaries, make up the whole of 3-space, and do not overlap, except at their boundaries. One region in the body is distinguished as the exterior region, which shall be infinite; all other regions in the body shall be finite.
- A set of geometry (surfaces, curve and/or points).
- A body-type. This may be wire, sheet, solid or general.

Region

A region is an open connected subset of 3-dimensional space whose boundary is a collection of vertices, edges, and oriented faces.

Regions are either solid or void, and they may be non-manifold. A solid region contributes to the point-set of its owning body; a void region does not (although its boundary will).

Two regions may share a face, one on each side.

A region may be infinite, but a body shall have exactly one infinite region. The infinite region of a body shall be void.

A region has the following fields:

- A logical indicating whether the region is solid.
- A set of shells. The positive shell of a region, if it has one, is not distinguished.

The shells of a region do not overlap or share faces, edges or vertices.

A region may have no shells, in which case it represents all space (and will be the only region in its body, which will have no faces, edges or vertices).

Shell

A shell is a connected component of the boundary of a region. As such it will be defined by a collection of faces, each used by the shell on one 'side', or on both sides; and some edges and vertices.

A shell has the following fields:

- A set of (face, logical) pairs.

Each pair represents one side of a face (where true indicates the front of the face, i.e. the side towards which the face normal points), and means that the region to which the shell belongs lies on that side of the face. The same face may appear twice in the shell (once with each orientation), in which case the face is a 2-dimensional cut subtracted from the region which owns the shell.

- A set of wireframe edges.

Edges are called **wireframe** if they do not bound any faces, and so represent 1-dimensional cuts in the shell's region. These edges are not shared by other shells.

- A vertex.

This is only non-null if the shell is an **acorn** shell, i.e. it represents a 0-dimensional hole in its region, and has one vertex, no edges and no faces.

A shell shall contain at least one vertex, edge, or face.

Face

A face is an open finite connected subset of a surface, whose boundary is a collection of edges and vertices. It is the 2-dimensional analogy of a region.

A face has the following fields:

- A set of loops. A face may have zero loops (e.g. a full spherical face), or any number.
- Surface. This may be null, and may be used by other faces.
- Sense. This logical indicates whether the normal to the face is aligned with or opposed to that of the surface.

Loop

A loop is a connected component of the boundary of a face. It is the 2-dimensional analogy of a shell. As such it will be defined by a collection of fins and a collection of vertices.

A loop has the following fields:

- An ordered ring of fins.

Each fin represents the oriented use of an edge by a loop. The sense of the fin indicates whether the loop direction and the edge direction agree or disagree. A loop may not contain the same edge more than once in each direction.

The ordering of the fins represents the way in which their owning edges are connected to each other via common vertices in the loop (i.e. nose to tail, taking the sense of each fin into account).

The loop direction is such that the face is locally on the left of the loop, as seen from above the face and looking in the direction of the loop.

- A vertex.

This is only non-null if the loop is an isolated loop, i.e. has no fins and represents a 0-dimensional hole in the face.

Consequently, a loop shall consist either of:

- A single fin whose owning ring edge has no vertices, or

- At least one fin and at least one vertex, or
- A single vertex.

Fin

A fin represents the oriented use of an edge by a loop.

A fin has the following fields:

- A logical **sense** indicating whether the fin's orientation (and thus the orientation of its owning loop) is the same as that of its owning edge, or different.
- A curve. This is only non-null if the fin's edge is tolerant, in which case every fin of that edge will reference a trimmed SP-curve. The underlying surface of the SP-curve shall be the same as that of the corresponding face. The curve shall not deviate by more than the edge tolerance from curves on other fins of the edge, and its ends shall be within vertex tolerance of the corresponding vertices.

Edge

An edge is an open finite connected subset of a curve; its boundary is a collection of zero, one or two vertices. It is the 1-dimensional analogy of a region.

An edge has the following fields:

- Start vertex.
- End vertex. If one vertex is null, then so is the other; the edge will then be called a **ring** edge.
- An ordered ring of distinct fins.
- The ordering of the fins represents the spatial ordering of their owning faces about the edge (with a right-hand screw rule, i.e. looking in the direction of the edge the fin ordering is clockwise). The edge may have zero or any number of fins; if it has none, it is called a **wireframe** edge.
- A curve. This will be null if the edge has a tolerance. Otherwise, the vertices shall lie within vertex tolerance of this curve, and if it is a Trimmed Curve, they shall lie within vertex tolerance of the corresponding ends of the curve. The curve shall also lie in the surfaces of the faces of the edge, to within modeller resolution.
- Sense. This logical indicates whether the direction of the edge (start to end) is the same as that of the curve.
- A tolerance. If this is null-double, the edge is **accurate** and is regarded as having a tolerance of half the modeller linear resolution, otherwise the edge is called **tolerant**.

Vertex

A vertex represents a point in space. It is the 0-dimensional analogy of a region.

A vertex has the following fields:

- A geometric point.
- A tolerance. If this is null-double, the vertex is **accurate** and is regarded as having a tolerance of half the modeller linear resolution.

Attributes

An attribute is an entity which contains data, and which can be attached to any other entity except attributes, fins, lists, transforms or attribute definitions. An attribute has the following fields:

- Definition. An attribute definition is an entity which defines the number and type of the data fields in a specific type of attribute, which entities may have such an attribute attached, and what happens to the attribute when its owning entity is changed. XT data shall not contain duplicate attribute definitions. Each attribute of a given type should reference the same instance of the attribute definition for that type. It is incorrect, for example, to create a copy of an attribute

definition for each instance of the attribute of that type. Only those attribute definitions referenced by attributes in the part occur in the data.

- Owner.
- Fields. These are data fields consisting of one or more integers, doubles, vectors etc.

There are a number of system attribute definitions which may be present in the XT data. These are documented in the section 'System Attribute Definitions'. User attribute definitions can also be created. These are included in the XT data along with any attributes that use them.

Groups

A group is a collection of entities in the same part. Groups in assemblies may contain instances, surfaces, curves and points. Groups in bodies may contain regions, faces, edges, vertices, surfaces, curves and points. Groups have:

- Owning part.
- A set of member entities.
- Type. The type of the group specifies the allowed type of its members, e.g. a 'face' group in a body may only contain faces, whereas a 'mixed' group may have any valid members.

Node-ids

All entities in a part, other than fins, have a non-zero integer node-id which is unique within a part. This is intended to enable the entity to be identified within the XT data.

Entity matrix

Thus the relations between entities can be represented in matrix form as follows in Table H 3. The numbers represent the number of distinct entities connected (either directly or indirectly) to the given one.

Table H 3 — Entity Matrix relations

	Body	Region	Shell	Face	Loop	Fin	Edge	Vertex
Body	-	>0	any	any	any	any	any	any
Region	1	-	any	any	any	any	any	any
Shell	1	1	-	any	any	any	any	any
Face	1	1-2	1-2	-	any	any	any	any
Loop	1	1-2	1-2	1	-	any	any	any
Fin	1	1-2	1-2	1	1	-	1	0-2
Edge	1	any	any	any	any	any	any	any
Vertex	1	any	any	any	any	any	any	-

H.2.4.3 Representation of manifold bodies

H.2.4.3.1 *Body types*

XT bodies have a field `body_type` which takes values from an enumeration indicating whether the body is:

- **solid**, representing a manifold 3-dimensional volume, possibly with internal voids. It need not be connected;
- **sheet**, representing a 2-dimensional subset of 3-space which is either manifold or manifold with boundary (certain cases are not strictly manifold – see below for details). It need not be connected;
- **wire**, representing a 1-dimensional subset of 3-space which is either manifold or manifold with boundary, and which need not be connected. An **acorn** body, which represents a single 0-dimensional point in space, also has body-type wire;

- **general** - none of the above.

A general body is not necessarily non-manifold, but at the same time it is not constrained to be manifold, connected, or of a particular dimensionality (indeed, it may be of mixed dimensionality).

Restrictions on entity relationships for manifold body types

Solid, sheet, and wire bodies are best regarded as special cases of the topological model; for convenience we call them the manifold body types (although as stated above, a general body may also be manifold).

In particular, bodies of these manifold types shall obey the following constraints:

- An acorn body shall consist of a single void region with a single shell consisting of a single vertex.
- A wire body shall consist of a single void region, with one or more shells, consisting of one or more wireframe edges and zero or more vertices (and no faces). Every vertex in the body shall be used by exactly one or two of the edges (so, in particular, there are no acorn vertices).
- So each connected component will be either: closed, where every vertex has exactly two edges; or open, where all but two vertices have exactly two edges each.
- A wire is called open if all its components are open, and closed if all its components are closed
- Solid and sheet bodies shall each contain at least one face; they may not contain any wireframe edges or acorn vertices.
- A solid body shall consist of at least two regions; at least one of its regions shall be solid. Every face in a solid body shall have a solid region on its negative side and a void region on its positive side (in other words, every face forms part of the boundary of the solid, and the face normals always point away from the solid).
- Every edge in a solid body shall have exactly two fins, which will have opposite senses. Every vertex in a solid body shall either belong to a single isolated loop, or belong to one or more edges; in the latter case, the faces which use those edges shall form a single edgewise-connected set (when considering only connections via the edges which meet at the vertex).
- These constraints ensure that the solid is manifold.
- All the regions of a sheet body shall be void. It is known as an open sheet if it has one region, and a closed sheet if it has no boundary.
- Every edge in a sheet body shall have exactly one or two fins; if it has two, these shall have opposite senses. In a closed sheet body, all the edges will have exactly two fins. Every vertex in a sheet body shall either belong to a single isolated loop, or belong to one or more edges; in the latter case, the faces which use those edges shall either form a single edgewise-connected set where all the edges involved have exactly two fins, or any number of edgewise-connected sets, each of which shall involve exactly two edges with one fin each (again, considering only connections via the edges which meet at the vertex).

Note that, although the constraints on edges and vertices in a sheet body are very similar to those which apply to a solid, in this case they do not guarantee that the body will be manifold; indeed, the rather complicated rules about vertices in an open sheet body specifically allow bodies which are non-manifold (such as a body consisting of two square faces which share a single corner vertex).

H.2.4.3.2 Schema Definition

Underlying types

```
union CURVE_OWNER_u
{
    struct EDGE_s           *edge;
    struct FIN_s           *fin;
    struct BODY_s          *body;
    struct ASSEMBLY_s      *assembly;
```

```

    struct WORLD_s          *world;
    };

union SURFACE_OWNER_u
{
    struct FACE_s          *face;
    struct BODY_s          *body;
    struct ASSEMBLY_s      *assembly;
    struct WORLD_s         *world;
};

union ATTRIB_GROUP_u
{
    struct ATTRIBUTE_s     *attribute;
    struct GROUP_s         *group;
    struct MEMBER_OF_GROUP_s *member_of_group;
};
typedef union ATTRIB_GROUP_u ATTRIB_GROUP;

```

H.2.4.3.3 Geometry

```

union CURVE_u
{
    struct LINE_s          *line;
    struct CIRCLE_s        *circle;
    struct ELLIPSE_s       *ellipse;
    struct INTERSECTION_s  *intersection;
    struct TRIMMED_CURVE_s *trimmed_curve;
    struct PE_CURVE_s       *pe_curve;
    struct B_CURVE_s        *b_curve;
    struct SP_CURVE_s       *sp_curve;
};
typedef union CURVE_u      CURVE;

union SURFACE_u
{
    struct PLANE_s          *plane;
    struct CYLINDER_s       *cylinder;
    struct CONE_s           *cone;
    struct SPHERE_s         *sphere;
    struct TORUS_s          *torus;
    struct BLENDED_EDGE_s   *blended_edge;
    struct BLEND_BOUND_s    *blend_bound;
    struct OFFSET_SURF_s    *offset_surf;
    struct SWEEP_SURF_s     *swept_surf;
    struct SPUN_SURF_s      *spun_surf;
    struct PE_SURF_s        *pe_surf;
    struct B_SURFACE_s      *b_surface;
};
typedef union SURFACE_u    SURFACE;

union GEOMETRY_u
{
    union SURFACE_u         surface;
    union CURVE_u           curve;
    struct POINT_s          *point;
    struct TRANSFORM_s      *transform;
};
typedef union GEOMETRY_u  GEOMETRY;

```

Curves

In the following field tables, 'pointer0' means a reference to another node which may be null. 'pointer' means a non-null reference.

All curve nodes share the following common fields:

Table H 4 — Curve node common fields

Field name	Data type	Description
node_id	int	Integer value unique to curve in part
attributes_groups	pointer0	Attributes and groups associated with curve
owner	pointer0	topological owner
next	pointer0	next curve in geometry chain
previous	pointer0	previous curve in geometry chain
geometric_owner	pointer0	geometric owner node
sense	char	sense of curve: '+' or '-' (see end of Geometry section)

```

struct ANY_CURVE_s          // Any Curve
{
  int          node_id;          // $d
  union ATTRIB_GROUP_u    attributes_groups; // $p
  union CURVE_OWNER_u     owner;    // $p
  union CURVE_u          next;     // $p
  union CURVE_u          previous;  // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char          sense;          // $c
};
typedef struct ANY_CURVE_s *ANY_CURVE;
  
```

Line

A straight line has a parametric representation of the form:

$$R(t) = P + t D$$

where

- P is a point on the line.
- D is its direction.

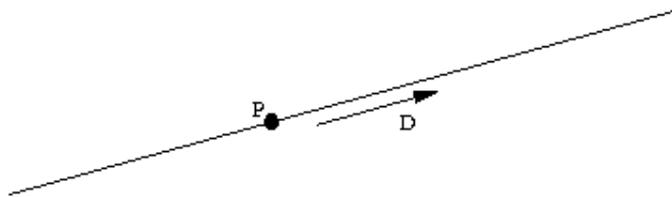


Table H 5 — Line Fields

Field name	Data type	Description
pvec	vector	point on the line
direction	vector	direction of the line (a unit vector)

```

struct LINE_s == ANY_CURVE_s // Straight line
{
  int          node_id;          // $d
  union ATTRIB_GROUP_u    attributes_groups; // $p
  union CURVE_OWNER_u     owner;    // $p
  union CURVE_u          next;     // $p
  union CURVE_u          previous;  // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char          sense;          // $c
  vector       pvec;           // $v
};
  
```

```
vector direction; // $v
};
typedef struct LINE_s *LINE;
```

CIRCLE

A circle has a parametric representation of the form

$$R(t) = C + r X \cos(t) + r Y \sin(t)$$

Where

- C is the centre of the circle.
- r is the radius of the circle.
- X and Y are the axes in the plane of the circle.

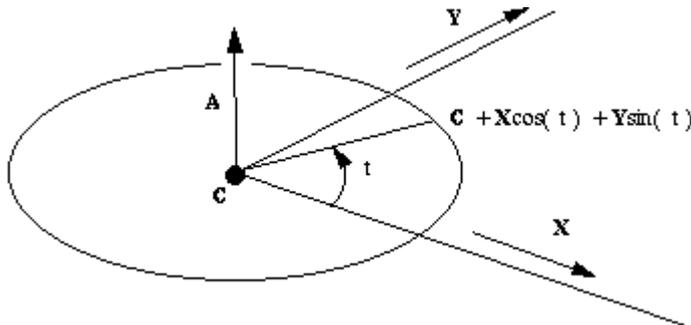


Table H 6 — Circle fields

Field name	Data type	Description
centre	vector	Centre of circle
normal	vector	Normal to the plane containing the circle (a unit vector)
x_axis	vector	X axis in the plane of the circle (a unit vector)
radius	double	Radius of circle

The Y axis in the definition above is the vector cross product of the normal and x_axis.

```
struct CIRCLE_s == ANY_CURVE_s // Circle
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  union CURVE_OWNER_u owner; // $p
  union CURVE_u next; // $p
  union CURVE_u previous; // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char sense; // $c
  vector centre; // $v
  vector normal; // $v
  vector x_axis; // $v
  double radius; // $f
};
typedef struct CIRCLE_s *CIRCLE;
```

ELLIPSE

An ellipse has a parametric representation of the form

$$R(t) = C + a X \cos(t) + b Y \sin(t)$$

where

- C is the centre of the circle.
- X is the major axis.

- r is the major radius.
- Y and b are the minor axis and minor radius respectively.

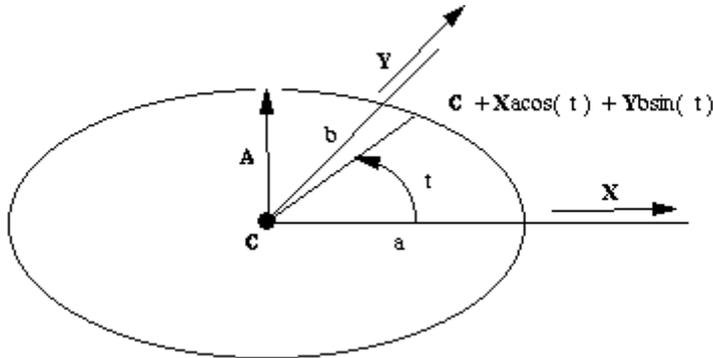


Table H 7 — Ellipse fields

Field name	Data type	Description
centre	Vector	Centre of ellipse
normal	Vector	Normal to the plane containing the ellipse (a unit vector)
x_axis	Vector	major axis in the plane of the ellipse (a unit vector)
major_radius	Double	major radius
minor_radius	Double	minor radius

The minor axis (Y) in the definition above is the vector cross product of the normal and x_axis.

```

struct ELLIPSE_s == ANY_CURVE_s      // Ellipse
{
  int          node_id;                // $d
  union ATTRIB_GROUP_u      attributes_groups; // $p
  union CURVE_OWNER_u      owner;      // $p
  union CURVE_u            next;       // $p
  union CURVE_u            previous;   // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  vector          centre;             // $v
  char            sense;              // $c
  vector          normal;             // $v
  vector          x_axis;             // $v
  double          major_radius;      // $f
  double          minor_radius;      // $f
};
typedef struct ELLIPSE_s      *ELLIPSE;
  
```

B_CURVE (B-spline curve)

XT supports B spline curves in full NURBS format. The mathematical description of these curves is:

- Non Uniform Rational B-splines as (NURBS), and

$$P(t) = \frac{\sum_{i=0}^{n-1} b_i(t)w_i V_i}{\sum_{i=0}^{n-1} b_i(t)w_i}$$

- the more simple Non Uniform B-spline

$$P(t) = \sum_{i=0}^{n-1} b_i(t) V_i$$

— Where:

n = number of vertices ($n_vertices$ in the PK standard form)

$V_0 \dots V_{n-1}$ are the B-spline vertices

$w_0 \dots w_{n-1}$ are the weights

$b_j(t), l = 0 \dots n-1$ are the B-spline basis functions

Knot Vectors

The parameter t above is global. The user supplies an ordered set of values of t at specific points. The points are called knots and the set of values of t is called the knot vector. Each successive value in the set shall be greater than or equal to its predecessor. Where two or more such values are the same we say that the knots are coincident, or that the knot has multiplicity greater than 1. In this case it is best to think of the knot set as containing a null or zero length span. The principal use of coincident knots is to allow the curve to have less continuity at that point than is formally required for a spline. A curve with a knot of multiplicity equal to its *degree* can have a discontinuity of first derivative and hence of tangent direction. This is the highest permitted multiplicity except at the first or last knot where it can go as high as $(degree+1)$.

In order to avoid problems associated, for example with rounding errors in the knot set, XT stores an array of distinct values and an array of integer multiplicities. This is reflected in the standard form used by the PK for input and output of B-curve data.

Most algorithms in the literature, and the following discussion refer to the expanded knot set in which a knot of multiplicity n appears explicitly n times.

THE NUMBER OF KNOTS AND VERTICES

The knot set determines a set of basis functions which are bell shaped, and non zero over a span of $(degree+1)$ intervals. One basis function starts at each knot, and each one finishes $(degree + 1)$ knots higher. The control vectors are the coefficients applied to these basis functions in a linear sum to obtain positions on the curve. Thus it can be seen that we require the number of knots $n_knots = n_vertices + degree + 1$.

THE VALID RANGE OF THE B-CURVE

So if the knot set is numbered $\{t_0$ to $t_{n_knots-1}\}$ it can be seen then that it is only after t_{degree} that sufficient $(degree + 1)$ basis functions are present for the curve to be fully defined, and that the B-curve ceases to be fully defined after $t_{n_knots - 1 - degree}$.

The first *degree* knots and the last *degree* knots are known as the imaginary knots because their parameter values are outside the defined range of the B-curve.

PERIODIC B-CURVES

When the end of a B-curve meets its start sufficiently smoothly XT allows it to be defined to have periodic parametrization. That is to say that if the valid range were from t_{degree} to $t_{n_knots - 1 - degree}$ then the difference between these values is called the period and the curve can continue to be evaluated with the same point reoccurring every period.

The minimal smoothness requirement for periodic curves in XT is tangent continuity, but we strongly recommend $C_{degree-1}$, or continuity in the $(degree-1)^{th}$ derivative. This in turn is best achieved by repeating the first *degree* vertices at the end, and by matching knot intervals so that counting from the start of the defined range, t_{degree} , the first *degree* intervals between knots match the last *degree* intervals, and similarly matching the last *degree* knot intervals before the end of the defined range to the first *degree* intervals.

CLOSED B-CURVES

A periodic B-curve shall also be closed, but is permitted to have a closed Bcurve that is not periodic.

In this case the rules for continuity are relaxed so that only C_0 or positional continuity is required between the start and end. Such closed non-periodic curves are not able to be attached to topology.

RATIONAL B-CURVE

In the rational form of the curve, each vertex is associated with a weight, which increases or decreases the effect of the vertex without changing the curve hull. To ensure that the convex hull property is retained, the curve equation is divided by a denominator which makes the coefficients of the vertices sum to one.

$$P(t) = \frac{\sum_{i=0}^{n-1} b_i(t)w_iV_i}{\sum_{i=0}^{n-1} b_i(t)w_i}$$

Where $w_0... w_{n-1}$ are weights.

Each weight may take any positive value, and the larger the value, the greater the effect of the associated vertex. However, it is the relative sizes of the weights which is important, as may be seen from the fact that in the equation given above, all the weights may be multiplied by a constant without changing the equation.

In XT the weights are stored with the vertices by treating these as having an extra dimension. In the usual case of a curve in 3-d cartesian space this means that vertex_dim is 4, the x, y, z values are multiplied through by the corresponding weight and the 4th value is the weight itself.

```
struct B_CURVE_s == ANY_CURVE_s // B curve
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  union CURVE_OWNER_u owner; // $p
  union CURVE_u next; // $p
  union CURVE_u previous; // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char sense; // $c
  struct NURBS_CURVE_s *nurbs; // $p
  struct CURVE_DATA_s *data; // $p
};
typedef struct B_CURVE_s *B_CURVE;
```

The data stored in the XT data for a NURBS_CURVE is

Table H 8 — NURB curve fields

Field name	Data type	Description
degree	Short	degree of the curve
n_vertices	Int	number of control vertices ('poles')
vertex_dim	Short	dimension of control vertices
n_knots	Int	number of distinct knots
knot_type	Byte	form of knot vector
periodic	Logical	true if curve is periodic
closed	Logical	true if curve is closed
rational	Logical	true if curve is rational
curve_form	Byte	shape of curve, if special
bspline_vertices	Pointer	control vertices node
knot_mult	Pointer	knot multiplicities node
knots	Pointer	knots node

The knot_type enum is used to describe whether or not the knot vector has a certain regular spacing or other common property:

```
typedef enum
```

```

{
SCH_unset = 1,           // Unknown
SCH_non_uniform = 2,    // Known to be not special
SCH_uniform = 3,        // Uniform knot set
SCH_quasi_uniform = 4,  // Uniform apart from bezier ends
SCH_piecewise_bezier = 5, // Internal multiplicity of order-1
SCH_bezier_ends = 6    // Bezier ends, no other property
}
SCH_knot_type_t;

```

A uniform knot set is one where all the knots are of multiplicity one and are equally spaced. A curve has bezier ends if the first and last knots both have multiplicity 'order'.

The curve_form enum describes the geometric shape of the curve. The parameterization of the curve is not relevant.

```

typedef enum
{
SCH_unset          = 1,    // Form is not known
SCH_arbitrary      = 2,    // Known to be of no particular shape
SCH_polyline       = 3,
SCH_circular_arc   = 4,
SCH_elliptic_arc   = 5,
SCH_parabolic_arc  = 6,
SCH_hyperbolic_arc = 7
}
SCH_curve_form_t;

struct NURBS_CURVE_s // NURBS curve
{
short degree; // $n
int n_vertices; // $d
short vertex_dim; // $n
int n_knots; // $d
SCH_knot_type_t knot_type; // $u
logical periodic; // $1
logical closed; // $1
logical rational; // $1
SCH_curve_form_t curve_form; // $u
struct BSPLINE_VERTICES_s *bspline_vertices; // $p
struct KNOT_MULT_s *knot_mult; // $p
struct KNOT_SET_s *knots; // $p
};
typedef struct NURBS_CURVE_s *NURBS_CURVE;

```

The bspline vertices node is simply an array of doubles; 'vertex_dim' doubles together define one control vertex. Thus the length of the array is n_vertices * vertex_dim.

```

struct BSPLINE_VERTICES_s // B-spline vertices
{
double vertices[ 1 ]; // $f[]
};
typedef struct BSPLINE_VERTICES_s *BSPLINE_VERTICES;

```

The knot vector of the NURBS_CURVE is stored as an array of distinct knots and an array describing the multiplicity of each distinct knot. Hence the two nodes

```

struct KNOT_SET_s // Knot set
{
double knots[ 1 ]; // $f[]
};
typedef struct KNOT_SET_s *KNOT_SET;

```

and

```

struct KNOT_MULT_s // Knot multiplicities

```

```

    {
        short                mult[ 1 ];                // $n[]
    };
typedef struct KNOT_MULT_s *KNOT_MULT;

```

The data stored in the XT data for a CURVE_DATA node is:

```

typedef enum
{
    SCH_unset = 1,                // check has not been performed
    SCH_no_self_intersections = 2, // passed checks
    SCH_self_intersects = 3,      // fails checks
    SCH_checked_ok_in_old_version = 4 // see below
}
    SCH_self_int_t;

struct CURVE_DATA_s                // curve_data
{
    SCH_self_int_t                self_int;                // $u
    Struct HELIX_CU_FORM_s        *analytic_form          // $p
};
typedef struct CURVE_DATA_s *CURVE_DATA;

```

The self-intersection enum describes whether or not the geometry has been checked for self-intersections, and whether such self-intersections were found to exist:

If the analytic_form field is not null, it will point to a HELIX_CU_FORM node, which indicates that the curve has a helical shape, as follows:

```

struct HELIX_CU_FORM_s
{
    vector                axis_pt                // $v
    vector                axis_dir              // $v
    vector                point                 // $v
    char                  hand                  // $c
    interval              turns                 // $i
    double                pitch                 // $f
    double                tol                    // $f
};
typedef struct HELIX_CU_FORM_s *HELIX_CU_FORM;

```

The axis_pt and axis_dir fields define the axis of the helix. The hand field is '+' for a right-handed and '-' for a left-handed helix. A representative point on the helix is at turn position zero. The turns field gives the extent of the helix relative to the point. For instance, an interval [0 10] indicates a start position at the point and an end 10 turns along the axis. Pitch is the distance travelled along the axis in one turn. Tol is the accuracy to which the owning bcurve fits this specification.

INTERSECTION

An intersection curve is one of the branches of a surface / surface intersection. XT represents these curves exactly; the information held in an intersection curve node is sufficient to identify the particular intersection branch involved, to identify the behaviour of the curve at its ends, and to evaluate precisely at any point in the curve. Specifically, the data is:

- The two surfaces involved in the intersection.
- The two ends of the intersection curve. These are referred to as the 'limits' of the curve. They identify the particular branch involved.
- An ordered array of points along the curve. This array is referred to as the 'chart' of the curve. It defines the parameterisation of the curve, which increases as the array index increases.
- The natural tangent to the curve at any point (i.e. in the increasing parameter direction) is given by the vector cross-product of the surface normals at that point, taking into account the senses of the surfaces.

Singular points where the cross-product of the surface normals is zero, or where one of the surfaces is degenerate, are called terminators. Intersection curves do not contain terminators in their interior. At terminators, the tangent to the curve is defined by the limit of the curve tangent as the curve parameter approaches the terminating value.

Field Name	Data Type	Description
surface	pointer array [2]	surfaces of intersection curve
chart	Pointer	array of hvecs on the curve – see below
start	Pointer	start limit of the curve
end	Pointer	end limit of the curve
intersection_data	Pointer	optional structure for storing additional information associated with an intersection curve

```

struct INTERSECTION_s == ANY_CURVE_s // Intersection
{
  int          node_id;           // $d
  union ATTRIB_GROUP_u  attributes_groups; // $p
  union CURVE_OWNER_u   owner;     // $p
  union CURVE_u         next;      // $p
  union CURVE_u         previous;  // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char          sense;           // $c
  union SURFACE_u       surface[ 2 ]; // $p[2]
  struct CHART_s        *chart;    // $p
  struct LIMIT_s        *start;    // $p
  struct LIMIT_s        *end;      // $p
  nolog struct INTERSECTION_DATA *intersection_data // $p
};
typedef struct INTERSECTION_s *INTERSECTION;

```

A point on an intersection curve is stored in a data structure called an hvec (hepta-vec, or 7- vector):

```

typedef struct hvec_s // hepta_vec
{
  vector      Pvec;           //position
  double double u[2];        //surface parameters
  double double v[2];
  vector      Tangent;       //curve tangent
  double      t;             //curve parameter
} hvec;

```

Where

- pvec is a point common to both surfaces;
- u[] and v[] are the u and v parameters of the pvec on each of the surfaces;
- tangent is the tangent to the curve at pvec. This will be equal to the (normalized) vector cross product of the surface normals at pvec, when this cross product is non-zero. These surface normals take account of the surface sense fields;
- t is the parameter of the pvec on the curve.

Note: Only the pvec part of an hvec is actually transmitted.

The chart data structure essentially describes a piecewise-linear (chordal) approximation to the true curve. As well as containing the ordered array of hvecs defining this approximation, it contains extra information pertaining to the accuracy of the approximation:

```

struct CHART_s          //Chart
    double              Base_parameter;          // $f
    double              Base scale;              // $f
    int                 Chart count;            // $d
    double              Chordal error;          // $f
    double              Angular error;          // $f
    double              Parameter error[2];     // $f[2]
    hvec                Hvec[ 1 ];              // $h[]
};

typedef struct CHART_s *CHART;

```

Where

- `base_parameter` is the parameter of the first hvec in the chart;
- `base_scale` determines the scale of the parameterization (see below);
- `chart_count` is the length of the hvec array;
- `chordal_error` is an estimate of the maximum deviation of the curve from the piecewise- linear approximation given by the hvec array. It may be null;
- `angular_error` is the maximum angle between the tangents of two sequential hvecs. It may be null;
- `parameter_error[]` is always [null, null];
- `hvec[]` is the ordered array of hvecs.

The limits of the intersection curve are stored in the following data structure:

```

struct LIMIT_s          // Limit
{
    Char type;           //$c
    Hvec hvec[1];       //$h[]
};

typedef struct LIMIT_s *LIMIT;

```

The 'type' field may take one of the following values

```

const char SCH_help      ='H'; // help hvec
const char SCH_terminator='T'; // terminator
const char SCH_limit     ='L'; // arbitrary limit
const char SCH_boundary  ='B'; // spine boundary

```

The length of the hvec array depends on the type of the limit

- a `SCH_help` limit is an arbitrary point on a closed intersection curve. There will be one hvec in the hvec array, locating the curve.
- a `SCH_terminator` limit is a point where one of the surface normals is degenerate, or where their cross-product is zero. Typically, there will be more than one branch of intersection between the two surfaces at these singularities. There will be two values in the hvec array. The first will be the exact position of the singularity, and the second will be a point on the curve a small distance away from the terminator. This 'branch point' identifies which branch relates to the curve in question. The branch point is the one which appears in the chart, at the corresponding end – so the singularity lies just outside the parameter range of the chart.

- a SCH_limit limit is an artificial boundary of an intersection curve on an otherwise potentially infinite branch. The single hvec describes the end of the curve.
- a SCH_boundary limit is used to describe the end of a degenerate rolling-ball blend. It is not relevant to intersection curves.

The parameterisation of the curve is given as follows. If the chart points are P_i , $i = 0$ to n , with parameters t_i , and natural tangent vectors T_i , then define

$$C_i = | P_{i+1} - P_i |$$

$$\cos(a_i) = T_i \cdot (P_{i+1} - P_i) / C_i \quad \cos(b_i) = T_i \cdot (P_i - P_{i-1}) / C_{i-1}$$

Then at any chart point P_i the angles a_i and b_i are the deviations between the tangent at the chart point and the next and previous chords respectively.

Let $f_0 = \text{base_scale}$

$$f_i = (\cos(b_i) / \cos(a_i)) f_{i-1}$$

Then $t_0 = \text{base_parameter}$ $t_i = t_{i-1} + C_{i-1}$

$$_1 f_{i-1}$$

The factors f_i are chosen so that the parameterisation is $C1$. The parameter of a point between two chart points is given by projecting the point onto the chord between the previous and next chart point. The point on the intersection curve corresponding to a given parameter is defined as follows:

- For a parameter equal to that of a chart point, it is the position of the chart point.
- For a parameter interior to the chart, it is the local point of intersection of three surfaces: the two surfaces of the intersection, and a plane defined by the chart. If the parameter t lies between chart parameters t_i , t_{i+1} , then the chord point corresponding to t lies at

$$(t_{i+1} - t) / (t_{i+1} - t_i) P_i + (t - t_i) / (t_{i+1} - t_i) P_{i+1}$$

The plane lies through this point and is orthogonal to the chord (P_{i+1}, P_i) .

For a parameter between a branch chart point and a terminator, it is the local point of intersection of three surfaces: one of the intersection surfaces and two planes. Surface[0] is used unless it is singular at the terminator and surface[1] is not singular at the terminator. The first plane contains the chord between the branch and the terminator, and the normal of the chosen intersection surface at the terminator or the curve tangent at the branch chart point if the surface normal cannot be defined. The second plane is the plane orthogonal to the chord between the branch and terminator points through the chord point as calculated above.

The `intersection_data` node is an optional structure for storing surface uv parameters from hvecs that are associated with an intersection curve.

```
logged struct INTERSECTION_DATA_s          //Intersection data
{
    SCH_intersection_uv_type_t uv_type;     //$u
    double values [1]; ---$f[]
};
typedef struct INTERSECTION_DATA_s*INTERSECTION_DATA;
inline double *SCH_INTERSECTION_DATA_values(INTERSECTION_DATA self)
{
    return self -> values;
}
SCH_define_init_fn_m(INTERSECTION_DATA_s, self,
    self -> uv_type = SCH_intersection_uv_none;
    double*values = SCH_INTERSECTION_DATA_values(self);
    for (int i = 0; i < n_variable; ++i)
        values [i] = null;
)
```

The `intersection_data` node contains an enum value and a variable length double array. The enum value specifies the uv values stored in the values array and is set based on the following:

```
typedef short short enum
{
```

```

    SCH_intersection_uv_none =1,
    SCH_intersection_uv_first =2,
    SCH_intersection_uv_second=3,
    SCH_intersection_uv_both=4,
  }
SCH_intersection_uv_type_t;
char *SCH_intersection_uv_type_sprintf

```

The uv values are converted to the number of parameters which are stored for each chart `hvec` as follows:

- If `SCH_intersection_uv_none`, the number of parameters is 0
- If `SCH_intersection_uv_first` or `SCH_intersection_uv_second`, the number of parameters is 2
- If `SCH_intersection_uv_both`, the number of parameters is 4

The variable length double array contains these parameters, and the start and end limits. The values for the start and end limits can be found in the variable length arrays in the `LIMIT start`, and `LIMIT end` fields of the `INTERSECTION` node.

The number of values in the double array is calculated as:

(The number of chart points + The number of terminator limits) * (The number of parameters per `hvec`)

For each terminator present in the array the number of values will increase by 0, 2, or 4 depending on the `intersection_uv_type` field. For example, if both the start and the end limits are terminators and the `intersection_uv_type` is set to `SCH_intersection_uv_both` the value will increase by 8.

The order of values in the array is as follows:

If the start limit is a terminator:

If the <code>intersection_uv_type</code> is...	The order of values in array is...
<code>SCH_intersection_uv_first</code> or <code>SCH_intersection_uv_both</code>	intersection node ->start-> <code>hvec[0].u[0]</code> intersection node ->start-> <code>hvec[0].v[0]</code>
<code>SCH_intersection_uv_second</code> or <code>SCH_intersection_uv_both</code>	intersection node ->start -> <code>hvec[0].u[1]</code> intersection node ->start -> <code>hvec[0].v[1]</code>

For each `hvec` in the chart:

If the <code>intersection_uv_type</code> is...	The order of values in array is...
<code>SCH_intersection_uv_first</code> or <code>SCH_intersection_uv_both</code>	intersection node->chart -> <code>hvec[i].u[0]</code> intersection node->chart -> <code>hvec[i].v[0]</code>
<code>SCH_intersection_uv_second</code> or <code>SCH_intersection_uv_both</code>	intersection node->chart -> <code>hvec[i].u[1]</code> intersection node->chart -> <code>hvec[i].v[1]</code>

chart `hvecs` are wrapped in a loop where `i = 0` to the (number of chart `hvecs` -1).If end limit is a terminator:

If the intersection_uv_type is...	The order of values in array is...
SCH_intersection_uv_firstor SCH_intersection_uv_both	intersection node->end ->hvec[0].u[0] intersection node->end ->hvec[0].v[0]
SCH_intersection_uv_secondor SCH_intersection_uv_both	intersection node->end ->hvec[0].u[1] intersection node->end ->hvec[0].v[1]

TRIMMED_CURVE

A trimmed curve is a bounded region of another curve, referred to as its basis curve. It is defined by the basis curve and two points and their corresponding parameters. Trimmed curves are most commonly attached to fins (fins) of tolerant edges in order to specify which portion of the underlying basis curve corresponds to the tolerant edge. They are necessary since the tolerant vertices of the edge do not necessarily lie exactly on the basis curve; the 'point' fields of the trimmed curve lie exactly on the basis curve, and within tolerance of the relevant vertex.

The rules governing the parameter fields and points are:

- point_1 and point_2 correspond to parm_1 and parm_2 respectively.
- If the basis curve has positive sense, parm_2 > parm_1.
- If the basis curve has negative sense, parm_2 < parm_1.

In addition,

For open basis curves.

- Both parm_1 and parm_2 shall be in the parameter range of the basis curve.
- point_1 and point_2 shall not be equal.

For periodic basis curves.

- parm_1 shall lie in the base range of the basis curve.
- If the whole basis curve is required then parm_1 and parm_2 should be a period apart and point_1 = point_2. Equality of parm_1 and parm_2 is not permitted.
- parm_1 and parm_2 shall not be more than a period apart.

For closed but non-periodic basis curves.

- Both parm_1 and parm_2 shall be in the parameter range of the basis curve.
- If the whole of the basis curve is required, parm_1 and parm_2 shall lie close enough to each end of the valid parameter range in order that point_1 and point_2 are coincident to XT tolerance (1.0e-8 by default).

The sense of a trimmed curve is positive.

Table H 9 — Trimmed curve fields

Field name	Data type	Description
basis_curve	pointer	Basis curve
point_1	vector	start of trimmed portion
point_2	vector	end of trimmed portion
parm_1	double	parameter on basis curve corresponding to point_1
parm_2	double	parameter on basis curve corresponding to point_2

```
struct TRIMMED_CURVE_s == ANY_CURVE_s // Trimmed Curve
{
  int node_id; // $d
```

```

union  ATTRIB_GROUP_u      attributes_groups;    // $p
union  CURVE_OWNER_u      owner;                        // $p
union  CURVE_u            next;                          // $p
union  CURVE_u            previous;                      // $p
struct GEOMETRIC_OWNER_s  *geometric_owner;            // $p
char    sense;                                                  // $c
union  CURVE_u            basis_curve;                   // $p
vector  point_1;                                                // $v
vector  point_2;                                                // $v
double  parm_1;                                                 // $f
double  parm_2;                                                 // $f
};
typedef struct TRIMMED_CURVE_s  *TRIMMED_CURVE;

```

SP_CURVE

An SP curve is the 3D curve resulting from embedding a 2D curve in the parameter space of a surface.

The 2D curve shall be a 2D BCURVE; that is it shall either be a rational B curve with a vertex dimensionality of 3, or a non-rational B curve with a vertex dimensionality of 2.

Table H 10 — SP curve fields

Field name	Data type	Description
surface	pointer	surface
b_curve	pointer	2D Bcurve
original	pointer0	not used
tolerance_to_original	double	not used

```

struct  SP_CURVE_s == ANY_CURVE_s          // SP curve
{
int      node_id;                          // $d
union  ATTRIB_GROUP_u      attributes_groups;    // $p
union  CURVE_OWNER_u      owner;                // $p
union  CURVE_u            next;                  // $p
union  CURVE_u            previous;              // $p
struct GEOMETRIC_OWNER_s  *geometric_owner;    // $p
char    sense;                            // $c
union  SURFACE_u          surface;               // $p
struct B_CURVE_s          *b_curve;              // $p
union  CURVE_u            original;              // $p
double  tolerance_to_original;                 // $f
};
typedef struct SP_CURVE_s  *SP_CURVE;

```

Surfaces

All surface nodes share the following common fields:

Table H 11 — Surface node fields

Field name	Data type	Description
node_id	int	Integer value unique to surface in part
attributes_groups	pointer0	Attributes and groups associated with surface
owner	pointer	topological owner
next	pointer0	next surface in geometry chain
previous	pointer0	previous surface in geometry chain
geometric_owner	pointer0	geometric owner node
sense	char	sense of surface: '+' or '-'(see end of Geometry section)

```

struct ANY_SURF_s                                // Any Surface
{
  int      node_id;                               // $d
  union    ATTRIB_GROUP_u      attributes_groups; // $p
  union    SURFACE_OWNER_u     owner;            // $p
  union    SURFACE_u           next;             // $p
  union    SURFACE_u           previous;        // $p
  struct  GEOMETRIC_OWNER_s   *geometric_owner; // $p
  char    sense;                  // $c
};
typedef struct ANY_SURF_s  *ANY_SURF;
  
```

PLANE

A plane has a parametric representation of the form

$$R(u, v) = P + uX + vY$$

where

- P is a point on the plan.
- X and Y are axes in the plane.

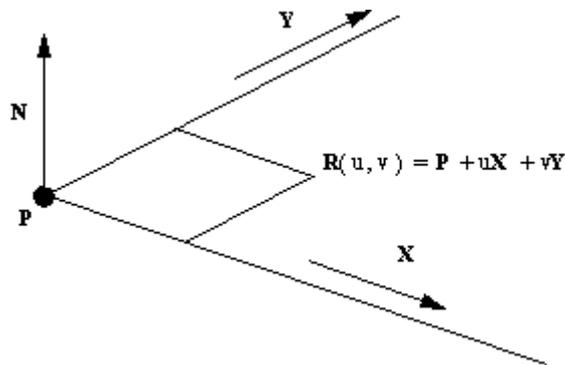


Table H 12 — Plane fields

Field name	Data type	Description
pvec	vector	point on the plane
normal	vector	normal to the plane (a unit vector)
x_axis	vector	X axis of the plane (a unit vector)

The Y axis in the definition above is the vector cross product of the normal and x_axis.

```

struct PLANE_s == ANY_SURF_s                    // Plane
{
  int      node_id;                               // $d
  union    ATTRIB_GROUP_u      attributes_groups; // $p
  union    SURFACE_OWNER_u     owner;            // $p
  union    SURFACE_u           next;             // $p
  union    SURFACE_u           previous;        // $p
  struct  GEOMETRIC_OWNER_s   *geometric_owner; // $p
  char    sense;                  // $c
  vector  pvec;                    // $v
  vector  normal;                  // $v
  vector  x_axis;                  // $v
};
typedef struct PLANE_s      *PLANE;
  
```

CYLINDER

A cylinder has a parametric representation of the form:

$$R(u,v) = P + rX\cos(u) + rY\sin(u) + vA$$

where

- P is a point on the cylinder axis.
- r is the cylinder radius.
- A is the cylinder axis.
- X and Y are unit vectors such that A, X and Y form an orthonormal set.

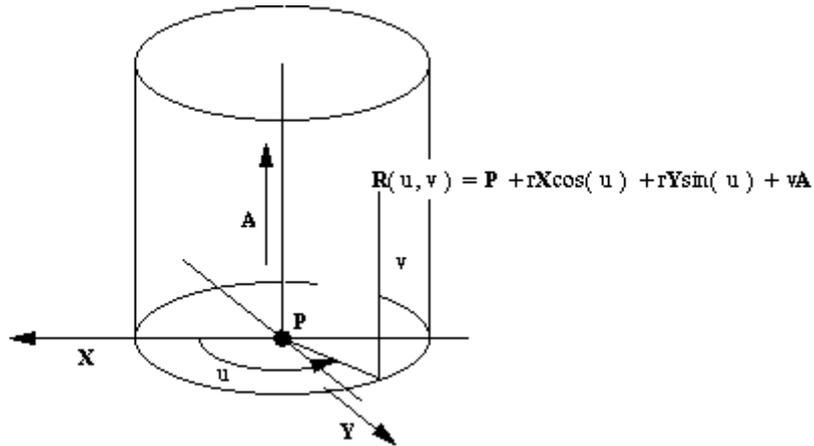


Table H 13 — Cylinder fields

Field name	Data type	Description
pvec	vector	point on the cylinder axis
axis	vector	direction of the cylinder axis (a unit vector)
radius	double	radius of cylinder
x_axis	vector	X axis of the cylinder (a unit vector)

The Y axis in the definition above is the vector cross product of the axis and x_axis.

```

struct CYLINDER_s == ANY_SURF_s // Cylinder
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  union SURFACE_OWNER_u owner; // $p
  union SURFACE_u next; // $p
  union SURFACE_u previous; // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char sense; // $c
  vector pvec; // $v
  vector axis; // $v
  double radius; // $f
  vector x_axis; // $v
};
typedef struct CYLINDER_s *CYLINDER;
  
```

CONE

A cone in XT is only half of a mathematical cone. By convention, the cone axis points away from the half of the cone in use. A cone has a parametric representation of the form:

$$R(u,v) = P - vA + (X\cos(u) + Y\sin(u))(r + v\tan(a))$$

where

- P is a point on the cone axis.
- r is the cone radius at the point P.
- A is the cone axis.
- X and Y are unit vectors such that A, X and Y form an orthonormal set, i.e. $Y = A \times X$.
- a is the cone half angle.

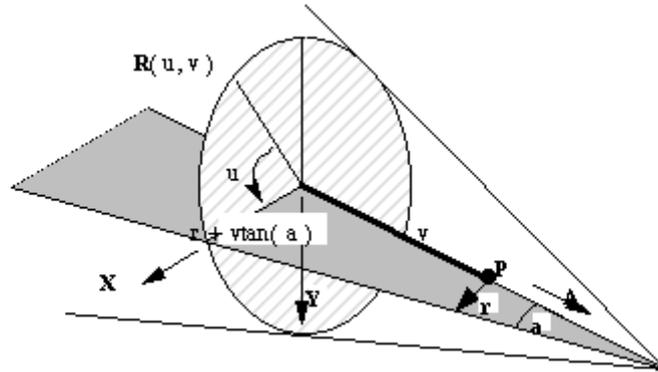


Table H 14 — Cone fields

Field name	Data type	Description
pvec	vector	point on the cone axis
axis	vector	direction of the cone axis (a unit vector)
radius	double	radius of the cone at its pvec
sin_half_angle	double	sine of the cone's half angle
cos_half_angle	double	cosine of the cone's half angle
x_axis	vector	X axis of the cone (a unit vector)

The Y axis in the definition above is the vector cross product of the axis and x_axis.

```

struct CONE_s == ANY_SURF_s // Cone
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  union SURFACE_OWNER_u owner; // $p
  union SURFACE_u next; // $p
  union SURFACE_u previous; // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char sense; // $c
  vector pvec; // $v
  vector axis; // $v
  double radius; // $f
  double sin_half_angle; // $f
  double cos_half_angle; // $f
  vector x_axis; // $v
};
typedef struct CONE_s *CONE;
  
```

SPHERE

A sphere has a parametric representation of the form:

$$R(u, v) = C + (X \cos(u) + Y \sin(u)) r \cos(v) + r \sin(v)$$

where

- C is centre of the sphere.
- r is the sphere radius.

- A, X and Y form an orthonormal axis set.




Table H 15 — Sphere fields

Field name	Data type	Description
Centre	vector	centre of the sphere
Radius	double	radius of the sphere
Axis	vector	A axis of the sphere (a unit vector)
x_axis	vector	X axis of the sphere (a unit vector)

The Y axis of the sphere is the vector cross product of its A and X axes.

```

struct SPHERE_s == ANY_SURF_s // Sphere
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  union SURFACE_OWNER_u owner; // $p
  union SURFACE_u next; // $p
  union SURFACE_u previous; // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char sense; // $c
  vector centre; // $v
  double radius; // $f
  vector axis; // $v
  vector x_axis; // $v
};
typedef struct SPHERE_s *SPHERE;
  
```

TORUS

A torus has a parametric representation of the form

$$R(u, v) = C + (X \cos(u) + Y \sin(u))(a + b \cos(v)) + b A \sin(v)$$

where

- C is centre of the torus.
- A is the torus axis.
- a is the major radius.
- b is the minor radius.
- X and Y are unit vectors such that A, X and Y form an orthonormal set.

In XT, there are three types of torus:

Doughnut - the torus is not self-intersecting ($a > b$)

Apple - the outer part of a self-intersecting torus ($a \leq b, a > 0$)

Lemon - the inner part of a self-intersecting torus ($a < 0, |a| < b$)

The limiting case $a = b$ is allowed; it is called an 'osculating apple', but there is no 'lemon' surface corresponding to this case.

The limiting case $a = 0$ cannot be represented as a torus; this is a sphere.

Table H 16 — Torus fields

Field name	Data type	Description
centre	vector	centre of the torus
axis	vector	axis of the torus (a unit vector)
major_radius	double	major radius
minor_radius	double	minor radius
x_axis	vector	X axis of the torus (a unit vector)

The Y axis in the definition above is the vector cross product of the axis of the torus and the x_axis.

```

struct TORUS_s == ANY_SURF_s // Torus
{
    int node_id; // $d
    union ATTRIB_GROUP_u attributes_groups; // $p
    union SURFACE_OWNER_u owner; // $p
    union SURFACE_u next; // $p
    union SURFACE_u previous; // $p
    struct GEOMETRIC_OWNER_s *geometric_owner; // $p
    char sense; // $c
    vector centre; // $v
    vector axis; // $v
    double major_radius; // $f
    double minor_radius; // $f
    vector x_axis; // $v
};

typedef struct TORUS_s *TORUS;
  
```


BLENDDED_EDGE (Rolling Ball Blend)

XT supports exact rolling ball blends. They have a parametric representation of the form

$$R(u, v) = C(u) + rX(u)\cos(v a(u)) + rY(u)\sin(v a(u))$$

where

- $C(u)$ is the spine curve.
- r is the blend radius.
- $X(u)$ and $Y(u)$ are unit vectors such that $C'(u) \cdot X(u) = C'(u) \cdot Y(u) = 0$.
- $a(u)$ is the angle subtended by points on the boundary curves at the spine.

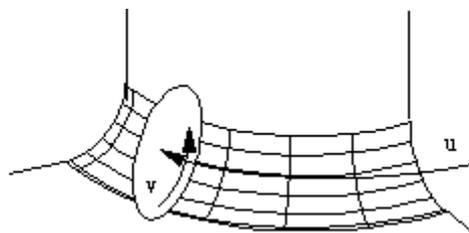

X , Y and a are expressed as functions of u , as their values change with u .

The spine of the rolling ball blend is the centre line of the blend; i.e. the path along which the centre of the ball moves.

Table H 17 — Blended edge fields

Field name	Data type	Description
type	char	type of blend: 'R' or 'E'
surface	pointer[2]	supporting surfaces (adjacent to original edge)
spine	pointer	spine of blend
range	double[2]	offsets to be applied to surfaces
thumb_weight	double[2]	always [1,1]
boundary	pointer0[2]	always [0, 0]
start	pointer0	Start LIMIT in certain degenerate cases
end	pointer0	End LIMIT in certain degenerate cases

```

struct BLENDED_EDGE_s == ANY_SURF_s // Blended edge
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  union SURFACE_OWNER_u owner; // $p
  union SURFACE_u next; // $p
  union SURFACE_u previous; // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char sense; // $c
  char blend_type; // $c
  union SURFACE_u surface[2]; // $p[2]
  union CURVE_u spine; // $p
  double range[2]; // $f[2]
  double thumb_weight[2]; // $f[2]
  union SURFACE_u boundary[2]; // $p[2]
  struct LIMIT_s *start; // $p
  struct LIMIT_s *end; // $p
};
typedef struct BLENDED_EDGE_s *BLENDED_EDGE;

```

The parameterization of the blend is as follows. The u parameter is inherited from the spine, the constant u lines being circles perpendicular to the spine curve. The v parameter is zero at the blend boundary on the first surface, and one on the blend boundary on the second surface; unless the sense of the spine curve is negative, in which case it is the other way round. The v parameter is proportional to the angle around the circle.

XT data can contain blends of the following types:

```

const char SCH_rolling_ball = 'R'; // rolling ball blend
const char SCH_cliff_edge = 'E'; // cliff edge blend

```

For rolling ball blends, the spine curve will be the intersection of the two surfaces obtained by offsetting the supporting surfaces by an amount given by the respective entry in range[]. Note that the offsets to be applied may be positive or negative, and that the sense of the surface is significant; i.e. the offset vector is the natural unit surface normal, times the range, times -1 if the sense is negative.

For cliff edge blends, one of the surfaces will be a blended_edge with a range of [0,0]; its spine will be the cliff edge curve, and its supporting surfaces will be the surfaces of the faces adjacent to the cliff edge. Its type will be R.

The limit fields will only be non-null if the spine curve is periodic but the edge curve being blended has terminators – for example if the spine is elliptical but the blend degenerates. In this case the two LIMIT nodes, of type 'L', determine the extent of the spine.

BLEND_BOUND (Blend boundary surface)

A blend_bound surface is a construction surface, used to define the boundary curve where a blend becomes tangential to its supporting surface. It is an implicit surface defined internally so that it intersects one of the supporting surfaces along the boundary curve. It is orthogonal to the blend and

the supporting surface along this boundary curve. The supporting surface corresponding to the blend_bound is

$$\text{Blend_bound} \rightarrow \text{blend.blended_edge} \rightarrow \text{surface}[1-\text{blend_bound} \rightarrow \text{boundary}]$$

Blend boundary surfaces have no parameterization, but are defined by the distance function

$$f(X) = f_0(X + r_1 * \text{grad}_{f_1}(X)) - r_0$$

Where

- f0 is the surface distance function of the supporting surface corresponding to the blend_bound.
- r0 is the blend radius corresponding to that supporting surface.
- f1 is the surface distance function of the other supporting surface of the blend.
- r1 is the blend radius corresponding to the other supporting surface.

Blend boundary surfaces are most commonly referenced by the intersection curve representing the boundary curve of the blend.

The data stored in the XT data for a blend_bound is only that necessary to identify the relevant blend and supporting surface:

Table H 18 — Blend boundary surface fields

Field name	Data type	Description
boundary	short	index into supporting surface array
blend	pointer	corresponding blend surface

```
struct BLEND_BOUND_s == ANY_SURF_s // Blend boundary
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  union SURFACE_OWNER_u owner; // $p
  union SURFACE_u next; // $p
  union SURFACE_u previous; // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char sense; // $c
  short boundary; // $n
  union SURFACE_u blend; // $p
};
typedef struct BLEND_BOUND_s *BLEND_BOUND;
```

The supporting surface corresponding to the blend_bound is

$$\text{blend_bound} \rightarrow \text{blend.blended_edge} \rightarrow \text{surface}[1 - \text{blend_bound} \rightarrow \text{boundary}].$$

OFFSET_SURF

An offset surface is the result of offsetting a surface a certain distance along its normal, taking into account the surface sense. It inherits the parameterization of this underlying surface.

Table H 19 — Offset surface fields

Field name	Data type	Description
Check	char	check status
true_offset	logical	not used
surface	pointer	underlying surface
offset	double	signed offset distance
scale	double	for internal use only – may be set to null

```
struct OFFSET_SURF_s == ANY_SURF_s // Offset surface
{
  int node_id; // $d
```

```

union ATTRIB_GROUP_u      attributes_groups;    // $p
union SURFACE_OWNER_u    owner;                // $p
union SURFACE_u          next;                 // $p
union SURFACE_u          previous;            // $p
struct GEOMETRIC_OWNER_s *geometric_owner;    // $p
char                      sense;              // $c
char                      check;              // $c
logical                   true_offset;        // $l
union SURFACE_u          surface;             // $p
double                   offset;             // $f
double                   scale;              // $f
};
typedef struct OFFSET_SURF_s *OFFSET_SURF;

```

The offset surface is subject to the following restrictions:

- The offset distance shall not be within modeller linear resolution of zero.
- The sense of the offset surface shall be the same as that of the underlying surface.
- Offset surfaces may not share a common underlying surface.

The 'check' field may take one of the following values:

```

[2] const char SCH_valid      = 'V';    [3] // valid
[4] const char SCH_invalid   = 'I';    [5] // invalid
[6] const char SCH_unchecked = 'U';    [8] // has not been checked
[7]

```

B_SURFACE

XT supports B spline surfaces in full NURBS format.

B-SURFACE DEFINITION

$$P(u, v) = \frac{\sum_{i=0}^{n-1} \sum_{j=0}^{m-1} b_i(u) b_j(v) w_{ij}}{\sum_{i=0}^{n-1} \sum_{j=0}^{m-1} b_i(u) b_j(v) w_{ij}}$$

The B-surface definition is best thought of as an extension of the B-curve definition into two parameters, usually called u and v. Two knot sets are required and the number of control vertices is the product of the number that would be required for a curve using each knot vector. The rules for periodicity and closure given in the B-curve documentation are extended to surfaces in an obvious way.

For attachment to topology a B-surface is required to have G₁ continuity. That is to say that the surface normal direction shall be continuous.

Surfaces that are self-intersecting or contain cusps are not permitted to be attached to topology.

Table H 20 — B-Surface fields

Field name	Data type	Description
nurbs	pointer	Geometric definition
data	pointer0	Auxiliary information

```

struct B_SURFACE_s == ANY_SURF_s // B surface
{
int node_id; // $d
union ATTRIB_GROUP_u attributes_groups; // $p
union SURFACE_OWNER_u owner; // $p
union SURFACE_u next; // $p
union SURFACE_u previous; // $p
struct GEOMETRIC_OWNER_s *geometric_owner; // $p
}

```

```

char          sense;           // $c
struct NURBS_SURF_s  *nurbs;  // $p
struct SURFACE_DATA_s *data;   // $p
};
typedef struct B_SURFACE_s  *B_SURFACE;

```

The data stored in the XT data for a NURBS surface is described in the table below.

Table H 21 — NURB Surface fields

Field name	Data type	Description
u_periodic	logical	true if surface is periodic in u parameter
v_periodic	logical	true if surface is periodic in v parameter
u_degree	short	u degree of the surface
v_degree	short	v degree of the surface
n_u_vertices	int	number of control vertices ('poles') in u direction
n_v_vertices	int	number of control vertices ('poles') in v direction
u_knot_type	byte	form of u knot vector – see "B curve"
v_knot_type	byte	form of v knot vector
n_u_knots	int	number of distinct u knots
n_v_knots	int	number of distinct v knots
Rational	logical	true if surface is rational
u_closed	logical	true if surface is closed in u
v_closed	logical	true if surface is closed in v
surface_form	byte	shape of surface, if special
vertex_dim	short	dimension of control vertices
bspline_vertices	pointer	control vertices (poles) node
u_knot_mult	pointer	multiplicities of u knot vector
v_knot_mult	pointer	multiplicities of v knot vector
u_knots	pointer	u knot vector
v_knots	pointer	v knot vector

The surface form enum is defined below.

```

typedef enum
{
  SCH_unset = 1,           // Unknown
  SCH_arbitrary = 2,      // No particular shape
  SCH_planar = 3,
  SCH_cylindrical = 4,
  SCH_conical = 5,
  SCH_spherical = 6,
  SCH_toroidal = 7,
  SCH_surf_of_revolution = 8,
  SCH_ruled = 9,
  SCH_quadric = 10,
  SCH_swept = 11
}
SCH_surface_form_t;

struct NURBS_SURF_s           // NURBS surface

```

```

{
logical          u_periodic;           // $l
logical          v_periodic;           // $l
short           u_degree;              // $n
short           v_degree;              // $n
int             n_u_vertices;          // $d
int             n_v_vertices;          // $d
SCH_knot_type_t u_knot_type;           // $u
SCH_knot_type_t v_knot_type;           // $u
int             n_u_knots;              // $d
int             n_v_knots;              // $d
logical         rational;              // $l
logical         u_closed;               // $l
logical         v_closed;               // $l
SCH_surface_form_t surface_form;       // $u
short           vertex_dim;            // $n
struct BSPLINE_VERTICES_s *bspline_vertices; // $p
struct KNOT_MULT_s *u_knot_mult;       // $p
struct KNOT_MULT_s *v_knot_mult;       // $p
struct KNOT_SET_s *u_knots;            // $p
struct KNOT_SET_s *v_knots;            // $p
};
typedef struct NURBS_SURF_s *NURBS_SURF;

```

The 'bspline_vertices', 'knot_set' and 'knot_mult' nodes and the 'knot_type' enum are described in the documentation for B_CURVE.

The 'surface data' field in a B surface node is a structure designed to hold auxiliary or 'derived' data about the surface: it is not a necessary part of the definition of the B surface. It may be null, or the majority of its individual fields may be null.

```

struct SURFACE_DATA_s // auxiliary surface data
{
interval          original_uint;        // $i
interval          original_vint;        // $i
interval          extended_uint;        // $i
interval          extended_vint;        // $i
SCH_self_int_t    self_int;             // $u
char              original_u_start;     // $c
char              original_u_end;       // $c
char              original_v_start;     // $c
char              original_v_end;       // $c
char              extended_u_start;     // $c
char              extended_u_end;       // $c
char              extended_v_start;     // $c
char              extended_v_end;       // $c
char              analytic_form_type;   // $c
char              swept_form_type;      // $c
char              spun_form_type;       // $c
char              blend_form_type;      // $c
void              *analytic_form;       // $p
void              *swept_form;          // $p
void              *spun_form;           // $p
void              *blend_form;          // $p
};
typedef struct SURFACE_DATA_s *SURFACE_DATA;

```

The 'original_' and 'extended_' parameter intervals and corresponding character fields original_u_start etc. are all connected with the ability to extend B surfaces when necessary – functionality which is commonly exploited in "local operation" algorithms for example. This is done automatically without the need for user intervention.

In cases where the required extension can be performed by adding rows or columns of control points, then the nurbs data will be modified accordingly – this is referred to as an 'explicit' extension. In some rational B surface cases, explicit extension is not possible - in these cases, the surface will be

'implicitly' extended. When a B surface is implicitly extended, the nurbs data is not changed, but it will be treated as being larger by allowing out-of-range evaluations on the surface. Whenever an explicit or implicit extension takes place, it is reflected in the following fields:

- "original_u_int" and "original_v_int" are the original valid parameter ranges for a B surface before it was extended.
- "extended_u_int" and "extended_v_int" are the valid parameter ranges for a B surface once it has been extended.

The character fields 'original_u_start' etc. all refer to the status of the corresponding parameter boundary of the surface before or after an extension has taken place. For B surfaces, the character can have one of the following values:

```
const char SCH_degenerate = 'D';      [9] // Degenerate edge
const char SCH_periodic   = 'P';      [10] // Periodic parameterization
const char SCH_bounded    = 'B';      [11] // Parameterization bounded
const char SCH_closed     = 'C';      [12] // Closed, but not periodic
```

The separate fields original_u_start and extended_u_start etc. are necessary because an extension may cause the corresponding parameter boundary to become degenerate.

If the surface_data node is present, then the original_u_int, original_v_int, original_u_start, original_u_end, original_v_start and original_v_end fields should be set to their appropriate values. If the surface has not been extended, the extended_u_int and extended_v_int fields should contain null, and the extended_u_start etc. fields should contain

```
const char SCH_unset_char = '?'; // generic uninvestigated value
```

As soon as any parameter boundary of the surface is extended, all the fields should be set, regardless of whether the corresponding boundary has been affected by the extension.

The SCH_self_int_t enum is documented in the corresponding curve_data structure under B curve.

The 'swept_form_type', 'spun_form_type' and 'blend_form_type' characters and the corresponding pointers swept_form, spun_form and blend_form, are not implemented in XT. The character fields should be set to SCH_unset_char ("?") and the pointers should be set to null pointer.

If the analytic_form field is not null, it will point to a HELIX_SU_FORM node, which indicates that the surface has a helical shape. In this case the analytic_form_type field will be set to 'H'.

```
struct HELIX_SU_FORM_s
{
    vector      axis_pt           // $v
    vector      axis_dir         // $v
    char        hand              // $c
    interval     turns           // $i
    double      pitch            // $f
    double      gap              // $f
    double      tol              // $f
};
typedef struct HELIX_SU_FORM_s *HELIX_SU_FORM;
```

The axis_pt and axis_dir fields define the axis of the helix. The hand field is '+' for a right-handed and '-' for a left-handed helix. The turns field gives the extent of the helix relative to the profile curve which was used to generate the surface. For instance, an interval [0 10] indicates a start position at the profile curve and an end 10 turns along the axis. Pitch is the distance travelled along the axis in one turn. Tol is the accuracy to which the owning bsurface fits this specification. Gap is for future expansion and will currently be zero. The v parameter increases in the direction of the axis.

SWEPT_SURF

A swept surface has a parametric representation of the form:

$$R(u, v) = C(u) + vD$$

where

- $C(u)$ is the section curve.
- D is the sweep direction (unit vector).
- C shall not be an intersection curve or a trimmed curve.

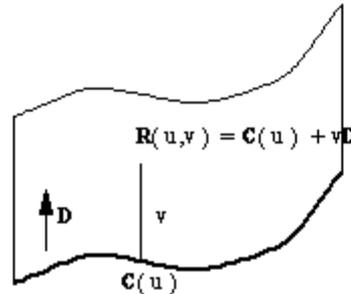


Table H 22 — Swept surface fields

Field name	Data type	Description
section	pointer	section curve
sweep	vector	sweep direction (a unit vector)
scale	double	for internal use only – may be set to null

```

struct SWEPT_SURF_s == ANY_SURF_s           // Swept surface
{
  int node_id;                               // $d
  union ATTRIB_GROUP_u attributes_groups;    // $p
  union SURFACE_OWNER_u owner;              // $p
  union SURFACE_u next;                     // $p
  union SURFACE_u previous;                 // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char sense;                               // $c
  union CURVE_u section;                     // $p
  vector sweep;                              // $v
  double scale;                              // $f
};
typedef struct SWEPT_SURF_s *SWEPT_SURF;
  
```


SPUN_SURF

A spun surface has a parametric representation of the form:

$$R(u, v) = Z(u) + (C(u) - Z(u))\cos(v) + A \times (C(u) - Z(u)) \sin(v)$$

where

- $C(u)$ is the profile curve
- $Z(u)$ is the projection of $C(u)$ onto the spin axis.
- A is the spin axis direction (unit vector).
- C shall not be an intersection curve or a trimmed curve.

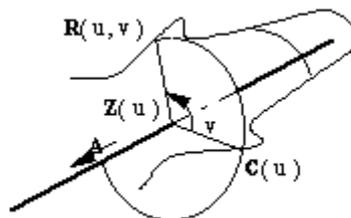

NOTE: $Z(u) = P + ((C(u) - P) \cdot A)A$ where P is a reference point on the axis.

Table H 23 — Spun surface fields

Field name	Data type	Description
profile	pointer	profile curve
base	vector	point on spin axis
axis	vector	spin axis direction (a unit vector)
start	vector	position of degeneracy at low u (may be null)
end	vector	position of degeneracy at low v (may be null)
start_param	double	curve parameter at low u degeneracy (may be null)
end_param	double	curve parameter at high u degeneracy (may be null)
x_axis	vector	unit vector in profile plane if common with spin axis
scale	double	for internal use only – may be set to null

```

struct SPUN_SURF_s == ANY_SURF_s // Spun surface
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  union SURFACE_OWNER_u owner; // $p
  union SURFACE_u next; // $p
  union SURFACE_u previous; // $p
  struct GEOMETRIC_OWNER_s *geometric_owner; // $p
  char sense; // $c
  union CURVE_u profile; // $p
  vector base; // $v
  vector axis; // $v
  vector start; // $v
  vector end; // $v
  double start_param; // $f
  double end_param; // $f
  vector x_axis; // $v
  double scale; // $f
};
typedef struct SPUN_SURF_s *SPUN_SURF;

```

The 'start' and 'end' vectors correspond to physical degeneracies on the spun surface caused by the profile curve crossing the spin axis at that point. The values start_param and end_param are the corresponding parameters on the curve. These parameter values define the valid range for the u parameter of the surface. If either value is null, then the valid range for u is infinite in that direction. For example, for a straight line profile curve intersecting the spin axis at the parameter t=1, values of null for start_param and 1 for end_param would define a cone with u parameterization (-infinity, 1].

If the profile curve lies in a plane containing the spin axis, then x_axis shall be set to a vector perpendicular to the spin axis and in the plane of the profile, pointing from the spin axis to a point on the profile curve in the valid range. If the profile curve is not planar, or its plane does not contain the spin axis, then x_axis should be set to null.

Point

Table H 24 — Point fields

Field name	Data type	Description
node_id	int	integer unique within part
attributes_groups	pointer0	attributes and groups associated with point
owner	pointer	Owner
next	pointer0	next point in chain
previous	pointer0	previous point in chain
pvec	vector	position of point

```

union POINT_OWNER_u
{
  struct VERTEX_s          *vertex;
  struct BODY_s           *body;
  struct ASSEMBLY_s       *assembly;
  struct WORLD_s          *world;
};

struct POINT_s              // Point
{
  int                      node_id;                // $d
  union ATTRIB_GROUP_u    attributes_groups;      // $p
  union POINT_OWNER_u     owner;                  // $p
  struct POINT_s          *next;                  // $p
  struct POINT_s          *previous;              // $p
  vector                   pvec;                  // $v
};
typedef struct POINT_s    *POINT;

```

Transform

Table H 25 — Transform fields

Field name	Data type	Description
node_id	int	integer unique within part
owner	pointer	owning instance or world
next	pointer0	next transform in chain
previous	pointer0	previous pointer in chain
rotation_matrix	double[3][3]	rotation component
translation_vector	vector	translation component
scale	double	scaling factor
flag	byte	binary flags indicating non-trivial components
perspective_vector	vector	perspective vector (always null vector)

The transform acts as

$$x' = (\text{rotation_matrix} \cdot x + \text{translation_vector}) * \text{scale}$$

The 'flag' field contains various bit flags which identify the components of the transformation:

Table H 26 — Transform action fields

Flag Name	Binary Value	Description
translation	00001	set if translation vector non-zero
rotation	00010	set if rotation matrix is not the identity
scaling	00100	set if scaling component is not 1.0
reflection	01000	set if determinant of rotation matrix is negative
general affine	10000	set if the rotation_matrix is not a rigid rotation

```

union TRANSFORM_OWNER_u
{
  struct INSTANCE_s      *instance;
  struct WORLD_s        *world;
};

struct TRANSFORM_s       // Transformation
{
  int                    node_id;                // $d
  union TRANSFORM_OWNER_u owner;                  // $p
  struct TRANSFORM_s    *next;                  // $p
  struct TRANSFORM_s    *previous;              // $p
};

```

```

double          rotation_matrix[3][3];          // $f[9]
vector          translation_vector;             // $v
double          scale;                         // $f
unsigned        flag;                          // $d
vector          perspective_vector;            // $v
};
typedef struct TRANSFORM_s *TRANSFORM;

```

Curve and Surface Senses

The 'natural' tangent to a curve is that in the increasing parameter direction, and the 'natural' normal to a surface is in the direction of the cross-product of dP/du and dP/dv. For some purposes these are modified by the curve and surfaces senses, respectively – for example in the definition of blend surfaces, offset surfaces and intersection curves.

At the PK interface, the edge/curve and face/surface sense orientations are regarded as properties of the topology/geometry combination. In the XT format, this orientation information resides in the curves, surfaces and faces as follows:

The edge/curve orientation is stored in the curve->sense field. The face/surface orientation is a combination of sense flags stored in the face->sense and surface->sense fields, so the face/surface orientation is true (i.e. the face normal is parallel to the natural surface normal) if neither, or both, of the face and surface senses are positive.

Geometric_owner

Where geometry has dependants, the dependants point back to the referencing geometry by means of Geometric Owner nodes. Each geometric node points to a doubly-linked ring of Geometric Owner nodes which identify its referencing geometry. Referenced geometry is as follows:

- Intersection: 2 surfaces
- SP-curve: Surface
- Trimmed curve: basis curve
- Blended edge: 2 supporting surfaces, 2 blend_bound surfaces, 1 spine curve
- Blend bound: blend surface
- Offset surface: underlying surface
- Swept surface: section curve
- Spun surface: profile curve

Note that the 2D B-curve referenced by an SP-curve is not a dependent in this sense, and does not need a geometric owner node.

Table H 27 — Geometry owner fields

Field name	Data type	Description
owner	pointer	referencing geometry
next	pointer	next in ring of geometric owners referring to the same geometry
previous	pointer	previous in above ring
shared_geometry	pointer	referenced (dependent) geometry

```

struct GEOMETRIC_OWNER_s // geometric owner of geometry
{
  union GEOMETRY_u          owner; // $p
  struct GEOMETRIC_OWNER_s *next; // $p
  struct GEOMETRIC_OWNER_s *previous; // $p
  union GEOMETRY_u          shared_geometry; // $p
};
typedef struct GEOMETRIC_OWNER_s *GEOMETRIC_OWNER;

```

H.2.4.3.4 Topology

In the following tables, 'ignore' means this may be set to null (zero) and should be ignored.

Unless otherwise stated, all chains of nodes are doubly-linked and null-terminated.

WORLD

Table H 28 — World topology fields

Field name	Type	Description
assembly	pointer0	Head of chain of assemblies
attribute	pointer0	Ignore
body	pointer0	Head of chain of bodies
transform	pointer0	Head of chain of transforms
surface	pointer0	Head of chain of surfaces
curve	pointer0	Head of chain of curves
point	pointer0	Head of chain of points
alive	logical	True unless partition is at initial pmark
attrib_def	pointer0	Head of chain of attribute definitions
highest_id	int	Highest pmark id in partition
current_id	int	Id of current pmark
index_map_offset	int	Shall be set to 0
index_map	pointer0	Shall be set to null
schema_embedding_map	pointer0	Shall be set to null

The World node is only used when a partition is transmitted. Because some of the attribute definitions may be referenced by nodes which have been deleted, but which may reappear on rollback, the attribute definitions are chained off the World node rather than simply being referenced by attributes.

The fields `index_map_offset`, `index_map`, and `schema_embedding_map` are used for Indexed Transmit; applications writing XT data shall set them to 0 and null.

```

struct WORLD_s // World
{
  struct ASSEMBLY_s *assembly; // $p
  struct ATTRIBUTE_s *attribute; // $p
  struct BODY_s *body; // $p
  struct TRANSFORM_s *transform; // $p
  union SURFACE_u surface; // $p
  union CURVE_u curve; // $p
  struct POINT_s *point; // $p
  logical alive; // $l
  struct ATTRIB_DEF_s *attrib_def; // $p
  int highest_id; // $d
  int current_id; // $d
};
typedef struct WORLD_s *WORLD;

```

ASSEMBLY

Table H 29 — Assembly fields

highest_node_id	int	Highest node-id in assembly
attributes_groups	pointer0	Head of chain of attributes of, and groups in, assembly
attribute_chains	pointer0	List of attributes, one for each attribute definition used in the assembly
list	pointer0	Null
surface	pointer0	Head of construction surface chain
curve	pointer0	Head of construction curve chain

point	pointer0	Head of construction point chain
key	pointer0	Ignore
res_size	double	Value of 'size box' when transmitted (normally 1000)
res_linear	double	Value of modeller linear precision when transmitted (normally 1.0e-8).
ref_instance	pointer0	Head of chain of instances referencing this assembly
next	pointer0	Ignore
previous	pointer0	Ignore
state	byte	Set to 1.
owner	pointer0	Ignore
type	byte	Always 1.
sub_instance	pointer0	Head of chain of instances in assembly

The value of the 'state' field should be ignored, as should any nodes of type 'KEY' referenced by the assembly. If XT data is constructed without use of the Parasolid Kernel, the state field should be set to 1, and the key to null.

The highest_node_id gives the highest node-id of any node in the assembly. Certain nodes within the assembly (namely instances, transforms, geometry, attributes and groups) have unique node-ids which are non-zero integers.

```
typedef enum
{
    SCH_collective_assembly = 1,
    SCH_conjunctive_assembly = 2,
    SCH_disjunctive_assembly = 3
}
SCH_assembly_type;

typedef enum
{
    SCH_new_part = 1,
    SCH_stored_part = 2,
    SCH_modified_part = 3,
    SCH_anonymous_part = 4,
    SCH_unloaded_part = 5
}
SCH_part_state;

struct ASSEMBLY_s // Assembly
{
    int highest_node_id; // $d
    union ATTRIB_GROUP_u attributes_groups; // $p
    struct LIST_s *attribute_chains; // $p
    struct LIST_s *list; // $p
    union SURFACE_u surface; // $p
    union CURVE_u curve; // $p
    struct POINT_s *point; // $p
    struct KEY_s *key; // $p
    double res_size; // $f
    double res_linear; // $f
    struct INSTANCE_s *ref_instance; // $p
    struct ASSEMBLY_s *next; // $p
    struct ASSEMBLY_s *previous; // $p
    SCH_part_state state; // $u
    struct WORLD_s *owner; // $p
    SCH_assembly_type type; // $u
    struct INSTANCE_s *sub_instance; // $p
};

typedef struct ASSEMBLY_s *ASSEMBLY;
struct KEY_s // Key
```

```

    {
        string[1];                char                // $c[]
    };
typedef struct KEY_s *KEY;

```

INSTANCE

Table H 30 — Instance fields

Field name	Type	Description
node_id	int	Node-id
attributes_groups	pointer0	Head of chain of attributes of instance and member_of_groups of instance
type	byte	Always 1
part	pointer	Part referenced by instance
transform	pointer0	Transform of instance
assembly	pointer	Assembly in which instance lies
next_in_part	pointer0	Next instance in assembly
prev_in_part	pointer0	Previous instance in assembly
next_of_part	pointer0	Next instance of instance->part
prev_of_part	pointer0	Previous instance of instance->part

```

typedef enum
{
    SCH_positive_instance = 1,
    SCH_negative_instance = 2
}
SCH_instance_type;

union PART_u
{
    struct BODY_s          *body;
    struct ASSEMBLY_s     *assembly;
};
typedef union PART_u     PART;

struct INSTANCE_s          // Instance
{
    int                    node_id;                // $d
    union ATTRIB_GROUP_u  attributes_groups;      // $p
    SCH_instance_type     type;                   // $u
    union PART_u          part;                   // $p
    struct TRANSFORM_s    *transform;            // $p
    struct ASSEMBLY_s     *assembly;             // $p
    struct INSTANCE_s     *next_in_part;         // $p
    struct INSTANCE_s     *prev_in_part;         // $p
    struct INSTANCE_s     *next_of_part;         // $p
    struct INSTANCE_s     *prev_of_part;         // $p
};
typedef struct INSTANCE_s *INSTANCE;

```

BODY

Table H 31 — Body fields

Field name	Type	Description
highest_node_id	int	Highest node-id in body
attributes_groups	pointer0	Head of chain of attributes of, and groups in, body

Field name	Type	Description
attribute_chains	pointer0	List of attributes, one for each attribute definition used in the body
surface	pointer0	Head of construction surface chain
curve	pointer0	Head of construction curve chain
point	pointer0	Head of construction point chain
key	pointer0	Ignore
res_size	double	Value of 'size box' when transmitted (normally 1000)
res_linear	double	Value of modeller linear precision when transmitted (normally 1.0e-8)
ref_instance	pointer0	Head of chain of instances referencing this part
next	pointer0	Ignore
previous	pointer0	Ignore
state	byte	Set to 1 (see below)
owner	pointer0	Ignore
body_type	byte	Body type
nom_geom_state	byte	Set to 1 (not documented)
shell	pointer0	For general bodies: null For solid bodies: the first shell in one of the solid regions For other bodies: the first shell in one of the regions This field is obsolete , and should be ignored by applications reading XT data. When writing XT data, it shall be set as above.
boundary_surface	pointer0	Head of chain of surfaces attached directly or indirectly to faces or edges or fins
boundary_curve	pointer0	Head of chain of curves attached directly or indirectly to edges or faces or fins
boundary_point	pointer0	Head of chain of points attached to vertices
region	pointer	Head of chain of regions in body; this is the infinite region
edge	pointer0	Head of chain of all non-wireframe edges in body
vertex	pointer0	Head of chain of all vertices in body
index_map_offset	int	Shall be set to 0
index_map	pointer0	Shall be set to null
node_id_index_map	pointer0	Shall be set to null
schema_embedding_map	pointer0	Shall be set to null

The value of the 'state' field should be ignored, as should any nodes of type 'KEY' referenced by the body. If the XT data is constructed without using the Parasolid Kernel, the state field should be set to 1, and the key to null.

The highest_node_id gives the highest node of any node in this body. Most nodes in a body have node-ids, which are non-zero integers unique to that node within the body. Applications writing XT data shall ensure that node-ids are present and distinct. The details of which nodes have node ids are given in an appendix.

The fields index_map_offset, index_map, node_id_index_map, and schema_embedding_map are used for Indexed Transmit; applications writing XT data shall ensure that these fields are set to 0 and null.

```

typedef enum
{
  SCH_solid_body      = 1,
  SCH_wire_body      = 2,
  SCH_sheet_body     = 3,
  SCH_general_body   = 6
}
SCH_body_type;

typedef short short enum
{
  SCH_nom_geom_off = 1,          --- Entirely off
  SCH_nom_geom_on  = 2          --- Entirely on
}
SCH_nom_geom_state_t;

struct BODY_s // Body
{
  int highest_node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  struct LIST_s *attribute_chains; // $p
  union SURFACE_u surface; // $p
  union CURVE_u curve; // $p
  struct POINT_s *point; // $p
  struct KEY_s *key; // $p
  double res_size; // $f
  double res_linear; // $f
  struct INSTANCE_s *ref_instance; // $p
  struct BODY_s *next; // $p
  struct BODY_s *previous; // $p
  SCH_part_state state; // $u
  struct WORLD_s *owner; // $p
  SCH_body_type body_type; // $u
  SCH_nom_geom_state_t nom_geom_state; // $u
  struct SHELL_s *shell; // $p
  union SURFACE_u boundary_surface; // $p
  union CURVE_u boundary_curve; // $p
  struct POINT_s *boundary_point; // $p
  struct REGION_s *region; // $p
  struct EDGE_s *edge; // $p
  struct VERTEX_s *vertex; // $p
  int index_map_offset; // $d
  struct INT_VALUES_s *index_map; // $p
  struct INT_VALUES_s *node_id_index_map; // $p
  struct INT_VALUES_s *schema_embedding_map; // $p
};
typedef struct BODY_s *BODY;

```

Attaching Geometry to Topology

The faces which reference a surface are chained together, surface->owner is the head of this chain. Similarly the edges which reference the same curve are chained together. Fins do not share curves.

Geometry in parts may be chained into one of the three boundary geometry chains, or one of the three construction geometry chains. A geometric node will fall into one of the following cases:

Table H 32 — Geometry to Topology attachment

Geometry	Owner	Whether chained
Attached to face	face	In boundary_surface chain
Attached to edge or fin	edge or fin	In boundary_curve chain
Attached to vertex	vertex	In boundary_point chain

Geometry	Owner	Whether chained
Indirectly attached to face or edge or fin	body	In boundary_surface chain or boundary_curve chain
Construction geometry	body or assembly	In surface, curve or point chain
2D B-curve in SP-curve	null	Not chained

Here 'indirectly attached' means geometry which is a dependent of a dependent of (... etc) of geometry attached to an edge, face or fin.

Geometry in a construction chain may reference geometry in a boundary chain, but not vice-versa.

REGION

Table H 33 — Region fields

Field name	Type	Description
node_id	int	Node-id
attributes_groups	pointer0	Head of chain of attributes of region and member_of_groups of region
body	pointer	Body of region
next	pointer0	Next region in body
prev	pointer0	Previous region in body
shell	pointer0	Head of singly-linked chain of shells in region
type	char	Region type – solid ('S') or void ('V')

```

struct REGION_s // Region
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  struct BODY_s *body; // $p
  struct REGION_s *next; // $p
  struct REGION_s *previous; // $p
  struct SHELL_s *shell; // $p
  char type; // $c
};
typedef struct REGION_s *REGION;

```

SHELL

Table H 34 — Shell fields

Field name	Type	Description
node_id	int	Node-id
attributes_groups	pointer0	Head of chain of attributes of shell
body	pointer0	For shells in wire and sheet bodies, and for shells bounding a solid region of a solid body, this is set to the body of the shell. For shells in general bodies, or void shells in solid bodies, it is null. This field is obsolete , and should be ignored by applications reading XT data. When writing XT data, it shall be set as above.
next	pointer0	Next shell in region
face	pointer0	Head of chain of back-faces of shell (i.e. faces with face normal pointing out of region of shell).
edge	pointer0	Head of chain of wire-frame edges of shell
vertex	pointer0	If shell consists of a single vertex, this is it; else null

region	pointer	Region of shell
front_face	pointer0	Head of chain of front-faces of shell (i.e. faces with face normal pointing into region of shell)

```

struct SHELL_s // Shell
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  struct BODY_s *body; // $p
  struct SHELL_s *next; // $p
  struct FACE_s *face; // $p
  struct EDGE_s *edge; // $p
  struct VERTEX_s *vertex; // $p
  struct REGION_s *region; // $p
  struct FACE_s *front_face; // $p
};
typedef struct SHELL_s *SHELL;

```

FACE

Table H 35 — Face fields

Field name	Type	Description
node_id	int	Node-id
attributes_groups	pointer0	Head of chain of attributes of face and member_of_groups of face
tolerance	double	Not used (null double)
next	pointer0	Next back-face in shell
previous	pointer0	Previous back-face in shell
loop	pointer0	Head of singly-linked chain of loops
shell	pointer	Shell of which this is a back-face
surface	pointer0	Surface of face
sense	char	Face sense – positive ('+') or negative ('-')
next_on_surface	pointer0	Next in chain of faces sharing the surface of this face
previous_on_surface	pointer0	Previous in chain of faces sharing the surface of this face
next_front	pointer0	Next front-face in shell
previous_front	pointer0	Previous front-face in shell
front_shell	pointer	Shell of which this is a front-face

```

struct FACE_s // Face
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  double tolerance; // $f
  struct FACE_s *next; // $p
  struct FACE_s *previous; // $p
  struct LOOP_s *loop; // $p
  struct SHELL_s *shell; // $p
  union SURFACE_u surface; // $p
  char sense; // $c
  struct FACE_s *next_on_surface; // $p
  struct FACE_s *previous_on_surface; // $p
  struct FACE_s *next_front; // $p
  struct FACE_s *previous_front; // $p
  struct SHELL_s *front_shell; // $p
};
typedef struct FACE_s *FACE;

```

LOOP

Table H 36 — Loop fields

Field name	Type	Description
node_id	int	Node-id
attributes_groups	pointer0	Head of chain of attributes of loop
fin	pointer	One of ring of fins of loop
face	pointer	Face of loop
next	pointer0	Next loop in face

Isolated loops

An isolated loop (one consisting of a single vertex) does not refer directly to a vertex, but points to a fin which refers to that vertex. This isolated fin has fin->forward = fin->backward = fin, and fin->other = fin->curve = fin->edge = null. Its sense is not significant. The fin is chained into the chain of fins referencing the isolated vertex.

```

struct LOOP_s // Loop
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  struct FIN_s *fin; // $p
  struct FACE_s *face; // $p
  struct LOOP_s *next; // $p
};
typedef struct LOOP_s *LOOP;
  
```

FIN

Table H 37 — Fin fields

Field name	Type	Description
attributes_groups	pointer0	Head of chain of attributes of fin
loop	pointer0	Loop of fin
forward	pointer0	Next fin around loop
backward	pointer0	Previous fin around loop
vertex	pointer0	Forward vertex of fin
other	pointer0	Next fin around edge, clockwise looking along edge
edge	pointer0	Edge of fin
curve	pointer0	For a non-dummy fin of a tolerant edge, this will be a trimmed SP-curve, otherwise null.
next_at_vx	pointer0	Next fin referencing the vertex of this fin
sense	char	Positive ('+') if the fin direction is parallel to that of its edge, else negative ('-')

Dummy fins

An application will see edges as having any number of fins, including zero. However internally, they have at least two. This is so that the forward and backward vertices of an edge can always be found as edge->fin->vertex and edge->fin->other->vertex respectively - the first one being a positive fin, the second a negative fin. If an edge does not have both a positive and a negative externally-visible fin, **dummy** fins will exist for this purpose. Dummy fins have fin->loop = fin->forward = fin->backward = fin->curve = fin->next_at_vx = null. For example the boundaries of a sheet always have one dummy fin.

```

struct FIN_s // Fin
{
  union ATTRIB_GROUP_u attributes_groups; // $p
  
```

```

    struct LOOP_s          *loop;           // $p
    struct FIN_s           *forward;        // $p
    struct FIN_s           *backward;       // $p
    struct VERTEX_s        *vertex;         // $p
    struct FIN_s           *other;          // $p
    struct EDGE_s          *edge;           // $p
    union CURVE_u          curve;           // $p
    struct FIN_s           *next_at_vx;     // $p
    char                   sense;           // $c
};
typedef struct FIN_s *FIN;

```

VERTEX

Table H 38 — Vertex fields

Field name	Type	Description
node_id	int	Node-id
attributes_groups	pointer0	Head of chain of attributes of vertex and member_of_groups of vertex
fin	pointer0	Head of singly-linked chain of fins referencing this vertex
previous	pointer0	Previous vertex in body
next	pointer0	Next vertex in body
point	pointer	Point of vertex
tolerance	double	Tolerance of vertex (null-double for accurate vertex)
owner	pointer	Owning body (for non-acorn vertices) or shell (for acorn vertices)

```

union SHELL_OR_BODY_u
(
    struct BODY_s          *body;
    struct SHELL_s         *shell;
);
typedef union SHELL_OR_BODY_u SHELL_OR_BODY;

struct VERTEX_s           // Vertex
{
    int                   node_id;          // $d
    union ATTRIB_GROUP_u  attributes_groups; // $p
    struct FIN_s          *fin;             // $p
    struct VERTEX_s       *previous;        // $p
    struct VERTEX_s       *next;           // $p
    struct POINT_s        *point;          // $p
    double                tolerance;        // $f
    union SHELL_OR_BODY_u owner;           // $p
};
typedef struct VERTEX_s *VERTEX;

```

EDGE

Table H 39 — Edge fields

Field name	Type	Description
node_id	int	Node-id
attributes_groups	pointer0	Head of chain of attributes of edge and member_of_groups of edge
tolerance	double	Tolerance of edge (null-double for accurate edges)
fin	pointer	One of singly-linked ring of fins around edge

Field name	Type	Description
previous	pointer0	Previous edge in body or shell
next	pointer0	Next edge in body or shell
curve	pointer0	Curve of edge, zero for tolerant edge. If edge is accurate, but any of its vertices are tolerant, this will be a trimmed curve
next_on_curve	pointer0	Next in chain of edges sharing the curve of this edge
previous_on_curve	pointer0	Previous in chain of edges sharing the curve of this edge
owner	pointer	Owning body (for non-wireframe edges) or shell (for wireframe edges)

```

struct EDGE_s // Edge
{
  int node_id; // $d
  union ATTRIB_GROUP_u attributes_groups; // $p
  double tolerance; // $f
  struct FIN_s *fin; // $p
  struct EDGE_s *previous; // $p
  struct EDGE_s *next; // $p
  union CURVE_u curve; // $p
  struct EDGE_s *next_on_curve; // $p
  struct EDGE_s *previous_on_curve; // $p
  union SHELL_OR_BODY_u owner; // $p
};
typedef struct EDGE_s *EDGE;

```

H.2.4.3.5 Associated Data

LIST

Table H 40 — Associated List

Field name	Type	Description
node_id	int	Zero
list_type	byte	Always 4
notransmit	logical	Ignore
owner	pointer	Owning part
next	pointer0	Ignore
previous	pointer0	Ignore
list_length	int	Length of list (>= 0)
block_length	int	Length of each block of list. Always 20
size_of_entry	int	Ignore
finger_index	int	Any integer between 1 and list->list_length (set to 1 if length is zero). Ignore
finger_block	pointer	Any block e.g. the first one. Ignore
list_block	pointer	Head of singly-linked chain of pointer list blocks

Lists only occur in part data as the list of attributes referenced by a part.

```

[13] typedef enum
[14] {
[15] LIS_pointer = 4
[16] }
[17] LIS_type_t;

```

```

union LIS_BLOCK_u
{
    struct POINTER_LIS_BLOCK_s    *pointer_block;
};
typedef union LIS_BLOCK_u        LIS_BLOCK;

union LIST_OWNER_u
{
    struct BODY_s                *body;
    struct ASSEMBLY_s            *assembly;
    struct WORLD_s               *world;
};
typedef union LIST_OWNER_u LIST_OWNER;

struct LIST_s                    // List Header
{
    int                          node_id;                // $d
    LIS_type_t                   list_type;              // $u
    logical                       nottransmit;           // $l
    union LIST_OWNER_u            owner;                  // $p
    struct LIST_s                 *next;                  // $p
    struct LIST_s                 *previous;              // $p
    int                           list_length;            // $d
    int                           block_length;           // $d
    int                           size_of_entry;         // $d
    int                           finger_index;           // $d
    union LIS_BLOCK_u             finger_block;           // $p
    union LIS_BLOCK_u             list_block;            // $p
};
typedef struct LIST_s *LIST;
  
```

POINTER_LIS_BLOCK:

Table H 41 — Pointer List Block

Field name	Type	Description
n_entries	int	Number of entries in this block (0 <= n_entries <= 20). Only the first block may have n_entries = 0.
index_map_offset	int	Shall be set to 0
next_block	pointer0	Next pointer list block in chain
Entries[20]	pointer0	Pointers in block, those beyond n_entries shall be zero

When the pointer_lis_block is used as the root node in XT data containing more than one part, the restriction n_entries <= 20 does not apply.

The index_map_offset field is used for Indexed Transmit; applications writing XT data shall ensure this field is set to 0.

```

struct POINTER_LIS_BLOCK_s        // Pointer List
{
    int                          n_entries;              // $d
    int                          index_map_offset        // $d
    struct POINTER_LIS_BLOCK_s    *next_block;           // $p
    void                          *entries[ 1 ];         // $p[]
};
typedef struct POINTER_LIS_BLOCK_s *POINTER_LIS_BLOCK;
  
```

ATT_DEF_ID

Table H 42 — Attribute Definition ID

Field name	Type	Description
string[]	char	String name e.g. "SDL/TYSA_COLOUR"

```
struct ATT_DEF_ID_s          // name field type for attrib def.
{
    char                    String[1];          // $c[]
};
typedef struct ATT_DEF_ID_s *ATT_DEF_ID;
```

FIELD_NAMES

Table H 43 — Field Names

Field name	Type	Description
names[]	pointer	Array of field names – unicode or char

```
typedef union FIELD_NAME_u
{
    struct CHAR_VALUES_s      *name
    struct UNICODE_VALUES_s  *uname
};
FIELD_NAME_t;

struct FIELD_NAME_s          // attribute field name
{
    union FIELD_NAME_u        names[1];          // $p[]
};
typedef struct FIELD_NAME_s *FIELD_NAME;
```

ATTRIB_DEF

Table H 44 — Attribut definition

Field name	Type	Description
next	pointer0	Next attribute definition. This can be ignored, except in partition data.
identifier	pointer	Pointer to string name
type_id	int	Numeric id, e.g. 8001 for colour. 9000 for user-defined attribute definitions
actions[8]	byte	Required actions on various events
field_names	pointer0	Names of fields (unicode or char)
legal_owners[14]	logical	Allowed owner types
fields[]	byte	Array of field types. Note that the number of fields is given by the length of the variable length part of this node, i.e. the integer following the node type in the XT data.

The legal_owners array is an array of logicals determining which node types may own this type of attribute.

E.g. if faces are allowed attrib_def -> legal_owners [SCH_fa_owner] = true.

Note that if the XT data contains user fields, the 'fields' field of an attribute definition may contain extra values, set to zero. These are to be ignored.

The 'actions' field in an attribute definition defines the behaviour of the attribute when an event (rotate, scale, translate, reflect, split, merge, transfer, change) occurs. The actions are in Table H 45:

Table H 45 — Attribute definition action fields

do_nothing	Leave attribute as it is
delete	Delete the attribute
transform	Transform the transformable fields (point, vector, direction, axis) by appropriate part of transformation
propagate	Copy attribute onto split-off node
keep_sub_dominant	Move attribute(s) from deleted node onto surviving node in a merge, but any such attributes already on the surviving node are deleted.
keep_if_equal	Keep attribute if present on both nodes being merged, with the same field values.
combine	Move attribute(s) from deleted node onto surviving node, in a merge

The XT attribute classes 1-7 correspond as follows:

Table H 46 — Corresponding attribute classes

	split	merge	transfer	change	Rotate	scale	translate	reflect
class 1	propagate	keep_equal	do_nothing	do_nothing	do_nothing	do_nothing	do_nothing	do_nothing
class 2	delete	delete	delete	delete	do_nothing	delete	do_nothing	do_nothing
class 3	delete	delete	delete	delete	Delete	delete	delete	delete
class 4	propagate	keep_equal	do_nothing	do_nothing	Transform	transform	transform	transform
class 5	delete	delete	delete	delete	Transform	transform	transform	transform
class 6	propagate	combine	do_nothing	do_nothing	do_nothing	do_nothing	do_nothing	do_nothing
class 7	propagate	combine	do_nothing	do_nothing	Transform	transform	transform	transform

```
typedef enum
{
  SCH_rotate      = 0,
  SCH_scale       = 1,
  SCH_translate   = 2,
  SCH_reflect     = 3,
  SCH_split       = 4,
  SCH_merge       = 5,
  SCH_transfer    = 6,
  SCH_change      = 7,
  SCH_max_logged_event // last entry; value in $d[] code for
                        actions
}
SCH_logged_event_t;

typedef enum
{
  SCH_do_nothing  = 0,
  SCH_delete      = 1,
  SCH_transform   = 2,
  SCH_propagate   = 3,
```

```

    SCH_keep_sub_dominant = 4,
    SCH_keep_if_equal     = 5,
    SCH_combine           = 6
  }
  SCH_action_on_fields_t;

typedef enum
{
  SCH_as_owner   = 0,
  SCH_in_owner   = 1,
  SCH_by_owner   = 2,
  SCH_sh_owner   = 3,
  SCH_fa_owner   = 4,
  SCH_lo_owner   = 5,
  SCH_ed_owner   = 6,
  SCH_vx_owner   = 7,
  SCH_fe_owner   = 8,
  SCH_sf_owner   = 9,
  SCH_cu_owner   = 10,
  SCH_pt_owner   = 11,
  SCH_rg_owner   = 12,
  SCH_fn_owner   = 13,
  SCH_max_owner   // last entry; value in $1[] for
                  .legal_owners
} SCH_attrib_owners_t;

typedef enum
{
  SCH_int_field      = 1,
  SCH_real_field     = 2,
  SCH_char_field     = 3,
  SCH_point_field    = 4,
  SCH_vector_field   = 5,
  SCH_direction_field = 6,
  SCH_axis_field     = 7,
  SCH_tag_field      = 8,
  SCH_pointer_field  = 9,
  SCH_unicode_field  = 10
} SCH_field_type_t;

struct ATTRIB_DEF_s // attribute definition
{
  struct ATTRIB_DEF_s *next; // $p
  struct ATT_DEF_ID_s *identifier; // $p
  int type_id; // $d
  SCH_action_on_fields_t actions // $u[8]
  [(int)SCH_max_logged_event]
  ;
  struct FIELD_NAMES_s *field_names // $p
  logical legal_owners // $l[14]
  [(int)SCH_max_owner];
  SCH_field_type_t fields[1]; // $u[]
};
typedef struct ATTRIB_DEF_s *ATTRIB_DEF;

```

ATTRIBUTE

Table H 47 — Attribute fields

Field name	Type	Description
node_id	int	Node-id
definition	pointer	Attribute definition
owner	pointer	Attribute owner
next	pointer0	Next attribute, group, or member_of_group
previous	pointer0	Previous ditto

Field name	Type	Description
next_of_type	pointer0	Next attribute of this type in this part
previous_of_type	pointer0	Previous attribute of this type in this part
fields[]	pointer	Fields, of type int_values etc. The number of fields is given by the length of the variable part of the node. There may be no fields.

The attributes of a node are chained using the next and previous pointers in the attribute. The attribute_groups pointer in the node points to the head of this chain. This chain also contains the member_of_groups of the node.

Attributes within the same part, with the same attribute definition, are chained together by the next_of_type and previous_of_type pointers. The part points to the head of this chain as follows. The attribute_chains pointer in the part points to a list which contains the heads of these attribute chains, one for each attribute definition which has attributes in the part. The list may be null.

Note that the attributes_groups chains in parts, groups and nodes contain the following types of node:

- Part: attributes and groups
- Group: attributes
- Node: attributes and member_of_groups

```
union ATTRIBUTE_OWNER_u
{
    struct ASSEMBLY_s      *assembly;
    struct INSTANCE_s     *instance;
    struct BODY_s         *body;
    struct SHELL_s        *shell;
    struct REGION_s       *region;
    struct FACE_s         *face;
    struct LOOP_s         *loop;
    struct EDGE_s         *edge;
    struct FIN_s          *fin;
    struct VERTEX_s       *vertex;
    union SURFACE_u       Surface;
    union CURVE_u         Curve;
    struct POINT_s        *point;
    struct GROUP_s        *group;
};
typedef union ATTRIBUTE_OWNER_u ATTRIBUTE_OWNER;

union FIELD_VALUES_u
{
    struct INT_VALUES_s    *int_values;
    struct REAL_VALUES_s   *real_values;
    struct CHAR_VALUES_s   *char_values;
    struct POINT_VALUES_s  *point_values;
    struct VECTOR_VALUES_s *vector_values;
    struct DIRECTION_VALUES_s *direction_values;
    struct AXIS_VALUES_s   *axis_values;
    struct TAG_VALUES_s    *tag_values;
    struct UNICODE_VALUES_s *unicode_values;
};
typedef union FIELD_VALUES_u FIELD_VALUES;

struct ATTRIBUTE_s // Attribute
{
    int node_id; // $d
    struct ATTRIB_DEF_s *definition; // $p
    union ATTRIBUTE_OWNER_u owner; // $p
    union ATTRIB_GROUP_u next; // $p
    union ATTRIB_GROUP_u previous; // $p
    struct ATTRIBUTE_s *next_of_type; // $p
};
```

```

    struct ATTRIBUTE_s          *previous_of_type;          // $p
    union FIELD_VALUES_u       fields[1];                 // $p[]
  };
typedef struct ATTRIBUTE_s *ATTRIBUTE;

```

INT_VALUES

Table H 48 — Integer values

values[]	int	Integer values
----------	-----	----------------

```

struct INT_VALUES_s          // Int values
{
  int          values[1];    // $d[]
};
typedef struct INT_VALUES_s *INT_VALUES;

```

REAL_VALUES

Table H 49 — Real values

values[]	double	Real values
----------	--------	-------------

```

struct REAL_VALUES_s        // Real values
{
  double       values[1];    // $f[]
};
typedef struct REAL_VALUES_s *REAL_VALUES;

```

CHAR_VALUES

Table H 50 — Character values

values[]	char	Character values
----------	------	------------------

```

struct CHAR_VALUES_s        // Character values
{
  char         values[1];    // $c[]
};
typedef struct CHAR_VALUES_s *CHAR_VALUES;

```

UNICODE_VALUES

Table H 51 — Unicode values

values[]	short	Unicode character values
----------	-------	--------------------------

```

struct UNICODE_VALUES_s     // Unicode character values
{
  short        values[1];    // $w[]
};
typedef struct UNICODE_VALUES_s *UNICODE_VALUES;

```

POINT_VALUES

Table H 52 — Point values

values[]	vector	Point values
----------	--------	--------------

```

struct POINT_VALUES_s       // Point values
{
  vector       values[1];    // $v[]
};

```

```
typedef struct POINT_VALUES_s *POINT_VALUES;
```

VECTOR_VALUES

Table H 53 — Vector values

values[]	vector	Vector values
----------	--------	---------------

```
struct VECTOR_VALUES_s // Vector values
{
  vector          values[1]; // $v[]
};
typedef struct VECTOR_VALUES_s *VECTOR_VALUES;
```

DIRECTION_VALUES

Table H 54 — Direction values

values[]	vector	Direction values
----------	--------	------------------

```
struct DIRECTION_VALUES_s // Direction values
{
  vector          values[1]; // $v[]
};
typedef struct DIRECTION_VALUES_s *DIRECTION_VALUES;
```

AXIS_VALUES

Table H 55 — Axis values

values[]	vector	Axis values
----------	--------	-------------

Note that an axis takes up two vectors.

```
struct AXIS_VALUES_s // Axis values
{
  vector          values[1]; // $v[]
};
typedef struct AXIS_VALUES_s *AXIS_VALUES;
```

TAG_VALUES

Table H 56 — Tag values

values[]	int	Integer tag values
----------	-----	--------------------

The tag field type and the tag_values node are not available for use in user-defined attributes, they occur only in certain system attributes.

```
struct TAG_VALUES_s // Tag values
{
  int          values[1]; // $t[]
};
typedef struct TAG_VALUES_s *TAG_VALUES;
```

GROUP

Table H 57 — Group fields

Field name	Type	Description
node_id	int	Node-id
attributes_groups	pointer0	Head of chain of attributes of this group
owner	pointer	Owning part
next	pointer0	Next group or attribute
previous	pointer0	Previous group or attribute
type	byte	Type of node allowed in group
first_member	pointer0	Head of chain of member_of_group nodes in group

The groups in a part are chained by the next and previous pointers in a group. The attributes_groups pointer in the part points to the head of the chain. This chain also contains the attributes attached directly to the part - groups and attributes are intermingled in this chain, the order is not significant.

Each group has a chain of member_of_groups. These are chained together using the next_member and previous_member pointers. The first_member pointer in the group points to the head of the chain. Each member_of_group has an owning_group pointer which points back to the group.

Each member_of_group has an owner pointer which points to a node. Thus the group references its member nodes via the member_of_groups.

The member_of_groups which refer to a particular node are chained using the next and previous pointers in the member_of_group. The attributes_groups pointer in the node points to the head of this chain. This chain also contains the attributes attached to the node.

```
typedef enum
{
    SCH_instance_fe    = 1,
    SCH_face_fe       = 2,
    SCH_loop_fe       = 3,
    SCH_edge_fe       = 4,
    SCH_vertex_fe     = 5,
    SCH_surface_fe    = 6,
    SCH_curve_fe      = 7,
    SCH_point_fe      = 8,
    SCH_mixed_fe      = 9,
    SCH_region_fe     = 10
} SCH_group_type_t;

struct GROUP_s // Group
{
    int node_id; // $d
    union ATTRIB_GROUP_u attributes_groups; // $p
    union PART_u owner; // $p
    union ATTRIB_GROUP_u next; // $p
    union ATTRIB_GROUP_u previous; // $p
    SCH_group_type_t type; // $u
    struct MEMBER_OF_GROUP_s *first_member; // $p
};
typedef struct GROUP_s *GROUP;
```

MEMBER_OF_GROUP

Table H 58 — Group member fields

Field name	Type	Description
dummy_node_id	int	Entity label
owning_group	pointer	Owning group
owner	pointer	Referenced member of group
next	pointer0	Next attribute, group or member_of_group
previous	pointer0	Previous ditto
next_member	pointer0	Next member_of_group in this group
previous_member	pointer0	Previous ditto

```

union GROUP_MEMBER_u
{
  struct INSTANCE_s      *instance;
  struct FACE_s          *face;
  struct REGION_s       *region;
  struct LOOP_s          *loop;
  struct EDGE_s         *edge;
  struct VERTEX_s       *vertex;
  union SURFACE_u       surface;
  union CURVE_u         curve;
  struct POINT_s        *point;
};
typedef union GROUP_MEMBER_u GROUP_MEMBER;

struct MEMBER_OF_GROUP_s // Member of group
{
  int dummy_node_id; // $d
  struct GROUP_s *owning_group; // $p
  union GROUP_MEMBER_u owner; // $p
  union ATTRIB_GROUP_u next; // $p
  union ATTRIB_GROUP_u previous; // $p
  struct MEMBER_OF_GROUP_s *next_member; // $p
  struct MEMBER_OF_GROUP_s *previous_member; // $p
};
typedef struct MEMBER_OF_GROUP_s *MEMBER_OF_GROUP;
  
```

Node Types

Table H 59 — Node types

Node Name	Node Type	Visible at PK	Has Node-ID
ASSEMBLY	10	Yes	No
INSTANCE	11	Yes	Yes
BODY	12	Yes	No
SHELL	13	Yes	Yes
FACE	14	Yes	Yes
LOOP	15	Yes	Yes
EDGE	16	Yes	Yes
FIN	17	Yes	No
VERTEX	18	Yes	Yes
REGION	19	Yes	Yes
POINT	29	Yes	Yes
LINE	30	Yes	Yes
CIRCLE	31	Yes	Yes
ELLIPSE	32	Yes	Yes
INTERSECTION	33	Yes	Yes

Node Name	Node Type	Visible at PK	Has Node-ID
CHART	40	No	
LIMIT	41	No	
BSPLINE_VERTICES	45	No	
PLANE	50	Yes	Yes
CYLINDER	51	Yes	Yes
CONE	52	Yes	Yes
SPHERE	53	Yes	Yes
TORUS	54	Yes	Yes
BLENDED_EDGE	56	Yes	Yes
BLEND_BOUND	59	No	
OFFSET_SURF	60	Yes	Yes
SWEPT_SURF	67	Yes	Yes
SPUN_SURF	68	Yes	Yes
LIST	70	Yes	Yes
POINTER_LIS_BLOCK	74	No	
ATT_DEF_ID	79	No	
ATTRIB_DEF	80	Yes	No

Node Name	Node Type	Visible at PK	Has Node-ID
ATTRIBUTE	81	Yes	Yes
INT_VALUES	82	No	
REAL_VALUES	83	No	
CHAR_VALUES	84	No	
POINT_VALUES	85	No	
VECTOR_VALUES	86	No	
AXIS_VALUES	87	No	
TAG_VALUES	88	No	
DIRECTION_VALUES	89	No	
GROUP	90	Yes	Yes
MEMBER_OF_GROUP	91	No	
UNICODE_VALUES	98	No	
FIELD_NAMES	99	No	
TRANSFORM	100	Yes	No
WORLD	101	No	
KEY	102	No	
PE_SURF	120	Yes	Yes
INT_PE_DATA	121	No	
EXT_PE_DATA	122	No	
B_SURFACE	124	Yes	No
SURFACE_DATA	125	No	
NURBS_SURF	126	No	
KNOT_MULT	127	No	
KNOT_SET	128	No	
PE_CURVE	130	Yes	Yes
TRIMMED_CURVE	133	Yes	Yes
B_CURVE	134	Yes	Yes
CURVE_DATA	135	No	
NURBS_CURVE	136	No	
SP_CURVE	137	Yes	Yes
GEOMETRIC_OWNER	141	No	
HELIX_SU_FORM	163	No	

Node Name	Node Type	Visible at PK	Has Node-ID
HELIX_CU_FORM	184	No	
POLYLINE	200	Yes	Yes
MESH	201	Yes	Yes
INTERSECTION_DATA	204	No	No

Node Classes

Table H 60 — Node classes

Node class name	Node class
GEOMETRY	1003
PART	1005
SURFACE	1006
SURFACE_OWNER	1007
CURVE	1008
CURVE_OWNER	1010
POINT_OWNER	1011
LIS_BLOCK	1012
LIST_OWNER	1013
ATTRIBUTE_OWNER	1015
GROUP_OWNER	1016
GROUP_MEMBER	1017
FIELD_VALUES	1018
ATTRIB_GROUP	1019
TRANSFORM_OWNER	1023
PE_DATA	1027
PE_INT_GEOM	1028
SHELL_OR_BODY	1029
FIELD_NAME	1037

H.2.4.3.6 System Attribute Definitions

All system attribute definitions are of class 1.

Hatching Attributes

Hatching

Table H 61 — Hatching

Identifier	SDL/TYSA_HATCHING	
Type_id	8003	
Entity types	face	
Fields	real	real 1
		real 2
		real 3
		real 4
	integer	Hatching type

Set by	Application
---------------	-------------

For **planar hatching** - the four real values define the hatch orientation as a vector and a spacing between consecutive planes.

For **radial hatching** - the first three real values define the spacing of the hatch lines. The fourth value is not used.

For **parametric hatching** - the first two real values define the spacing in u and v respectively. The last two values are not used.

Planar Hatch

Table H 62 — Planar Hatch

Identifier	SDL/TYSA_PLANAR_HATCH		
Type_id	8021		
Entity types	face		
Fields	real	x component	'direction' or plane normal
		y component	
		z component	
		'pitch' or separation	
		x component	position vector
		y component	
		z component	
Set by	Application		

For planar hatching, an attribute with this definition takes precedence over an attribute with the SDL/TYSA_HATCHING definition, if a face has both types of attribute attached.

Radial Hatch

Table H 63 — Radial Hatch

Identifier	SDL/TYSA_RADIAL_HATCH		
Type_id	8027		
Entity types	face		
Fields	real	radial around	
		radial along	
		radial about	
		radial around start	
		radial along start	
		radial about start	
Set by	Application		

For radial hatching, an attribute with this definition takes precedence over an attribute with the SDL/TYSA_HATCHING definition, if a face has both types of attribute attached.

Parametric Hatch

Table H 64 — Parametric Hatch

Identifier	SDL/TYSA_PARAM_HATCH	
Type_id	8028	
Entity types	face	
Fields	real	u spacing
		v spacing
		u start
		v start
Set by	Application	

For parametric hatching, an attribute with this definition takes precedence over an attribute with the SDL/TYSA_HATCHING definition, if a face has both types of attribute attached.

Density Attributes

There are density attributes for each of regions, faces, edges and vertices in addition to the system attribute for density of a body.

The region/face/edge/vertex attributes will be taken into account when finding the mass, centre of gravity and moment of inertia of a body or of the entity to which the attribute is attached:

- The mass of a region will not include that of any of its faces or edges, and the same applies to faces and edges and their boundaries.
- A void region will always have zero mass whatever its density and a solid region will inherit its density from the body if it does not have a density of its own.
- The default density for faces, edges and vertices is always zero.

Density (of a body)

Table H 65 — Body Density

Identifier	SDL/TYSA_DENSITY	
Type_id	8004	
Entity types	body	
Fields	real	Density
	string	Units
Set by	Application	

A body without a density attribute is taken to have, by default, a density of 1.0.

The character field units can be set and read by the application.

Region Density

Table H 66 — Region Density

Identifier	SDL/TYSA_REGION_DENSITY	
Type_id	8023	
Entity types	region	
Fields	real	Density of region
	string	Units
Set by	Application	

This attribute only makes sense for solid regions; void regions always have a mass of zero.

A solid region without a density attribute is taken to have, by default, the same density as its owning body.

The character field units can be set and read by the user.

Face Density

Table H 67 — Face Density

Identifier	SDL/TYSA_FACE_DENSITY	
Type_id	8024	
Entity types	face	
Fields	real	Density of face
	string	Units
Set by	Application	

The value of this attribute is treated as a mass per unit area.

A mass will be calculated for a face only when a face possesses this attribute. In all other cases the mass of a face is not defined.

The character field units can be set and read by the user.

Edge Density

Table H 68 — Edge Density

Identifier	SDL/TYSA_EDGE_DENSITY	
Type_id	8025	
Entity types	edge	
Fields	real	Density of edge
	string	Units
Set by	Application	

The value of this attribute is treated as a mass per unit length.

A mass will be calculated for an edge only when an edge possesses this attribute. In all other cases the mass of an edge is not defined.

The character field units can be set and read by the user.

Vertex Density

Table H 69 — Vertex Density

Identifier	SDL/TYSA_VERTEX_DENSITY	
Type_id	8026	
Entity types	vertex	
Fields	real	Mass of vertex
	string	Units
Set by	Application	

The value of this attribute is treated as a point mass.

A mass will be calculated for a vertex only when a vertex possesses this attribute. In all other cases the mass of a vertex is not defined.

The character field units can be set and read by the user.

Region

Table H 70 — Region

Identifier	SDL/TYSA_REGION	
Type_id	8013	
Entity types	face	
Fields	string	Unused
Set by	Application	

Regional data will allow the application to analyze a hidden-line picture for distinct regions in the 2D view.

Colour

Table H 71 — Colour

Identifier	SDL/TYSA_COLOUR		
Token	8001		
Entity types	face edge		
Fields	real	Red value	These three values should be in the range 0.0 to 1.0
		Green value	
		Blue value	
Set by	Application		

Reflectivity

Table H 72 — Reflectivity

Identifier	SDL/TYSA_REFLECTIVITY	
Token	8014	
Entity types	face	
Fields	real	Coefficient of specular reflection
		Proportion of coloured light in highlights
		Coefficient of diffuse reflection
		Coefficient of ambient reflection
	integer	Reflection power
Set by	Application	

The attribute types for Reflectivity and Translucency are also used by the Parasolid routine RRPIXL, but the use of this routine is not recommended.

Translucency

Table H 73 — Translucency

Identifier	SDL/TYSA_TRANSLUCENCY		
Token	8015		
Entity types	face		
Fields	real	Transparency coefficient	range 0.0 to 1.0, where 0 is opaque and 1 is transparent
Set by	Application		

Name

Table H 74 — Name

Identifier	SDL/TYSA_NAME		
Token	8017		
Entity types	assembly, body, instance, shell, face, loop, edge, vertex, group, surface, curve, point		
Fields	string	Name of entity	
Set by	Application		

Incremental faceting

Table H 75 — Incremental faceting

Identifier	SDL/TYSA_INCREMENTAL_FACETTING		
Token	8030		
Entity types	face		
Fields	string	Unused	
Set by	XT incremental faceting/Application		

Transparency

Table H 76 — Transparency

Identifier	SDL/TYSA_TRANSPARENCY		
Token	8029		
Entity types	Body, face		
Fields	integer	Non-zero transparency coefficient value is transparent	
Set by	Application		

A body may be rendered transparent if it has an attached transparency attribute with a non-zero transparency coefficient.

Non-mergeable edges

Table H 77 — Non-mergeable edges

Identifier	SDL/TYSA_NO_MERGE	
Token	8032	
Entity types	edge	
Fields	string	Unused
Set by	Application	

If an edge has an attribute of this definition attached, it indicates that the edge should not be merged in any modelling operations.

Group merge behaviour

Table H 78 — Group merge behaviour

Identifier	SDL/TYSA_GROUP_MERGE	
Token	8037	
Entity types	group	
Fields	string	Unused
Set by	Application	

If a group has an attribute of this definition attached, it indicates that alternative behaviour should be used if an entity in the group is merged with an entity not in that group.

Unicode name

Table H 79 — Unicode name


Identifier	SDL/TYSA_UNAME	
Token	8038	
Entity types	assembly, body, instance, shell, face, loop, edge, vertex, group, surf, curve, point, region	
Fields	ustring	Name of entity
Set by	Application	

If a group has an attribute of this definition attached, it indicates that alternative behaviour should be used if an entity in the group is merged with an entity not in that group.

H.2.5 XT Moniker Attributes

In order to allow design in context based on JT files, it is mandatory to provide a stable possibility to recognize a particular B-Rep element, especially faces, for external links.

Consider a design change as shown in the following pictures:

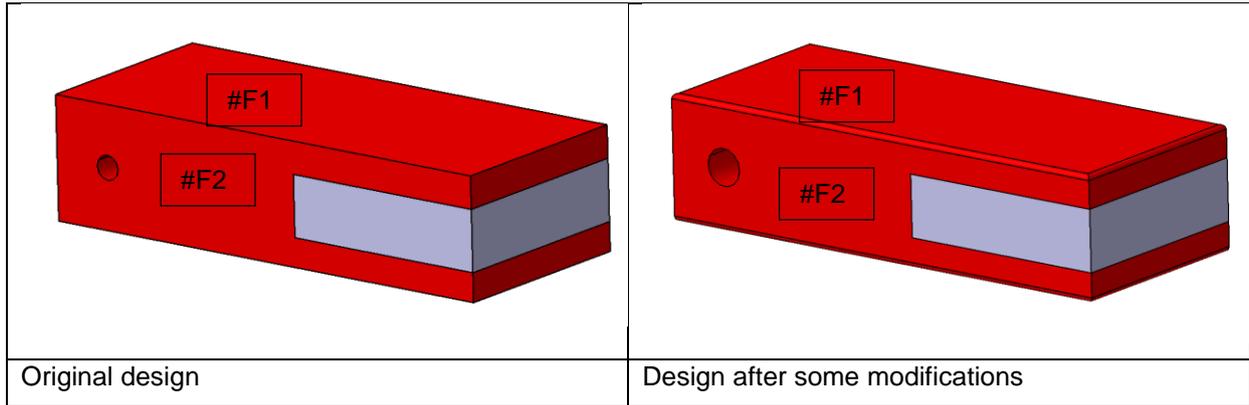

In case of an external reference to one of the faces, i.e. the top face #F1, it must be possible to reconsider the proper face when replacing the part. Otherwise, the external link requires an interactive reassignment.

Internally, CAD systems typically maintain names or identifiers for B-Rep entities that persist across modelling operations. These persistent names are called “Moniker IDs” in context of JT.

Note: Moniker IDs are not 100% reliable in any CAD system. If a very extensive design change is performed, some of the Moniker IDs may not be preserved.

This kind of mechanism can only work when the two JT files (original and modified designed) have been converted with the same convertor (and settings) or at least the same algorithm for adding the Moniker ID. Furthermore, it must be possible to retrieve a stable persistent ID from the original CAD system.

Moniker IDs

Moniker attributes were created to enable JT adopters with the ability to keep track of design changes made to the solid bodies stored in the XT segment of a JT file. For example, a CAD system that imports JT data that is generated from an updated version of an existing CAD model can use moniker data to determine which bodies in the XT segment of the JT file have changed. These attributes are defined to enable consistent use of JT with XT geometry for data exchange. Moniker attributes must be uniquely defined and persisted to be effective.

Moniker attributes follow the standard convention for creation of attributes in the XT segment of JT. For detailed information on Attributes in the XT segment of JT files see the sections Attributes and System Attribute Definitions in this Annex of JTIAP Edition 3 file specification [1].






MONIKER/GUID_TABLE_ATTRIB and MONIKER/MONIKER_DATA_ATTRIB

The MONIKER/GUID_TABLE_ATTRIB and MONIKER/MONIKER_DATA_ATTRIB attributes are used to store data in the XT segment of a JT file that records unique identifiers for XT faces and bodies with index values to link them together.

Unique identifiers for bodies are assigned as GUID strings for each version of a body. Unique identifiers for faces are assigned as 32-bit integers. An index field is used to tie the identifier of a body to the identifier of a face. For every version of a body, a set of MONIKER/GUID_TABLE_ATTRIB and MONIKER/MONIKER_DATA_ATTRIB attributes will be defined to record that version’s identifiers. For example, a model might start with a body that has 6 faces. That body will have one MONIKER/GUID_TABLE_ATTRIB attributes and 6 MONIKER/MONIKER_DATA_ATTRIB attributes. If a change is made that adds one face to the body, that body then will have a new version. There will be 2 MONIKER/GUID_TABLE_ATTRIB attributes and 7 MONIKER/MONIKER_DATA_ATTRIB attributes. The information in these attributes is used to form an indexed table of values for bodies and faces. The indices in the first body version will relate 6 faces to that version’s GUID string. The index value in the second version of the body will tie one face ID to that version’s GUID string.

Table H 80 — Moniker attribute use example shows how moniker attributes are used. Each version of a body has a unique GUID. The face identifiers reflect their GUID and index values.

Table H 80 — Moniker attribute use example

Operation	Application X	Application Y	Operation																
<p>Application X constructs initial model. Single entry in GUID table Part 1.0</p> <table border="1"> <thead> <tr> <th>GUID</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td>GUID-A</td> <td>0</td> </tr> </tbody> </table>	GUID	Index	GUID-A	0															
GUID	Index																		
GUID-A	0																		
<p>Application X modifies model with blend Adds entry in GUID Table New f9 moniker on blend Face uses new GUID index. Part 1.1</p> <table border="1"> <thead> <tr> <th>GUID</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td>GUID-A</td> <td>0</td> </tr> <tr> <td>GUID-B</td> <td>1</td> </tr> </tbody> </table>	GUID	Index	GUID-A	0	GUID-B	1			<p>Part imported into Application Y Monikers are unchanged on imported part. Part 2.0</p> <table border="1"> <thead> <tr> <th>GUID</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td>GUID-A</td> <td>0</td> </tr> <tr> <td>GUID-B</td> <td>1</td> </tr> </tbody> </table>	GUID	Index	GUID-A	0	GUID-B	1				
GUID	Index																		
GUID-A	0																		
GUID-B	1																		
GUID	Index																		
GUID-A	0																		
GUID-B	1																		
<p>Application X adds a boss. New entry in GUID table is unique. New boss faces reference new GUID index Part 1.2</p> <table border="1"> <thead> <tr> <th>GUID</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td>GUID-A</td> <td>0</td> </tr> <tr> <td>GUID-B</td> <td>1</td> </tr> <tr> <td>GUID-C</td> <td>2</td> </tr> </tbody> </table>	GUID	Index	GUID-A	0	GUID-B	1	GUID-C	2			<p>Application Y adds 2 blends. New entry in GUID table is unique. New blend face monikers reference new GUID Part 2.1</p> <table border="1"> <thead> <tr> <th>GUID</th> <th>Index</th> </tr> </thead> <tbody> <tr> <td>GUID-A</td> <td>0</td> </tr> <tr> <td>GUID-B</td> <td>1</td> </tr> <tr> <td>GUID-D</td> <td>2</td> </tr> </tbody> </table>	GUID	Index	GUID-A	0	GUID-B	1	GUID-D	2
GUID	Index																		
GUID-A	0																		
GUID-B	1																		
GUID-C	2																		
GUID	Index																		
GUID-A	0																		
GUID-B	1																		
GUID-D	2																		

If during a modelling operation a moniker bearing face is split into multiple faces then the moniker attribute is carried over to all the resulting faces (see Figure H 4 — Split a face).

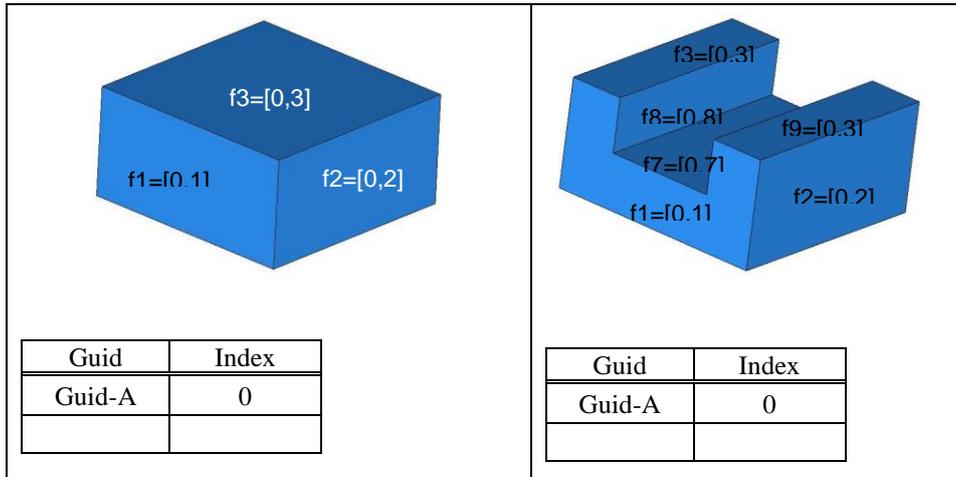


Figure H 4 — Split a face

When multiple entities get merged in a modelling operation, the moniker attributes from both entities are copied to the new entity. The moniker data from the input faces should not match (see Figure H 5 — Merge faces)

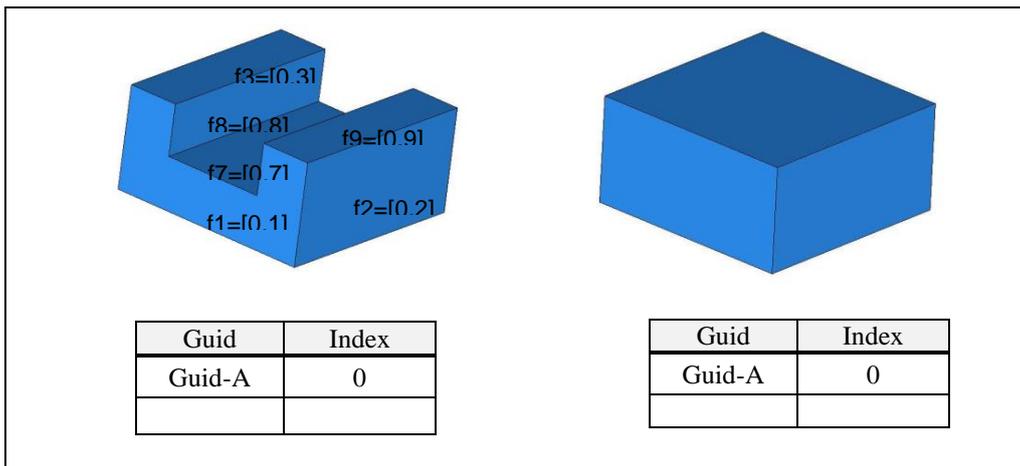


Figure H 5 — Merge faces

Table H 81 — MONIKER/GUID_TABLE_ATTRIB and MONIKER/MONIKER_DATA_ATTRIB provides attribute data descriptions.

Table H 81 — MONIKER/GUID_TABLE_ATTRIB and MONIKER/MONIKER_DATA_ATTRIB

XT Attribute name	Description
MONIKER/GUID_TABLE_ATTRIB	<p>An XT body can have multiple occurrences of this attribute.</p> <p>This attribute contains 3 fields:</p> <ol style="list-style-type: none"> 5. GUID string – GUID (Globally Unique Identifier). Each version of an XT body will have a GUID string. The string consists of a series of hexadecimal values separated by a “-”. <p>The GUID string syntax appears this way when using the C printf convention for strings;</p> <pre>“{%08x-%04x-%04x-%02x%02x-%02x%02x%02x%02x%02x%02x}”</pre> <ol style="list-style-type: none"> 6. Index – a 32 bit integer. Corresponds with the index field value in MONIKER/MONIKER_DATA_ATTRIB. 7. Application name string – optional string used to record the application that authored the attribute
MONIKER/MONIKER_DATA_ATTRIB	<p>Each face can have in an XT segment can have this attribute.</p> <p>Each attribute contains 3 fields:</p> <ul style="list-style-type: none"> • Index – a 32 bit integer. Correspond with the index field value in MONIKER/GUID_TABLE_ATTRIB. • Entity Id - a 32 bit integer face identifier. • Label string – optional string for face specific information.

MONIKER/BODY_ID_ATTRIB

MONIKER/BODY_ID_ATTRIB is a standalone attribute with no dependencies to the MONIKER/GUID_TABLE_ATTRIB or MONIKER/MONIKER_DATA_ATTRIB attributes. It is created for each version of an XT body in the XT segment of a JT file. An XT body can have multiple occurrences of this attribute, each with an id for that version of the body. It is valid for an XT segment of a JT file to contain all three moniker attributes as different CAD systems will use one or the other constructs.

Table H 82 — MONIKER/BODY_ID_ATTRIB

XT Attribute name	Description
MONIKER/BODY_ID_ATTRIB	<p>This attribute is created for each version of an XT body in the XT segment of a JT file. It is used to uniquely identify an XT body in the XT segment of a JT file. The Entity Id field is populated with an incrementing integer typically utilized by CAD authoring systems.</p> <p>This attribute consists of 2 fields:</p> <ul style="list-style-type: none"> — Entity Id - 32 bit integer — Application name string – optional string used to record the application that authored the attribute

Annex I

JT ULP Segment

JT ULP Segment contains an Element that defines the semi-precise geometric Boundary Representation data for a particular Part in JT ULP format.

JT ULP Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element). The JT ULP Segment type supports compression on all element data, so all elements in JT ULP Segment use the Logical Element Header Compressed. form of element header data.




Figure I 1 — JT ULP Segment data collection

Complete description for Segment Header can be found in the File Header section of Base Format Description under Data Segment.

I.1 JT ULP Element

Object Type ID: 0xf338a4af, 0xd7d2, 0x41c5, 0xbc, 0xf2, 0xc5, 0x5a, 0x88, 0xb2, 0x1e, 0x73

JT ULP Element represents a particular Part's ultra-lightweight semi-precise B-Rep data. Like JT B-Rep Element or XT B-Rep Element, JT ULP Element contains all the topological and geometric information that describes the shape of a part. The difference is that the size of JT ULP Element is typically around 10% of a typical JT file with B-Rep and LODs, and this is achieved by sophisticated compression techniques. In addition, JT ULP Element is semi-precise meaning that its geometric description is not as precise as either JT B-Rep Element or XT B-Rep Element. The precision loss of JT ULP Element, however, is carefully controlled to be equal to or better than 0.01% of the part size or 0.1mm, whichever is smaller.

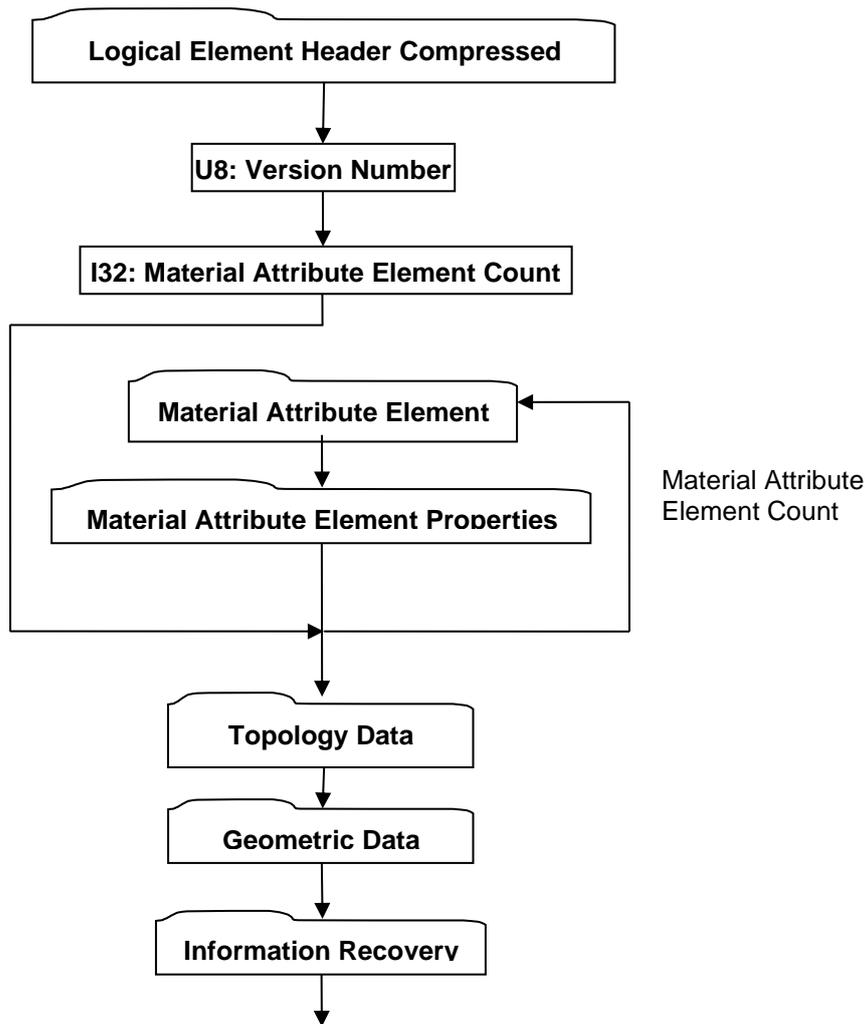


Figure I 2 — JT ULP Element data collection

Complete description for Logical Element Header Compressed can be found in the File Header section of Base Format Description under Data Segment, Data.

U8: Version Number

Version Number is the version identifier for this JT ULP Element. Information on local version numbers can be found in the Base Format Description under Common Data Conventions and Constructs Local version numbers.

I32: Material Attribute Element Count

Material Attribute Element Count is the number of material attribute elements.

Complete description for Material Attribute Element can be found in Material Attribute Element.

I.1.1 Topology Data

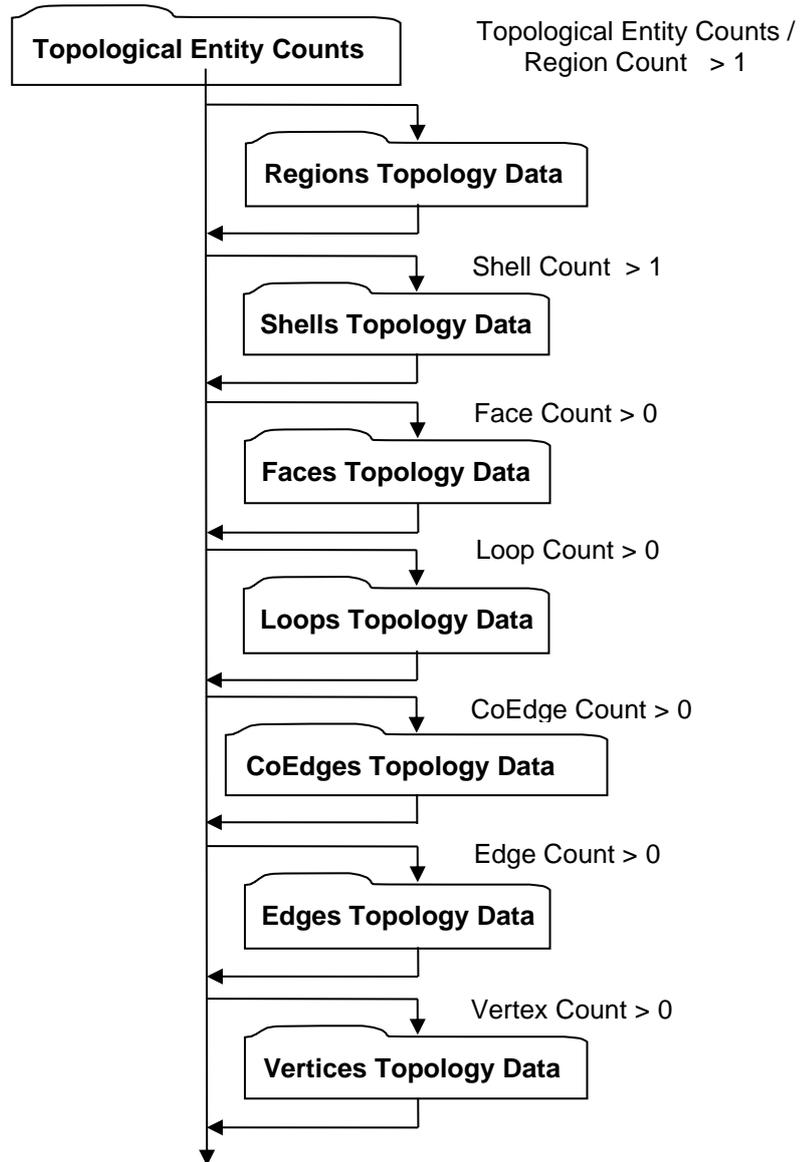


Figure I 3 — Topology Data collection

Topological Entity Counts

Topological Entity Counts data collection defines the counts for each of the various topological entities within a ULP.

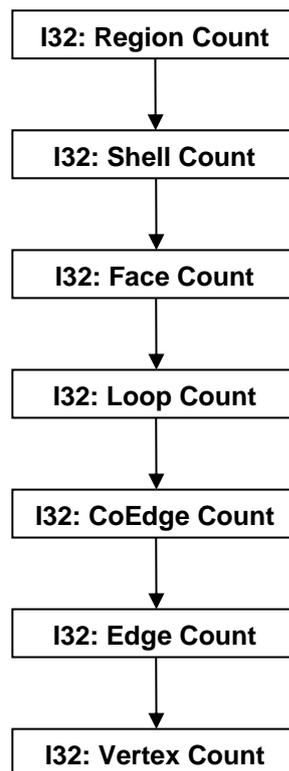


Figure I 4 — Topological Entity Counts data collection

I32: Region Count

Region Count indicates the number of topological region entities in the ULP.

I32: Shell Count

Shell Count indicates the number of topological shell entities in the ULP.

I32: Face Count

Face Count indicates the number of topological face entities in the ULP.

I32: Loop Count

Loop Count indicates the number of topological loop entities in the ULP.

I32: CoEdge Count

CoEdge Count indicates the number of topological coedge entities in the ULP.

I32: Edge Count

Edge Count indicates the number of topological edge entities in the ULP.

I32: Vertex Count

Vertex Count indicates the number of topological vertex entities in the ULP.

Combined Predictor Type

A predictor type may be combined with additional processing. When Combined Predictor Type is used, the additional processing step is encoded. For example, combined predictor type *Combined:NULL* means that the data collection follows the logical diagram in the Figure I 5 with ePredictorType set to be NULL.

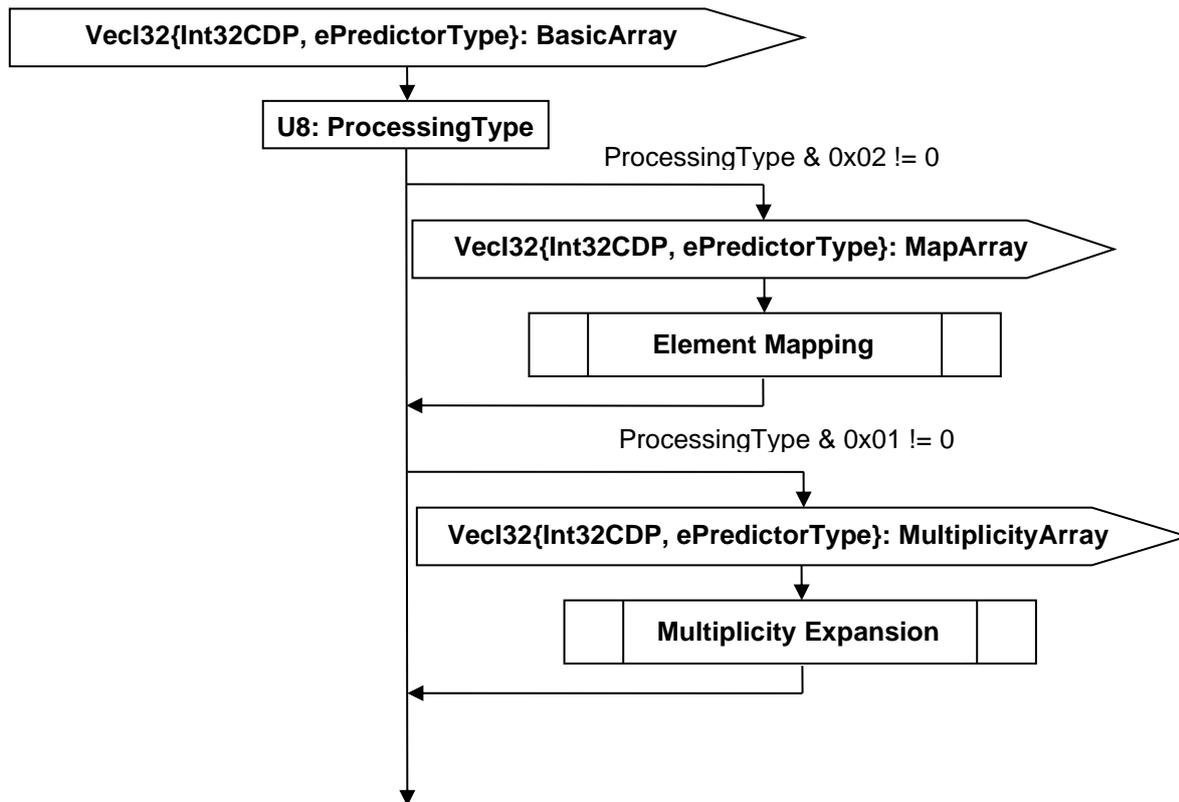


Figure I 5 — Combined Predictor Type data collection

VecI32{Int32CDP, ePredictorType}: BasicArray

BasicArray is an integer array, compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

U8: ProcessingType

Two bits of this value are currently used. If bit 0x02 is set, then the integer array is a list of elements with unique values and Element Mapping step is needed to recover the original values. If bit 0x01 is set, then the some elements in the integer array may be repeated, and Multiplicity Expansion is used to recover the original values.

VecI32{Int32CDP, ePredictorType}: MapArray

MapArray is an integer array, where each element represents the index mapping information. MapArray is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Element Mapping

Element Mapping recovers the original array from BasicArray and MapArray, using

$$relationshipOriginalArray[i] = BasicArray[MapArray[i]].$$

After Element Mapping, the value of BasicArray is updated with OriginalArray.

VecI32{Int32CDP, ePredictorType}: MultiplicityArray

MultiplicityArray is an integer array, where each element represents the multiplicity of each element in BasicArray. MultiplicityArray is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Multiplicity Expansion

Multiplicity Expansion recovers the original array from BasicArray and MultiplicityArray. The original array is an expansion of the BasicArray. If the corresponding multiplicity value is greater than 1, the element in BasicArray is contiguously repeated in the original array according to multiplicity value.

Regions Topology Data

Regions Topology Data defines the disjoint set of non-overlapping Shells making up each Region. Each Region is defined by one or more non-overlapping Shells. The volume of a Region is that volume lying inside each “anti-hole Shell” and outside each simply-contained “hole Shell” belonging to the particular Region. A Region is analogous to a dimensionally elevated face where Region corresponds to Face and Shell corresponds to Trim Loop.

Each Region’s defining Shells are identified in a list of Shells by an index for both the first Shell and the last Shell in each Region (i.e. all Shells inclusive between the specified first and last Shell list index define the particular Region). In addition, the indices of all the shells in a single Region are contiguous. The first shell index of the first region is 0, and the first shell index of other regions is one greater than the last shell index of the previous region. Therefore only the number of shells of each region is stored. In the special case when the number of regions is 1, no information needs be stored since its last Shell index is known to be Shell Count-1.

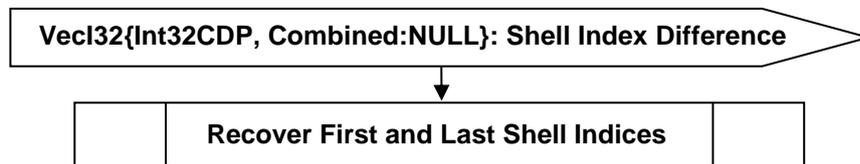


Figure I 6 — Regions Topology Data collection

VecI32{Int32CDP, Combined:NULL}: Shell Index Difference

Shell Index Difference is a vector of indices representing the integer value by subtracting first shell index from last shell index in each region, encoded using Combined Predictor Type. Shell Index Difference is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Recover First and Last Shell Indices

The first shell index of the first region is 0, and the last shell index of the first region is element 0 of Shell Index Difference. The first shell index of region $k, k \geq 1$ equals to the last shell index of region $k - 1$ plus 1. The last shell index of region $k, k \geq 1$ equals to the first shell index of region k plus element k of Shell Index Difference array.

Shells Topology Data

Shells Topology Data defines the set of topological adjacent Faces making up each Shell. A Shell’s set of topological adjacent Faces define a single (usually closed) two manifold solid that in turn defines the boundary between the finite volume of space enclosed within the Shell and the infinite volume of space outside the Shell. In addition, each Shell has a flag that denotes whether the Shell refers to the finite interior volume (i.e. a “hole Shell”) or the infinite exterior volume (i.e. an “anti-hole Shell”).

Each Shell’s defining Faces are identified in a list of Faces by an index for both the first Face and the last Face in each Shell (i.e. all Faces inclusive between the specified first and last Face list index define the particular Shell). In addition, the indices of all the faces in a single Shell are contiguous. The first face index of the first shell is 0, and the first face index of other shells is one greater than the last face index of the previous shell. Therefore only the number of faces of each shell is stored. In the special case when the number of shells is 1, no information needs be stored since its last face index is known to be Face Count-1.

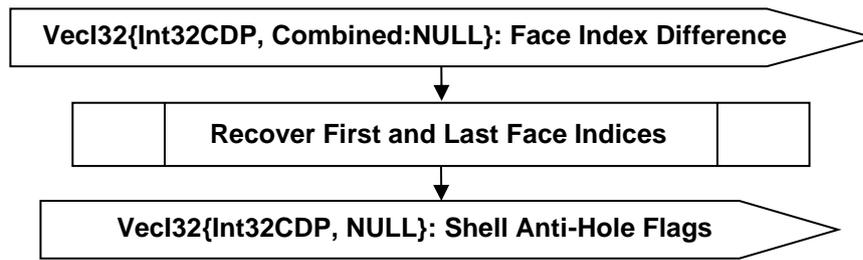


Figure I 7 — Shells Topology Data collection

VecI32{Int32CDP, Combined:NULL}: Face Index Difference

Face Index Difference is a vector of indices representing the integer value by subtracting first face index from last face index in each shell, encoded using Combined Predictor Type. Face Index Difference is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Recover First and Last Face Indices

The first face index of the first shell is 0, and the last face index of the first shell is element 0 of Face Index Difference. The first face index of shell $k, k \geq 1$ equals to the last face index of shell $k - 1$ plus 1. The last face index of shell $k, k \geq 1$ equals to the first face index of shell k plus element k of Face Index Difference array.

VecI32{Int32CDP, NULL}: Shell Anti-Hole Flags

Each Shell has a flag identifying whether the Shell is an anti-hole Shell. Shell Anti-Hole Flags is a vector of anti-hole flags for a set of Shells.

In an uncompressed/decoded form the flag values have the following meaning:

Table I 1 — JT ULP Shell Anti-Hole Flag values

= 0	Shell is not an anti-hole Shell
= 1	Shell is an anti-hole Shell

Shell Anti-Hole Flags uses the Int32 version of the CODEC to compress and encode data.

Faces Topology Data

A Face shall be trimmed with at least one “anti-hole” Trim Loop and may be trimmed with one or more “hole” Trim Loops. The complete description of face and its relation to the trim loops can be found in Faces Topology Data.

Each Face’s defining Trim Loops are identified in a list of trim Loops by an index for both the first Trim Loop and the last Trim Loop in each Face (i.e. all Trim Loops inclusive between the specified first and last Trim Loop list index define the particular Face). In addition, the indices of all the loops in a single Face are contiguous. The first loop index of the first face is 0, and the first loop index of other faces is one greater than the last loop index of the previous face. Therefore only the number of loops of each face is stored. In the special case when the number of faces is 1, no information needs be stored since its last loop index is known to be Loop Count-1.

Each Face’s underlying Geometric Surface is identified by an index into a list of Geometric Surfaces. Each face’s material is identified by an index into the list of f Material Attribute Elements.

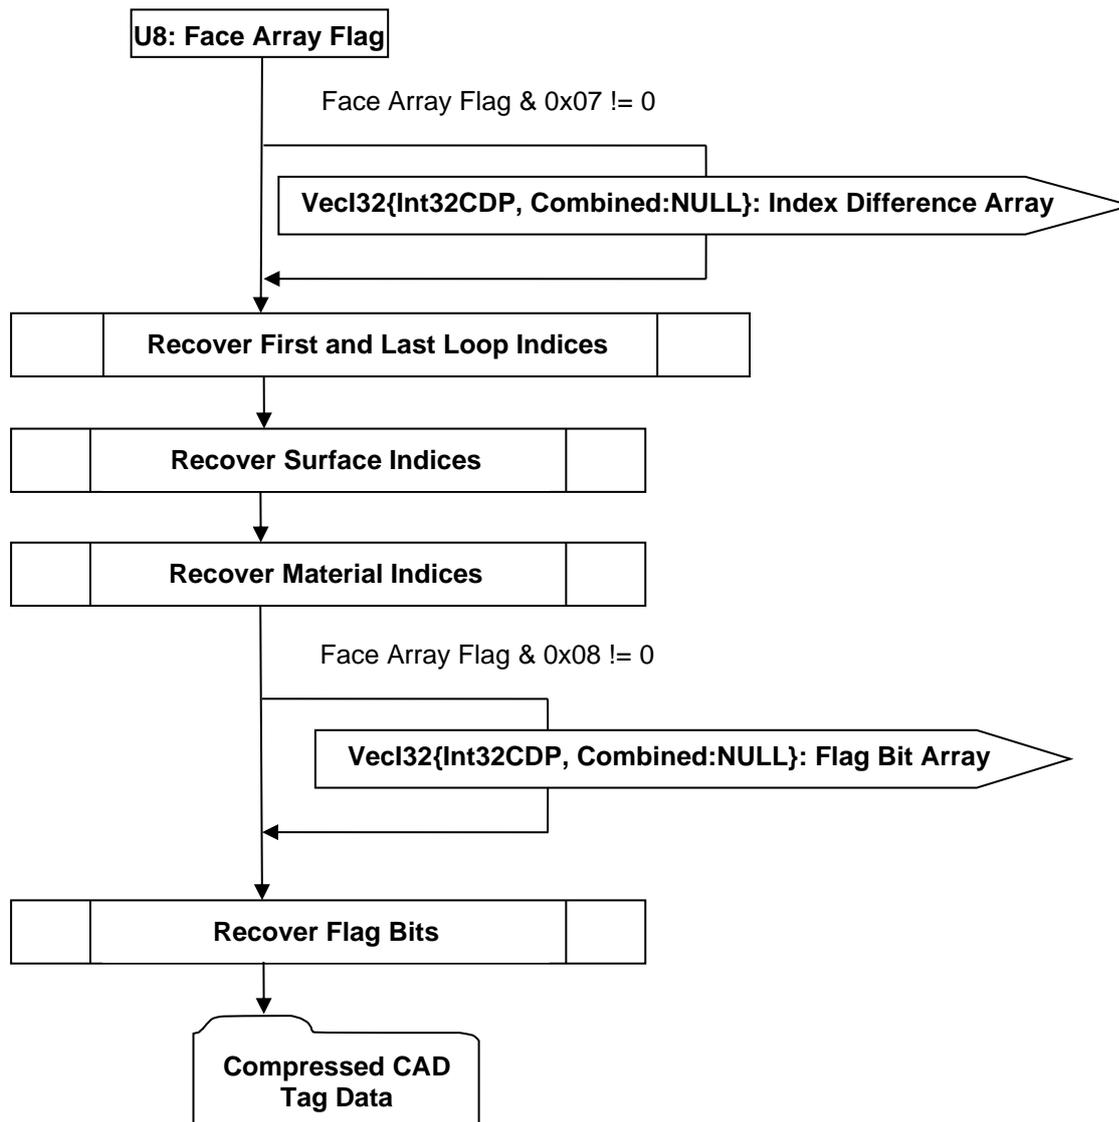


Figure I 8 — Faces Topology Data collection

U8: Face Array Flag

Face Array Flag indicates which arrays of face topology data are not trivial and therefore encoded.

VecI32{Int32CDP, Combined:NULL}: Index Difference Array

Index Difference Array is a combined vector of indices encoded using Int32 version of CODEC and Combined Predictor Type, with its content decided by the value of Face Array Flag. If Face Array Flag has bit 0x01 set, then the vector of integer values obtained by subtracting first loop index from last loop index in each face is appended to the end of Index Difference Array. If Face Array Flag has bit 0x02 set, then the vector of integer values obtained by subtracting surface index from face index in each face is appended to the end of Index Difference Array. If Face Array Flag has bit 0x04 set, then the vector of integer values representing the material index of each face is appended to the end of Index Difference Array.

Recover First and Last Loop Indices

The first loop index of the first face is 0, and the last loop index of the first face is element 0 of Index Difference Array if the array is encoded, or 0 if bit 0x01 of Face Array Flag is not set. The first loop index of face $k, k \geq 1$ equals to the last loop index of face $k - 1$ plus 1. The last loop index of face

$k, k \geq 1$ equals to the first loop index of face k plus element k of Index Difference Array, or 0 if bit 0x01 of Face Array Flag is not set.

Recover Surface Indices

The surface index of each face equals to the face index if bit 0x02 of Face Array Flag is not set. Otherwise the surface index of face k is obtained by subtracting element $k + \text{offset}$ of Index Difference Array from face index k , where offset is equal to Face Count if bit 0x01 of Face Array Flag is set and 0 if the bit is not set.

Recover Material Indices

The material index of each face equals to 0 if bit 0x04 of Face Array Flag is not set. Otherwise the material index of face k equals to the element $k + \text{offset}$ of Index Difference Array, where offset is equal to twice of Face Count if both bit 0x01 and bit 0x02 of Face Array Flag are set, is equal to Face Count if either bit 0x01 or bit 0x02 of Face Array Flag is set, and is equal to 0 if neither bit is set.

VecI32{Int32CDP, Combined:NULL}: Flag Bit Array

Only the lower 24 bits of the four integer indices, namely first loop index, last loop index, surface index, and material index, are used as integer identifiers. The other bits of these integers are documented as reserved for future use.

Table I 2 — JT ULP Flag Bit Array Look Index values

	24	25	26	27	28	29	30	31
First Loop Index	Surface Type			U Knot Type		V Knot Type		isNormalReversed
Last Loop Index	isIsolated	Reserved						
Surface Index	Reserved							
Material Index	Reserved							

Each element of Flag Bit Array is a 32 bit integer obtained by combining all 32 flag bits from four different integers. More specifically:

- Bits 0~7 of Flag Bit Array are equal to bits 24~31 of First Loop Index.
- Bits 8~15 of Flag Bit Array are equal to bits 24~31 of Last Loop Index.
- Bits 16~23 of Flag Bit Array are equal to bits 24~31 of Surface Index.
- Bits 24~31 of Flag Bit Array are equal to bits 24~31 of Material Index.

Supported Surface Type

In an uncompressed/decoded form, the supported surface types are listed below.

Table I 3 — JT ULP Supported Surface Type values

0	Nurbs
1	Plane
2	Cylinder
3	Cone
4	Sphere
5	Torus
6	Reserved
7	Reserved

Supported Knot Type

In an uncompressed/decoded form, the supported knot types are listed below. The knot type of the underlying surface along both U and V parameter directions are encoded.

Table I 4 JT ULP Supported Knot Type Values

0	No Pattern
1	No knot value in between the clamped end knots
2	All knot values in between the end knots increase with an even interval
3	All knot values in between the end knots repeat exactly once, and the distinct values increase with an even interval

In an uncompressed/decoded form, the Face Reverse Normal Flag has the following meaning:

Table I 5 — JT ULP Face Reverse Normal Flag values

= 0	Face normal is not reversed
= 1	Face normal is reversed.

Recover Flag Bits

If Face Array Flag & 0x08 is equal to 0, then each element in Flag Bit Array is set to have value 0. The flag bits are recovered by assigning bits 0~7 of Flag Bit Array to bits 24~31 of First Loop Index, bits 8~15 of Flag Bit Array to bits 24~31 of Last Loop Index, bits 16~23 of Flag Bit Array to bits 24~31 of Surface Index, and bits 24~31 of Flag Bit Array to bits 24~31 of Material Index.

Loops Topology Data

A Loop (often called Trimming Loop) defines in parameter space a 1D boundary around which geometric surfaces are trimmed to form a Face. Loops Topology Data specifies the CoEdges making up each Loop along with an anti-hole flag and identifier tag for each Loop. The complete description of loop and its relation to the CoEdges can be found in Loops Topology Data.

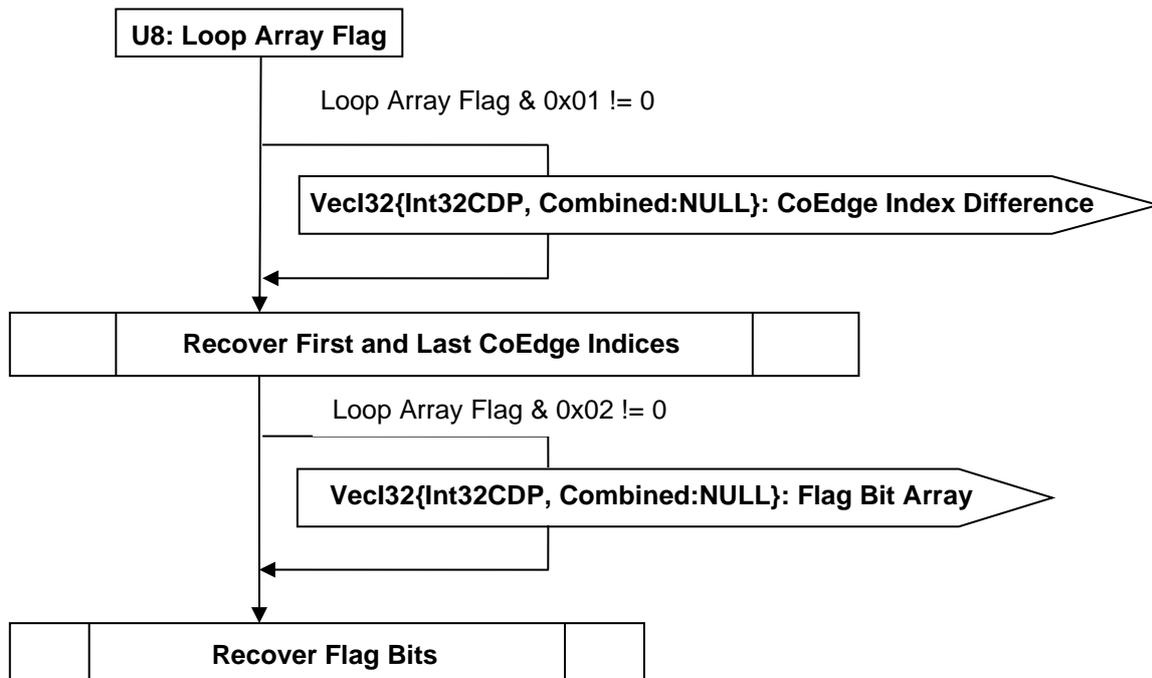


Figure I 9 — Loops Topology Data collection

U8: Loop Array Flag

Loop Array Flag indicates which arrays of loop topology data are not trivial and therefore encoded.

VecI32{Int32CDP, Combined:NULL}: CoEdge Index Difference

CoEdge Index Difference is a vector of indices representing the integer value by subtracting first CoEdge index from last CoEdge index in each loop, encoded using Combined Predictor Type. CoEdge Index Difference is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Recover First and Last CoEdge Indices

The first CoEdge index of the first loop is 0, and the last CoEdge index of the first loop is element 0 of CoEdge Index Difference. The first CoEdge index of loop $k, k \geq 1$ equals to the last CoEdge index of loop $k - 1$ plus 1. The last CoEdge index of loop $k, k \geq 1$ equals to the first CoEdge index of loop k plus element k of CoEdge Index Difference array.

VecI32{Int32CDP, Combined:NULL}: Flag Bit Array

Only the lower 24 bits of the two integer indices, namely first CoEdge index and last CoEdge index are used as integer identifiers. The other bits of these integers documented as reserved for future use.

Table I 6 — JT ULP Loops Topology Flag Bit Array values

		24	25	26	27	28	29	30	31
First Index	CoEdge	Reserved							isAntiHoleLoop
Last Index	CoEdge	Reserved							

Bits 0~7 of Flag Bit Array are equal to bits 24~31 of First CoEdge Index

Bits 8~15 of Flag Bit Array are equal to bits 24~31 of Last CoEdge Index

Bits 16~31 of Flag Bit Array are set to be 0

In an uncompressed/decoded form, the AntiHole Loop Flag has the following meaning:

Table I 7 — JT ULP Loops Topology Reverse Normal Flag values

= 0	Loop is not an anti-hole Loop
= 1	Loop is an anti-hole Loop

Recover Flag Bits

The flag bits are recovered by assigning bits 0~7 of Flag Bit Array to bits 24~31 of First CoEdge Index, and bits 8~15 of Flag Bit Array to bits 24~31 of Last CoEdge Index.

CoEdges Topology Data

A CoEdge defines a parameter space edge trim Loop segment (i.e. the projection of an Edge into the parameter space of the Face). CoEdges Topology Data specifies the underlying Edge and PCS Curve making up each CoEdge along with a MCS curve reversed flag and tag for each CoEdge. The complete description of CoEdge and its relation to the Edge can be found in CoEdges Topology Data.

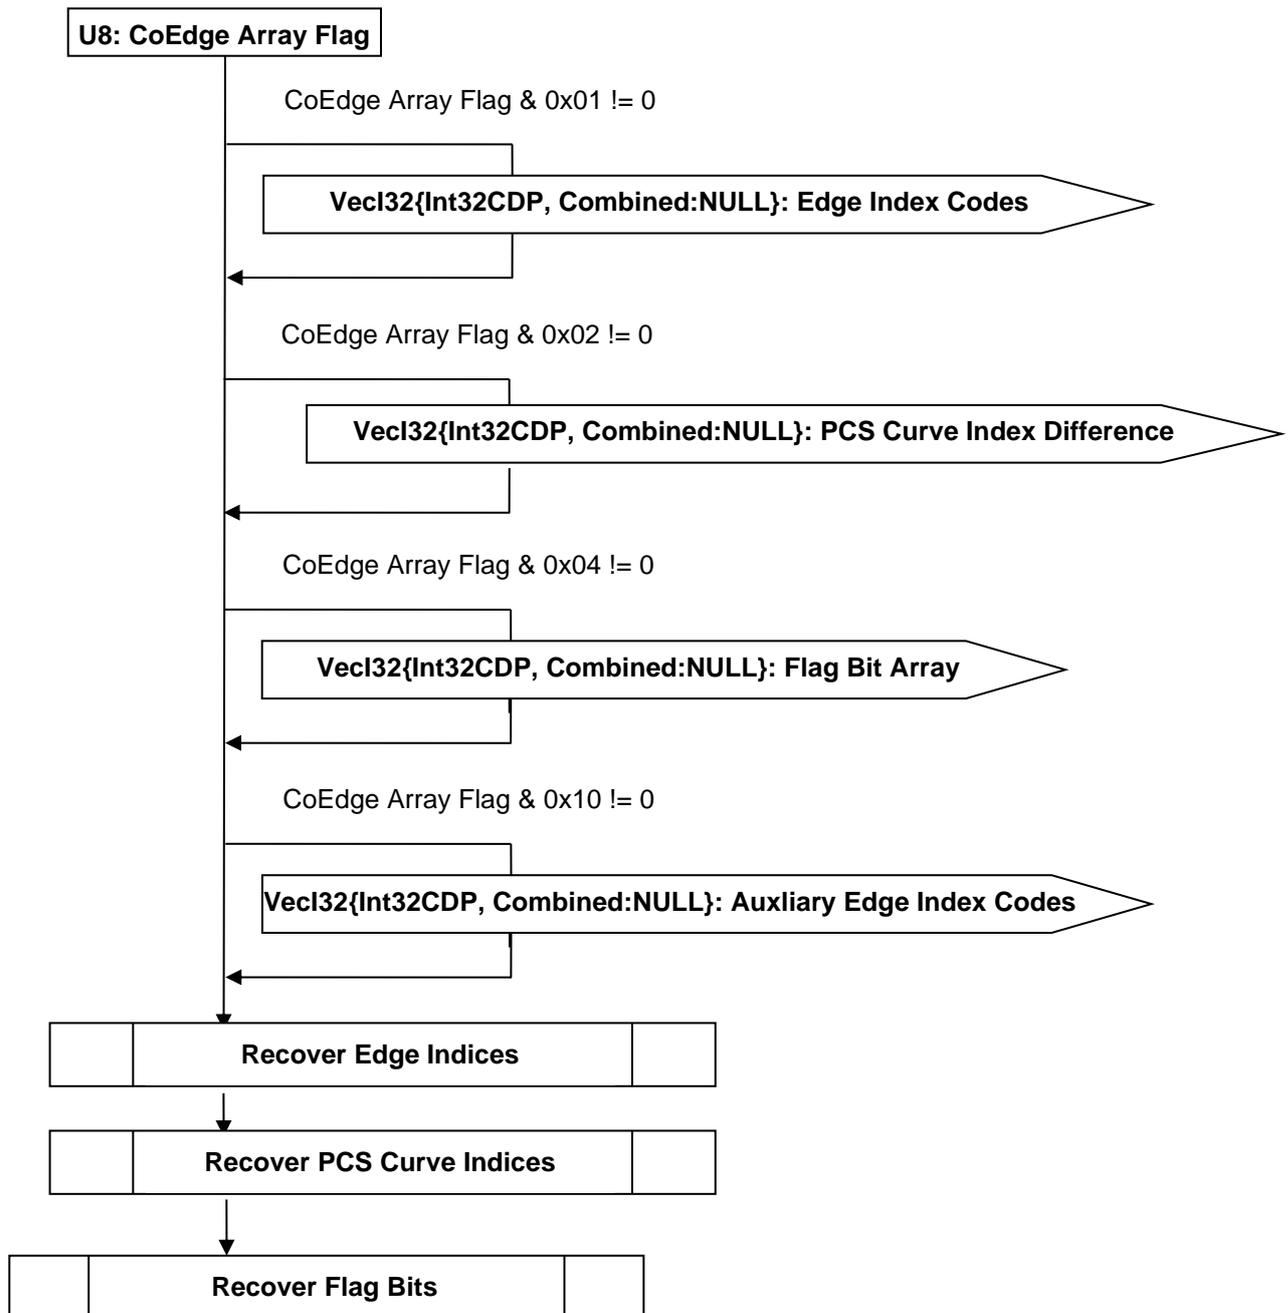


Figure I 10 — CoEdges Topology Data collection

U8: CoEdge Array Flag

CoEdge Array Flag indicates which arrays of coedge topology data are not trivial and therefore encoded.

VecI32{Int32CDP, Combined:NULL}: Edge Index Codes

Edge Index Codes is a vector of integer indices representing the Edge index for each CoEdge, encoded using Combined Predictor Type. Edge Index Codes is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Depending on how the edge indices are assigned, and indicated by bit 0x08 in CoEdge Array Flag, the Edge Index Codes may represent the Edge Index information in two different ways. If the edge indices are randomly assigned, for example as shown in Figure I 11, then each element in Edge Index Codes represents the integer value by subtracting the Edge index from the CoEdge index for each CoEdge.

For the example shown in Figure I 11, the integer values in Edge Index Codes are -7, -4, -4, 3, 3, -1, -2, 5, 5, 1, 5, 7 and bit 0x08 is turned off in CoEdge Array Flag. If the edge indices are chosen to be based on the sequence of the reference from the parent coedges when the coedges are visited sequentially, as shown in Figure I 12, then each element in Edge Index Codes has value 0 if the edge is visited the first time, and value 1 if the edge is visited the second time. For the example shown in Figure I 12, the integer values in Edge Index Codes are 0, 0, 0, 0, 0, 1, 0, 0, 0, 1, 1, 0, and bit 0x08 is turned on in CoEdge Array Flag. Note that the edge index for all CoEdges with 0 entry can be figured out by counting number of zeros in Edge Index Codes preceding (not including) this entry. Take CoEdge 6 that has entry 0 in Edge Index Codes for example. The number of zeros before this entry is 5, which is equal to the edge index of CoEdge 6. Therefore only the edge indices of those CoEdges with entry value 1 in Edge Index Codes need be stored. These edge indices are stored in Auxiliary Edge Index Codes.

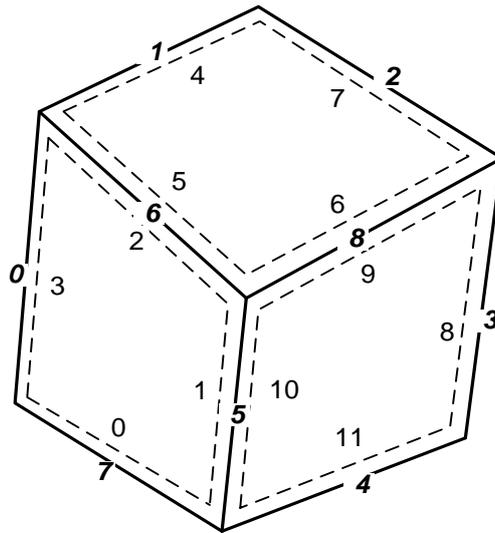


Figure I 11 — Sample Model with Randomly Assigned Edge Indices

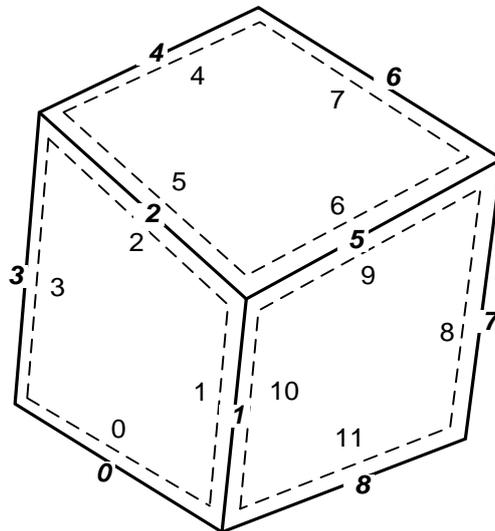


Figure I 12 — Sample Model with Sequentially Assigned Edge Indices

VecI32{Int32CDP, Combined:NULL}: Auxiliary Edge Index Codes

Auxiliary Edge Index Codes is an optional field and only exists if CoEdge Array Flag & 0x08 is not equal to 0. It contains the Edge indices that appear again during sequential traversal of the CoEdges. For the example shown in Figure I 12, the entries in Auxiliary Edge Index Codes are 2, 5, 1. More detailed explanation of what these entries mean can be found in Edge Index Codes.

Recover Edge Indices

If CoEdge Array Flag & 0x08 is equal to 0, then the Edge index of each CoEdge is equal to the CoEdge index if CoEdge Array Flag & 0x01 is equal to 0. Otherwise, the Edge index of CoEdge with index k can be computed by subtracting element k of Edge Index Codes array from k, the CoEdge index.

If CoEdge Array Flag & 0x08 is equal to 1, then the Edge index of all CoEdges having 0 entry in Edge Index Codes is set to be the number of zeros in Edge Index Codes preceding (not including) this entry. For all CoEdges that have 1 in Edge Index Codes, their edge indices are sequentially assigned as the corresponding value in Auxiliary Edge Index Codes.

VecI32{Int32CDP, Combined:NULL}: PCS Curve Index Difference

PCS Curve Index Difference is a vector of indices representing the integer value by subtracting the PCS Curve index from the CoEdge index for each CoEdge, encoded using Combined Predictor Type. PCS Curve Index Difference is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Recover PCS Curve Indices

If CoEdge Array Flag & 0x02 is equal to 0, then the PCS Curve index of each CoEdge is equal to the CoEdge index. Otherwise, the PCS Curve index of CoEdge with index k can be computed by subtracting element k of PCS Curve Index Difference array from k, the CoEdge index.

VecI32{Int32CDP, Combined:NULL}: Flag Bit Array

Only the lower 24 bits of the two integer indices, namely Edge index and PCS Curve index, are used as integer identifiers. The other bits of these integers are documented as reserved for future use.

Table I 8 — JT ULP Recover Edge Indices Flag Bit Array values

	24	25	26	27	28	29	30	31
Edge Index	Knot Type		Domain Type			PCS Curve Type		isXYZReversed
PCS Curve Index	isUvInc	Reserved						

Bits 0~7 of Flag Bit Array are equal to bits 24~31 of Edge Index

Bits 8~15 of Flag Bit Array are equal to bits 24~31 of PCS Curve Index

Bits 16~31 of Flag Bit Array are set to be 0

The Knot Type, defined in Supported Knot Type, is an integer with its value between 0 and 3.

Domain Type

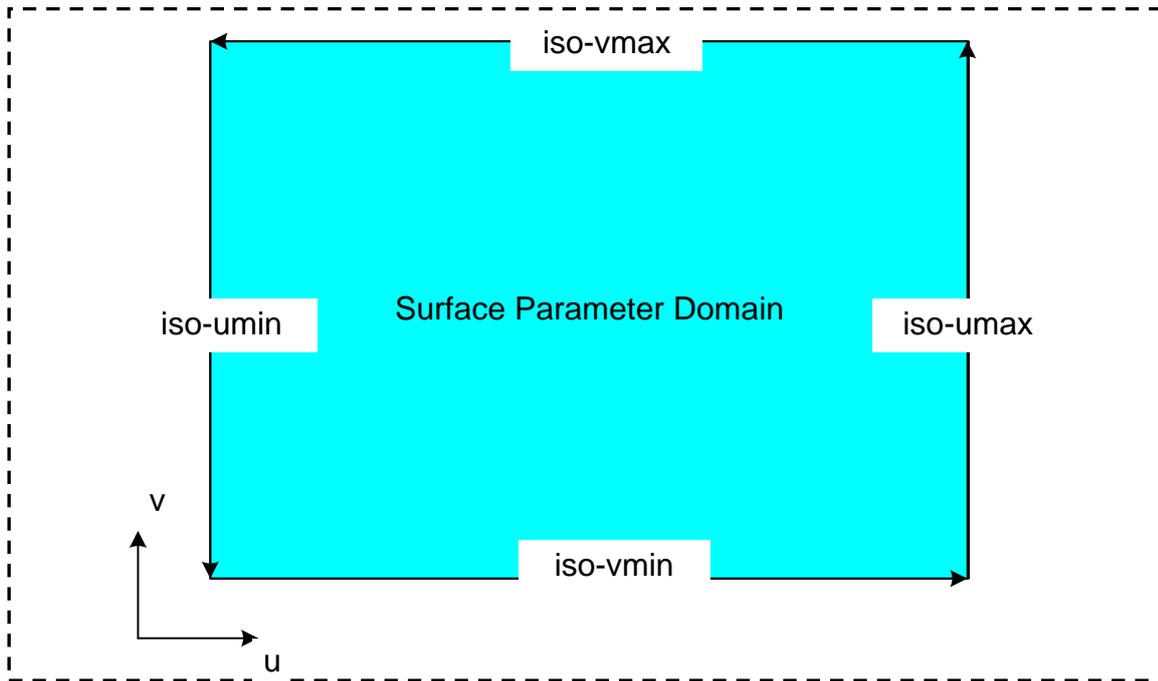


Figure I 13 — Surface Domain Classification

In an uncompressed/decoded form, the supported PCS Curve types are listed below.

Table I 9 — JT ULP Recover Edge Indices PCS curve type values

0	General
1	PCS curve is coincident with iso-umin curve in the surface parameter domain
2	PCS curve is coincident with iso-umax curve in the surface parameter domain
3	PCS curve is coincident with iso-vmin curve in the surface parameter domain
4	PCS curve is coincident with iso-vmax curve in the surface parameter domain
5	Reserved
6	Reserved
7	PCS curve is to be derived from MCS curve and surface geometry

PCS Curve Type

In an uncompressed/decoded form, the supported PCS Curve types are listed below.

Table I 10 — JT ULP PCS Curve Type values

0	Nurbs
1	Line
2	Circle
3	Reserved

In an uncompressed/decoded form, the XYZReversed Flag has the following meaning:

Table I 11 — JT ULP PCS Curve Type XYZ Reversed Flag values

= 0	Directional sense of associated edges MCS curve should not be interpreted as opposite the direction its parameterization implies.
= 1	Directional sense of associated edges MCS curve should be interpreted as opposite the direction its parameterization implies.

In an uncompressed/decoded form, the isUVInc Flag has the following meaning:

Table I 12 — JT ULP PCS Curve Type isUVInc Flag values

= 0	PCS Curve is iso-parameteric in surface parameter domain in one direction and the parameter increases in the other direction
= 1	PCS Curve is iso-parameteric in surface parameter domain in one direction and the parameter decreases in the other direction

The isUVInc flag is set only if the Domain Type of this CoEdge has value between 1 and 4 inclusive.

Recover Flag Bits

If CoEdge Array Flag & 0x04 is equal to 0, then each element in Flag Bit Array is set to have value 0. The flag bits are recovered by assigning bits 0~7 of Flag Bit Array to bits 24~31 of Edge Index, and bits 8~15 of Flag Bit Array to bits 24~31 of PCS Curve Index.

Edges Topology Data

An Edge defines a model space trim Loop segment. Edges Topology Data specifies the underlying MCS Curve along with an identification tag for each Edge. The complete description of Edge can be found in Edges Topology Data. Note that the start and end vertex index information is not stored. Instead it is recovered (Information Recovery).

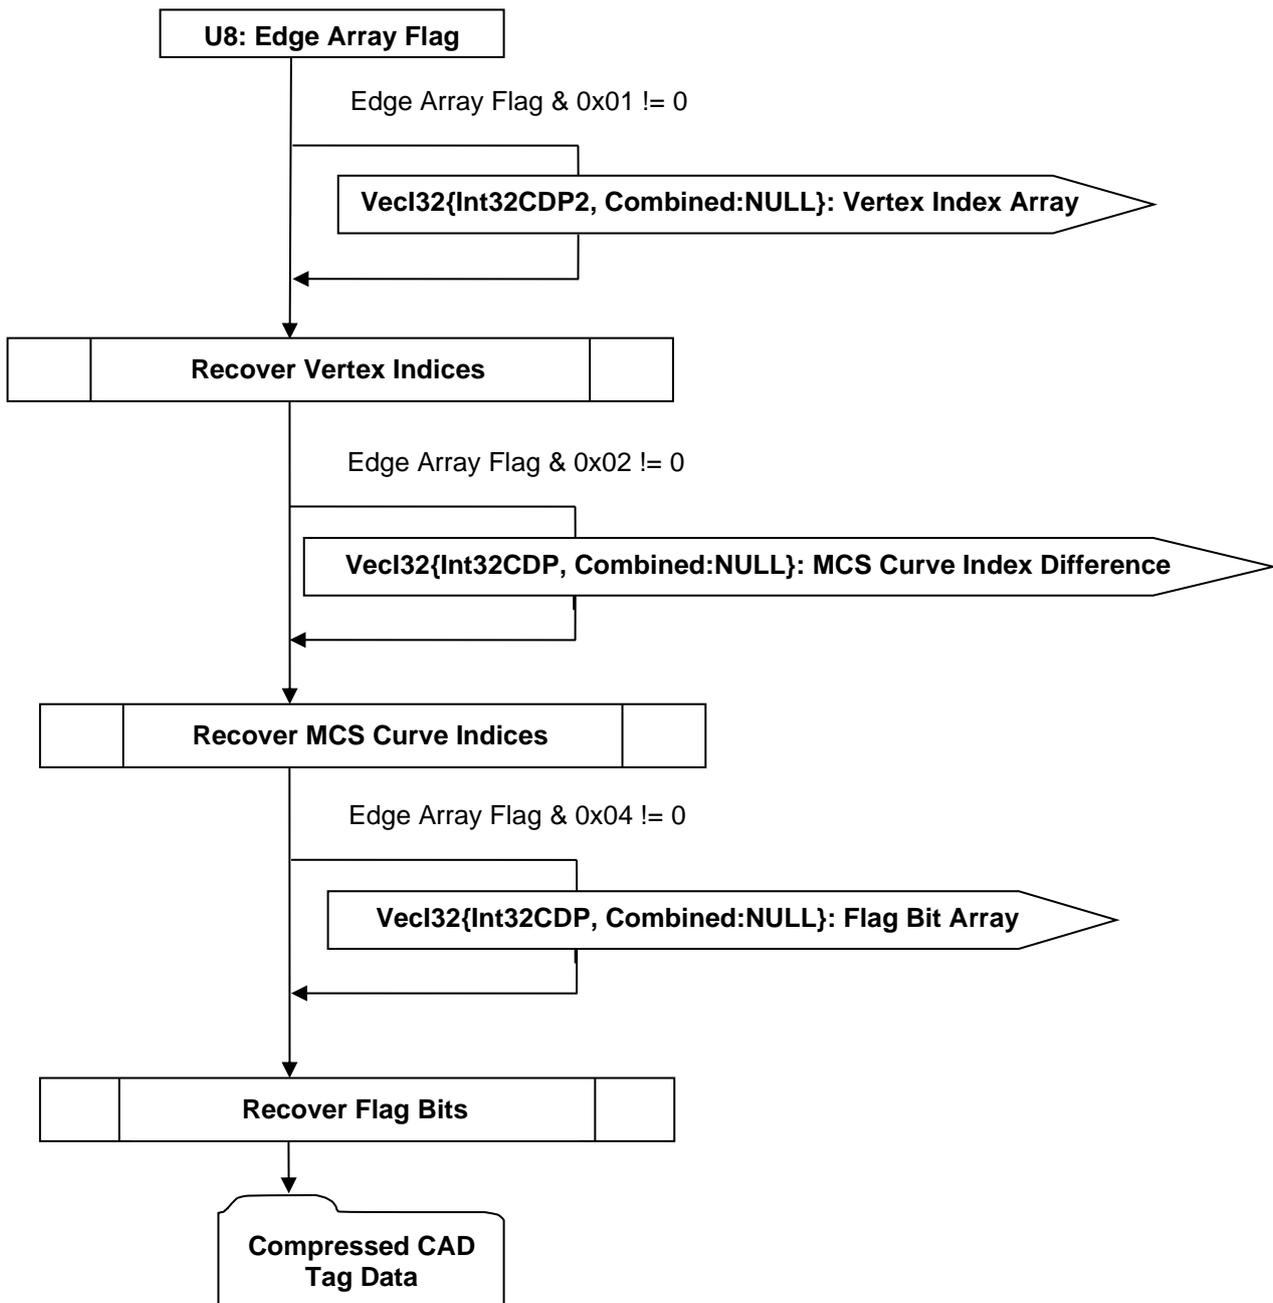


Figure I 14 — Edges Topology Data collection

U8: Edge Array Flag

Edge Array Flag indicates which arrays of edge topology data are not trivial and therefore encoded.

VecI32{Int32CDP, Combined:NULL}: MCS Curve Index Difference

MCS Curve Index Difference is a vector of indices representing the integer value by subtracting the MCS Curve index from the Edge index for each Edge, encoded using Combined Predictor Type. MCS Curve Index Difference is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Recover MCS Curve Indices

If Edge Array Flag & 0x02 is equal to 0, then the MCS Curve index of each Edge is equal to the Edge index. Otherwise, the MCS Curve index of Edge with index k can be computed by subtracting element k of MCS Curve Index Difference array from k, the Edge index.

VecI32{Int32CDP, Combined:NULL}: Flag Bit Array

Only the lower 24 bits of the three integer indices, namely MCS Curve index, Start Vertex index, and End Vertex index, are used as integer identifiers. The other bits of these integers documented as reserved for future use.

Table I 13 — JT ULP Edges Topology Recover MCS Curve Indices Flag Bit Array values

	24	25	26	27	28	29	30	31
MCS Curve Index	Knot Type		MCS Type	Curve	Reserved			
Start Vertex Index	Reserved							
End Vertex Index	Reserved							

The Knot Type, defined in Supported Knot Type, is an integer with its value between 0 and 3.

MCS Curve Type

In an uncompressed/decoded form, the supported MCS Curve types are listed below.

Table I 14 — JT ULP Edges Topology Recover MCS Curve Type values

0	Nurbs
1	Line
2	Circle
3	Projection: MCS curve geometry is to be computed from surface geometry and/or PCS curve geometry

Recover Flag Bits

If Edge Array Flag & 0x04 is equal to 0, then each element in Flag Bit Array is set to have value 0. The flag bits are recovered by assigning bits 0~7 of Flag Bit Array to bits 24~31 of MCS Curve Index.

Vertices Topology Data

Vertices Topology Data is not stored on disk. Instead it is constructed (Information Recovery).

I.1.2 Geometric Data

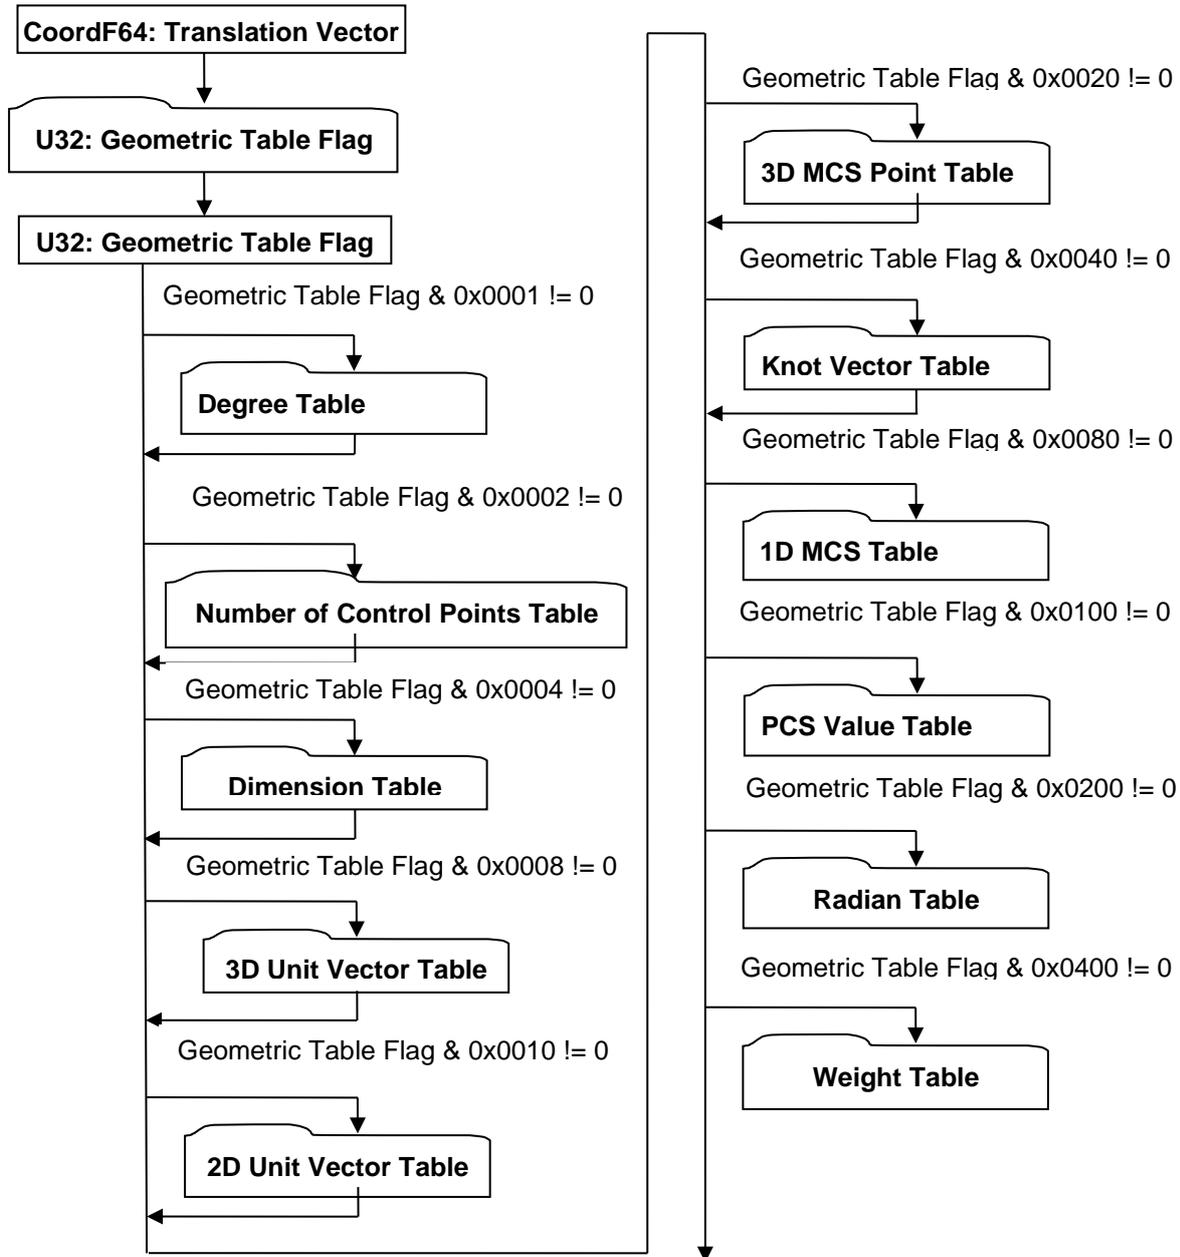


Figure I 15 — Geometric Data collection

CoordF64: Translation Vector

Translation Vector is a 3-dimensional vector that represents how the ULP geometry is defined w.r.t. the original B-Rep definition from which ULP geometry is derived. If the Translation Vector is not zero vector, then the ULP geometry read from disk is translated from original B-Rep definition by the amount of Translation Vector. This is usually done by the JT writer implementation to improve numerical accuracy of floating point numbers in the ULP geometry. It is important for all the JT readers to take this Translation Vector into consideration when consuming ULP geometry. For example if a LOD is generated from ULP geometry, e.g. by tessellation, then the LOD geometry shall be translated to undo the effect of Translation Vector for it be consistent with the original B-Rep definition. In other words, if we denote the Translation Vector as v , then the LOD geometry from ULP shall be translated by $-v$.

U32: Geometric Table Flag

Geometric Table Flag indicates which geometric tables are not trivial and therefore encoded.

Geometric Entity Counts

Geometric Entity Counts data collection defines the counts for each of the various geometric entities within a ULP.

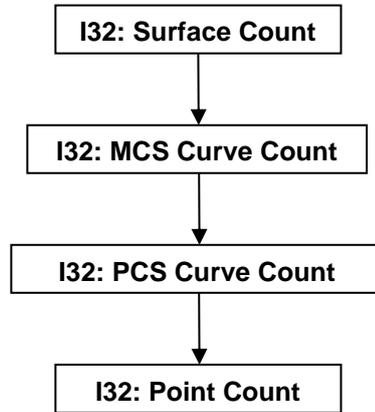


Figure I 16 — Geometric Entity Counts

I32: Surface Count

Surface Count indicates the number of distinct geometric surface entities in the ULP.

I32: MCS Curve Count

MCS Curve Count indicates the number of distinct geometric (Model Coordinate Space) curves (i.e. XYZ curve) entities in the ULP.

I32: PCS Curve Count

PCS Curve Count indicates the number of distinct geometric Parameter Coordinate Space curves (i.e. UV curve) entities in the ULP.

I32: Point Count

Point Count indicates the number of distinct geometric point entities in the ULP.

Degree Table

Degree Table stores a vector of integers that represent the degree information of Nurbs surfaces and/or curves. If the ULP does not contain any Nurbs entity, then the table is empty and bit 0x0001 in Geometric Table Flag is set to be 0.

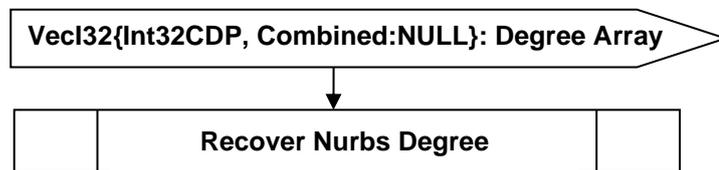


Figure I 17 — Degree Table data collection

VecI32{Int32CDP, Combined:NULL}: Degree Array

Degree Array is a vector of integers that stores the degree information for all the Nurbs entities in the ULP, encoded using Combined Predictor Type. Degree Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Recover Nurbs Degree

The logic diagram to recover degree information for all the Nurbs entities in the ULP from the Degree Array is shown below.

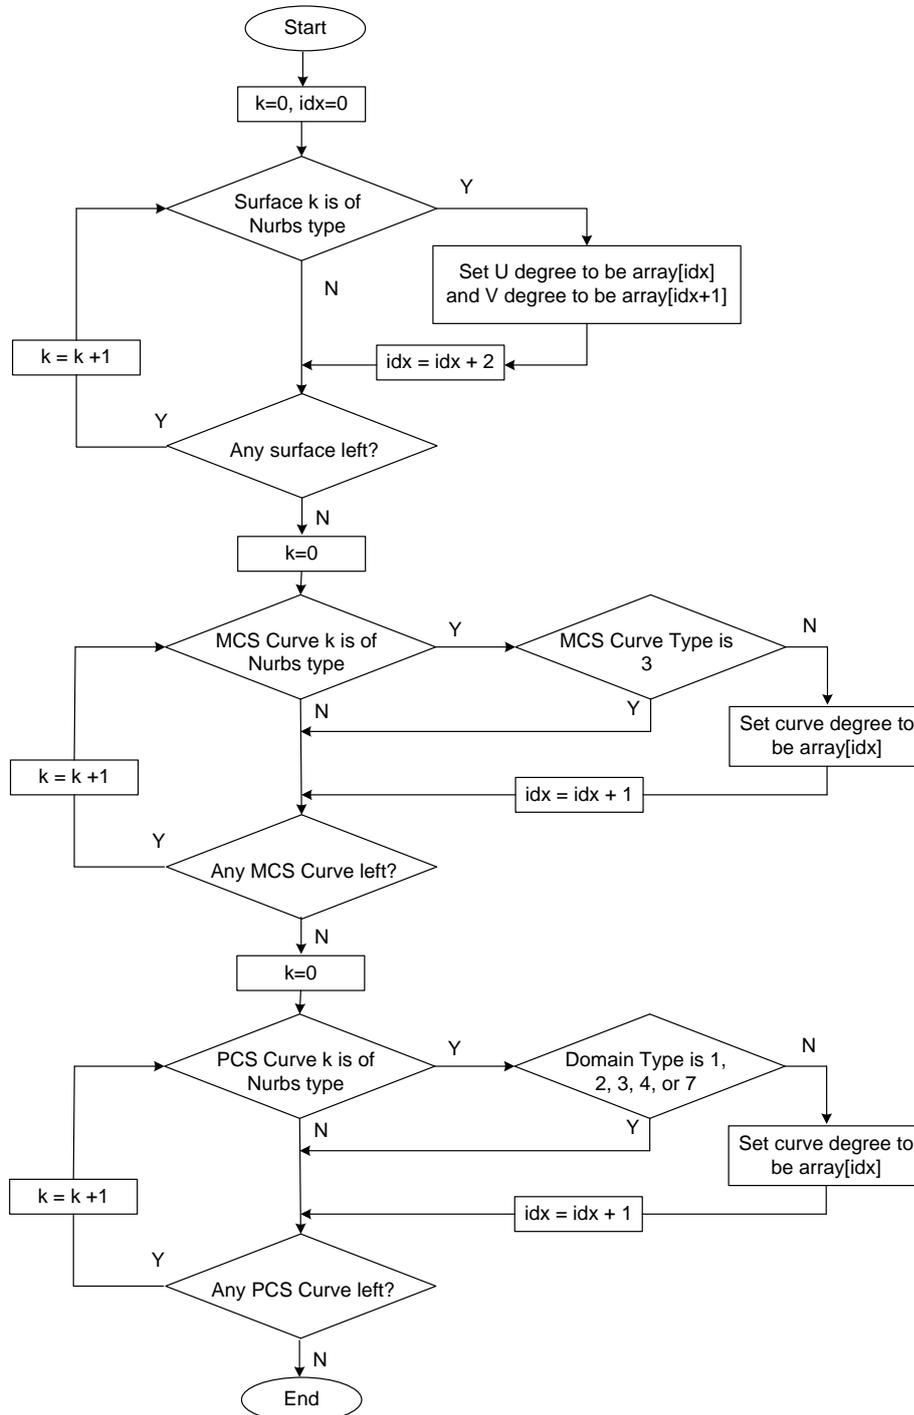


Figure I 18 — Recover Nurbs Degree

Number of Control Points Table

Number of Control Points Table stores a vector of integers that represent the number of control points information of Nurbs surfaces and/or curves. If the ULP does not contain any Nurbs entity, then the table is empty and bit 0x0002 in Geometric Table Flag is set to be 0.

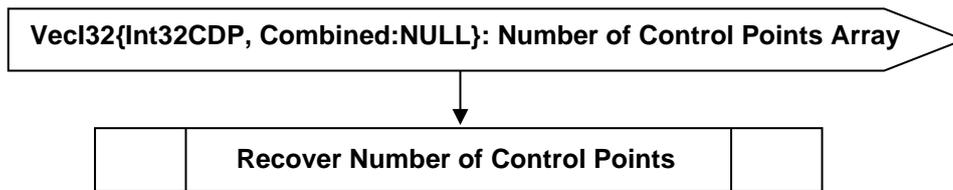


Figure I 19 — Number of Control Points Table data collection

VecI32{Int32CDP, Combined:NULL}: Number of Control Points Array

Number of Control Points Array is a vector of integers that stores the number of control points information for all the Nurbs entities in the ULP, encoded using Combined Predictor Type. Number of Control Points Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Recover Number of Control Points

The logic diagram to recover number of control points information for all the Nurbs entities in the ULP from the Number of Control Points Array is shown below.

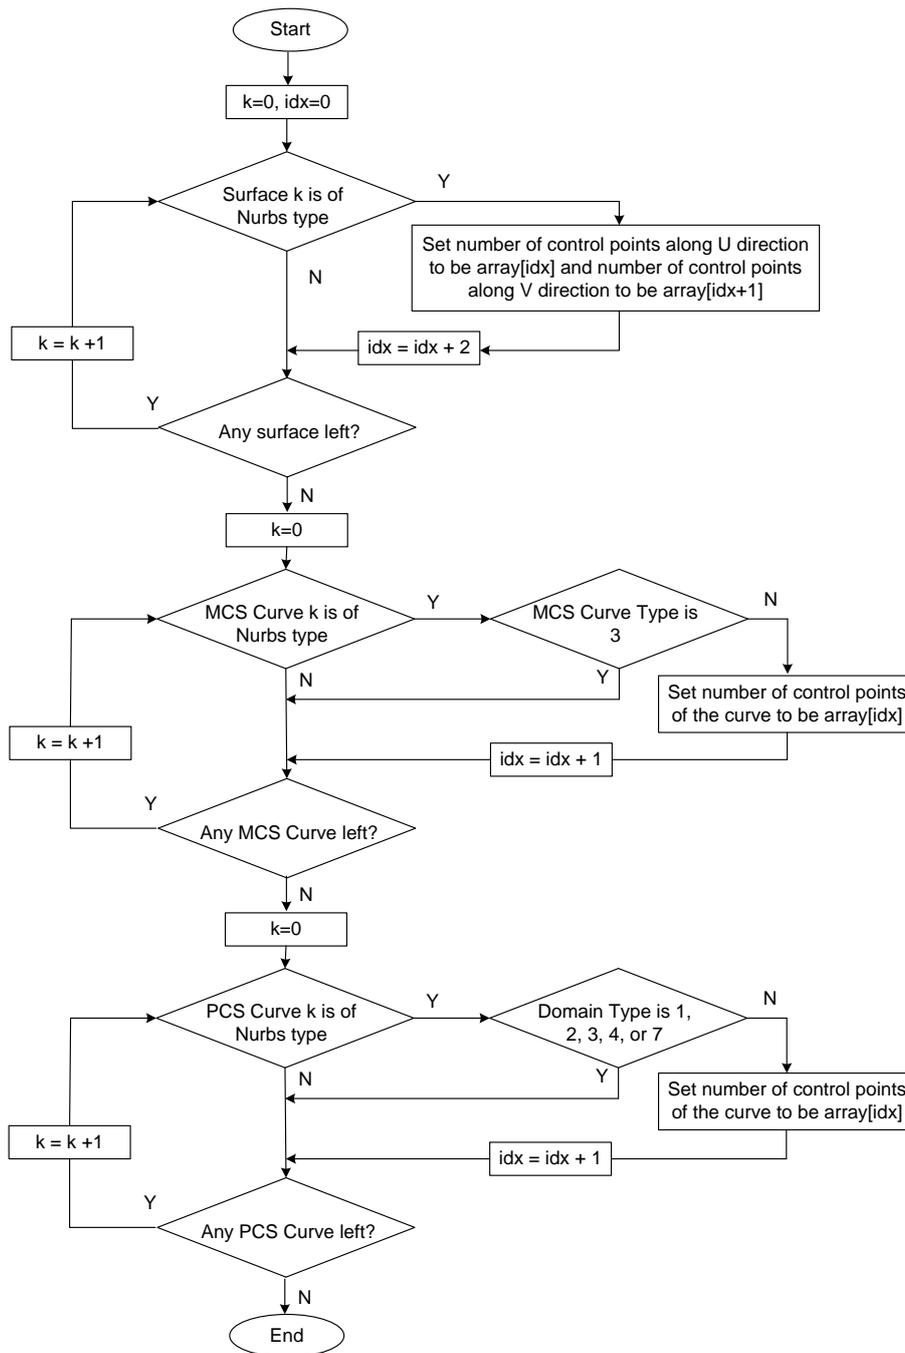


Figure I 20 — Recover Number of Control Points

Dimension Table

Dimension Table stores a vector of integers that represent the dimension information of Nurbs surfaces and/or curves. If the ULP does not contain any Nurbs entity, then the table is empty and bit 0x0004 in Geometric Table Flag is set to be 0.

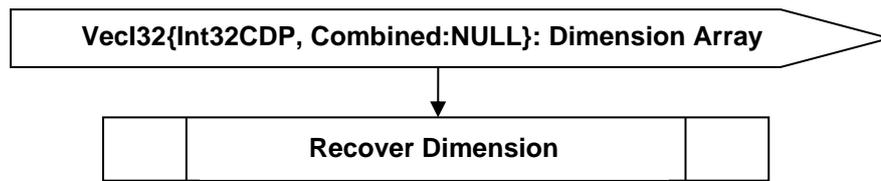


Figure I 21 — Dimension Table data collection

VecI32{Int32CDP, Combined:NULL}: Dimension Array

Dimension Array is a vector of integers that stores the dimension information for all the Nurbs entities in the ULP, encoded using Combined Predictor Type. Dimension Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Recover Dimension

The logic diagram to recover dimension information for all the Nurbs entities in the ULP from the Dimension Array is shown below.

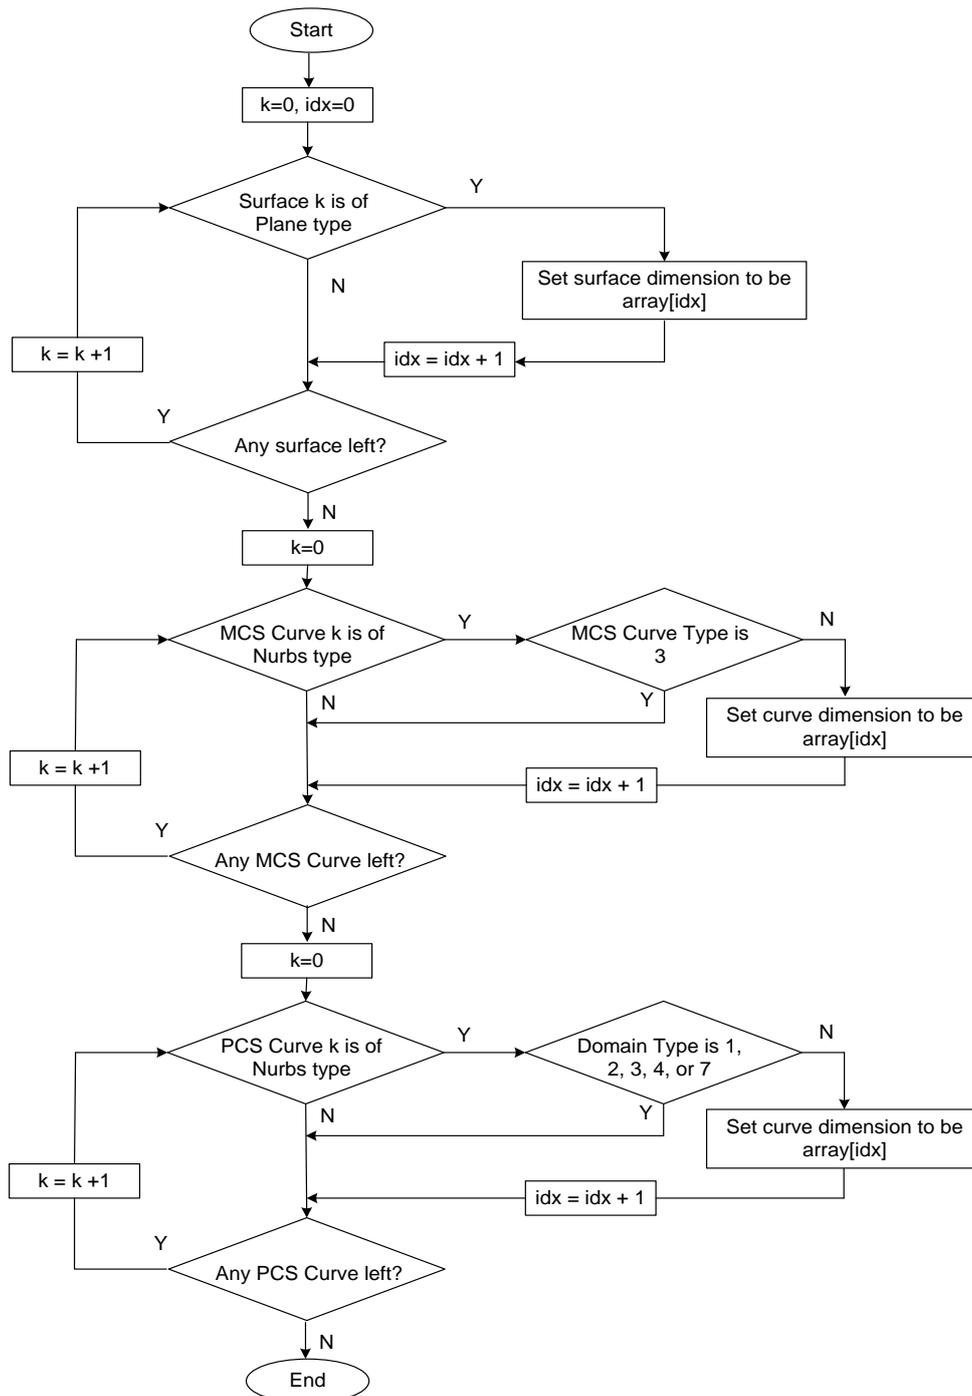


Figure I 22 — Recover Dimension

3D Unit Vector Table

3D Unit Vector Table stores an array of unit vectors in 3D that form part of the analytic surface or curve representation in ULP. If the ULP does not contain any analytic entity, then the table is empty and bit 0x0008 in Geometric Table Flag is set to be 0. The supported analytic surface types include plane, cylinder, cone, sphere, and torus, and the supported analytic curve types include line and circle for both parameter space and model space curves. The analytic representation of ULP follows XT convention as detailed in the XT Annex description.

Similar to the coding of Compressed Vertex Normal Array, each 3D unit vector is encoded as a single 32 bit integer using Deering Normal CODEC.

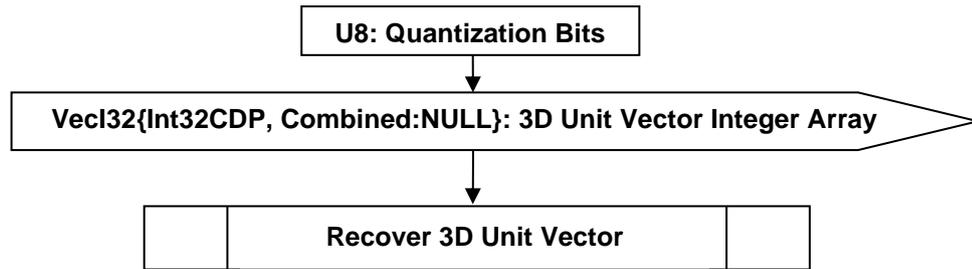


Figure I 23 — 3D Unit Vector Table data collection

U8: Quantization Bits

The number of bits used for the Deering Normal CODEC if quantization is enabled. A value of 0 denotes that quantization is disabled.

VecI32{Int32CDP, Combined:NULL}: 3D Unit Vector Integer Array

3D Unit Vector Integer Array is a vector of integers that stores the encoded 3D unit vector from all analytic entities in the ULP, encoded using Combined Predictor Type. 3D Unit Vector Integer Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Recover 3D Unit Vector

The logic diagram to recover 3D unit vector information for all the analytic entities in the ULP from the 3D Unit Vector Integer Array is shown below.

The recovery of a unit vector from an element in the 3D Unit Vector Integer Array is done as part of Deering Normal CODEC.

As described in the XT B-Rep Annex, the representation of an analytic surface of types plane, cylinder, cone, sphere, or torus, includes two 3D unit vectors. One is called "axis" and the other is called "x_axis". These two unit vectors of each analytic surface are recovered for each analytic surface. In addition, the "normal" vector to the plane containing a 3D circle is also recovered.

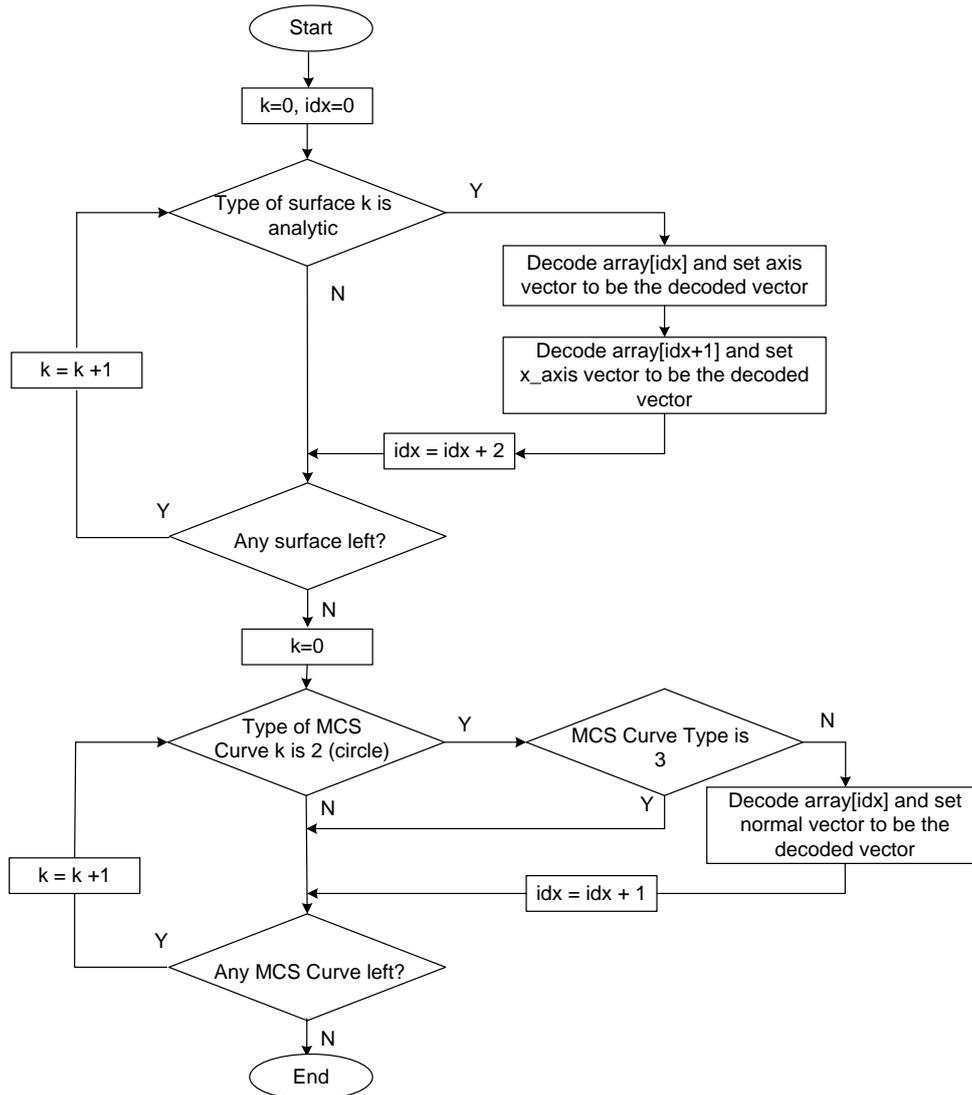


Figure I 24 — Recover Dimension

2D Unit Vector Table

2D Unit Vector Table stores an array of unit vectors in 2D that form part of PCS analytic circle representation in ULP. If the ULP does not contain any analytic circle in the PCS, then the table is empty and bit 0x0010 in Geometric Table Flag is set to be 0. The analytic curve representation of ULP follows XT convention as detailed in the XT B-Rep Annex.

Similar to the coding of Compressed Vertex Normal Array, each 2D unit vector is treated as a 3D unit vector with z component set to be 0.0, and encoded as a single 32 bit integer using Deering Normal CODEC. In addition, the Quantization Bits information of Deering Normal CODEC used to encode 2D Unit Vector Table is always the same as the one used for 3D Unit Vector Table.

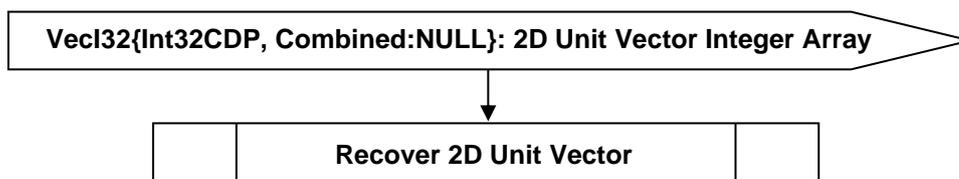


Figure I 25 — 2D Unit Vector Table data collection

VecI32{Int32CDP, Combined:NULL}: 2D Unit Vector Integer Array

2D Unit Vector Integer Array is a vector of integers that stores the encoded 2D unit vector from all analytic entities in the ULP.

Recover 2D Unit Vector

The logic diagram to recover 2D unit vector information for all the analytic entities in the ULP from the 2D Unit Vector Integer Array is shown below.

The recovery of a unit vector from an element in the 2D Unit Vector Integer Array is done as part of Deering Normal CODEC. The Quantization Bits read from 3D Unit Vector Table should be used for Deering Normal CODEC to decode the vector information from each element in 2D Unit Vector Integer Array.

The “x_axis” vector to the circle in the PCS, as described in the XT B-Rep Annex, is recovered.

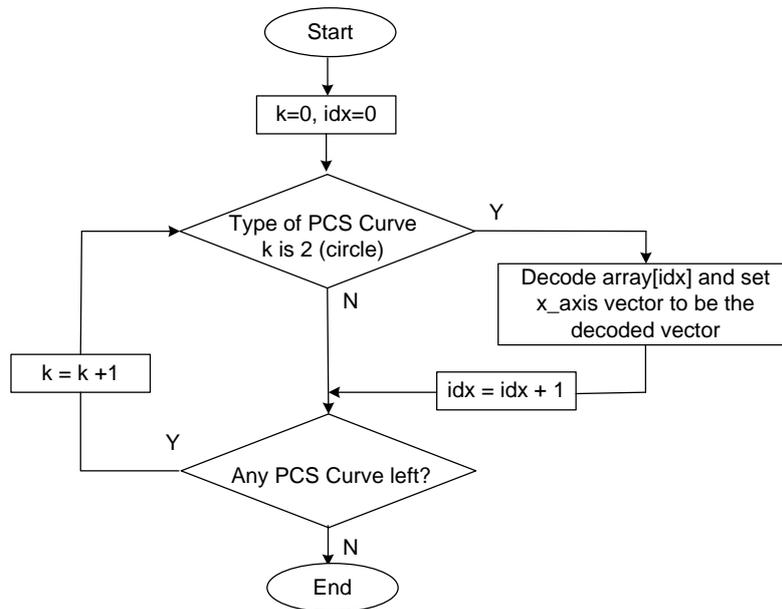


Figure I 26 — Recover 2D Unit Vector

3D MCS Point Table

3D MCS Point Table stores the quantization representation of an array of 3D MCS points in ULP. If the ULP does not contain 3D MCS points, then the table is empty and bit 0x0020 in Geometric Table Flag is set to be 0.

Each point coordinate is first encoded into an integer with uniform quantizer (see Uniform Quantizer Data) and then all the integers from each coordinate are grouped into an integer array, which is then encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type.

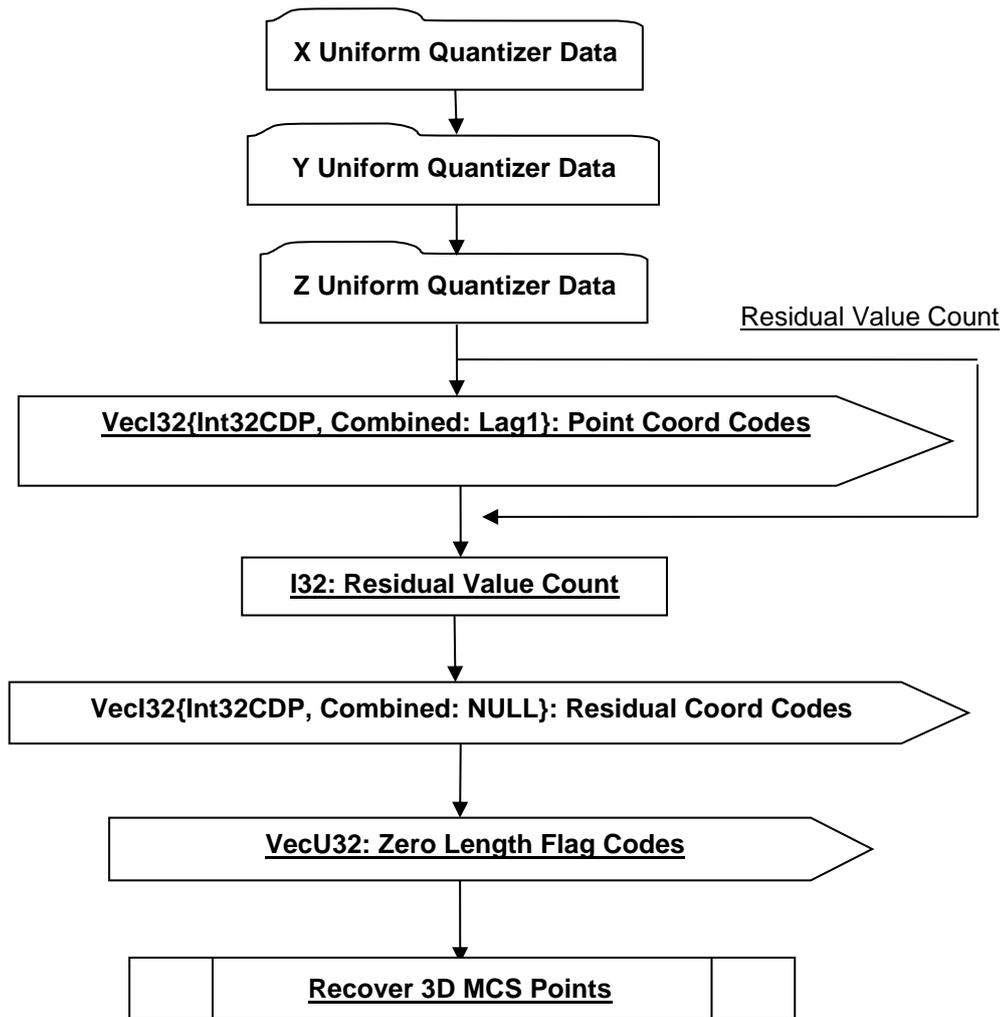


Figure I 27 — 3D MCS Point Table data collection

VecI32{Int32CDP, Combined: Lag1}: Point Coord Codes

Point Coord Codes is a vector of quantizer “codes” for all the coordinate components of an array of three dimensional points, arranged in the order of X-component of point 1, Y-component of point1, Z-component of point1, X-component of point2, etc.. Point Coord Codes uses the Int32CDP CODEC described in Int32 Compressed Data Packet to compress and encode data.

I32: Residual Value Count

Residual Value Count indicates the number of residual values.

VecI32{Int32CDP, Combined: NULL}: Residual Coord Codes

Residual Coord Codes is a vector of quantizer “codes” for all the coordinate components of an array of 3-dimensional residual points, arranged in the order of X-component of residual point 1, Y-component of residual point1, Z-component of residual point1, X-component of residual point2, etc.. The residual points are computed based on Parallelogram rule for the control points of Nurbs surfaces.

Denote $P_{i,i}, P_{i+1,i}, P_{i,i+1}, P_{i+1,i+1}$ as four control points of a Nurbs surface, and $Q_{i,i}, Q_{i+1,i}, Q_{i,i+1}$ as quantized points of $P_{i,i}, P_{i+1,i}, P_{i,i+1}$ respectively, the residual point of $P_{i+1,i+1}$ is defined as

$$R_{i+1,i+1} = P_{i+1,i+1} + Q_{i,i} - Q_{i,i+1} - Q_{i+1,i}.$$

Residual Coord Codes uses the Int32CDP CODEC described in Int32 Compressed Data Packet to compress and encode data.

VecU32: Zero Length Flag Codes

Zero Length Flag Codes is a vector of 32 bit unsigned integers, with each bit indicating whether or not a MCS curve with line geometry has zero length. The bits are arranged the same sequence as the MCS curve array. After decoding, the first N bits, where N is the total number of MCS line curves in the ULP, can be assigned to an integer array of length N with its element assigned with value 0 or 1. Each element in the decoded integer array describes whether or not the corresponding MCS line curve has zero length.

Recover 3D MCS Points

The logic diagram to recover 3D MCS points information in the ULP from the three decoded arrays, point coordinate array P_{cc} (with index ip) decoded from Zero Length Flag Codes, residual coordinate array R_{cc} (with index ir) decoded from Residual Coord Codes, and zero length flag array Z_{lf} (with index iz) decoded from Zero Length Flag Codes, is shown below. Note that the point coordinates are decoded from the integer elements with Uniform Quantizer (see Uniform Quantizer Data).

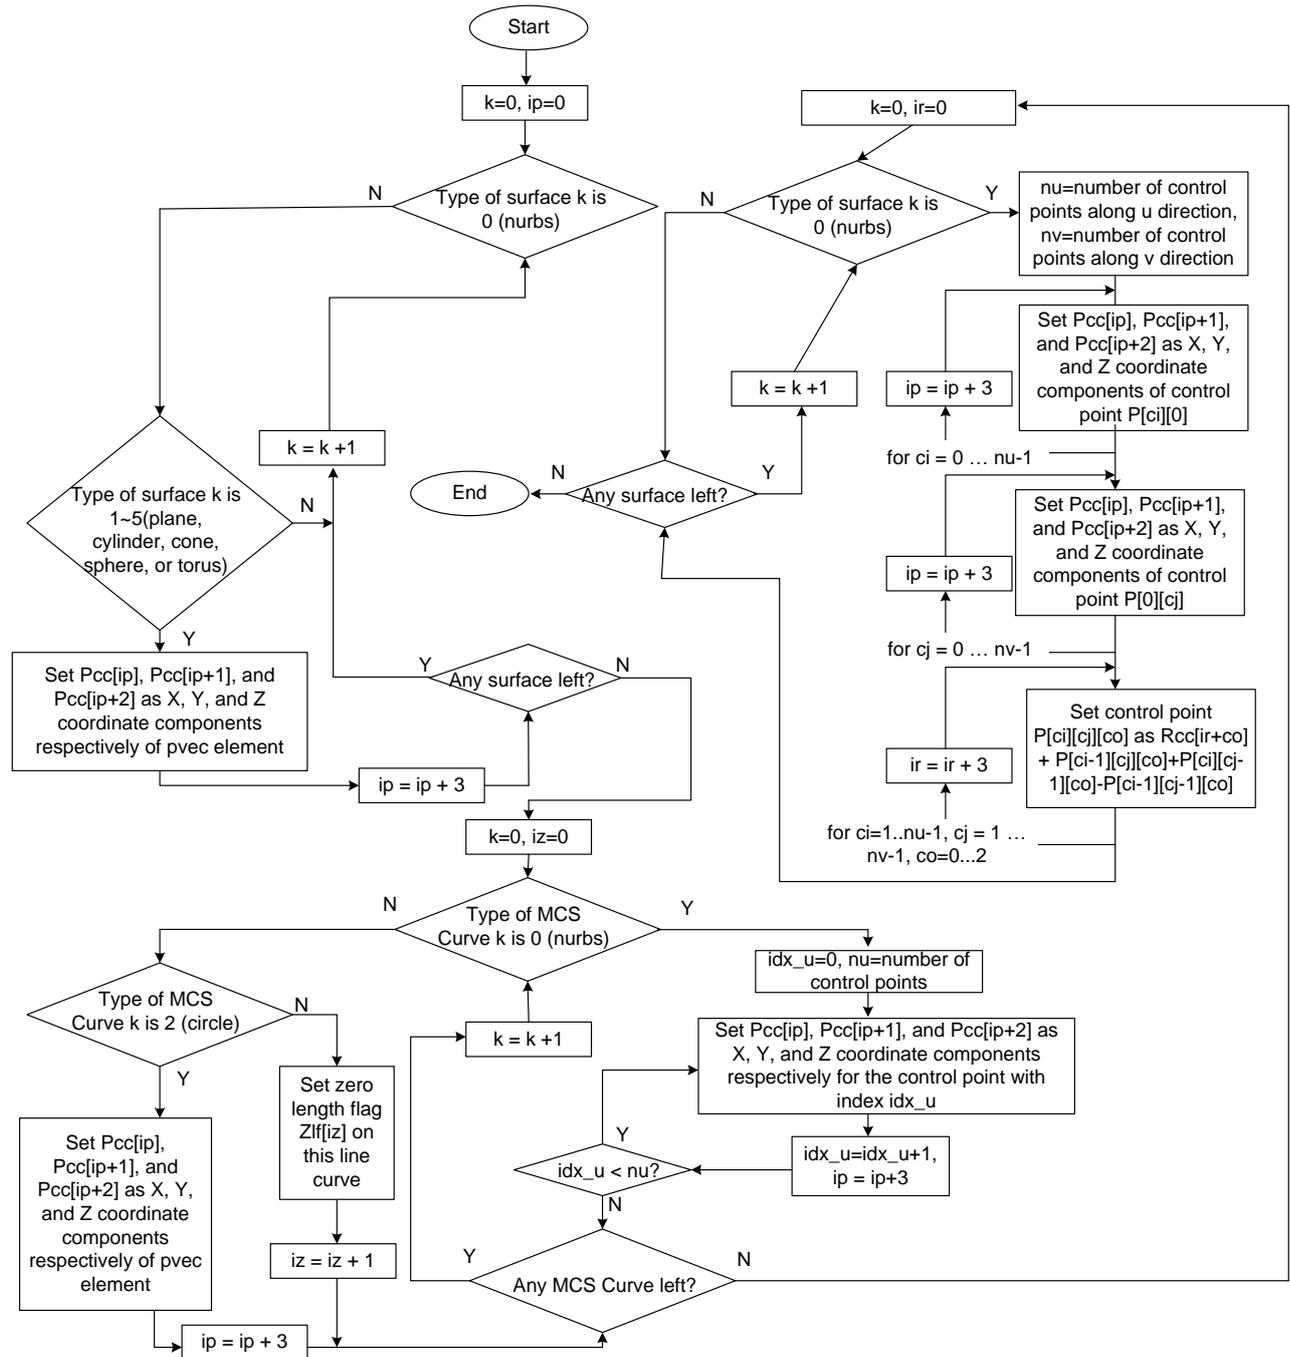


Figure I 28 — Recover 3D MCS Points

Knot Vector Table

Knot Vector Table stores the quantization representation of knot vectors in ULP. If the ULP does not contain any knot vector that needs be stored, then the table is empty and bit 0x0040 in Geometric Table Flag is set to be 0.

In ULP every knot vector starts with 0.0 and ends with 1.0 and is always clamped at both ends. The encoding of knot vector depends on its classified knot type. The knot values in the middle of a knot vector need be written only if the knot type is 0 (see Supported Knot Type). For all the knot values that need be written, each of them is encoded into an integer with uniform quantizer (see Uniform Quantizer Data) and then all the integers are grouped into an integer array. The integer array is then encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type.

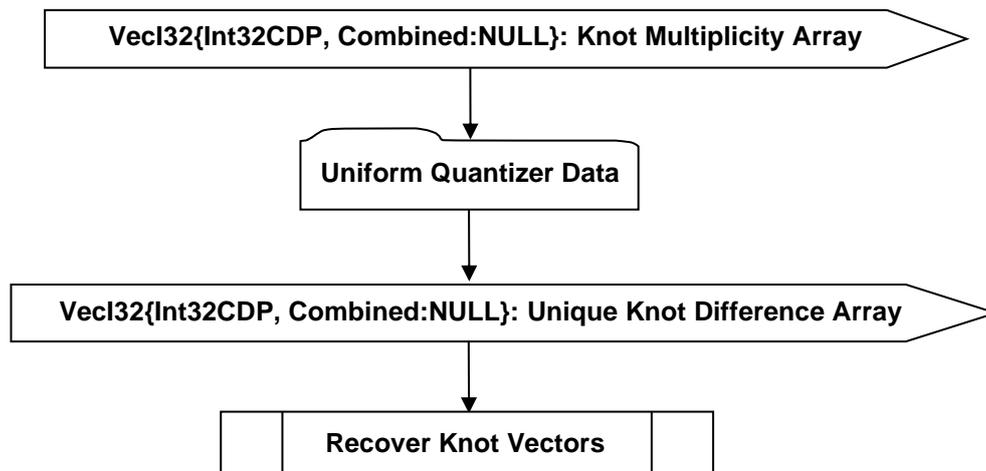


Figure I 29 — Knot Vector Table data collection

VecI32{Int32CDP, Combined:NULL}: Knot Multiplicity Array

Knot Multiplicity Array is a vector of integers that describes knot multiplicity for all the knot vectors. The value of knot multiplicity is set to be 0 if the knot value does not repeat itself. Knot Multiplicity Array is parallel to Knot Multiplicity Array with the same length, and uses the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type to compress and encode data.

VecI32{Int32CDP, Combined:NULL}: Unique Knot Difference Array

Unique Knot Difference Array is a vector that represents the unique knot values. The first element has the value of the first unique knot value. Each subsequent element k represents the value difference between unique knot value k and the quantized value of unique knot value $k-1$. Unique Knot Difference Array is first quantized (Uniform Data Quantization) and then the quantized value uses the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type to compress and encode data.

Recover Knot Vectors

The logic diagram to recover knot vector information in the ULP from the Knot Multiplicity Array (array K_m) and Unique Knot Difference Array (array U_k) is shown below. Note that each integer element in the Unique Knot Difference Array is decoded with Uniform Quantizer.


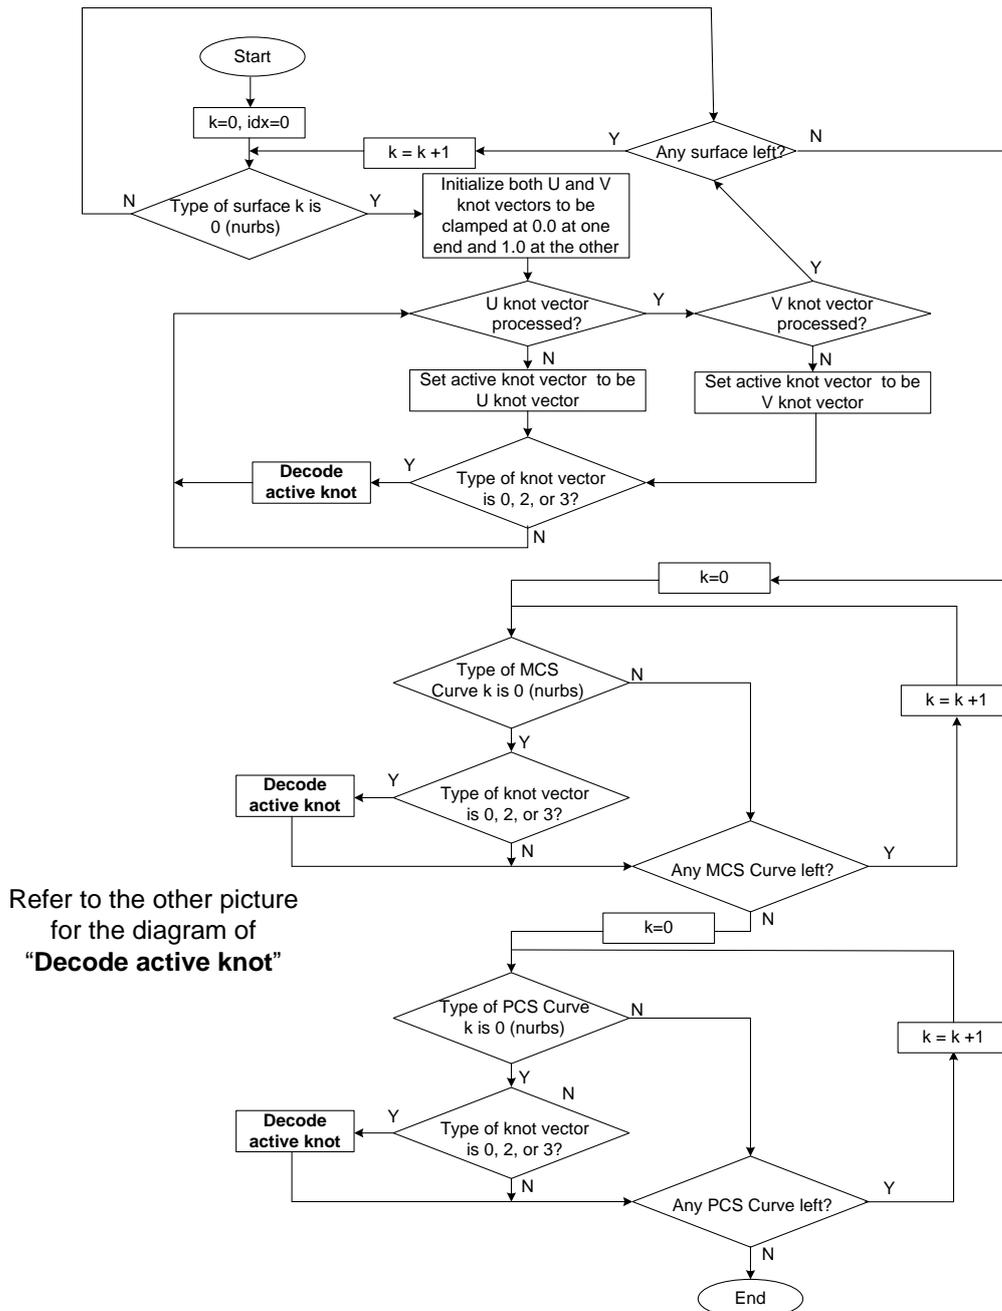


Figure I 30 — Recover Knot Vectors

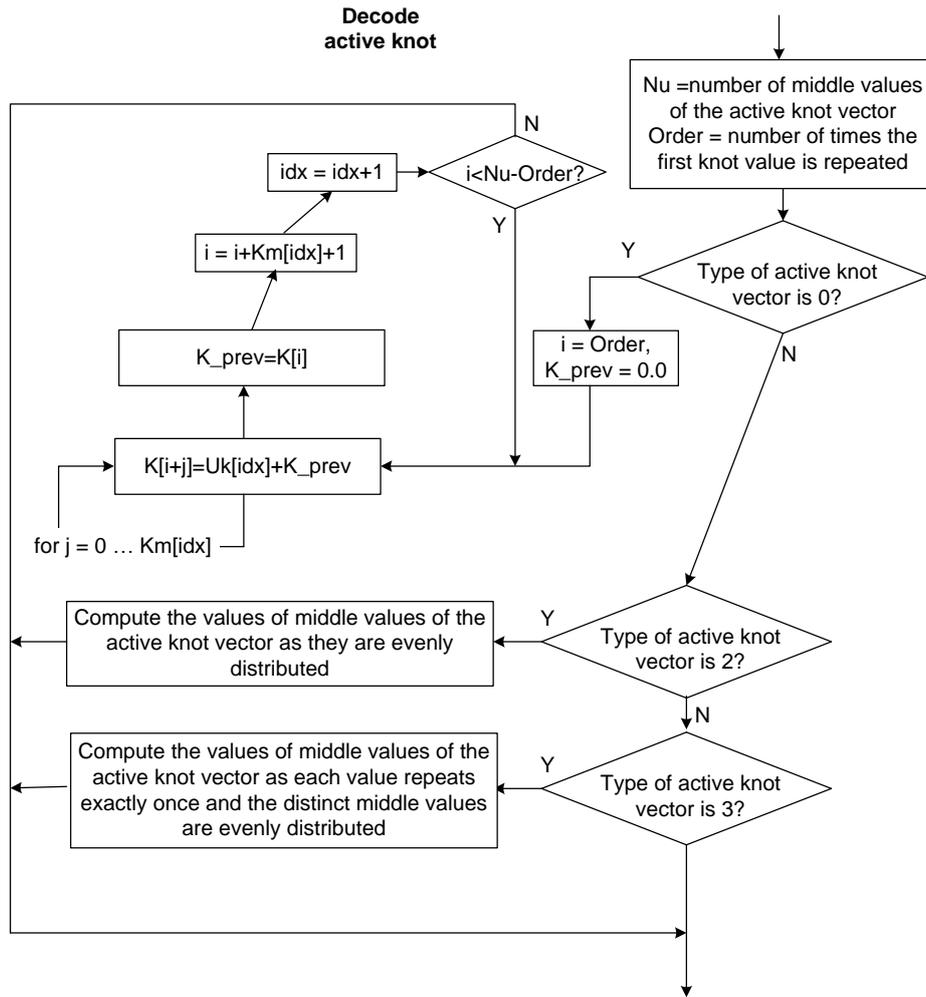

Recover Knot Vectors (continued)

1D MCS Table

1D MCS Table stores the quantization representation of floating point values in MCS. If the ULP does not contain any such value, then the table is empty and bit 0x0080 in Geometric Tabl Flag is set to be 0. Each floating point value is encoded into an integer with uniform quantizer (see Uniform Quantizer Data) and then all the integers are grouped into an integer array. The integer array is then encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type.

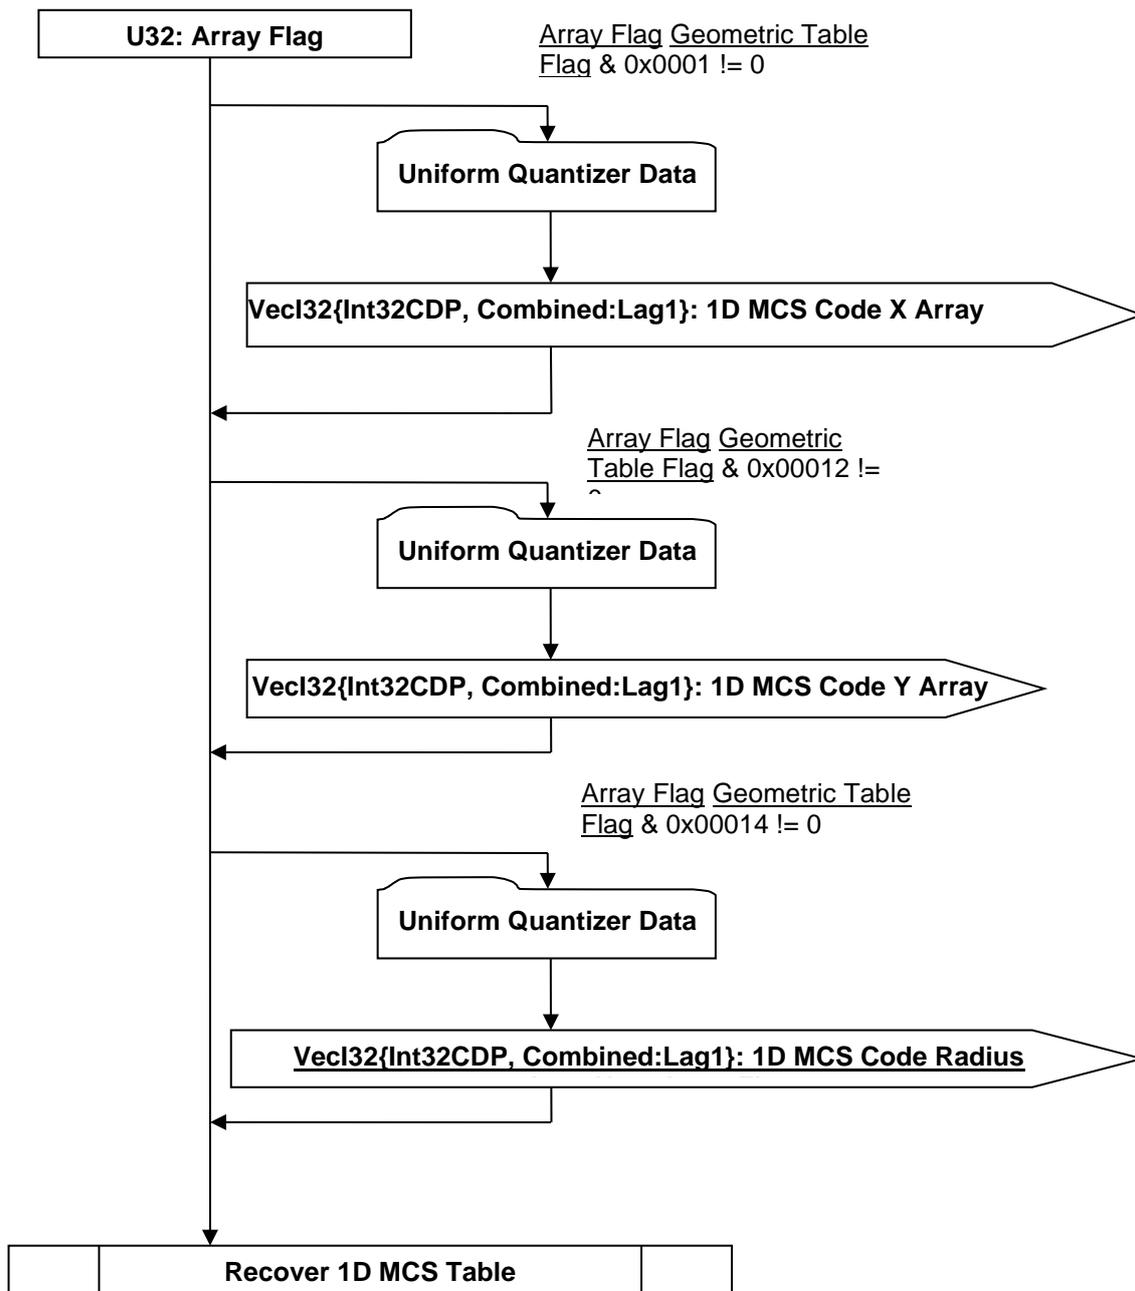


Figure I 31 — 1D MCS Table data collection

U32: Array Flag

Array Flag indicates which arrays are not trivial and therefore encoded.

VecI32{Int32CDP, Combined:Lag1}: 1D MCS Code X Array

1D MCS Code X Array is a vector of quantizer “codes” for one group of 1D floating point values in MCS that represent X coordinates. 1D MCS Code X Array uses the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type to compress and encode data.

VecI32{Int32CDP, Combined:Lag1}: 1D MCS Code Y Array

1D MCS Code Y Array is a vector of quantizer “codes” for one group of 1D floating point values in MCS that represent Y coordinates. 1D MCS Code Y Array uses the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type to compress and encode data.

VecI32{Int32CDP, Combined:Lag1}: 1D MCS Code Radius Array

1D MCS Code Radius Array is a vector of quantizer “codes” for one group of 1D floating point values in MCS that represent radius or other MCS metric values. 1D MCS Code Radius Array uses the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type to compress and encode data.

Recover 1D MCS Table

The representation of each surface or curve in ULP includes information that describes the extent of the surface or curve in the parameter domain. For curves the extent information is represented by two numbers, *umin* and *umax*, while for surfaces it is represented by two additional numbers for the other parametric direction, *vmin* and *vmax*. For surfaces or curves of Nurbs type such extent information is implied by the knot vector information. For surfaces or curves of other types the extent information needs be read from 1D MCS Table if the parameter value represents value in MCS, or Radian Table if the parameter value represents angle information. The detailed information about how the parameter domain information of different entities should be read is listed in the table below.

Table I 15 — Parameter Domain

Entity Type	<i>umin</i>	<i>umax</i>	<i>vmin</i>	<i>vmax</i>
NURBS Surface	n/a (from knot)	n/a (from knot))	n/a (from knot)	n/a (from knot)
Plane	n/a (always 0)	1D MCS Table	n/a (always 0)	1D MCS Table
Cylinder	n/a (always 0)	Radian Table	n/a (always 0)	1D MCS Table
Cone	n/a (always 0)	Radian Table	n/a (always 0)	1D MCS Table
Sphere	n/a (always 0)	Radian Table	Radian Table	Radian Table
Torus	n/a (always 0)	Radian Table	Radian Table	Radian Table
XYZ NURBS Curve	n/a (from knot)	n/a (from knot)	n/a	n/a
XYZ Line	n/a (always 0)	n/a (from vertex geometry)	n/a	n/a
XYZ Circle	n/a (always 0)	Radian Table	n/a	n/a
UV NURBS Curve	n/a (from knot)	n/a (from knot)	n/a	n/a
UV Line	n/a (always 0)	n/a (from next uv curve)	n/a	n/a
UV Circle	Radian Table	Radian Table	n/a	n/a

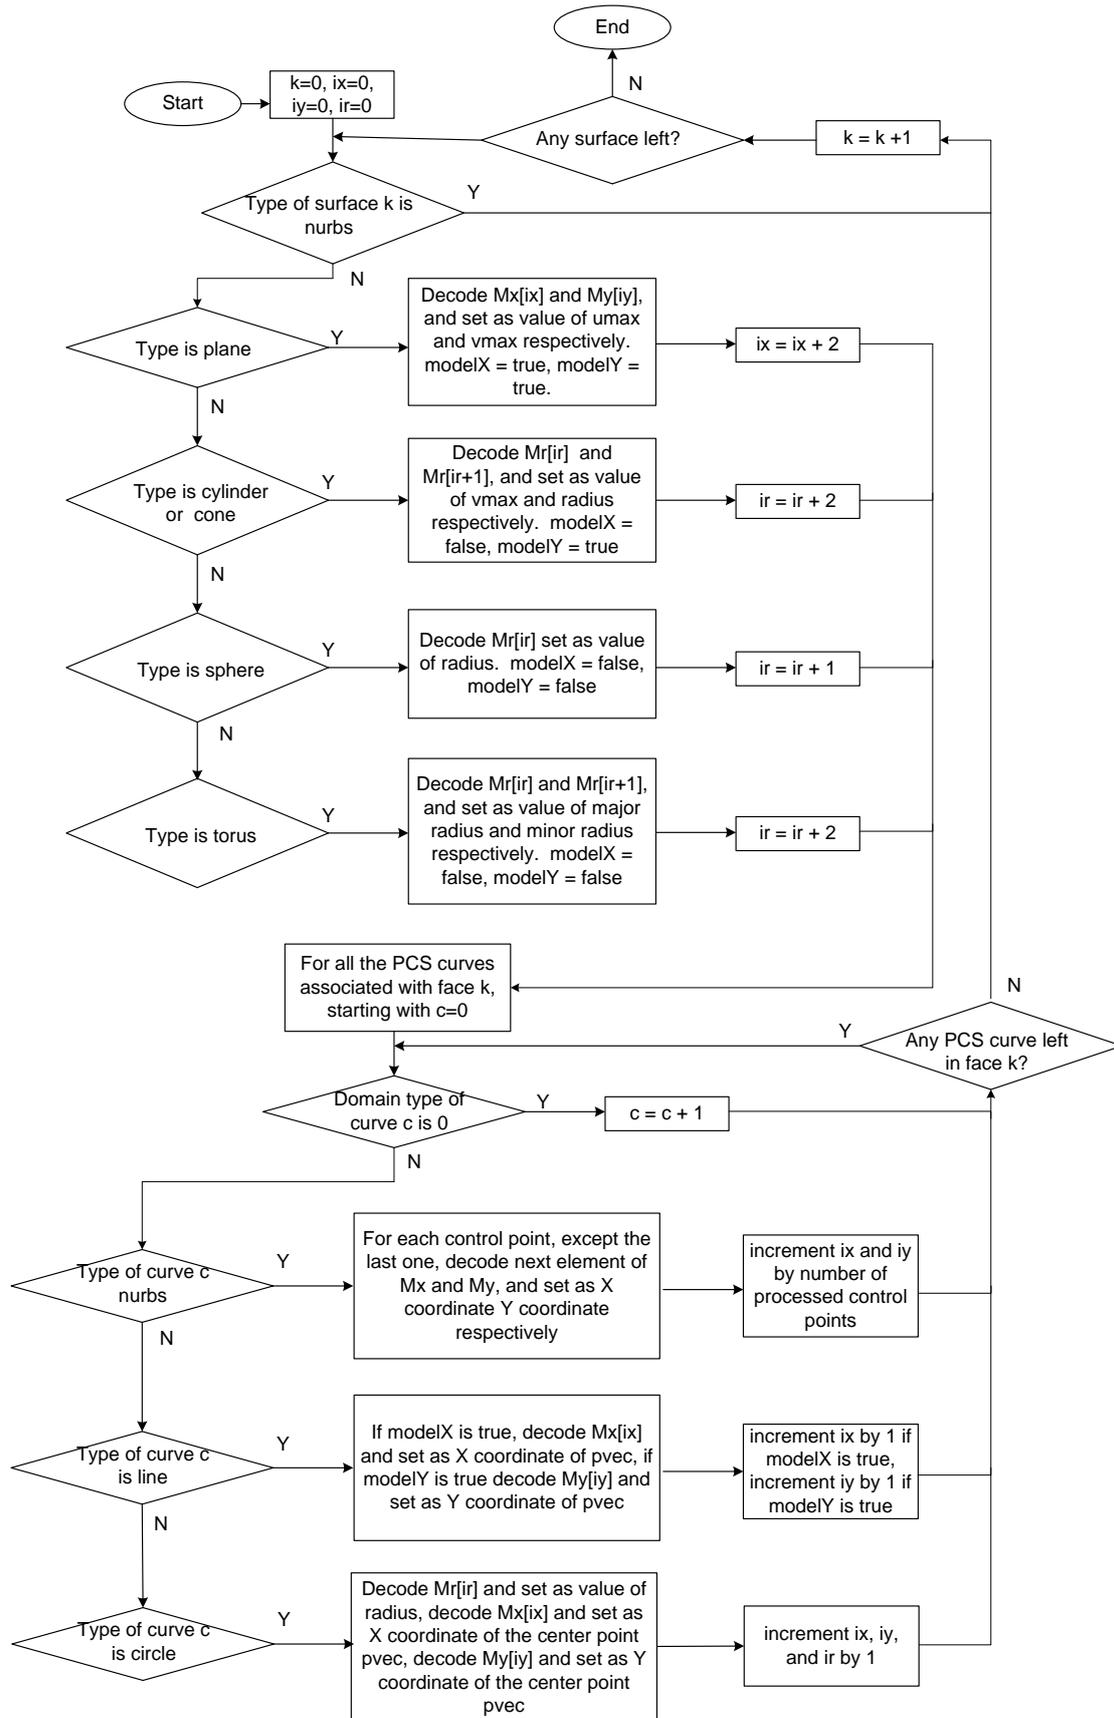


Figure I 32 — Recover 1D MCS Table

The logic diagram to recover 1D MCS table information in the ULP from the 1D MCS Code X Array is shown in Figure I 32- Recover 1D MCS Table. 1D MCS Code X Array is denoted as M_x (with index i_x), 1D MCS Code Y Array is denoted as M_y (with index i_y), and 1D MCS Code Radius Array is denoted as M_r (with index i_r). Note that each integer element in the arrays is decoded with Uniform Quantizer.

PCS Value Table

PCS Value Table stores the quantization representation of floating point values in PCS. If the ULP does not contain any such value, then the table is empty and bit 0x0100 in Geometric Tabl Flag is set to be 0. Each floating point value is encoded into an integer with uniform quantizer (see Uniform Quantizer Data) and then all the integers are grouped into an integer array. The integer array is then encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type.

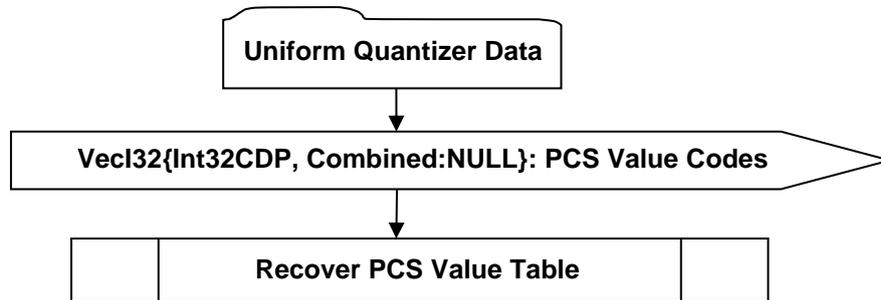


Figure I 33 — PCS Value Table data collection

VecI32{Int32CDP, Combined:NULL}: PCS Value Codes

PCS Value Codes is a vector of quantizer “codes” for all the floating point values in PCS. PCS Value Codes uses the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type to compress and encode data.

Recover PCS Value Table

The logic diagram to recover PCS Value Table information in the ULP from the PCS Value Codes is shown in Figure I 34. Note that each integer element in the PCS Value Codes array is decoded with Uniform Quantizer.

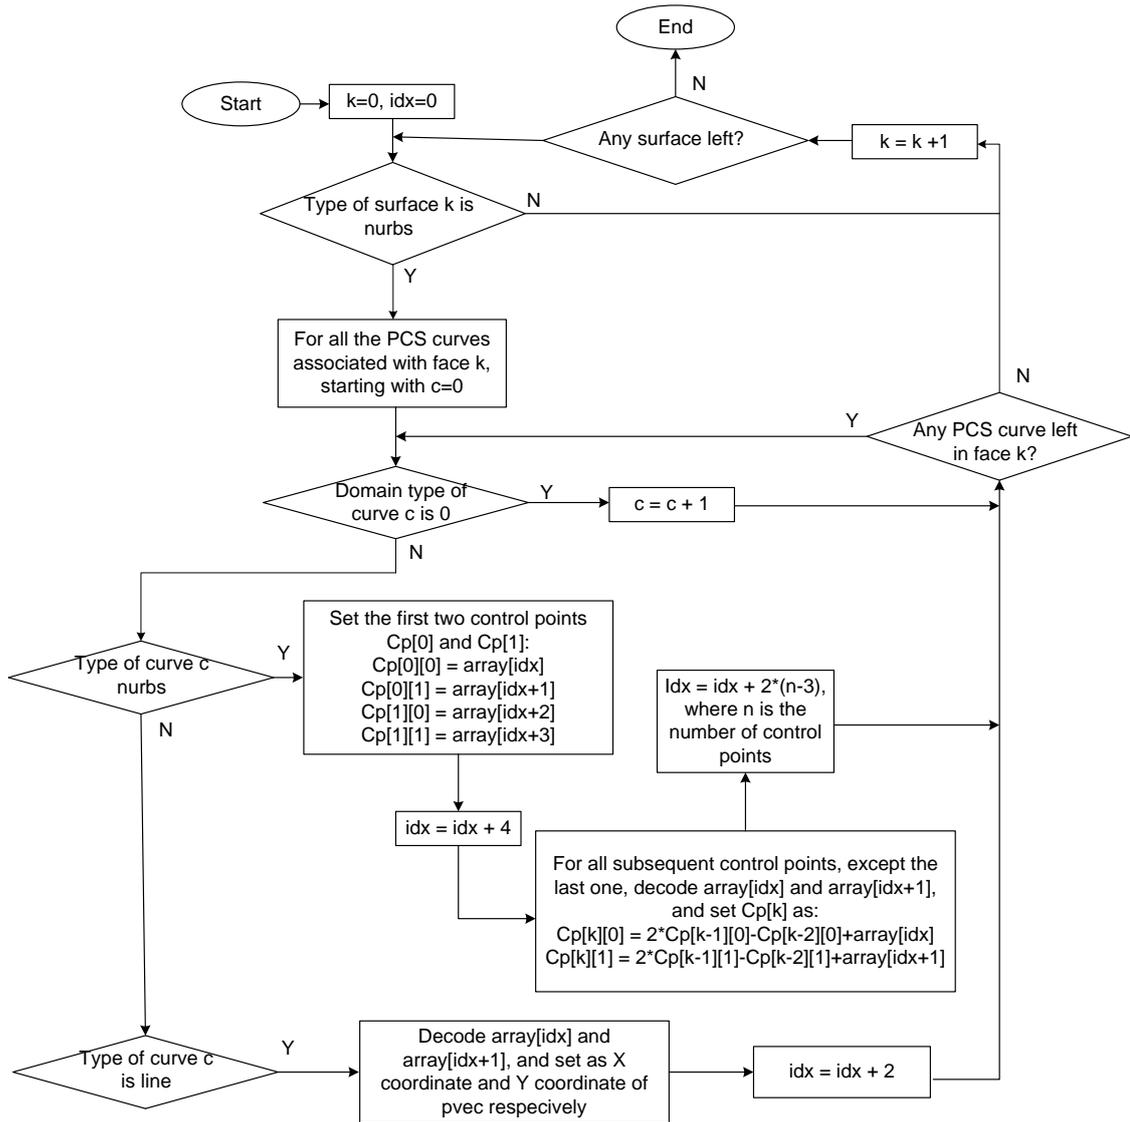


Figure I 34 — Recover PCS Value Table

Radian Table

Radian Table stores the quantization representation of angular values. If the ULP does not contain any such angular value, then the table is empty and bit 0x0200 in Geometric Table Flag is set to be 0. Each angular value is encoded into an integer with uniform quantizer (see Uniform Quantizer Data) and then all the integers are grouped into an integer array. The integer array is then encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type.

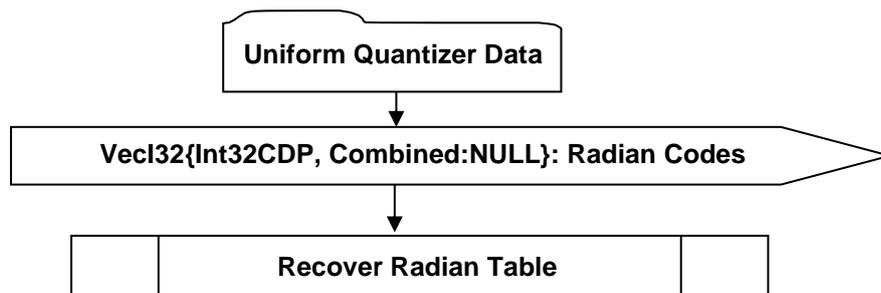


Figure I 35 — Radian Table data collection

VecI32{Int32CDP, Combined:NULL}: Radian Codes

Radian Codes is a vector of quantizer “codes” for all the angular values. Radian Codes uses the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type to compress and encode data.

Recover Radian Table

The logic diagram to recover Radian Table information in the ULP from the Radian Codes is shown in Figure I 36- Recover Radian Table. Note that each integer element in the Radian Codes array is decoded with Uniform Quantizer.

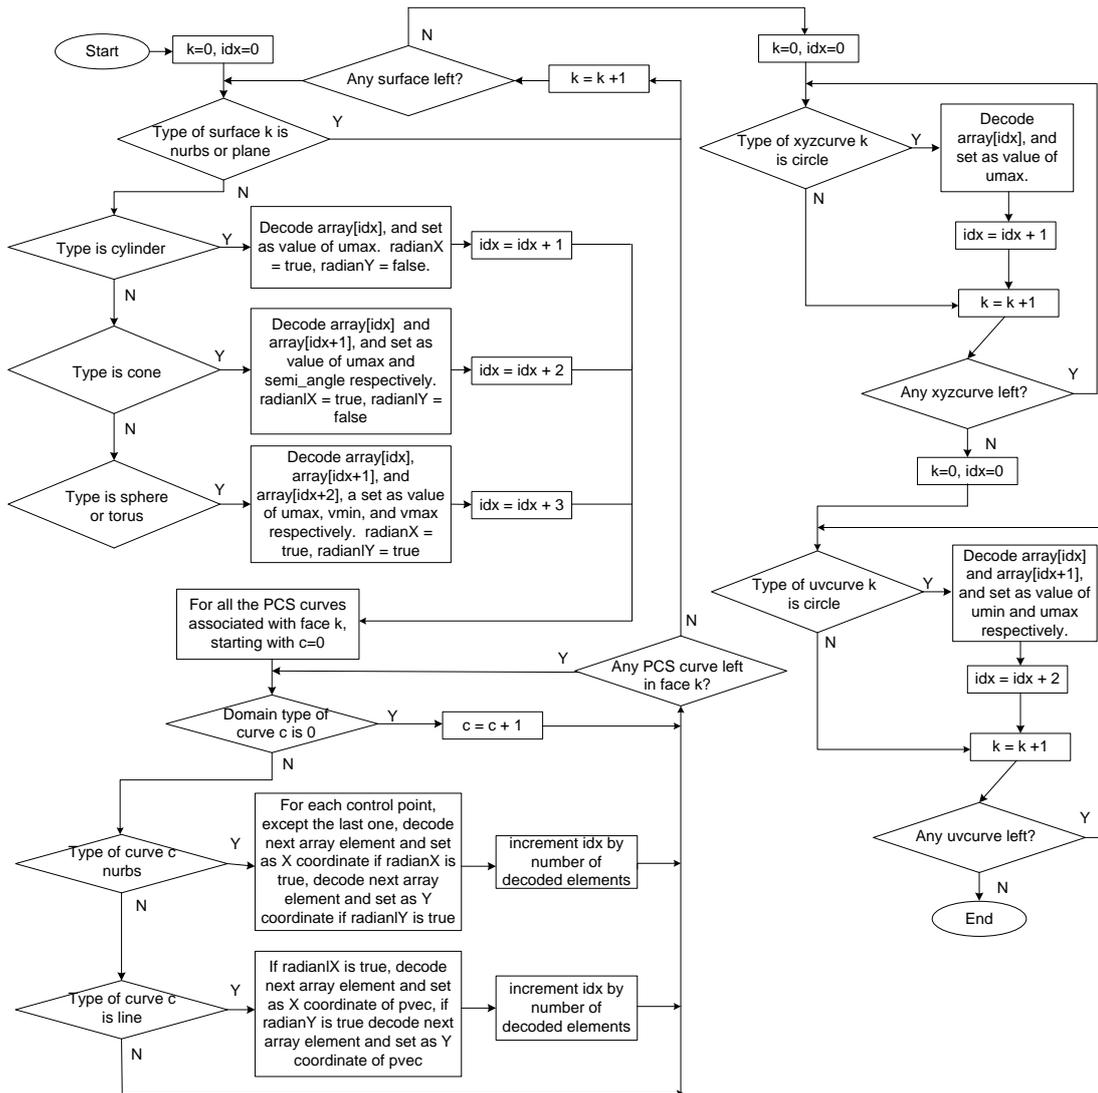


Figure I 36 — Recover Radian Table

Weight Table

Weight Table stores the quantization representation of weight values. If the ULP does not contain any such weight value, then the table is empty and bit 0x0400 in Geometric Table Flag is set to be 0. Each weight value is encoded into an integer with uniform quantizer (see Uniform Quantizer Data) and then all the integers are grouped into an integer array. The integer array is then encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type

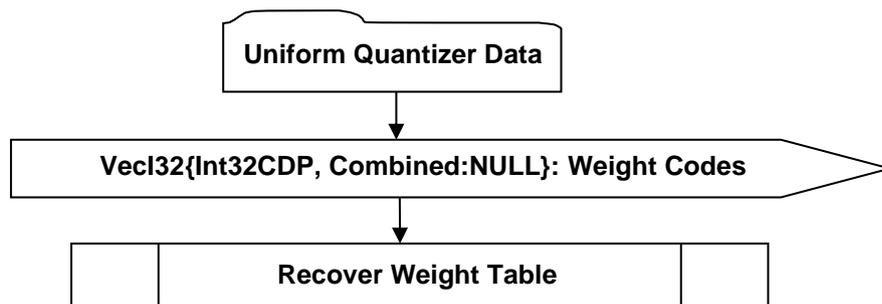


Figure I 37 — Weight Table data collection

VecI32{Int32CDP, Combined:NULL}: Weight Codes

Weight Codes is a vector of quantizer “codes” for all the weight values. Weight Codes uses the Int32CDP CODEC described in Int32 Compressed Data Packet with Combined Predictor Type to compress and encode data.

Recover Weight Table

The logic diagram to recover Weight Table information in the ULP from the Weight Codes is shown in Figure - Recover Weight Table. Note that each integer element in the Weight Codes array is decoded with Uniform Quantizer.

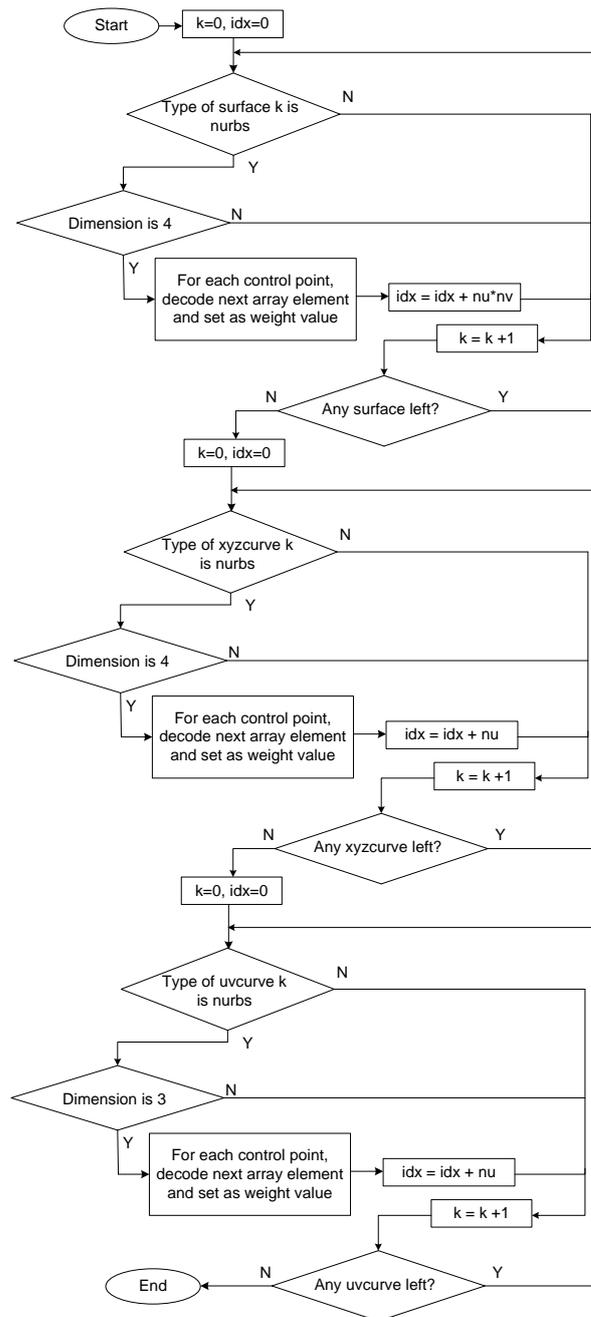


Figure I 38 — Recover Weight Table

I.1.3 Material Attribute Element Properties

The properties attached to material attribute are standard JT properties, and the logic diagram to read the properties attached to a material attribute is shown in Figure I 39 - Material Attribute Element Properties.

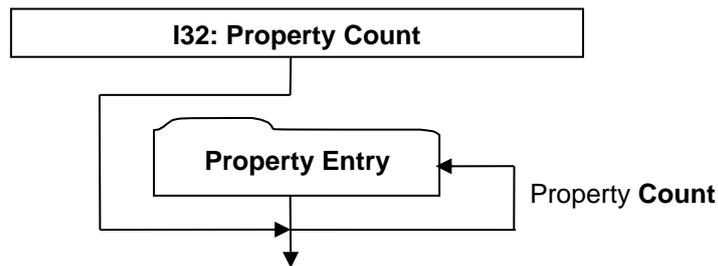


Figure I 39 — Material Attribute Element Properties

I32: Property Count

Property count is the number of properties attached.

Property Entry

Standard JT property entry, consisting of key and value pair.

I.1.4 Information Recovery

The information in ULP is classified as “essential information” that is explicitly written on disk, and “derivative information” that can be computed from the “essential information”. How “essential information” of ULP can be read from disk was covered in previous sections, and this section focuses on the logic to recover “derivative information” from “essential information”.

The derivative information consists of curve information either in the parameter or model space. For example, the PCS curves associated with an untrimmed face can be inferred from the parameter domain of the surface, or an MCS curve may be computed from vertex information and/or the combination of corresponding PCS curve geometry and surface geometry, etc.. Shown in Figure I 40 Information Recovery is the high level diagram to recover “derivative information”. First, all the PCS line geometry are recovered from the associated surface domain information if the domain type of those PCS curves, stored in its associated coedge, are of value 1, 2, 3, 4 meaning that the PCS curve is identical to one of the parameter boundaries of the surface. The PCS curve geometry is then finalized by leveraging the knowledge that all the PCS curves in the same loop are joined in a head to tail fashion. The geometry of two end points of every MCS curve can then be computed from the corresponding PCS curve and surface geometry. Second, the MCS curve geometry is recovered depending on its type. If the MCS curve type is 0, 1, or 2, then the geometry of its two end points is used to compute the curve geometry. If the MCS curve type is 3, then its geometry is computed by projecting PCS curve onto the surface geometry. The logical steps that are displayed with dark colour indicate steps that will be elaborated in more detail later.

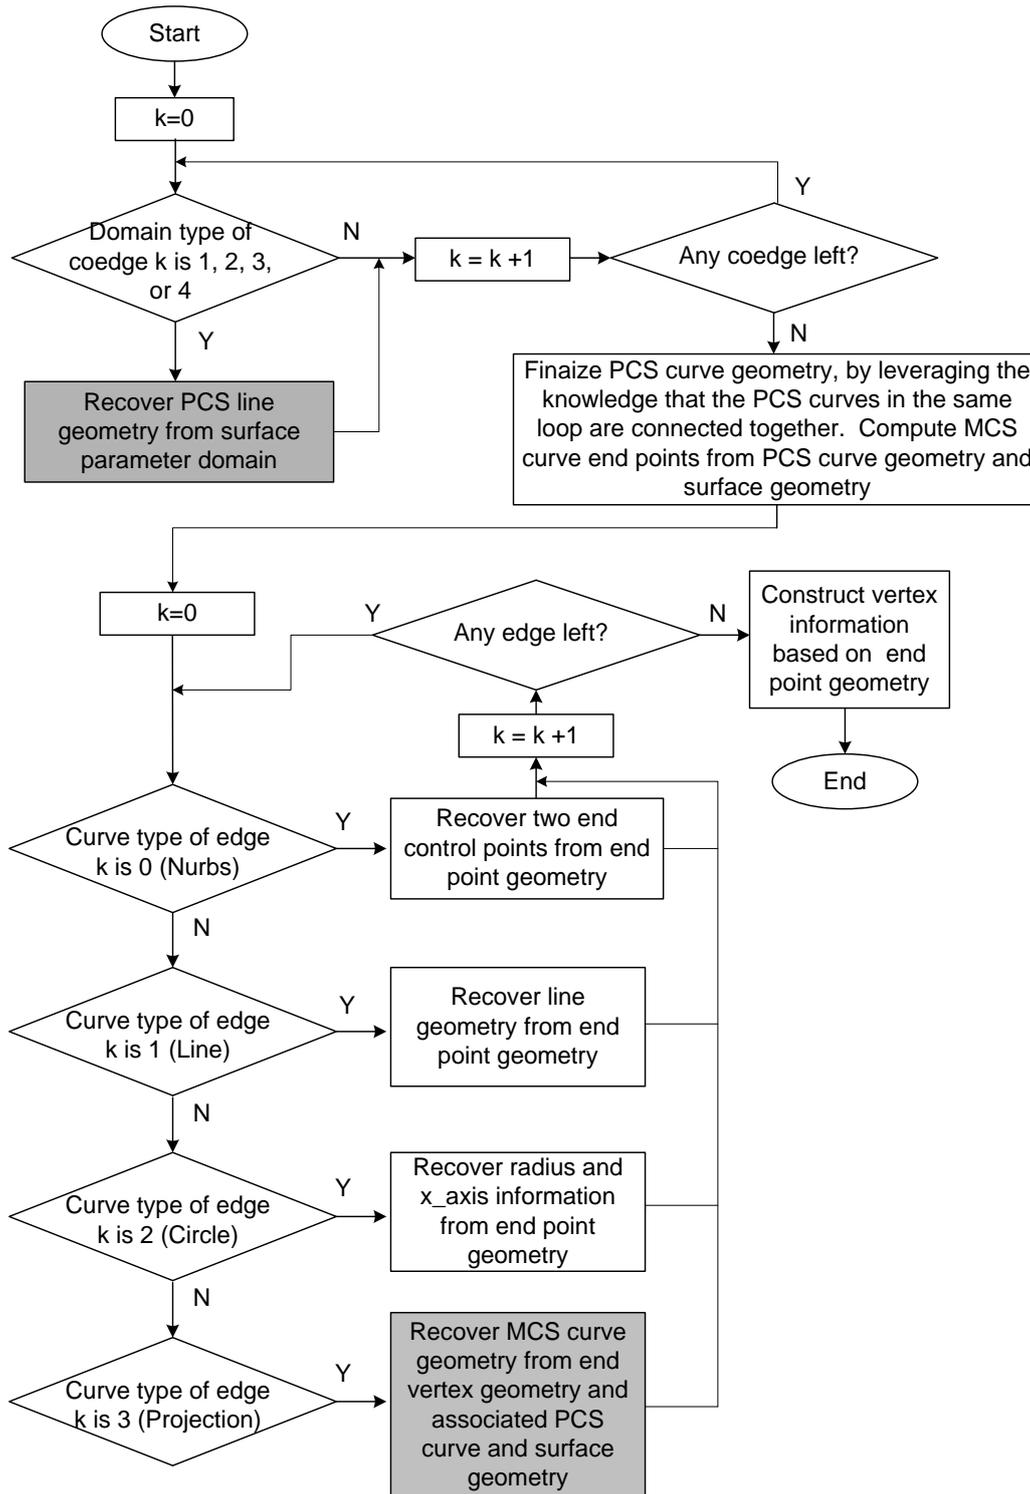


Figure I 40 — Information Recovery

PCS Curve Recovery from Surface Domain

Shown in Figure I 41- PCS Curve Recovery from Surface Domain is the diagram illustrating how the PCS curve geometry is recovered from surface parameter domain information.

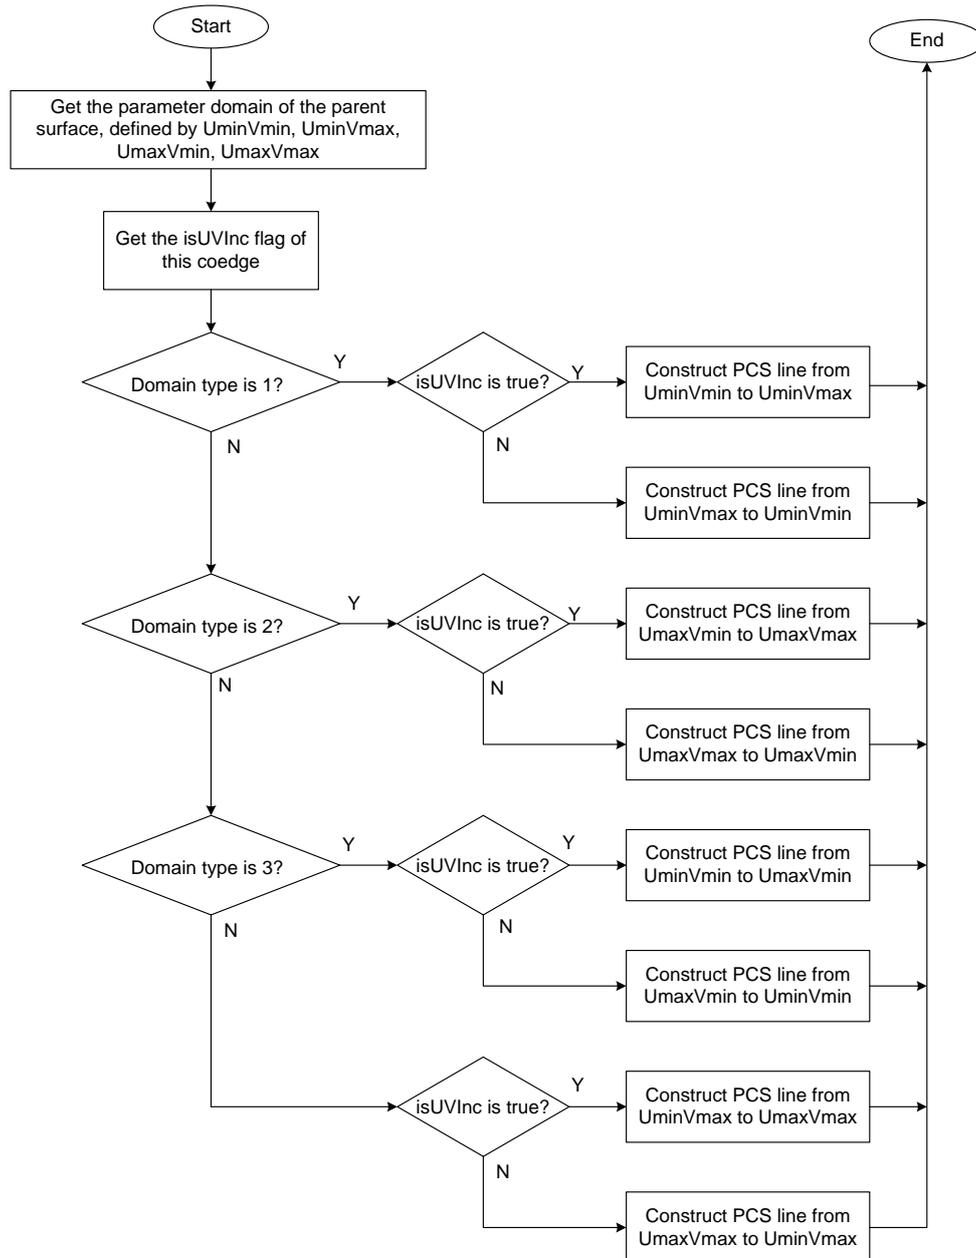


Figure I 41 — PCS Curve Recovery from Surface Domain

MCS Curve Recovery

Shown in Figure I 42 - MCS Curve Recovery is the diagram illustrating how MCS curve geometry is recovered from its end point geometry, and/or its associated PCS curve geometry and surface geometry. If the associated PCS curve is coincident with one of the parameter boundaries of the parent surface, then the MCS curve can be recovered from parent surface geometry. Otherwise, if the surface type is planar and PCS curve is of type Nurbs or circle, then the MCS curve geometry can be recovered by projecting the PCS curve from parameter domain to model space onto the planar surface.

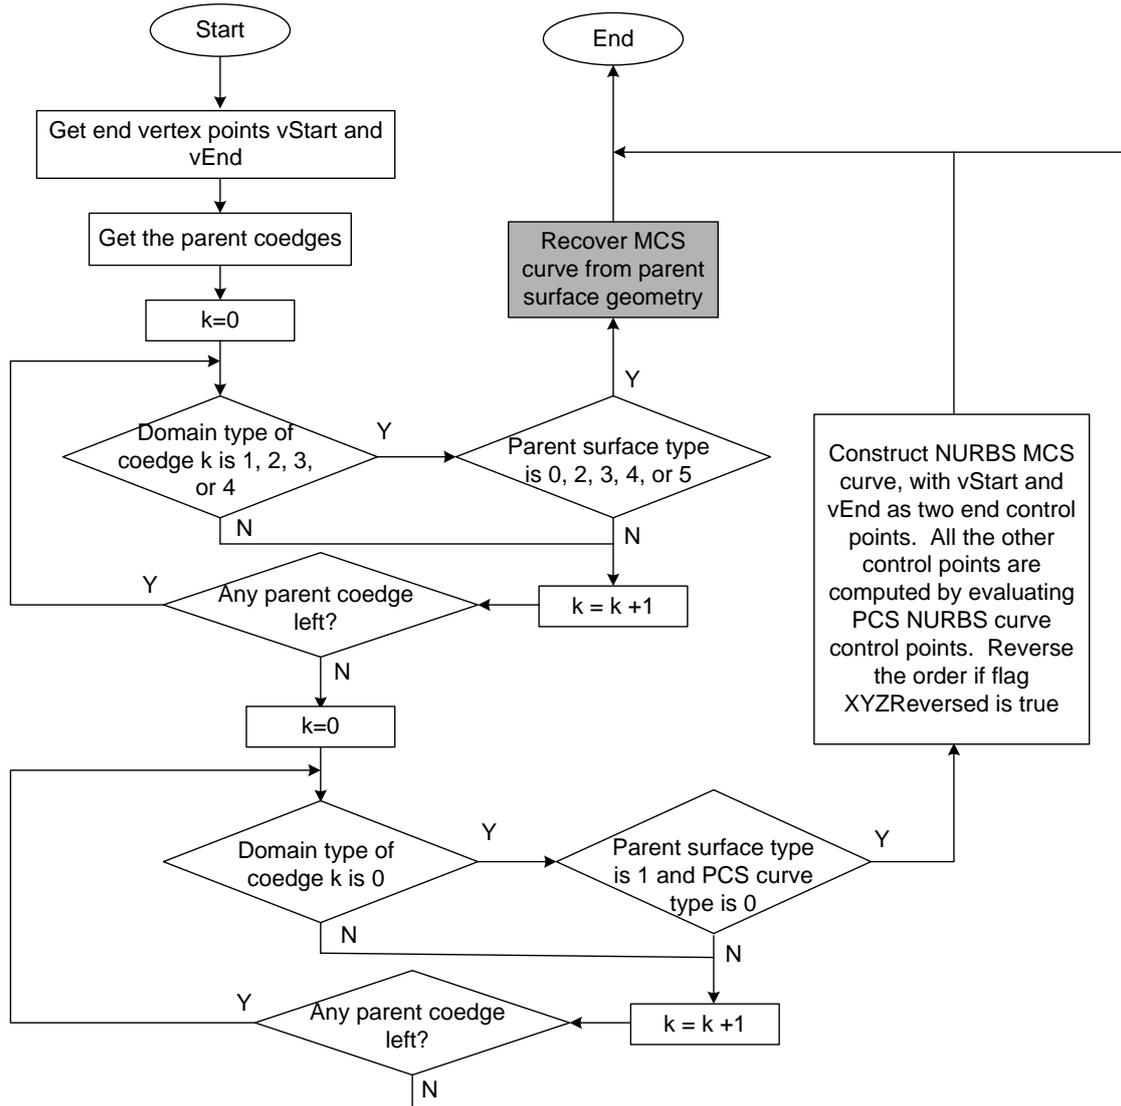


Figure I 42 — MCS Curve Recovery

Shown in Figure I 43- MCS Curve Recovery from Surface Geometry is the detailed description of how MCS curve can be recovered from surface geometry.

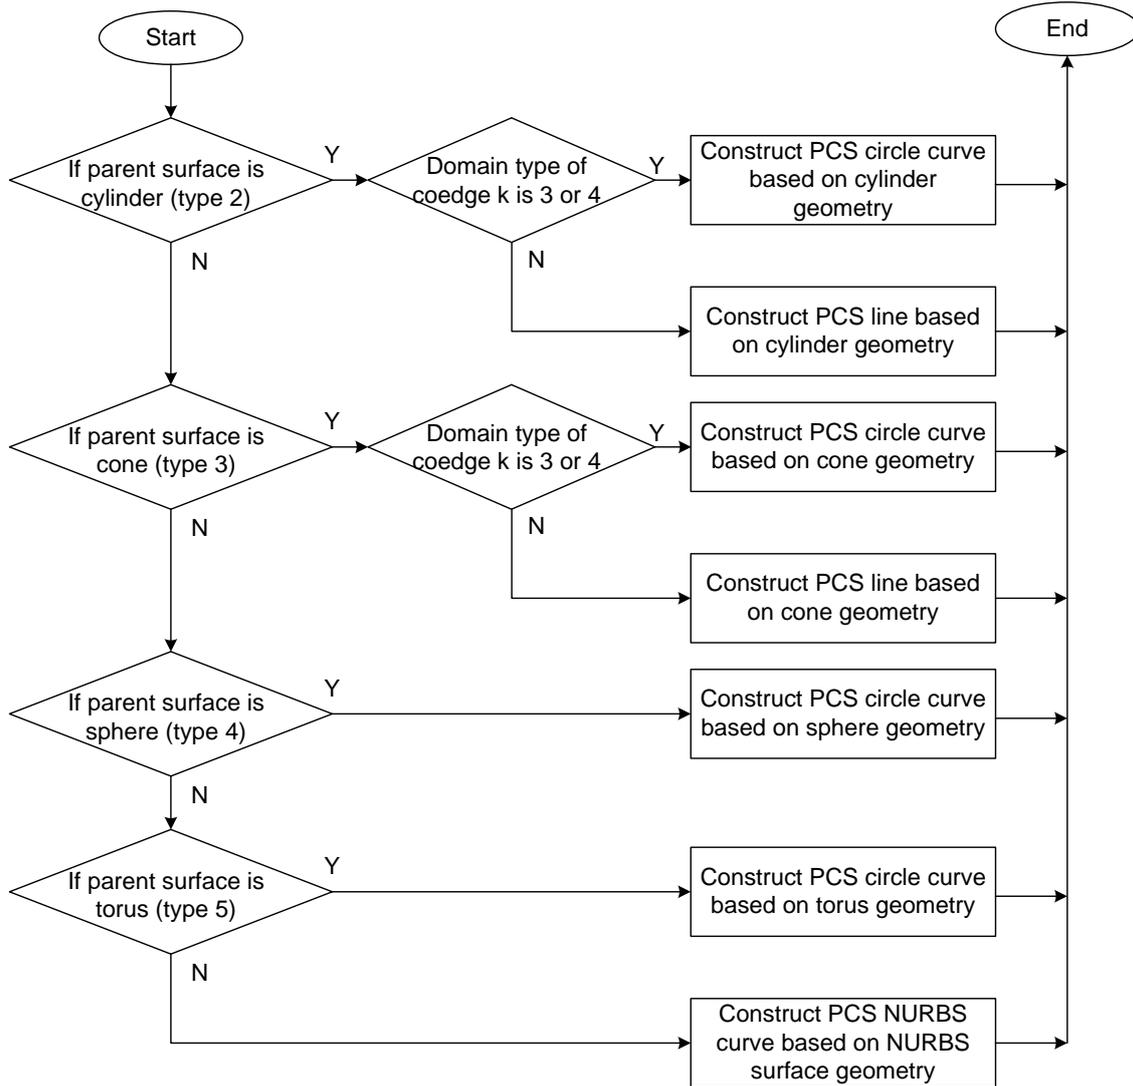


Figure I 43 — MCS Curve Recovery from Surface Geometry

Annex J

JT Smart Topology Table (STT) Segment

JT Smart Topology Table (hereafter referred to as STT) Segment contains an Element that defines the lightweight B-Rep description for a particular Part.

JT STT Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element). The JT STT Segment type supports compression on all element data, so all elements in JT STT Segment use the Logical Element Header Compressed form of element header data.




Figure J 1 — JT STT Segment data collection

Complete description for Segment Header can be found in the File Header section of Base Format Description under Data Segment.

J.1 JT STT Element

Object Type ID: 0xca7e6f89, 0x97c8, 0x47f0, 0x9f, 0xca, 0x16, 0x99, 0xc, 0xfb, 0xe2, 0x17

JT STT Element represents a lightweight B-Rep data. It contains complete B-Rep topology information, analytic geometry information, and attribute information.

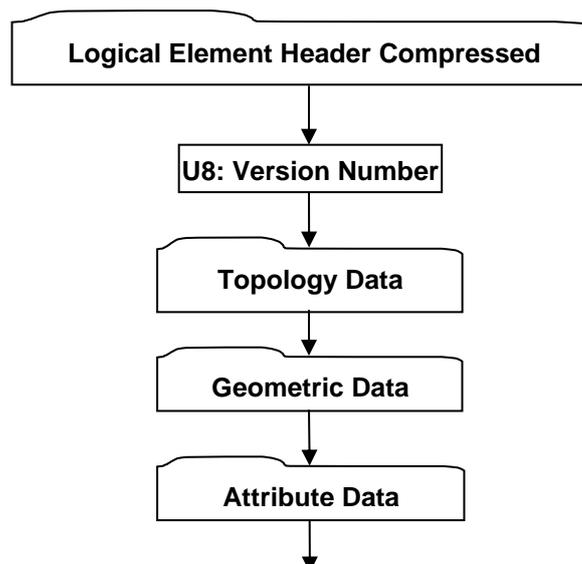


Figure J 2 — JT STT Element data collection

Complete description for Logical Element Header Compressed can be found in the File Header section of Base Format Description under Data Segment, Data.

J.1.1 Topology Data

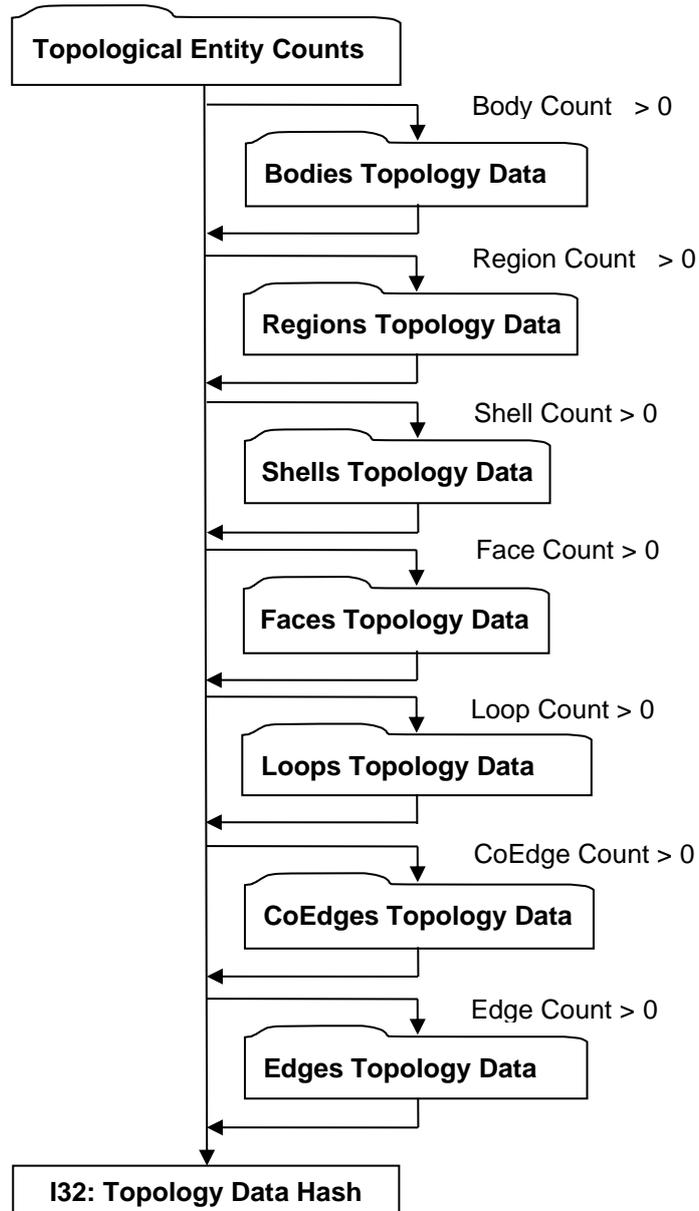


Figure J 3 — Topology Data collection

Topological Entity Counts

Topological Entity Counts data collection defines the counts for each of the various topological entities within a STT.

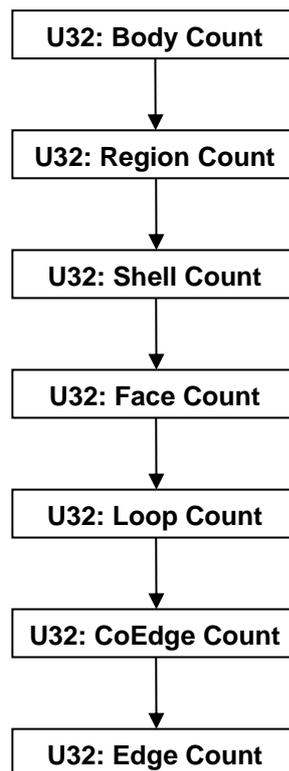


Figure J 4 — Topological Entity Counts data collection

U32: Body Count

Body Count indicates the number of topological body entities.

U32: Region Count

Region Count indicates the number of topological region entities.

U32: Shell Count

Shell Count indicates the number of topological shell entities.

U32: Face Count

Face Count indicates the number of topological face entities.

U32: Loop Count

Loop Count indicates the number of topological loop entities.

U32: CoEdge Count

CoEdge Count indicates the number of topological coedge entities.

U32: Edge Count

Edge Count indicates the number of topological edge entities.

Body Topology Data

Body Topology Data defines the disjoint set of non-overlapping Regions making up each Body. Each Body is defined by one or more non-overlapping Regions. A Body is the sum of all regions of this Body.

Each Body's defining Regions are identified in the Start Region Index. The indices of all the Regions in a single Body are contiguous. The first Region index of the first Body is 0. The first Region index of Body $k, k \geq 0$ is the value of the k th element in Start Region Index. The last Region index of Body $k, k \geq 0$ equals to the first Region index of Body $k+1$ minus 1.

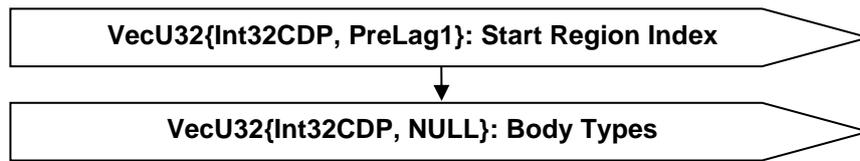


Figure J 5 — Body Topology Data collection

VecU32{Int32CDP, PreLag1}: Start Region Index

Start Region Index is a vector of indices representing the integer index value of start region for this body, which is equal to the last region index from last body plus 1. Start Region Index is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, NULL}: Body Types

Each Body has a type identifying the type of the Body. Body Types indexed by Body Index contains the body type enum values for corresponding Bodies.

In an uncompressed/decoded form the type values can be one of the following values:

Table J 1 — Body Type Values

0	A body consisting solely of an unbounded void region.
1	A topologically zero dimensional manifold body containing a single isolated vertex.
2	A topologically zero dimensional manifold body containing two or more isolated vertices.
3	A topologically one dimensional manifold body containing one or more connected sets of edges, where any vertex is at the junction of no more than two edges.
4	A topologically two dimensional manifold body containing one or more connected sets of faces, where any edge is at the junction of no more than two faces.
5	A topologically three dimensional manifold body containing one or more disjoint and separate solid regions. All faces form a boundary between a solid and a void region.
6	A body which is non-manifold and/or of mixed topological dimensionality.
7	The body type is not specified.

Body types uses the Int32 version of the CODEC to compress and encode data.

Region Topology Data

Region Topology Data defines the disjoint set of non-overlapping Shells making up each Region. Each Region is defined by one or more non-overlapping Shells. The volume of a Region is that volume lying inside each “anti-hole Shell” and outside each simply-contained “hole Shell” belonging to the particular Region. A Region is analogous to a dimensionally elevated face where Region corresponds to Face and Shell corresponds to Trim Loop.

Each Region’s defining Shells are identified in the Start Shell Index. The indices of all the Shells in a single Region are contiguous. The first Shell index of the first Region is 0. The first Shell index of Region $k, k \geq 0$ is the value of the k th element in Start Shell Index. The last Shell index of Region $k, k \geq 0$ equals to the first Shell index of Region $k+1$ minus 1.

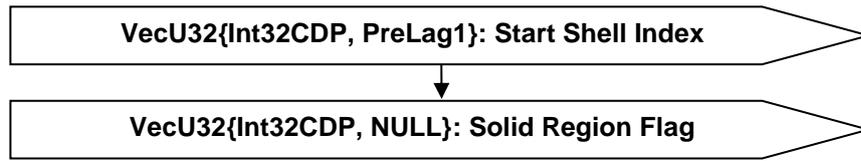


Figure J 6 — Region Topology Data collection

VecU32{Int32CDP, PreLag1}: Start Shell Index

Start Shell Index is a vector of indices representing the integer index value of start shell for this region, which is equal to the last shell index from last region plus 1. Start Shell Index is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, NULL}: Solid Region Flag

Solid Region Flag is a vector of flags representing the solid property of the Regions. The flag value is set according to the table below . Solid Region Flag is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Table J 2 — Solid Region Flag Values

= 0	Region is not solid
= 1	Region is solid

Shell Topology Data

Shell Topology Data defines the set of topological adjacent faces making up each shell. A shell's set of topological adjacent faces define a single (usually closed) two manifold solid that in turn defines the boundary between the finite volume of space enclosed within the shell and the infinite volume of space outside the shell. In addition, each shell has a flag that denotes whether the shell refers to the finite interior volume (i.e. a "inner shell"), the infinite exterior volume (i.e. an "outer shell"), or an open shell. Because an inner shell and its counterpart outer shell share the same set of faces, face information is only represented for outer shells and open shells. An outer or open shells for which face information is represented is called "a represented shell".

Each represented shell's defining faces are identified in the Start Face Index. The indices of all the faces in a single shell are contiguous. The first face index of the first shell is 0. The first face index of represented shell $k, k \geq 0$ is the value of the k th element in Start Face Index. The last face index of shell $k, k \geq 0$ equals to the first face index of shell $k+1$ minus 1.

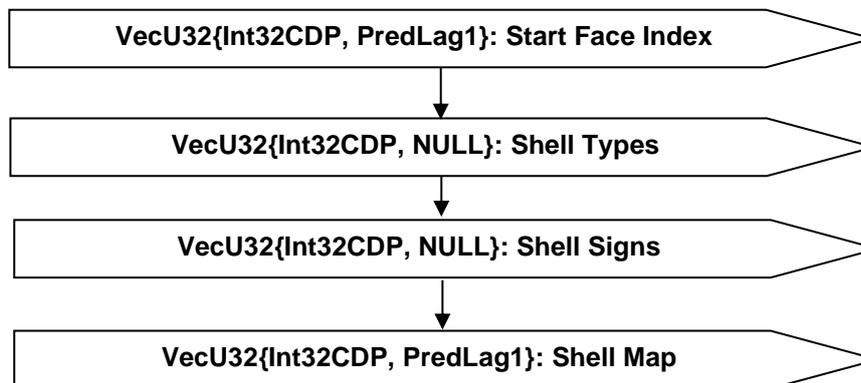


Figure J 7 — Shell Topology Data collection

VecU32{Int32CDP, PredLag1}: Start Face Index

Start Face Index is a vector of indices representing the integer index value of start face for this shell, which is equal to the last face index from last shell plus 1. The length of this array is equal to the

number of represented shells that are either open or positive. Start Face Index is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, NULL}: Shell Types

Each shell has a type identifying the type of the Shell. Shell Types indexed by the Shell index contains enum type values of corresponding Shells.

In an uncompressed/decoded form the type values is from the following enumeration:

Table J 3 — Shell Types

0	Shell has a single acorn vertex
1	Shell has one or more wireframe edges
2	Shell has no wireframe edges, but one or more faces
3	Shell has both wireframe edges and faces
4	The shell type is not specified.

Shell types uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP, NULL}: Shell Signs

Each shell has a sign. The Shell Signs array indexed by shell index contains the sign values of all the shells.

In an uncompressed/decoded form the type values is from the following enumeration:

Table J 4 — JT STT Shell Signs

0	JT_SHELL_sign_positive_c	There is a subset of the faces of the shell which divides space into two volumes, the volume inside the shell being finite; for example, the outermost shell of a solid region.
1	JT_SHELL_sign_negative_c	There is a subset of the faces of the shell which divides space into two volumes, the volume inside the shell being infinite; for example, an inner shell of a solid region.
2	JT_SHELL_sign_open_c	There is no subset of faces of the shell which divides space into two volumes, in other words, all points are either in or on the shell; for example, any shell consisting only of wireframe edges.
3	JT_SHELL_sign_unset	The shell sign is not specified

Shell signs uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP, PredLag1}: Shell Map

Shell Map is a vector that indicates the index of represented shell for every shell. Shell Map is compressed and encoded using the Int32CDP CODEC described in 12.1.1 Int32 Compressed Data Packet.

Face Topology Data

A Face shall be trimmed with at least one “anti-hole” Trim Loop and may be trimmed with one or more “hole” Trim Loops.

Each face’s defining loops are identified in the Start Loop Index. The indices of all the loops in a single face are contiguous. The first loop index of the first face is 0. The first loop index of face $k, k \geq 0$ is the value of the k th element in Start Loop Index. The last loop index of face $k, k \geq 0$ equals to the first loop index of face $k+1$ minus 1.

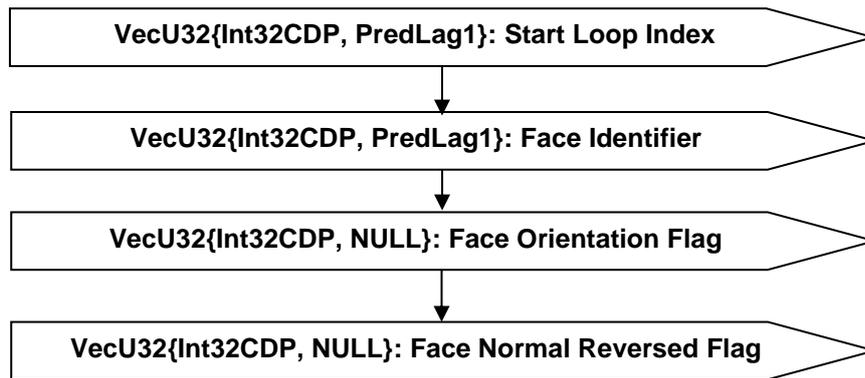


Figure J 8 — Face Topology Data collection

VecU32{Int32CDP, PredLag1}: Start Loop Index

Start Loop Index is a vector of indices representing the integer index value of start loop for each face, which is equal to the last loop index of previous face plus 1. Start Loop Index is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, PredLag1}: Face Identifier

Assigned identifiers of each face. Face Identifier is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, NULL}: Face Orientation Flag

Face Orientation Flag is a vector of flags, indexed by Face Identifier, representing the orientation of the face with respect to the volume bounded by its owner shell. The flag is set to 1 if face's normal points into its owner shell, and 0 otherwise. Face Orientation Flag is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Table J 5 — Face Orientation Flag Values

= 0	The face's normal points into its owner shell
= 1	The face's normal points away from its owner shell

VecU32{Int32CDP, NULL}: Face Normal Reversed Flag

Face Normal Reversed Flag is a vector of flags, indexed by face identifier, representing the normal direction of the face with respect to the underlying surface normal. The flag is set to be 1 if the face normal is anti-parallel to the surface normal, and 0 otherwise. Face Orientation Flag is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Table J 6 — Face Normal Reversed Flag values

= 1	the face normal is opposite to the surface normal
= 0	the face normal is parallel to the surface normal

Loop Topology Data

A loop defines in parameter space a 1D boundary around which geometric surfaces are trimmed to form a face. Loops Topology Data specifies the CoEdges making up each loop along with an anti-hole flag and identifier tag for each loop. Each Loop's defining CoEdges are identified in the Start CoEdge Index. The indices of all the CoEdges in a single Loop are contiguous. The first CoEdge index of the first Loop is 0. The first CoEdge index of Loop $k, k \geq 0$ is the value of the k th element in Start CoEdge Index. The last CoEdge index of Loop $k, k \geq 0$ equals to the first CoEdge index of Loop $k+1$ minus 1.

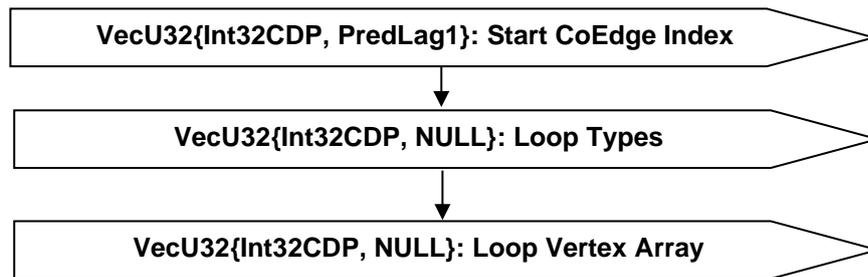


Figure J 9 — Loop Topology Data collection

VecU32{Int32CDP, PredLag1}: Start CoEdge Index

Start CoEdge Index is a vector of indices representing the integer index value of start CoEdge for this Loop, which is equal to the last coedge index from previous loop plus 1. Start CoEdge Index is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, NULL}: Loop Types

Each Loop has a type identifying the type of the Loop.

In an uncompressed/decoded form the type values is from the following enumeration:

Table J 7 — Loop Types

0	Loop is just a vertex without any edges
1	Loop has no interior, e.g. from a wire body
2	Simple peripheral loop
3	Loop is a simple hole
4	Winding loop on a periodic surface e.g. a circle on a cylinder or doughnut
5	Loop is a hole around the surface singularity e.g. chopping the top off a cone
6	An apparently peripheral loop on a doubly closed surface
7	An apparent hole in a doubly closed surface
8	A loop dividing a periodic degenerate surface in two (contains just one pole)
9	Invalid loop or algorithm failure
10	The loop type is not specified

Loop types uses the Int32 version of the CODEC to compress and encode data.

Loop Vertex Array

The element of Loop Vertex Array is the associated vertex identifier if it exists, -1 if the loop does not have associated vertex. Loop Vertex Array uses the Int32 version of the CODEC to compress and encode data.

CoEdges Topology Data

A CoEdge defines a parameter space edge trim Loop segment (i.e. the projection of an Edge into the parameter space of the Face). A CoEdge represents the oriented use of an Edge by a Loop.

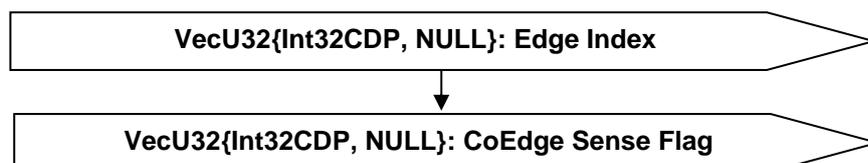


Figure J 10 — CoEdge Topology Data collection

VecU32{Int32CDP, NULL}: Edge Index

Edge Index indicates which Edge each CoEdge belongs to. Edge Index is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, NULL}: CoEdge Sense

CoEdge Sense Flag is a vector of flags representing the direction of the CoEdge with respect to the corresponding Edge. The flag is set to 1 if the CoEdge direction conforms to its corresponding Edge or 0 otherwise. CoEdge Sense Flag is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Table J 8 — CoEdge Sense Flag Values

= 0	The CoEdge direction is the opposite to its corresponding Edge
= 1	The CoEdge direction is the same as its corresponding Edge

Edge Topology Data

An Edge defines a model space trim Loop segment. Its boundary is a collection of zero, one or two vertices.

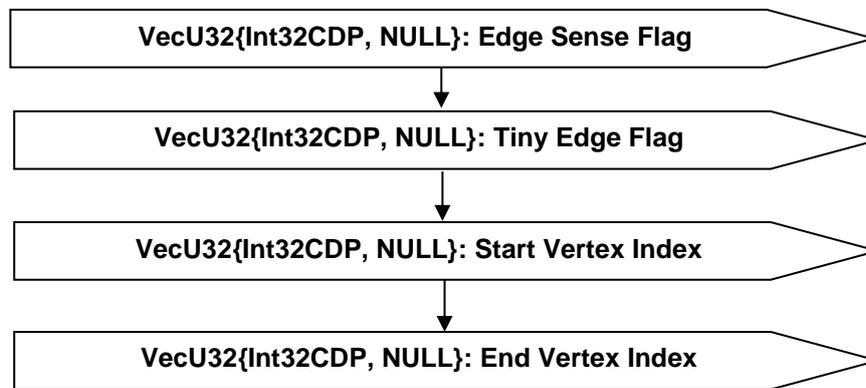


Figure J 11 — Edge Topology Data collection

VecU32{Int32CDP, NULL}: Edge Sense Flag

Edge Sense Flag is a vector of flags representing the direction of the edge with respect to the corresponding curve. The flag is set to 1 if the edge direction conforms to its corresponding curve and 0 otherwise. Edge Sense Flag is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Table J 9 — Edge Sense Flag Values

= 0	The Edge direction is the opposite to its corresponding curve
= 1	The Edge direction is the same as its corresponding curve

VecU32{Int32CDP, NULL}: Tiny Edge Flag

Tiny Edge Flag is a vector of flags representing whether the edge is tiny (e. g. shorter than 1*10⁻⁵ meters). The flag is set to 1 if the edge is tiny and 0. Tiny Edge Flag is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, NULL}: Start Vertex Index

Start Vertex Index contains start vertex index of each edge. Start Vertex Index is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, NULL}: End Vertex Index

End Vertex Index contains end vertex index of each edge. End Vertex Index is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

I32: Topology Data Hash

The Topology Data Hash is the combined hash of all the topology data. Refer to the Hashing Annex for a more detailed description of hashing.

J.1.2 Geometric Data

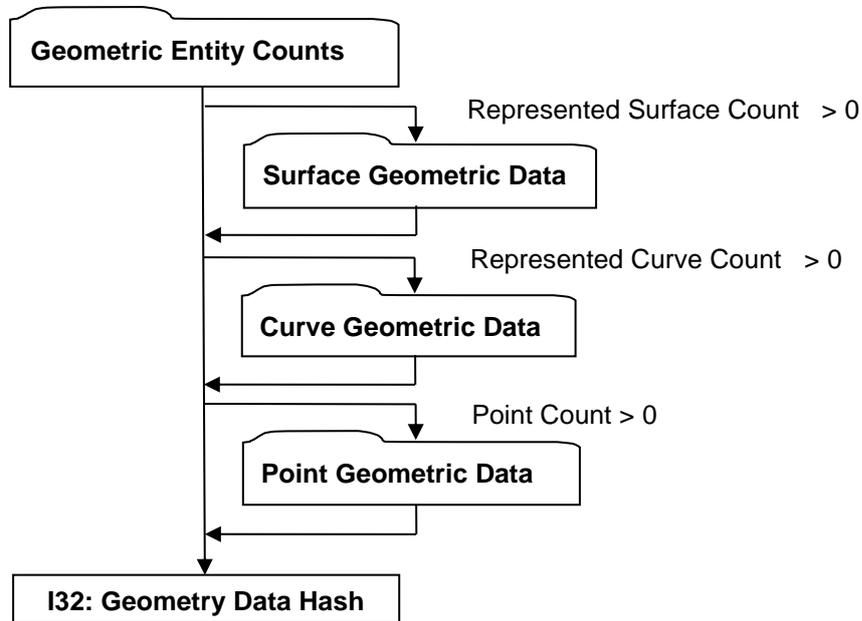


Figure J 12 — Geometric Data collection

Geometric Entity Counts

Geometric Entity Counts data collection defines the counts for each of the various geometric entities within a STT.

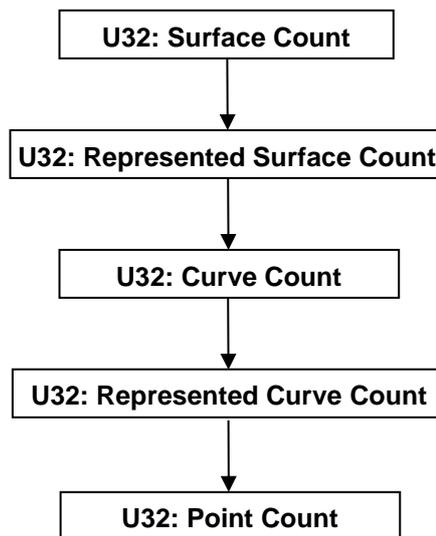


Figure J 13 — Geometric Entity Counts

U32: Surface Count

Surface Count indicates the number of distinct geometric surface entities in the STT.

U32: Represented Surface Count

Represented Surface Count indicates the number of geometric surfaces that are represented in the STT.

U32: Curve Count

Curve Count indicates the number of distinct geometric curve entities in the STT.

U32: Represented Curve Count

Represented Curve Count indicates the number of geometric curves that are represented in the STT.

U32: Point Count

Point Count indicates the number of distinct geometric point entities in the STT.

Surface Geometric Data

Surface Geometric Data defines a collection of surfaces and their mapping to the original B-Rep surfaces. Only surfaces of type Plane, Cylinder, Cone, Sphere, and Torus are represented.

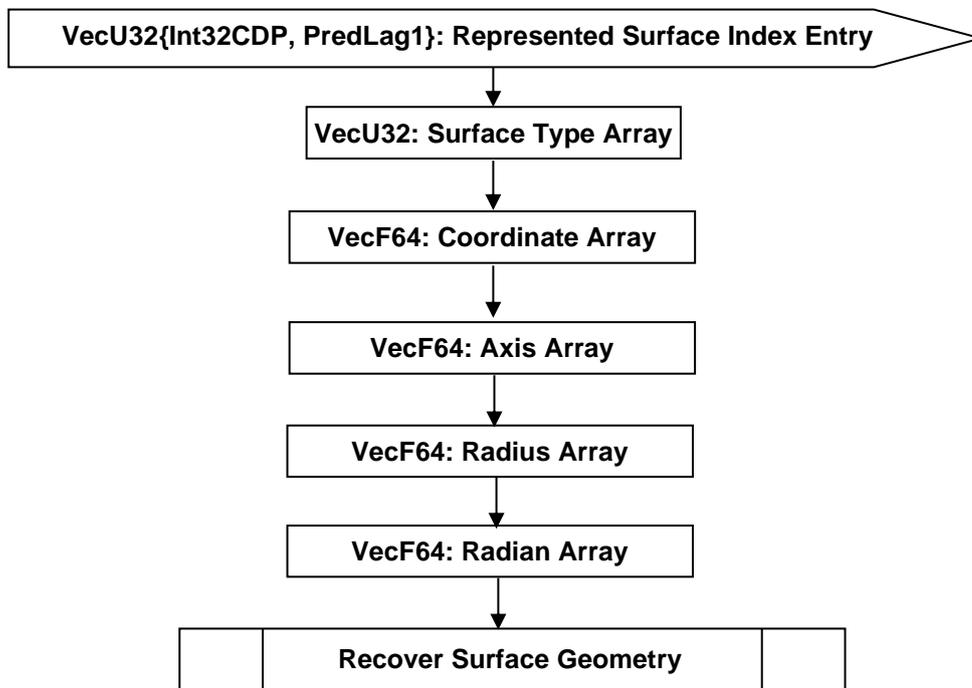


Figure J 14 — Surface Geometric Data collection

VecU32{Int32CDP, PredLag1}: Represented Surface Index Entry

Represented Surface Index Entry is a vector of integers that stores the index of the represented surfaces. Represented Surface Index Entry is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32: Surface Type Array

Surface Type Array is a vector of integers that stores the enumeration values of the analytical surface type. Surface Type Array is encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Table J 10 — Represented Surface Types

0	PLANE
1	CYLINDER
2	CONE
3	SPHERE
4	JT_SURF_TORUS

The detailed definitions of the Surface Types can be found: F.2.4.3.1 PLANE; F.2.4.3.2 CYLINDER; F.2.4.3.3 CONE; F.2.4.3.4 SPHERE; F.2.4.3.5 TORUS.

VecF64: Coordinate Array

Coordinate Array contains an array of double precision floating point numbers that represent the collection of point coordinate information in the definition of the analytic surface entities. The composite type VecF64 is defined in the Symbols table of Notational Conventions.

VecF64: Axis Array

Axis Array contains an array of double precision floating point numbers that represent the collection of unit vector information in the definition of the analytic surface entities. The composite type VecF64 is defined in the Symbols table found in Notational Conventions.

VecF64: Radius Array

Radius Array contains an array of double precision floating point numbers that represent the collection of radius information in the definition of the analytic surface entities. The composite type VecF64 is defined in in the Symbols table found in Notational Conventions.

VecF64: Radian Array

Radian Array contains an array of double precision floating point numbers that represent the collection of radian information in the definition of the analytic surface entities. The composite type VecF64 is defined in in the Symbols table found in Notational Conventions.

Recover Surface Geometry

The logic diagram to recover surface geometry from the arrays is shown below. All the represented surfaces are processed one by one sequentially, with its definition recovered from relevant arrays. In the diagram, vCoord represents “coordinate array”, vAxis represents “axis array”, vRadius represents “radius array”, and vRadian represents “radian array”.

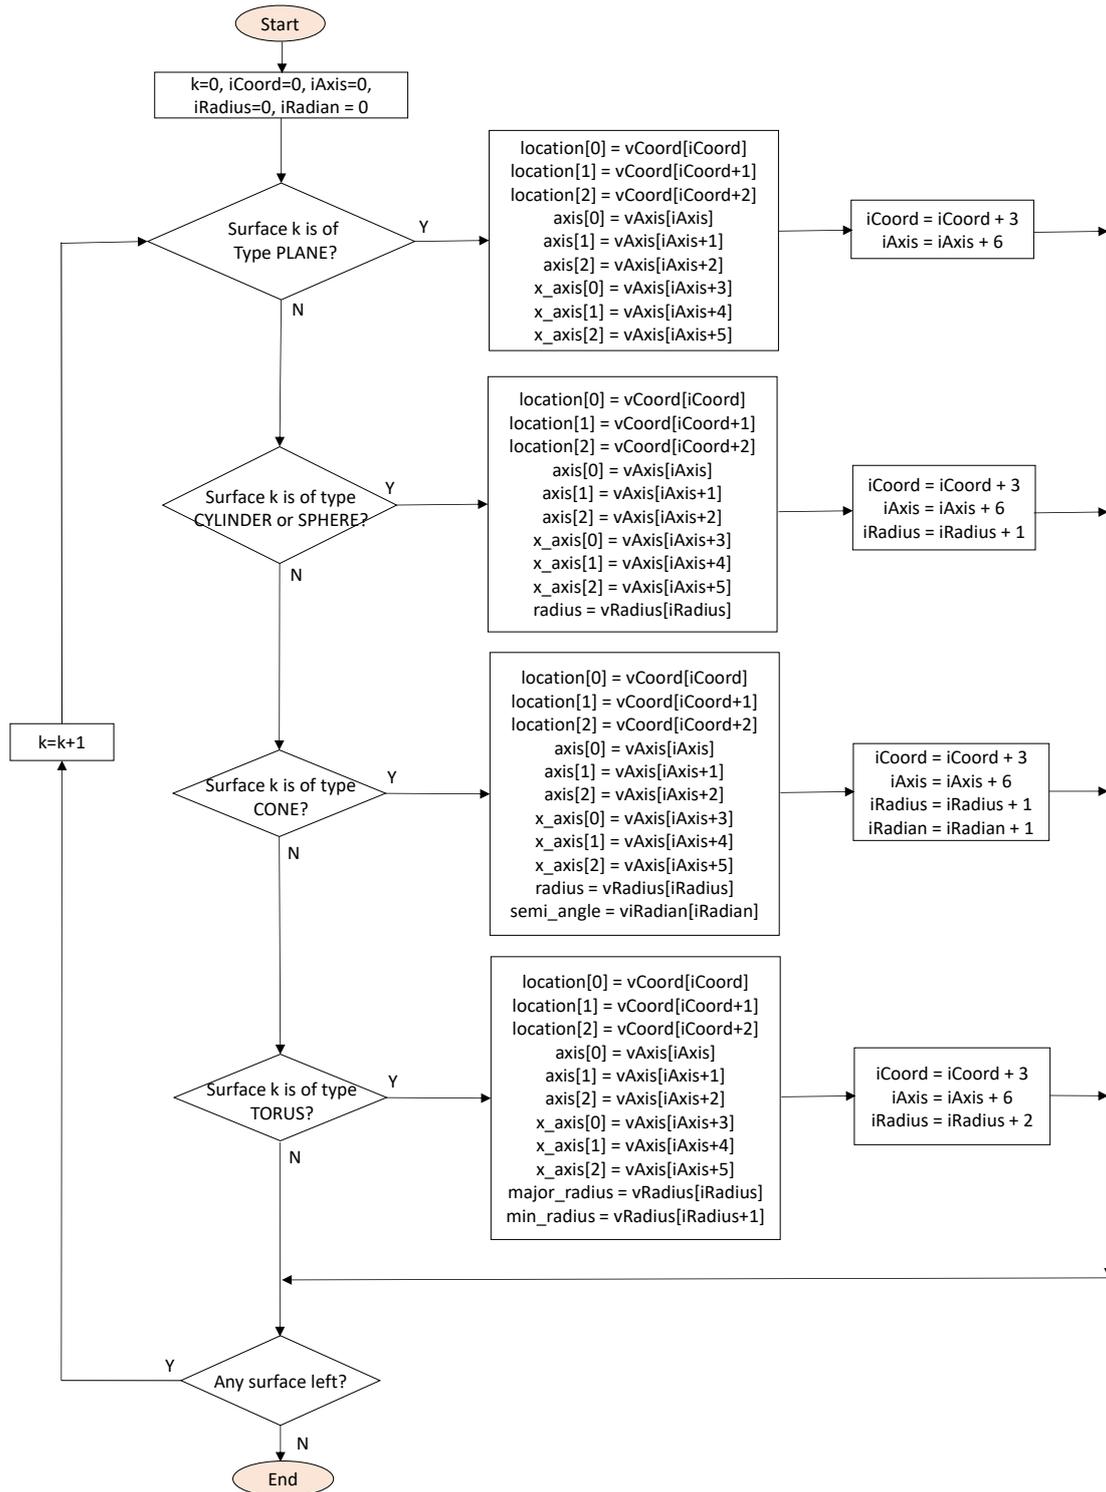


Figure J 15— Surface Geometry Recovery

Curve Geometric Data

Curve Geometric Data defines a collection of analytic curves and their mapping to the original B-Rep curves.

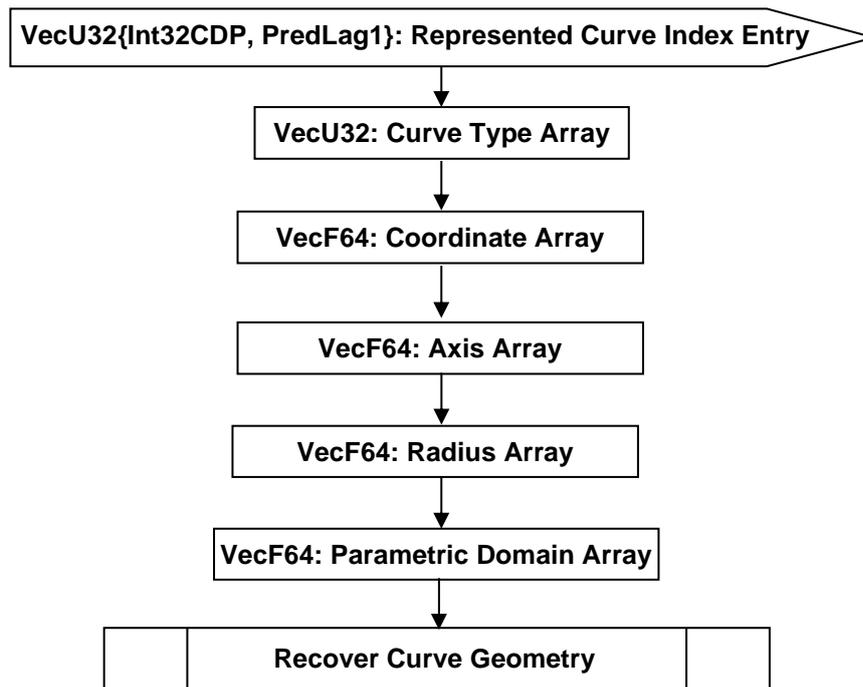


Figure J 16— Curve Geometric Data collection

VecU32{Int32CDP, PredLag1}: Represented Curve Index Entry

Represented Curve Index Entry is a vector of integers that stores the indices of curves represented in STT. Represented Curve Index Entry is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32: Curve Type Array

Curve Type Array is a vector of integers that stores the enumeration values of curve types. Curve Type Array is encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Table J 11 — JT STT Analytical Curve Types

0	LINE
1	CIRCLE
2	ELLIPSE

The detailed definitions of the Curve Types can be found: F.2.4.2.2 Line; F.2.4.2.3 CIRCLE and F.2.4.2.4 ELLIPSE.

VecF64: Coordinate Array

Coordinate Array contains an array of double precision floating point numbers that represent the collection of point coordinate information in the definition of the curve entities. The composite type VecF64 is defined in the Symbols table of Notational Conventions.

VecF64: Axis Array

Axis Array contains an array of double precision floating point numbers that represent the collection of unit vector information in the definition of the curve entities. The composite type VecF64 is defined in the Symbols table found in Notational Conventions.

VecF64: Radius Array

Radius Array contains an array of double precision floating point numbers that represent the collection of radius information in the definition of the curve surface. The composite type VecF64 is defined in in the Symbols table found in Notational Conventions.

VecF64: Parametric Domain Array

Parametric Domain Array contains an array of double precision floating point numbers that represent the collection of parametric domain information in the definition of the curve entities. The composite type VecF64 is defined in in the Symbols table found in Notational Conventions.

Recover Curve Geometry

The logic diagram to recover curve geometry from the arrays is shown below. All the represented curves are processed one by one sequentially, with its definition recovered from relevant arrays. In the diagram, vCoord represents “coordinate array”, vAxis represents “axis array”, vRadius represents “radius array”, and vDomain represents “parameter domain array”.

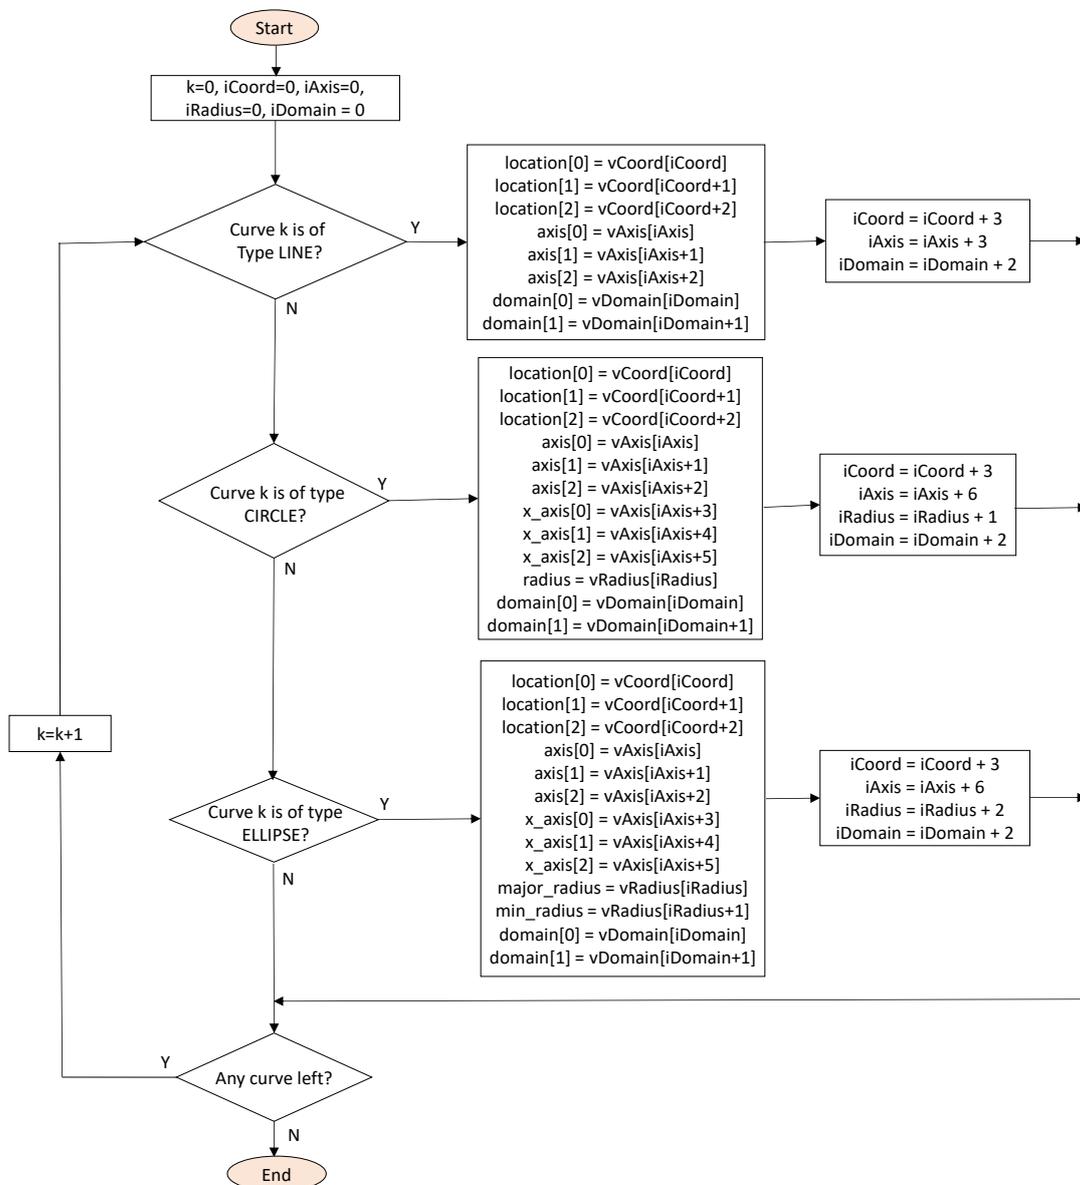


Figure J 17 — Curve Geometry Recovery

Point Geometric Data

Point Geometric Data defines a collection of vertex points.

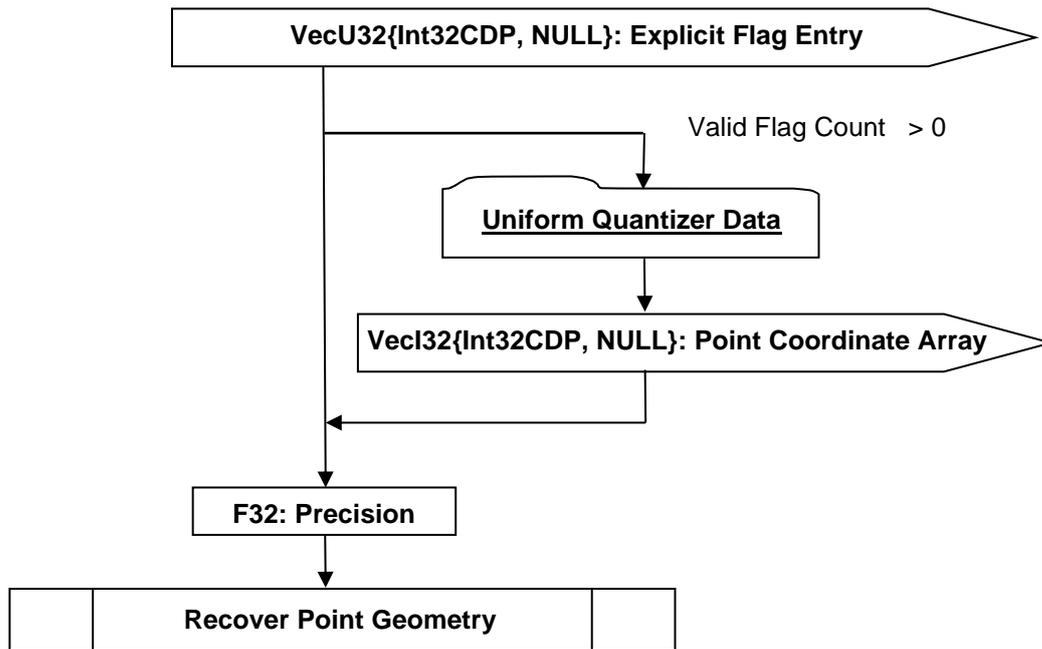


Figure J 18 — Point Geometric Data collection

VecU32{Int32CDP, NULL}: Explicit Flag Entry

Explicit Flag Entry is a vector of flags that indicates if a particular point is explicitly written. A point may not be explicitly written if that point can be inferred from curve geometry, e.g., coincident with one of the end points of a represented curve. The flag value is 1 if the point geometry is explicitly written, and 0 otherwise. Explicit Flag Entry is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecF32{Int32CDP, NULL}: Point Coordinate Array

Point Coordinate Array contains explicit point geometry to write. Point Coordinate Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

F32: Precision

Precision of Point Coordinate Array.

Recover Point Geometry

The logic diagram to recover point geometry by evaluating represented curves is shown below.

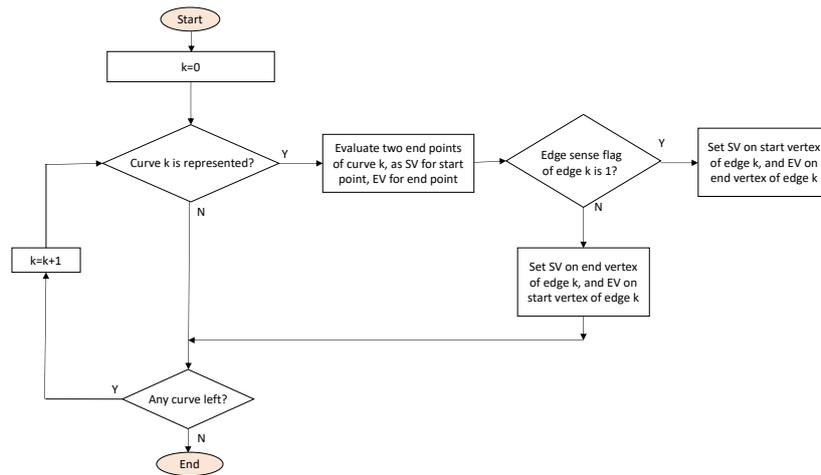


Figure J 19 — Point Geometry Recovery

I32: Geometry Data Hash

The Geometry Data Hash is the combined hash of all the elements in Geometry Data. Refer to the Hashing Annex for a more detailed description on hashing.

J.1.3 Attribute Data

The Attribute Data is B-Rep attributes from XTbrep. Attributes contain Body Attribute, Face Attribute and Edge Attribute.

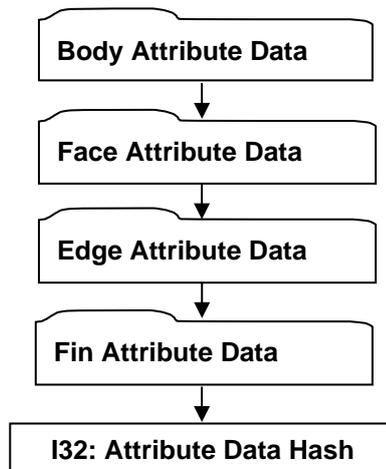


Figure J 20 — Attribute Data Collection

Body Attribute Data

The Body Attribute Data includes Body Identifiers, Body Checksums,

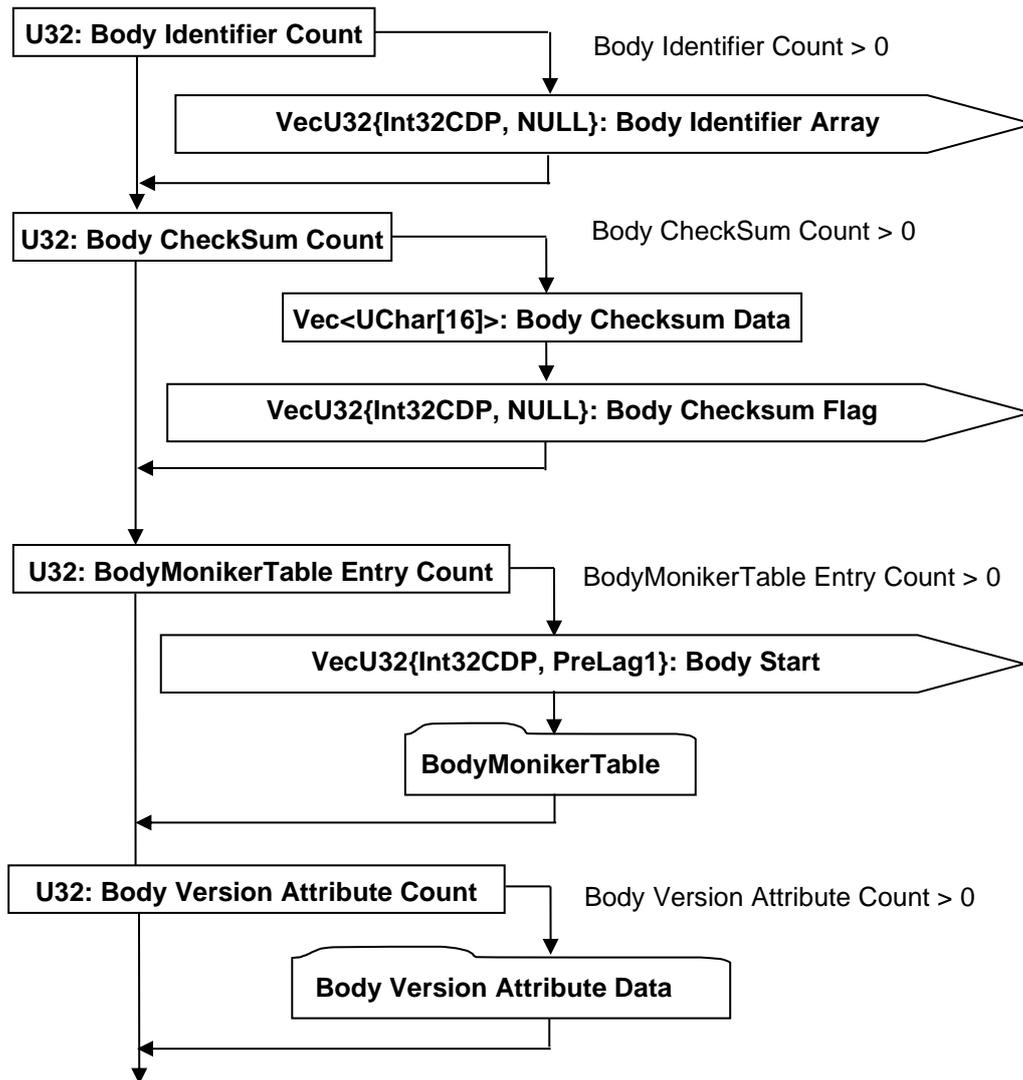


Figure J 21 — Bodies Attribute Data collection

U32: Body Identifier Count

Body Identifier Count indicates the number of body identifiers. Its value is either the number of bodies or 0.

VecU32{Int32CDP, NULL}: Body Identifier Array

Body Identifier Array is a vector of integer attributes, with its length indicated by Body Identifier Count. When Body Identifier Array exists, i.e., Body Identifier Count is greater than 0, it is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

U32: Body Checksum Count

Body Checksum Count indicates the number of body checksums. Its value is either the number of bodies or 0.

Vec<UChar[16]>: Body Checksum Data

Body Checksum Data is a vector of checksums, where each checksum, composed of 16 UChar values, represents the checksum of corresponding body in STT. The length of Body Checksum Data is indicated by Body Checksum Count.

VecU32{Int32CDP, NULL}: Body CheckSum Flag

Body CheckSum Flag is a vector of flags representing additional information about the Checksum value. It has the same length as Body Checksum Data, so that each checksum has an associated flag. The flag value can be either 0 or 1. Body Checksum Flag is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, PreLag1}: Body Start Array

Body Start Array is a vector of indices representing the integer index value of start MonikerGuidTable entry for each body. Body Start Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

U32: BodyMonikerTable Entry Count

BodyMonikerTable Entry Count indicates the number of entries in BodyMonikerTable. Its value is either the number of bodies or 0.

BodyMonikerTable Data

BodyMonikerTable Data contains all the moniker entries for all the bodies in STT. The association between bodies and these entries are represented in Body Start Array. Each entry includes three pieces of information: an integer that identifies the GUID, the GUID representation, and a string that describes the source of the GUID.

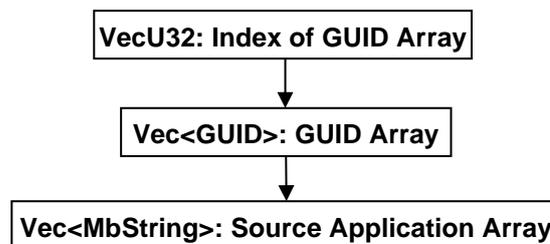


Figure J 22 — MonikerGuidTable Data collection

VecU32: Index of GUID Array

Index of GUID Array is a vector of integers that collects all the identifier fields from all MonikerGuidTable entries.

Vec<GUID>: GUID Array

GUID Array is a vector of GUIDs that collects all the GUIDs from all MonikerGuidTable entries.

Vec<MbString>: Source Application Array

Source Application Array is a vector of strings that collects all the source strings from all MonikerGuidTable entries.

U32: Body Version Attribute Count

Body Version Attribute Count indicates the number of body Version attributes. Its value is either the number of bodies or 0.

Body Version Attribute Data

Body Version Attribute Data consists of Body Version ID and Source Application descriptions.

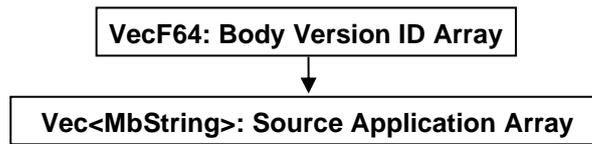


Figure J 23 — Body ID Attribute Data

VecF64: Body Version ID

Body Version ID Array is a vector of Float64 numbers, each of which describes version information for a body in STT.

Vec<MbString>: Source Application Array

Source Application Array is a vector of strings, each of which describes the source application that is associated with the version information.

Face Attribute Data

The Face Attribute Data describes attribute information for all the Faces in STT.

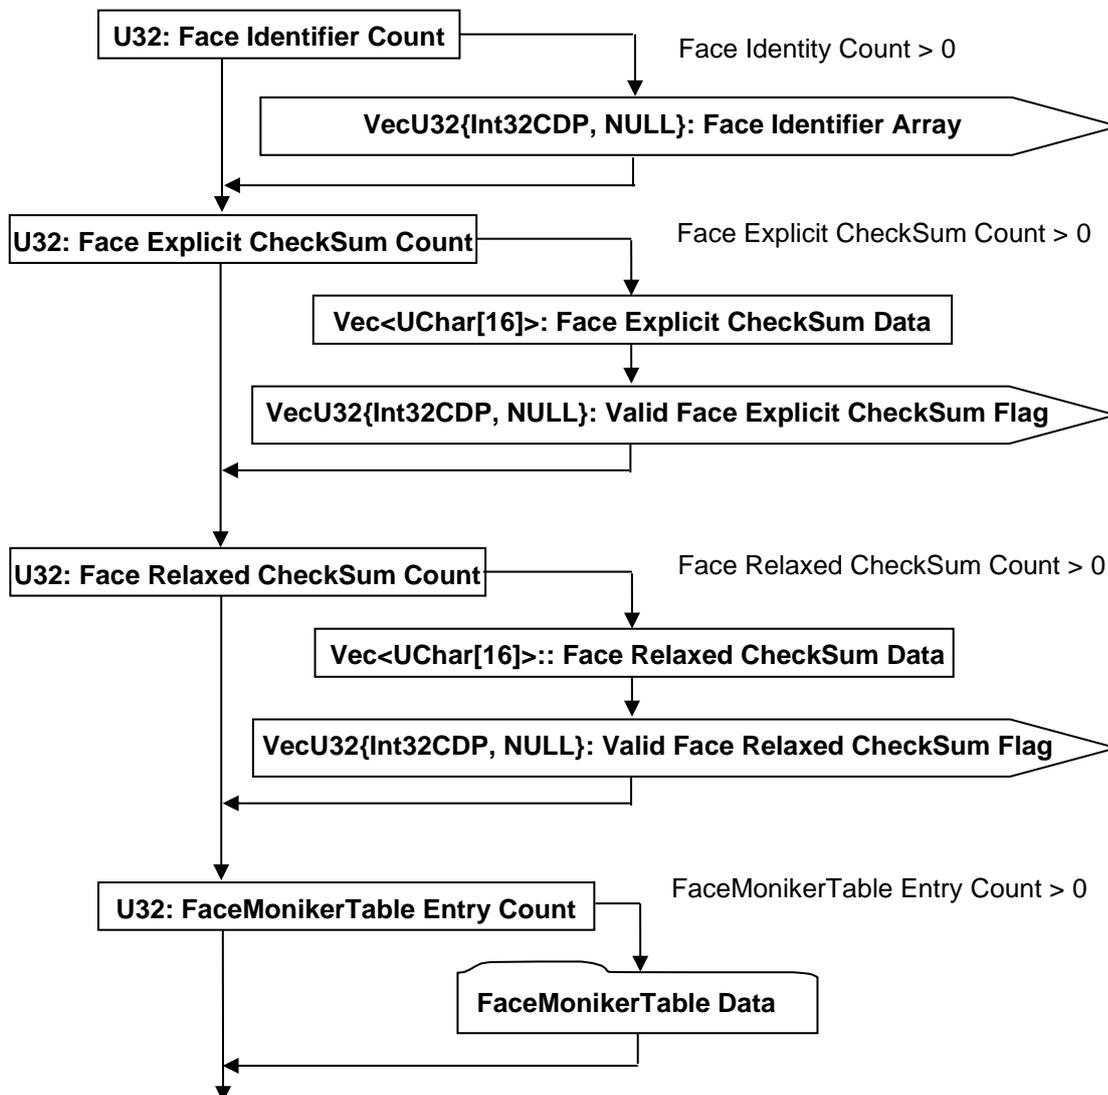


Figure J 24 — Face Attribute Data collection

U32: Face Identifier Count

Face Identifier Count indicates the number of face identifiers. Its value is either the number of faces or 0.

VecU32{Int32CDP, NULL}: Face Identifier Array

Face Identifier Array is a vector of integers that provides face identification. Face Identifier Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

U32: Face Explicit CheckSum Count

Face Explicit CheckSum Count indicates the number of Face Explicit CheckSums. Its value is either the number of faces or 0.

Vec<UChar[16]>: Face Explicit CheckSum Data

Face Explicit CheckSum Data describes Explicit CheckSum for all the faces, where each CheckSum is composed of 16 UChar values.

VecU32{Int32CDP, NULL}: Valid Face Explicit CheckSum Flag

Valid Face Explicit CheckSum Flag is a vector of flags representing if the corresponding CheckSum in Face Explicit CheckSum Data is valid. Valid Face Explicit CheckSum Flag is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

U32: Face Relaxed CheckSum Count

Face Relaxed CheckSum Count indicates the number of face Relaxed CheckSums. Its value is either the number of faces or 0.

UChar: Face Relaxed CheckSum Data

Face Relaxed CheckSum Data describes Relaxed CheckSum for all the faces, where each CheckSum is composed of 16 UChar values.

VecU32{Int32CDP, NULL}: Valid Face Relaxed CheckSum Flag

Valid Face Relaxed CheckSum Flag is a vector of flags representing if the corresponding CheckSum is valid. Valid Face Relaxed CheckSum Flag is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

U32: FaceMonikerTable Entry Count

FaceMonikerTable Entry Count indicates the number of entries in FaceMonikerTable Its value is either the number of faces in STT or 0.

Face Moniker Table Data

FaceMonikerTable Data includes a vector of entries, each of which describes moniker attribute for a face in STT. The description of each face includes three fields: a string label, an integer describing the index of GUID, and an integer that provides identification. Each field is grouped into a separate array for serialization.

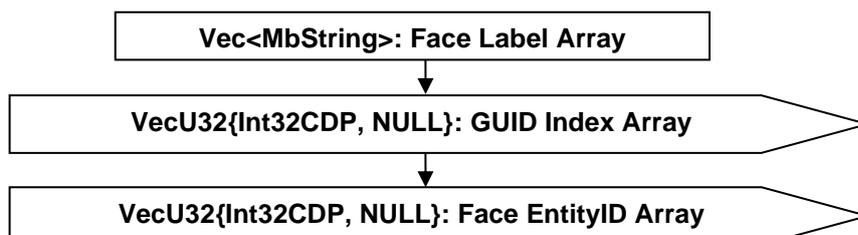


Figure J 25 — MONIKER/MONIKER_DATA_ATTRIB Data collection

Vec<MbString>: Face Label Array

Face Label Array is a vector of strings that provides label description for each Face.

VecU32{Int32CDP, NULL}: GUID Index Array

GUID Index Array is a vector of integers that provides GUID index into the GUID table associated with the body in which the face is part of. GUID Index Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, NULL}: Face Identity Array

Face Identity Array is a vector of integers that provides face identification. Face Identity Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Edge Attribute Data

The Edge Attribute Data contains attribute information for edges in STT.

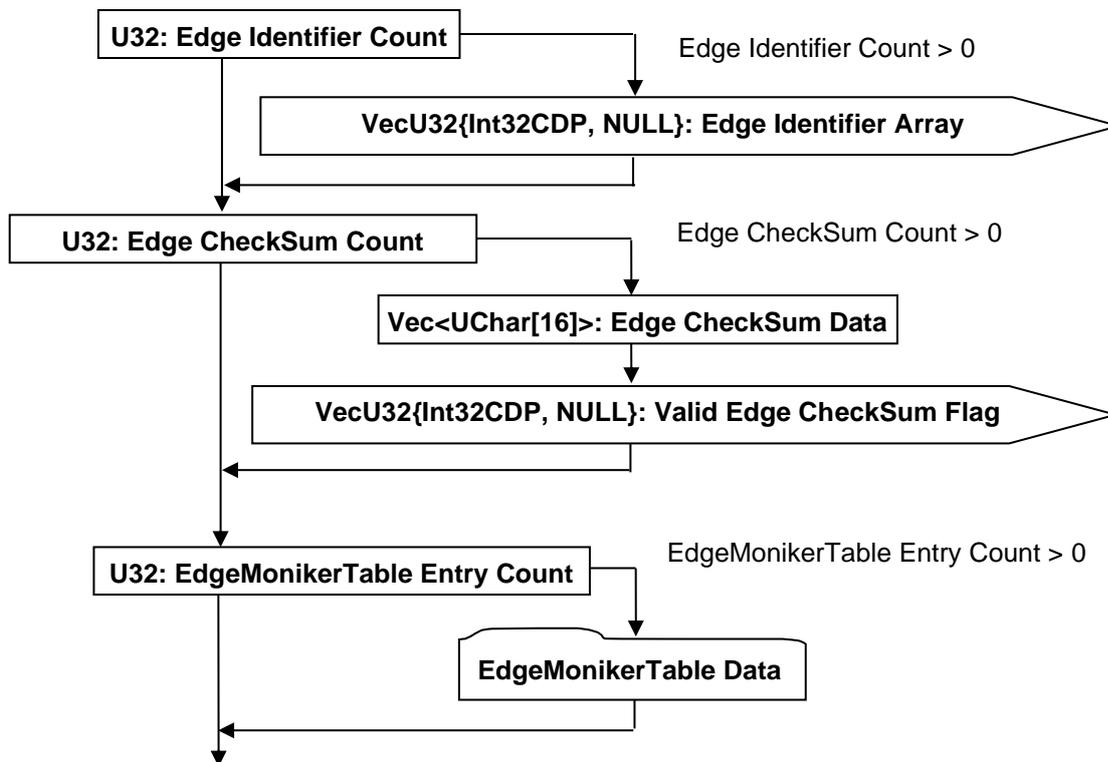


Figure J 26 — Edge Attribute Data collection

U32: Edge Identifier Count

Edge Identifier Count indicates the number of Edge identifiers. Its value is either the number of Edges in STT or 0.

VecU32{Int32CDP, NULL}: Edge Identifier Array

Edge Identifier Array is a vector of integer Edge identifiers. Edge Identifier Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

U32: Edge CheckSum Count

Edge CheckSum Count indicates the number of Edge CheckSums. Its value is either the number of Edges or 0.

Vec<UChar[16]>: Edge CheckSum Data

Edge CheckSum Data is a vector of checksum values for all the edges, where each checksum is composed of a 16 UChar values.

VecU32{Int32CDP, NULL}: Valid Edge CheckSum Flag

Valid Edge CheckSum Flag is a vector of integer flags representing whether the corresponding edge CheckSum is valid. Valid Edge CheckSum Flag is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

U32: EdgeMonikerTable Entry Count

EdgeMonikerTable Entry Count indicates the number of edge moniker entries. Its value is either the number of edges or 0.

Edge Moniker Table Data

Edge MonikerTable Data describes moniker attribute information for all the edges. The moniker attribute information includes three fields: Edge Label string, GUID index, and integer identifier. Each field is grouped into separate arrays.

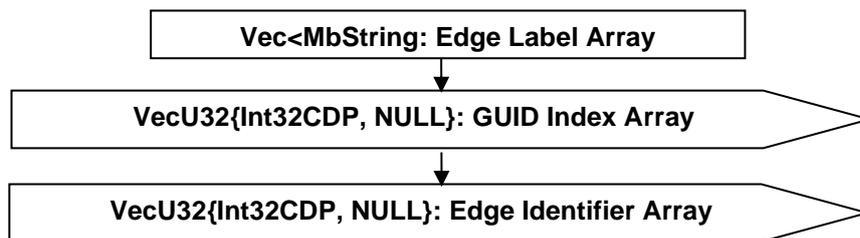


Figure J 27 — EdgeMonikerTable Data collection

Vec<MbString>: Edge Label Array

Edge Label Array is a vector of strings describing the Edge Label for all the edges.

VecU32{Int32CDP, NULL}: GUID Index Array

GUID Index Array is a vector of integers that provides GUID index into the GUID table associated with the body in which the Edge is part of. GUID Index Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

VecU32{Int32CDP, NULL}: Edge Identifier Array

Edge Identifier Array is a vector of integers that provides Edge identification. Edge Identity Array is compressed and encoded using the Int32CDP CODEC described in Int32 Compressed Data Packet.

Fin Attribute Data

The Fin Attribute Data describes information associated with the fins in STT.

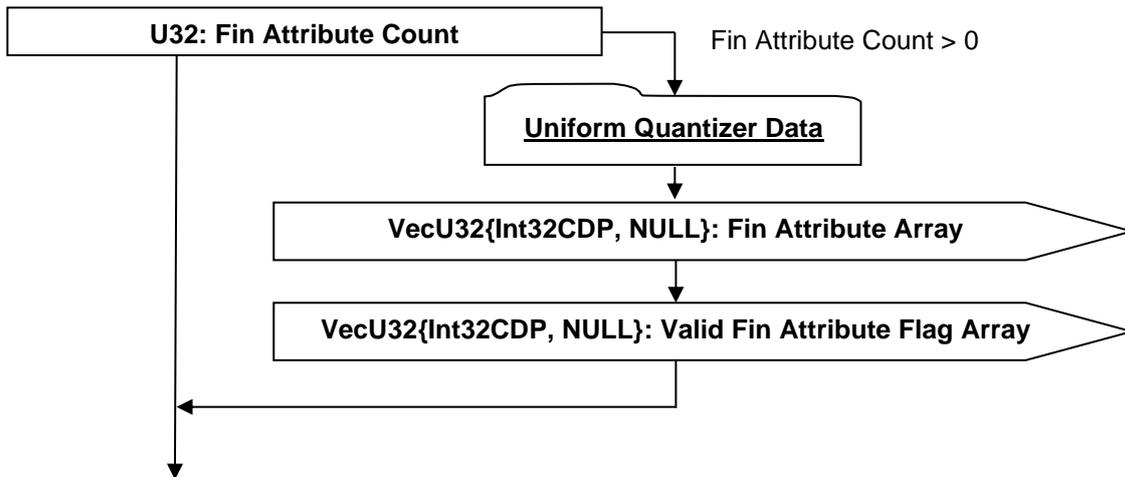


Figure J 28 — Fin Attribute Data collection

U32: Fin Attribute Count

Fin Attribute Count indicates the number of Fin Attributes. Its value is either the number of Fins or 0.

VecU32{Int32CDP, NULL}: Fin Attribute Array

Fin Attribute Data is a vector of integers for all the fins, where each integer represents a quantized value. There are two integers for each fin, with the first integer describing the normalized u parameter of the middle point on the Fin and second integer describing the normalized v parameter of the middle point on the Fin. These two integers of the same fin are continuous in the vector, and therefore the length of Fin Attribute Array is twice the number of fins in STT. Fin Attribute Array uses the Int32CDP CODEC Int32 Compressed Data Packet to compress and encode data.

VecU32{Int32CDP, NULL}: Valid Fin Attribute Flag Array

Valid Fin Attribute Flag is a vector of integer flags representing whether each corresponding Fin attribute, composed of two integer numbers in Fin Attribute Array, is valid. The corresponding Fin attribute is invalid if the flag has value 0 and valid otherwise.

Version Data

Version data is informative. It describes additional version information related to STT.

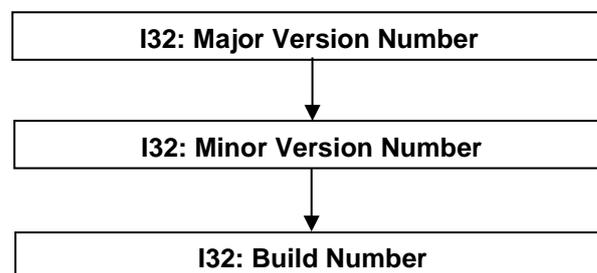


Figure J 29 — Version Data

I32: Major Version Number

Major Version Number specifies the major version number for the STT data in the JT File. Major version number is an informative field which can be set to 0 without negative impact to implementation.

I32: Minor Version Number

Minor Version Number specifies the minor version number for the STT data in the JT File. Minor version number is an informative field which can be set to 0 without negative impact to implementation.

I32: Build Number

Build Number specifies the build number for the STT data in the JT File. Build number is an informative field which can be set to 0 without negative impact to implementation.

I32: Attribute Data Hash

The Attribute Data Hash is the combined hash of all the data in Attribute Data. Refer to the Hashing Annex for a more detailed description on hashing.

Annex K

JT LWPA Segment

JT LWPA Segment contains an Element that defines light weight precise analytic data for a particular part. More specifically LWPA contains the collection of analytic surfaces in the B-Rep definition of the part.

JT LWPA Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element). The JT LWPA Segment type supports LZMA compression on all element data, so all elements in JT LWPA Segment use the Logical Element Header Compressed form of element header data.




Figure K 1 — JT LWPA data collection

Complete description for Segment Header can be found in the File Header section of Base Format Description under Data Segment.

K.1 JT LWPA Element

Object Type ID: 0xd67f8ea8, 0xf524, 0x4879, 0x92, 0x8c, 0x4c, 0x3a, 0x56, 0x1f, 0xb9, 0x3a

JT LWPA Segment represents a particular Part's precise analytic surfaces. It can be viewed as a subset of B-Rep representation where the subset refers to the complete collection of all the surfaces that are of one of the analytic types shown in the Supported Surface Type table, i.e., plane, cylinder, cone, sphere, or torus. Unlike JT B-Rep Element or XT B-Rep Element, JT LWPA Element does not contain any B-Rep topology information, nor does it contain geometric curve or point information. LWPA is designed to represent most essential part geometry information with much lighter weight on disk and much faster to load than B-Rep. Typically LWPA is less than 2 percent of B-Rep size on disk, and takes less than 5 percent time to load into memory. The analytic representation of LWPA follows XT convention as detailed in the XT B-Rep geometry Annex.

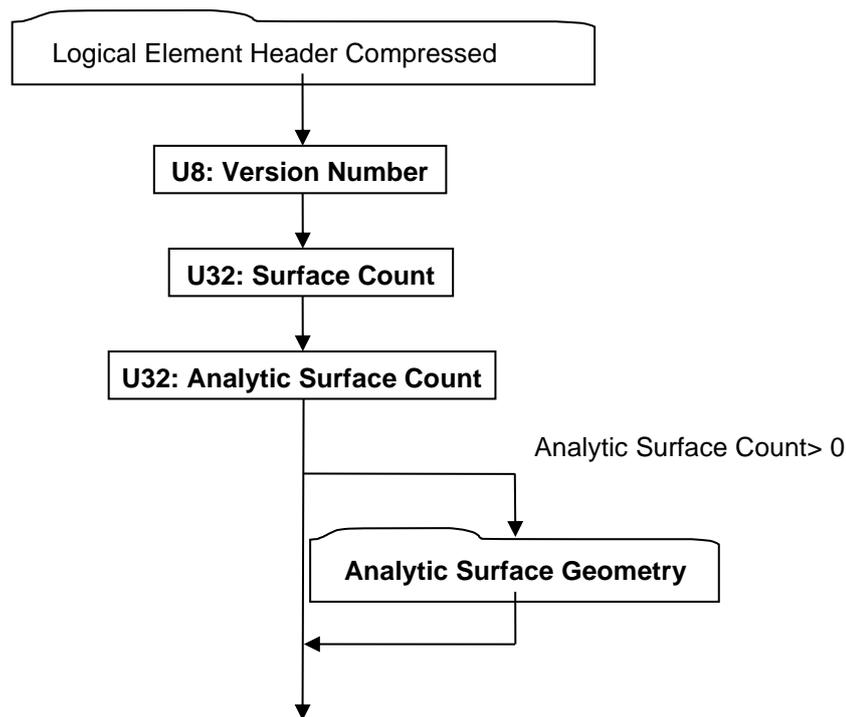


Figure K 2 — JT LWPA Element data collection

U8: Version Number

Version Number is the version identifier for this JT LWPA Element. Information on local version numbers can be found in the Base Format Description under Common Data Conventions and Constructs Local version numbers.

U32: Surface Count

Surface Count indicates the number of surface entries in LWPA. The number of surface entries is equal to the number of surfaces in the B-Rep representation. The surface entry does not contain any information if the corresponding B-Rep surface is not of analytic type.

U32: Analytic Surface Count

Analytic Surface Count indicates the number of analytic surface entries in LWPA.

Analytic Surface Geometry

Analytic Surface Geometry defines a collection of analytic surfaces and their mapping to the original B-Rep surfaces.

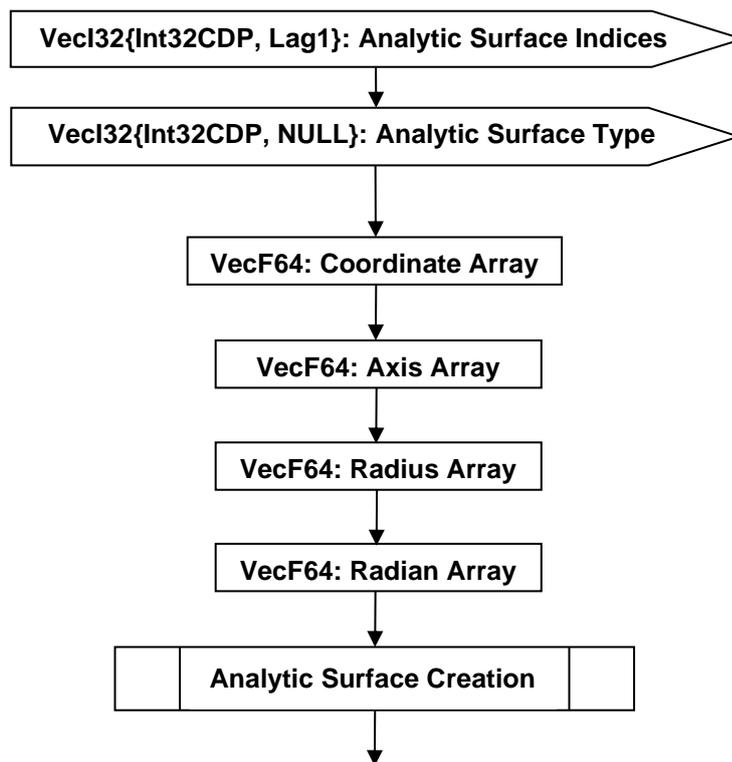


Figure K 3 — Analytic Surface Geometry data collection

VecI32{Int32CDP, Lag1}: Analytic Surface Indices

Analytic Surface Indices is an integer array with its length equal to the number of analytic surfaces in the LWPA. The value of each element in this array represents the index of this analytic surface in the original B-Rep representation.

VecI32{Int32CDP, NULL}: Analytic Surface Type

Analytic Surface Type is an integer array with its length equal to the number of analytic surfaces in the LWPA. The value of each element in this array represents the type of each analytic surface, as defined in table Supported Surface Type.

VecF64: Coordinate Array

Coordinate Array contains an array of double precision floating point numbers that represent the collection of point coordinate information in the definition of the analytic surface entities. The composite type VecF64 is defined in the Symbols table of Notational Conventions. Each floating point number in the array is written in binary form.

VecF64: Axis Array

Axis Array contains an array of double precision floating point numbers that represent the collection of unit vector information in the definition of the analytic surface entities. The composite type VecF64 is defined in the Symbols table found in Notational Conventions. Each floating point number in the array is written in binary form.

VecF64: Radius Array

Radius Array contains an array of double precision floating point numbers that represent the collection of radius information in the definition of the analytic surface entities. The composite type VecF64 is defined in in the Symbols table found in Notational Conventions. Each floating point number in the array is written in binary form.

VecF64: Radian Array

Radian Array contains an array of double precision floating point numbers that represent the collection of radian information in the definition of the analytic surface entities. The composite type VecF64 is

defined in in the Symbols table found in Notational Conventions. Each floating point number in the array is written in binary form.

Analytic Surface Creation

Analytic surfaces in LWPA are constructed based on the information of the above arrays, as illustrated by logical diagram in the Figure K 4 - Analytic Surface Creation.

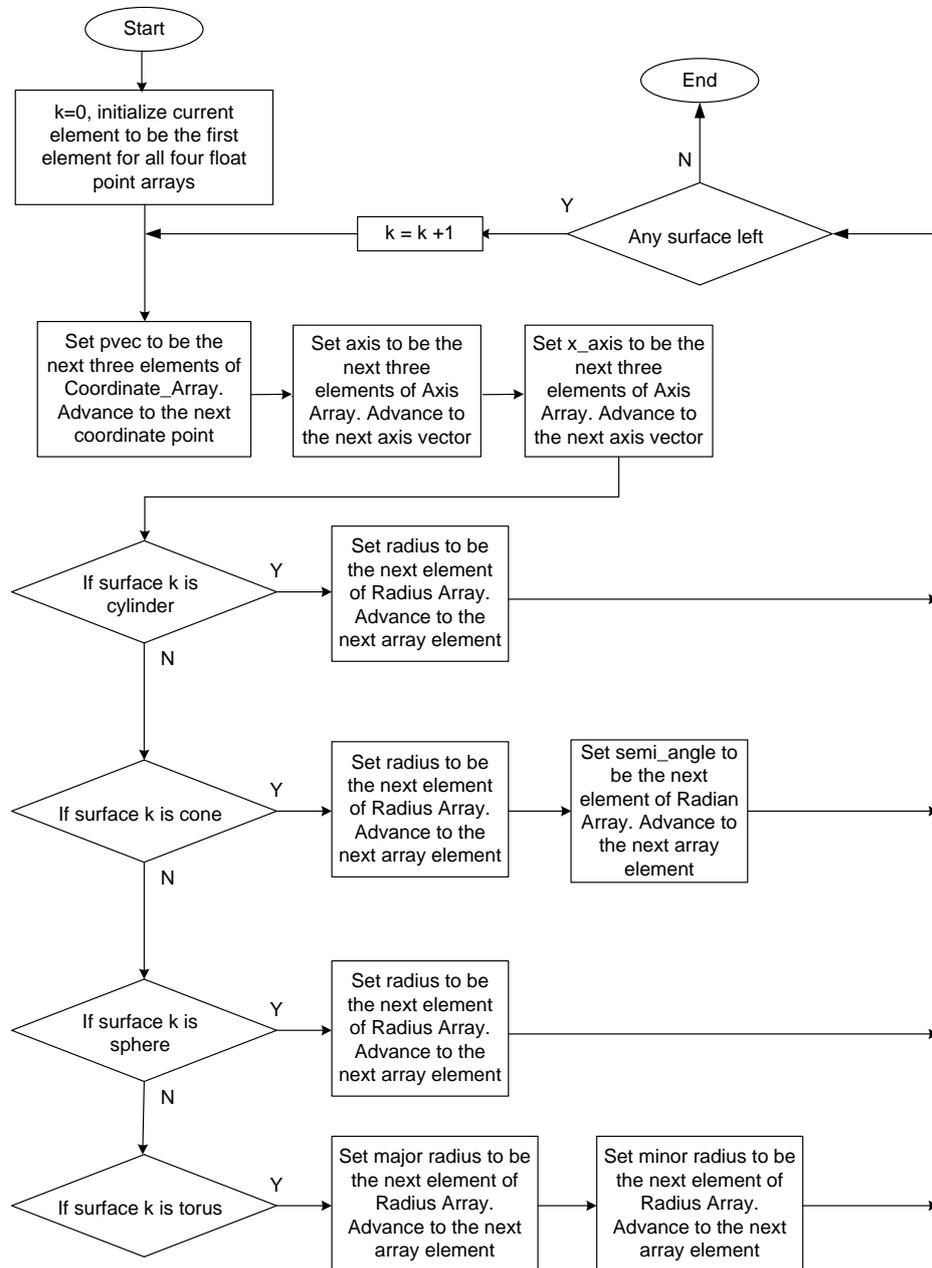


Figure K 4 — Analytic Surface Creation

Annex L

Wireframe Segment

Wireframe Segment contains an Element that defines the precise 3D wireframe data for a particular Part. A Wireframe Segment is typically referenced by a Part Node Element (see 6.1.1.5 Part Node Element) using a Second specifies the date Second value. Valid values are [0, 59] inclusive.

Late Loaded Property Atom Element (see Late Loaded Property Atom Element). The Wireframe Segment type supports LZMA compression on all element data, so all elements in Wireframe Segment use the Logical Element Header Compressed form of element header data.




Figure L 1 — Wireframe Segment data collection

Complete description for Segment Header can be found in the File Header section of Base Format Description under Data Segment.

L.1 Wireframe Rep Element

Object Type ID: 0x873a70d0, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Wireframe Rep Element represents a particular Part's precise 3D wireframe data (e.g. reference curves, section curves). Much of the "heavyweight" data contained within a Wireframe Rep Element is compressed and/or encoded. The compression and/or encoding state is indicated through other data stored in each Wireframe Rep Element.

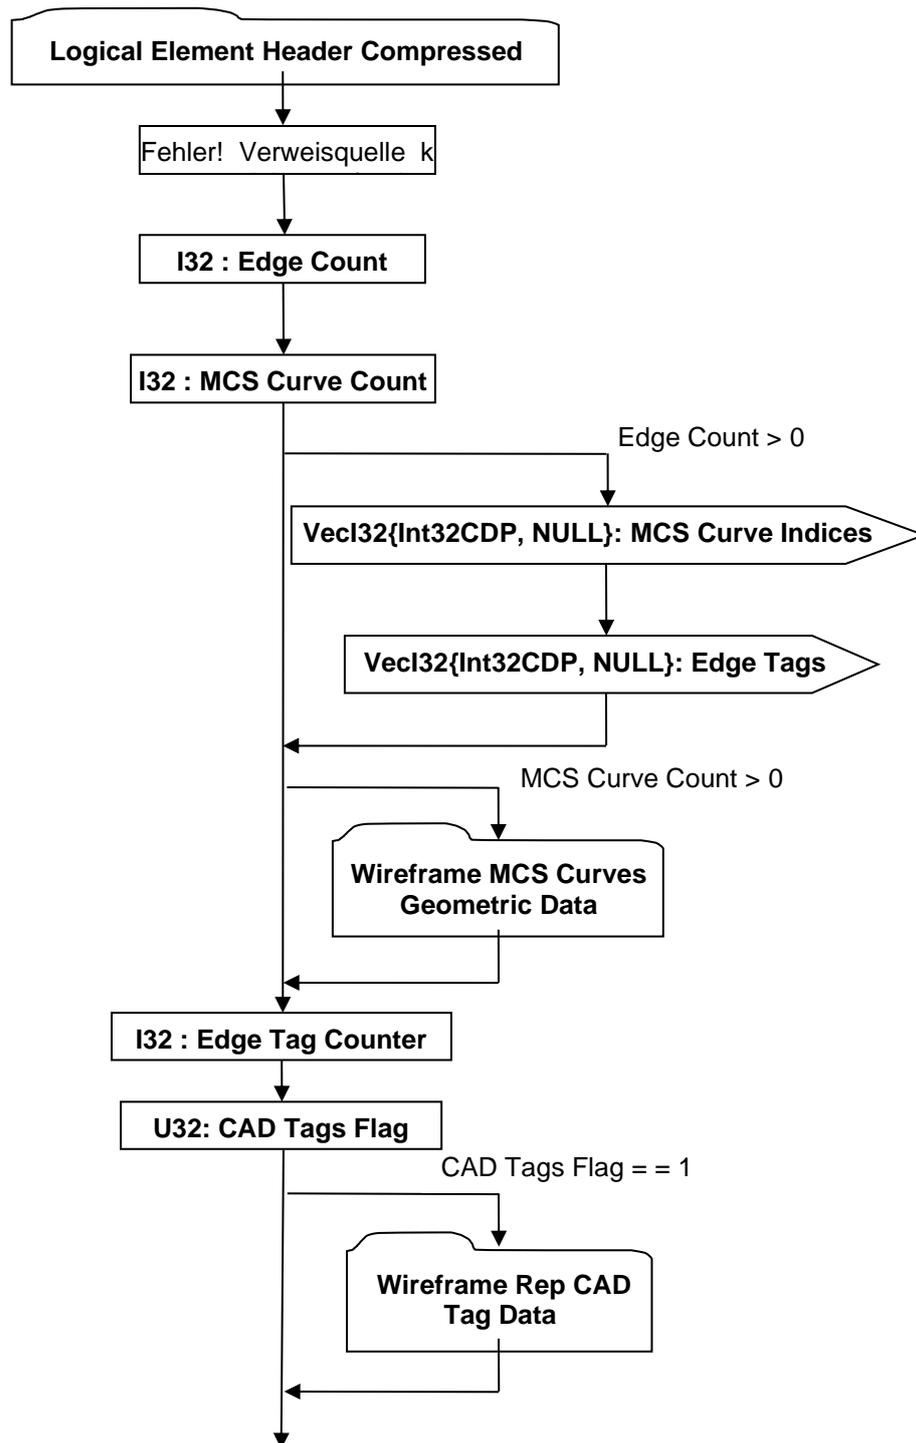


Figure L 2 — Wireframe Rep Element data collection

Complete description for Logical Element Header Compressed can be found in the File Header section of Base Format Description under Data Segment, Data.

U8: Version Number

Version Number is the version identifier for this JT Wireframe Rep Element. Information on local version numbers can be found in the Base Format Description under Common Data Conventions and Constructs Local version numbers.

I32: Edge Count

Edge Count indicates the number of topological Edge entities in the Wireframe Rep.

I32: MCS Curve Count

MCS Curve Count indicates the number of distinct geometric (Model Coordinate Space) curves (i.e. XYZ curve) entities in the Wireframe Rep.

VecI32{Int32CDP, NULL}: MCS Curve Indices

MCS Curve Indices is a vector of indices representing the index of the MCS Curve (Model Space curve) for each Edge. MCS Curve Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, NULL}: Edge Tags

Each Edge has an identifier Tag. Edge Tags is a vector of identifier Tags for a set of Edges. Edge Tags uses the Int32 version of the CODEC to compress and encode data.

I32: Edge Tag Counter

Edge Tag Counter specifies the next available “unique’ tag value for Edge entity.

U32: CAD Tags Flag

CAD Tags Flag is a flag indicating whether CAD Tag data exist for the Wireframe Rep.

Wireframe MCS Curves Geometric Data

Wireframe MCS Curves Geometric Data collection contains the Wireframe Rep’s Model Coordinate System geometric Curve data (i.e. XYZ Curve data). Currently only NURBS Curve types are supported within a Wireframe Rep. The count/number of MCS Curves within a Wireframe Rep is indicated by data field MCS Curve Count documented in Wireframe Rep Element.



Figure L 3 — Wireframe MCS Curves Geometric Data collection

Complete description for Compressed Curve Data can be found in Compressed Curve Data.

Wireframe Rep CAD Tag Data

The Wireframe Rep CAD Tag Data collection contains the list of persistent IDs, as defined in the CAD System, to uniquely identify individual Edges in the Wireframe Rep. The existence of this Wireframe Rep CAD Tag Data collection is dependent upon the value of previously read data field CAD Tags Flag as documented in Wireframe Rep Element.

If Wireframe Rep CAD Tag Data collection is present, there will be a CAD Tag for every Edge in the Wireframe Rep. Therefore the total number of CAD Tags in the list should be equal to “Edge Count” as documented in Wireframe Rep Element.



Figure L 4 — Wireframe Rep CAD Tag Data collection

Complete description for Compressed CAD Tag Data can be found in Compressed CAD Tag Data.

Annex M (deprecated) JT B-Rep Segment

JT B-Rep Segment contains an Element that defines the precise geometric Boundary Representation data for a particular Part in JT B-Rep format. The JT B-Rep segment specification is deprecated with JT IAP V2. The description is provided here to support legacy JT content.

JT B-Rep Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element). The JT B-Rep Segment type supports compression on all element data, so all elements in JT B-Rep Segment use the Logical Element Header Compressed form of element header data.

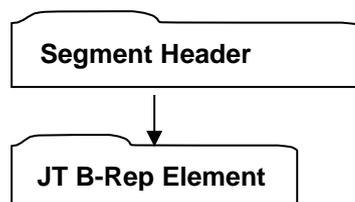


Figure M 1 — JT B-Rep Segment data collection

A Complete description for Segment Header can be found in the File Header section of Base Format Description under Data Segment.

M.1 JT B-Rep Element

Object Type ID: 0x873a70c0, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

JT B-Rep Element represents a particular Part's precise data in JT boundary representation format. Much of the "heavyweight" data contained within a JT B-Rep Element is compressed and/or encoded. The compression and/or encoding state is indicated through other data stored in each JT B-Rep Element.

Two important aspects of a Part are its geometry and its topology. The geometry describes the shape of a Part: this Surface is a plane, that Surface is a cylinder, this Curve is an arc, etc. The topology describes the connectivity of the Part: this Point is inside the Part, these Surfaces are next to each other, etc. The 0, 1, and 2 dimensional building blocks of geometry are Points, Curves, and Surfaces. The corresponding topological building blocks are Vertices, Edges, and Faces. Topology also uses Shells and Regions to conceptually divide up the three dimensional space.

Parts may have the same topology, but wildly different geometry. Imagine the Surfaces of a Part being composed of rubber. The topology of the Part does not change as we deform the Part by bending or stretching the surfaces, as long as we do not cut or glue them (we call this a "nice" deformation). A Part's topology can be classified as being "manifold" or "non-manifold"; where "manifold" implies that the Part has the property that each Edge, excluding seams and poles, has exactly two faces using it.

Similarly, Parts may have nearly identical geometry but different topology. The topology of a Part depends on how the geometry is put together. A Part may be manifold or non-manifold simply depending on how the geometry is put together. In addition to describing connectivity in space, topology is used to describe areas of interest (active areas) on Surfaces. These active Surface areas are used in defining a complex Part. The areas are specified by oriented Loops and often referred to as trimmed Surfaces which are exactly the 2-dimensional topological building block called a Face.

Readers desiring/needing a more in-depth exploration of boundary representation theory in order to understand the significance/meaning of some of the JT B-Rep data fields are referred to references [22] and [23] listed in the bibliography section of this specification.

Since the topology is a convenient way to describe or organize the Part, it is also convenient to store the geometry of the Part in the topological structures. The following sub-sections document the JT B-Rep format for storing the topology and geometry of a Part in a JT file.

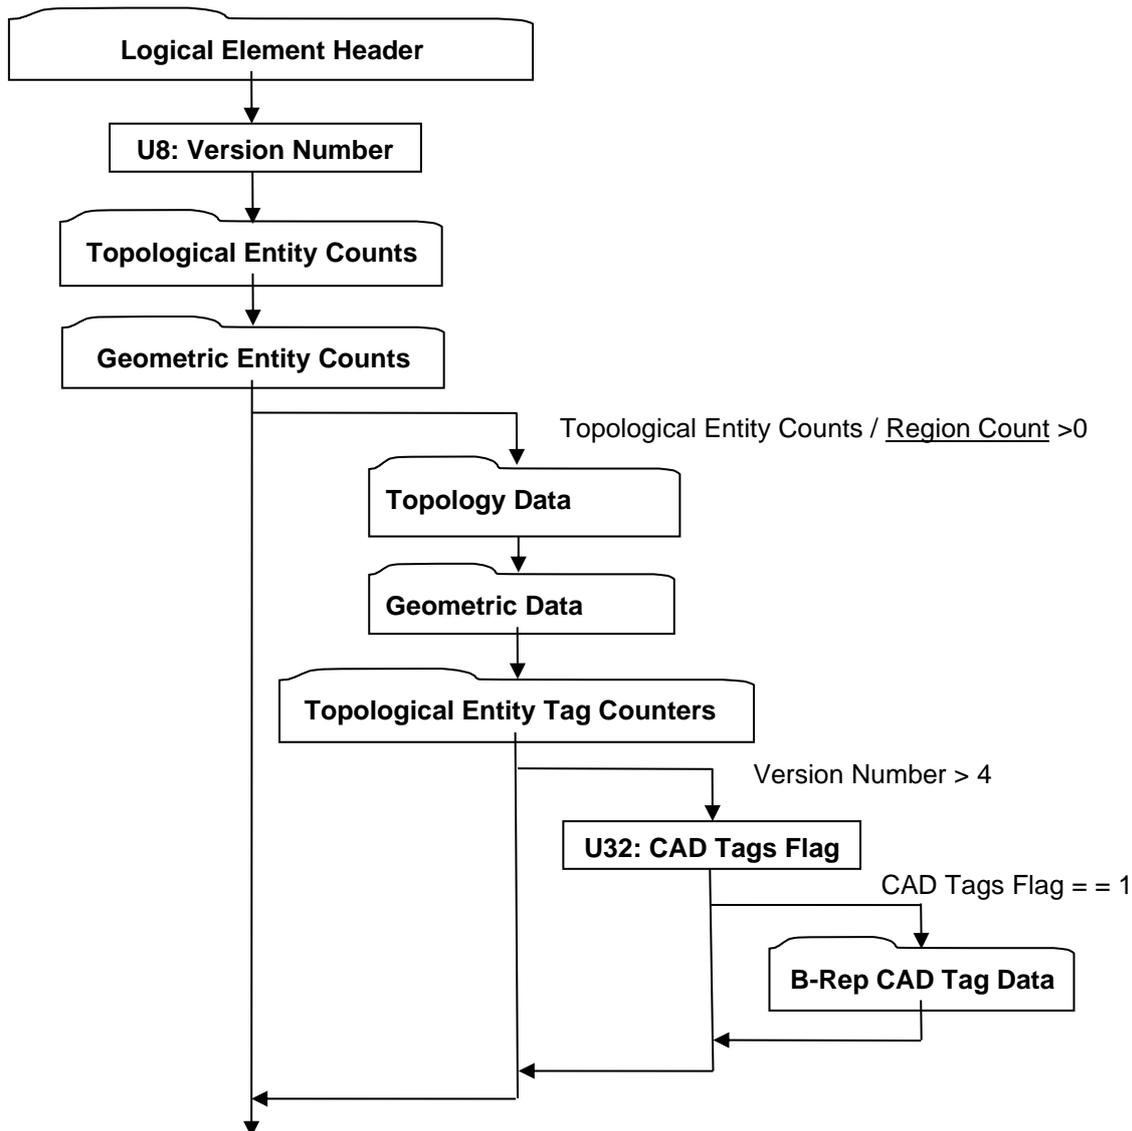


Figure M 2 — JT B-Rep Element data collection

Complete description for Logical Element Header Compressed can be found in the File Header section of Base Format Description under Data Segment, Data.

U8: Version Number

Version Number is the version identifier for this JT B-Rep Element. Information on local version numbers can be found in the Base Format Description under Common Data Conventions and Constructs Local version numbers.

U32: CAD Tags Flag

CAD Tags Flag is a flag indicating whether CAD Tag data exist for the JT B-Rep.

M.1.1 Topological Entity Counts

Topological Entity Counts data collection defines the counts for each of the various topological entities within a B-Rep.

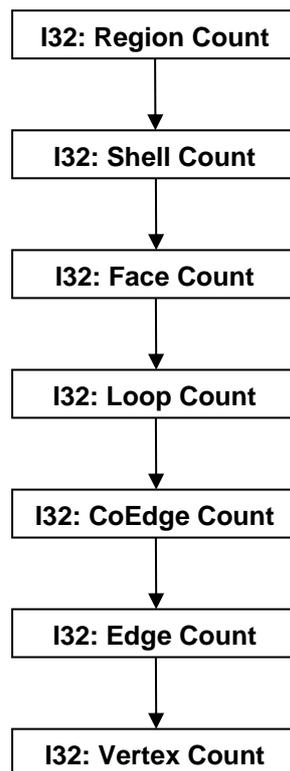


Figure M 3 — Topological Entity Counts data collection

I32: Region Count

Region Count indicates the number of topological region entities in the B-Rep.

I32: Shell Count

Shell Count indicates the number of topological shell entities in the B-Rep.

I32: Face Count

Face Count indicates the number of topological face entities in the B-Rep.

I32: Loop Count

Loop Count indicates the number of topological loop entities in the B-Rep.

I32: CoEdge Count

CoEdge Count indicates the number of topological coedge entities in the B-Rep.

I32: Edge Count

Edge Count indicates the number of topological edge entities in the B-Rep.

I32: Vertex Count

Vertex Count indicates the number of topological vertex entities in the B-Rep.

M.1.2 Geometric Entity Counts

Geometric Entity Counts data collection defines the counts for each of the various geometric entities within a B-Rep.

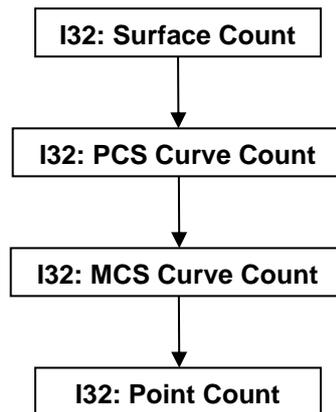


Figure M 4 — Geometric Entity Counts data collection

I32: Surface Count

Surface Count indicates the number of distinct geometric surface entities in the B-Rep.

I32: PCS Curve Count

PCS Curve Count indicates the number of distinct geometric Parameter Coordinate Space curves (i.e. UV curve) entities in the B-Rep.

I32: MCS Curve Count

MCS Curve Count indicates the number of distinct geometric (Model Coordinate Space) curves (i.e. XYZ curve) entities in the B-Rep.

I32: Point Count

Point Count indicates the number of distinct geometric point entities in the B-Rep.

M.1.2.1 Topology Data

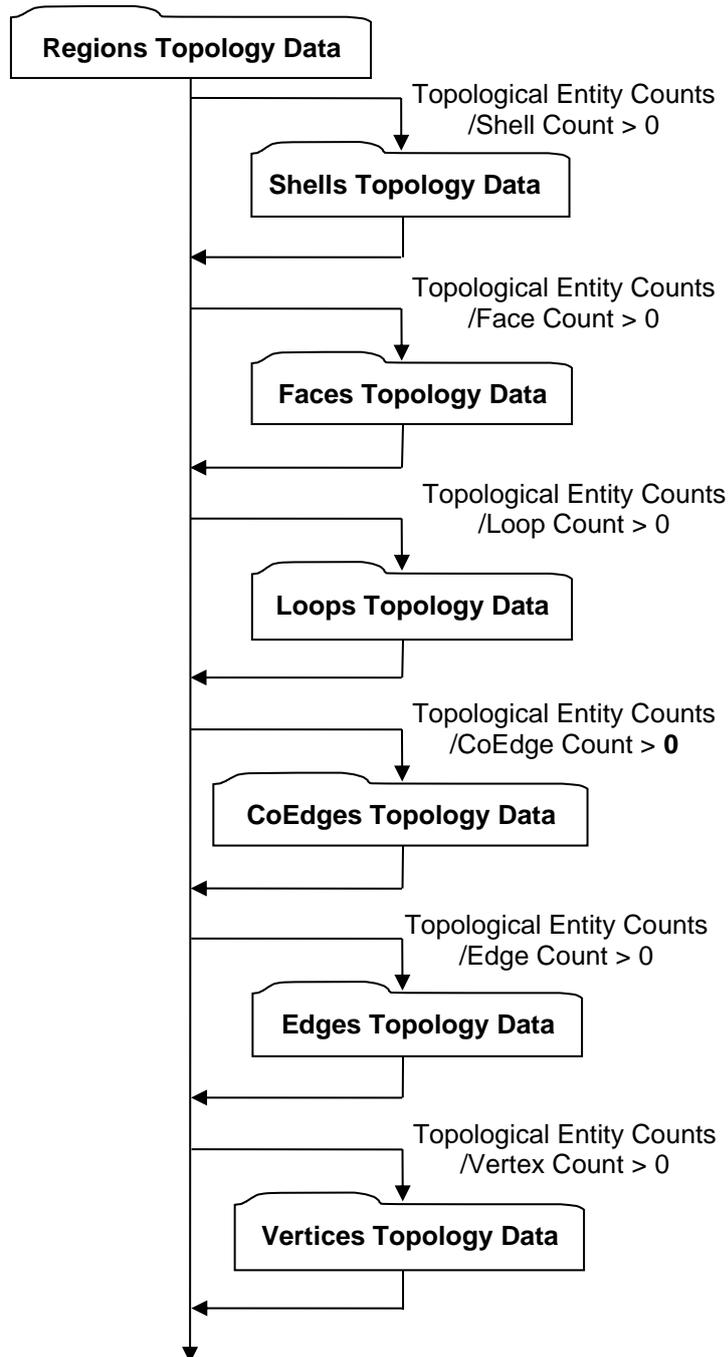


Figure M 5 — Topology Data collection

M.1.2.1.1 Regions Topology Data

Regions Topology Data defines the set of non-overlapping Shells comprising each Region. The volume of a Region is that volume lying inside each “anti-hole Shell” and outside each simply-contained “hole Shell” belonging to the particular Region. A Region is analogous to a dimensionally elevated face where Region corresponds to Face and Shell corresponds to Trim Loop.

Each Region’s defining Shells are identified in a list of Shells by an index for both the first Shell and the last Shell in each Region (i.e. all Shells inclusive between the specified first and last Shell list index define the particular Region).

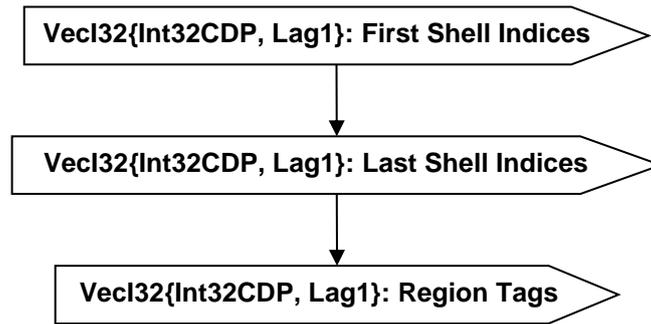


Figure M 6 — Regions Topology Data collection

VecI32{Int32CDP, Lag1}: First Shell Indices

First Shell Indices is a vector of indices representing the index of the first Shell in each Region. First Shell Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Last Shell Indices

Last Shell Indices is a vector of indices representing the index of the last Shell in each Region. Last Shell Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Region Tags

Each Region has an identifier tag. Region Tags is a vector of identifier tags for a set of Regions. Region Tags uses the Int32 version of the CODEC to compress and encode data.

Shells Topology Data

Shells Topology Data defines the set of topological adjacent Faces making up each Shell. A Shell's set of topological adjacent Faces define a single (usually closed) two manifold solid that in turn defines the boundary between the finite volume of space enclosed within the Shell and the infinite volume of space outside the Shell. Additional, each Shell has a flag that denotes whether the Shell refers to the finite interior volume (i.e. a "hole Shell") or the infinite exterior volume (i.e. an "anti-hole Shell").

Each Shell's defining Faces are identified in a list of Faces by an index for both the first Face and the last Face in each Shell (i.e. all Faces inclusive between the specified first and last Face list index define the particular Shell).

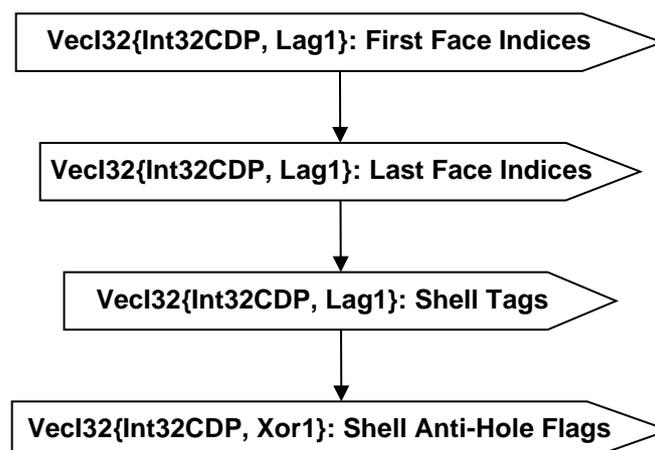


Figure M 7 — Shells Topology Data collection

VecI32{Int32CDP, Lag1}: First Face Indices

First Face Indices is a vector of indices representing the index of the first Face in each Shell. First Face Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Last Face Indices

Last Face Indices is a vector of indices representing the index of the last Face in each Shell. Last Face Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Shell Tags

Each Shell has an identifier tag. Shell Tags is a vector of identifier tags for a set of Shells. Shell Tags uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Xor1}: Shell Anti-Hole Flags

Each Shell has a flag identifying whether the Shell is an anti-hole Shell. Shell Anti-Hole Flags is a vector of anti-hole flags for a set of Shells.

In an uncompressed/decoded form the flag values have the following meaning:

Table M 1 — JT B-Rep Shell Topology Anti-Hole Flag values

= 0	Shell is not an anti-hole Shell
= 1	Shell is an anti-hole Shell

Shell Anti-Hole Flags uses the Int32 version of the CODEC to compress and encode data.

Faces Topology Data

A Face is a two-dimensional topological building block defined as the active (that portion to be used in the model) regions/areas of a Geometric Surface; where active regions/areas of a Geometric Surface are indicated using oriented Trim Loops. Faces Topology Data specifies the underlying Geometric Surface and Trim Loops making up each Face along with a “reverse normal” flag and identifier tag for each Face.

A Face shall be trimmed with at least one “anti-hole” Trim Loop and zero or more “hole” Trim Loops. Thus the area of the Geometric Surface defined as the Face, is the area inside the “anti-hole” Trim Loops and outside each “hole” Trim Loop. No Trim Loops (“hole” or “anti-hole”) may intersect/cross or be tangent at any point. “Anti-Hole” Trim Loops shall be defined with a counter-clockwise orientation in the underlying surface's parameter space whereas “hole” Trim Loops shall be defined with a clockwise orientation. With this Trim Loop orientation definition, as one traverses a Trim Loop of a Face, the material or “active region” is always to one's left. The figure below gives an example in parameter space of proper trim loop definition and orientation (as indicated by the arrows on the loop's CoEdges) for a face with two holes. “L1” represents the face “anti-hole” Trim Loop while “L2” and L3” represent the two “hole” Trim Loops. Note that each hole is always represented by a separate distinct “hole” Trim Loop.

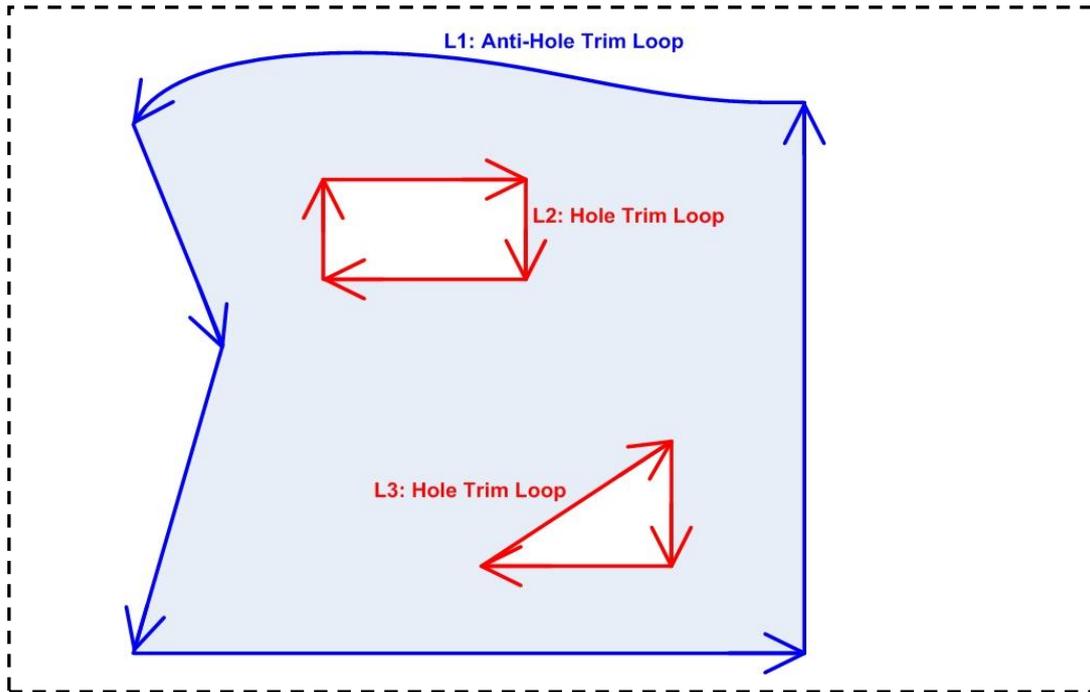


Figure M 8 — Trim Loop example in parameter Space - One Face with 2 Holes

Each Face's underlying Geometric Surface is identified by an index into a list of Geometric Surfaces. Each Face's defining Trim Loops are identified in a list of trim Loops by an index for both the first Trim Loop and the last Trim Loop in each Face (i.e. all Trim Loops inclusive between the specified first and last Trim Loop list index define the particular Face).

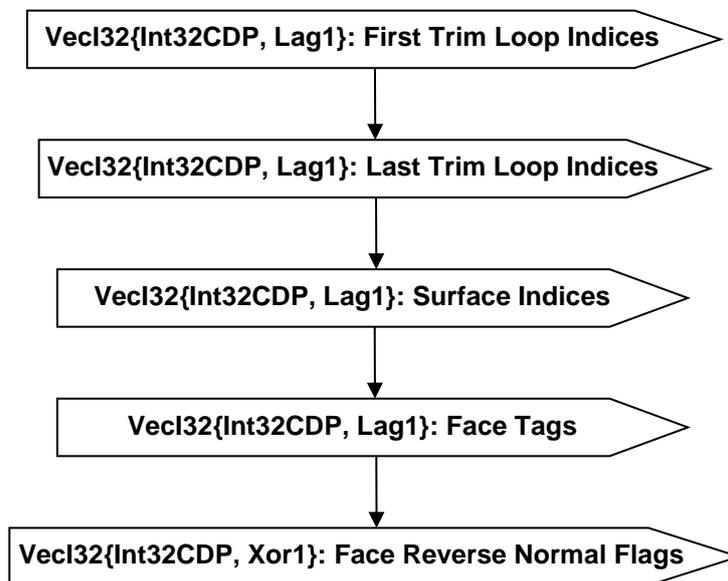


Figure M 9 — Faces Topology Data collection

VecI32{Int32CDP, Lag1}: First Trim Loop Indices

First Trim Loop Indices is a vector of indices representing the index of the first Trim Loop in each Face. First Trim Loop Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Last Trim Loop Indices

Last Trim Loop Indices is a vector of indices representing the index of the last Trim Loop in each Face. Last Trim Loop Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Surface Indices

Surface Indices is a vector of indices representing the index of the underlying Geometric Surface for each Face. Surface Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Face Tags

Each Face has an identifier tag. Face Tags is a vector of identifier tags for a set of Faces. Face Tags uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Xor1}: Face Reverse Normal Flags

Each Face has a flag identifying whether the Face's normal(s) should be interpreted to point in the direction opposite of the usual U cross V normal (note that these flags do not imply any sort of parameter reversal, the flag only implies that the material is on the other side of the surface).

Face Reverse Normal Flags is a vector of reverse-normal flags for a set of Faces.

In an uncompressed/decoded form the flag values have the following meaning:

Table M 2 — JT B-Rep Face Reverse Normal Flag values

= 0	Face normal is not reversed
= 1	Face normal is reversed.

Face Reverse Normal Flags uses the Int32 version of the CODEC to compress and encode data.

Loops Topology Data

A Loop (often called Trimming Loop) defines in parameter space a 1D boundary around which geometric surfaces are trimmed to form a Face. Loops Topology Data specifies the CoEdges making up each Loop along with an anti-hole flag and identifier tag for each Loop.

A Loop is composed of one or more CoEdges and the Loop shall be closed and non-self-intersecting.

Each Loop's defining CoEdges are identified in a list of CoEdges by an index for both the first CoEdge and the last CoEdge in each Loop (i.e. all CoEdges inclusive between the specified first and last CoEdge list index define the particular Loop).

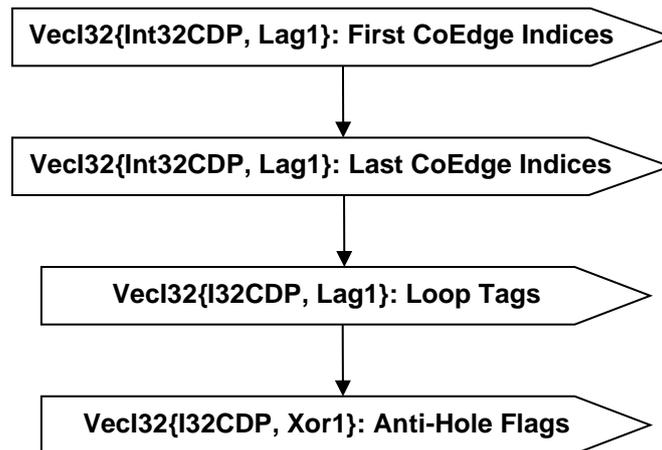


Figure M 10 — Loops Topology Data collection

VecI32{Int32CDP, Lag1}: First CoEdge Indices

First CoEdge Indices is a vector of indices representing the index of the first CoEdge in each Loop. First CoEdge Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Last CoEdge Indices

Last CoEdge Indices is a vector of indices representing the index of the last CoEdge in each Loop. Last CoEdge Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{I32CDP, Lag1}: Loop Tags

Each Loop has an identifier tag. Loop Tags is a vector of identifier tags for a set of Loops. Loop Tags uses the Int32 version of the CODEC to compress and encode data.

VecI32{I32CDP, Xor1}: Anti-Hole Flags

Each Loop has a flag identifying whether the Loop is an anti-hole Loop. Anti-Hole Flags is a vector of anti-hole flags for a set of Loops.

In an uncompressed/decoded form the flag values have the following meaning:

Table M 3 — JT B-Rep Loops Topology Data Anti-Hole Flag values

= 0	Loop is not an anti-hole Loop
= 1	Loop is an anti-hole Loop

Anti-Hole Flags uses the Int32 version of the CODEC to compress and encode data.

CoEdges Topology Data

A CoEdge defines a parameter space edge trim Loop segment (i.e. the projection of an Edge into the parameter space of the Face). CoEdges Topology Data specifies the underlying Edge and PCS Curve making up each CoEdge along with a MCS curve reversed flag and tag for each CoEdge.

The “Co” portion of the CoEdge name derives from the manifold topology definition that each Edge has exactly two Faces containing it; thus a CoEdge defines one Face’s “use” of an Edge and the adjoining Face also has a CoEdge (“edge use” in some other terminologies) for the same underlying Edge. This sharing of the same underlying Edge by two adjoining Faces requires an “MCS Curve Reversed Flag” on each CoEdge to indicate the edge traversal direction (i.e. for a proper manifold topology definition each CoEdge shall traverse the Edge in opposite directions).

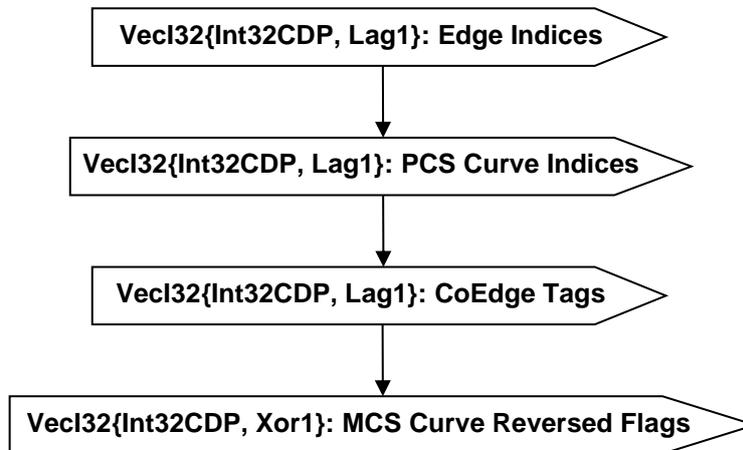


Figure M 11 — CoEdges Topology Data collection

VecI32{Int32CDP, Lag1}: Edge Indices

Edge Indices is a vector of indices representing the index of the underlying Edge for each CoEdge. Edge Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: PCS Curve Indices

PCS Curve Indices is a vector of indices representing the index of the PCS Curve (UV Curve) for each CoEdge. PCS Curve Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: CoEdge Tags

Each CoEdge has an identifier tag. CoEdge Tags is a vector of identifier tags for a set of CoEdges. CoEdge Tags uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Xor1}: MCS Curve Reversed Flags

Each CoEdge has a flag indicating whether the directional sense of the associated Edge's MCS curve should be interpreted as opposite the direction its parameterization implies. MCS Curve Reversed Flags is a vector of reverse flags for a set of CoEdges.

In an uncompressed/decoded form the flag values have the following meaning:

Table M 4 — JT B-Rep MCS Curve Reversed Flag values

= 0	Directional sense of associated edges MCS curve should not be interpreted as opposite the direction its parameterization implies.
= 1	Directional sense of associated edges MCS curve should be interpreted as opposite the direction its parameterization implies.

MCS Curve Reversed Flags uses the Int32 version of the CODEC to compress and encode data.

Edges Topology Data

An Edge defines a model space trim Loop segment. Edges Topology Data specifies the underlying MCS Curve and start and end Vertex making up each Edge along with an identification tag for each Edge.

If manifold topology, then two faces join at a single model Edge and thus an edge is shared/referenced by two CoEdges (one per Face).

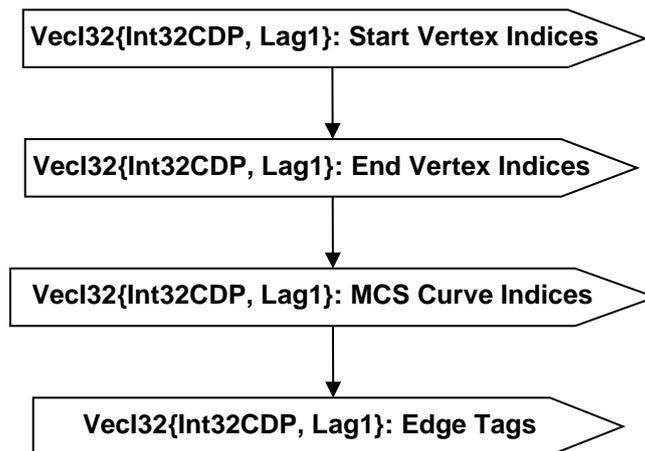


Figure M 12 — Edges Topology Data collection

VecI32{Int32CDP, Lag1}: Start Vertex Indices

Start Vertex Indices is a vector of indices representing the index of the start Vertex in each Edge. Start Vertex Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: End Vertex Indices

End Vertex Indices is a vector of indices representing the index of the end Vertex in each Edge. End Vertex Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: MCS Curve Indices

MCS Curve Indices is a vector of indices representing the index of the MCS Curve (Model Space curve) for each Edge. MCS Curve Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Edge Tags

Each Edge has an identifier Tag. Edge Tags is a vector of identifier Tags for a set of Edges. Edge Tags uses the Int32 version of the CODEC to compress and encode data.

Vertices Topology Data

A Vertex is the simplest topological entity and is basically made up of a geometric Point. Vertices Topology Data specifies the underlying geometric Point making up each Vertex along with an identification tag for each Vertex.

The presence of Vertices Topology Data in a JT B-Rep topology definition is optional. Vertex data is optional because unlike most topological entities, no connectivity information is contained in a Vertex structure and Vertex data is also not necessary for performing operations such as tessellation or mass properties calculations.

A Vertex is usually shared/referenced by two or more Edges (e.g. if the corners of four rectangular Faces touches at a common point, this point is represented by a Vertex and is shared by four Edges).

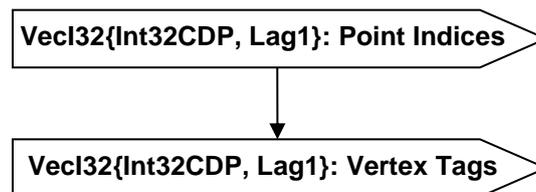


Figure M 13 — Vertices Topology Data collection

VecI32{Int32CDP, Lag1}: Point Indices

Point Indices is a vector of indices representing the index of the geometric point for each Vertex. Point Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Vertex Tags

Each Vertex has an identifier Tag. Vertex Tags is a vector of identifier Tags for a set of Vertices. Vertex Tags uses the Int32 version of the CODEC to compress and encode data.

M.1.2.2 Geometric Data

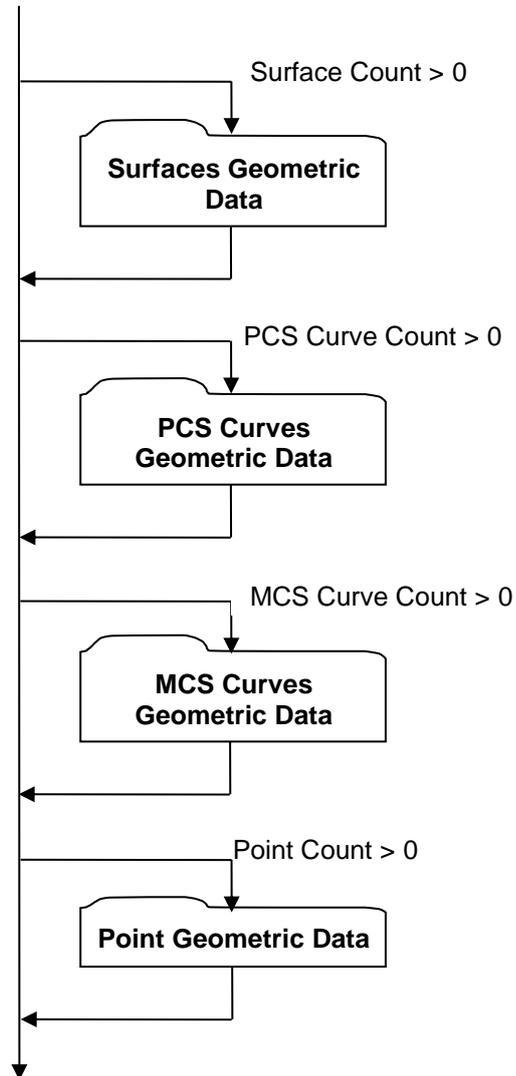


Figure M 14 — Geometric Data collection

M.1.2.2.1 Surfaces Geometric Data

Surfaces Geometric Data collection contains the JT B-Rep's geometric Surface data. Currently only NURBS Surface types are supported within a JT B-Rep. The count/number of Surfaces within a JT B-Rep is indicated by data field Surface Count documented in Geometric Entity Counts.

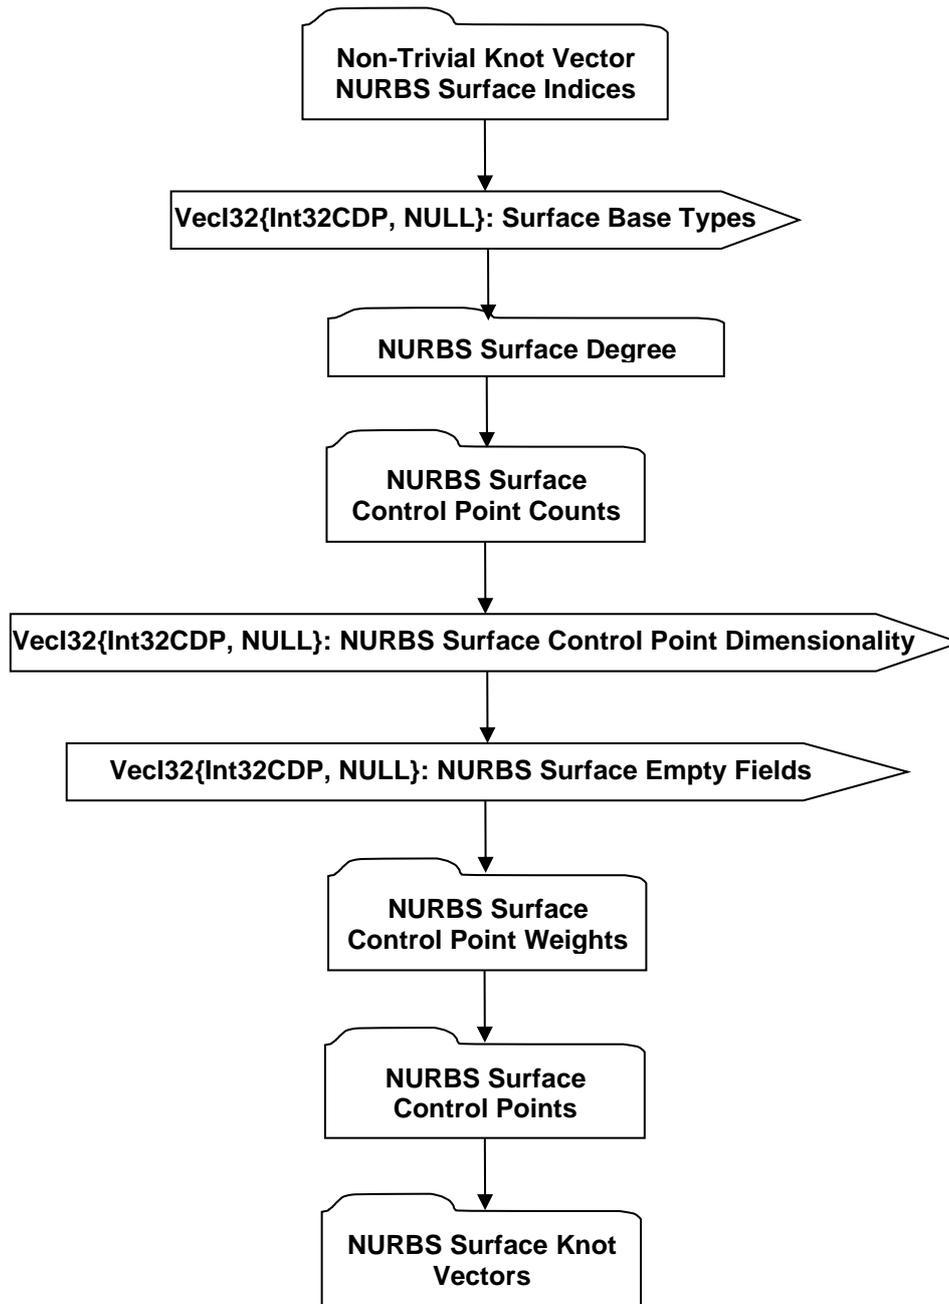


Figure M 15 — Surfaces Geometric Data collection

VecI32{Int32CDP, NULL}: Surface Base Types

Each Surface is assigned a base type identifier. Surface Base Types is a vector of base type identifiers for each Surface in a list of Surfaces. Currently only NURBS Surface Base Type is supported, but a type identifier is still included in the specification to allow for future expansion of the JT Format to support other surface types within a JT B-Rep.

In an uncompressed/decoded form the Surface base type identifier values have the following meaning:

Table M 5 — JT B-Rep Surface Base Type value

= 1	Surface is a NURBS surface
-----	----------------------------

Surface Base Types uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, NULL}: NURBS Surface Control Point Dimensionality

NURBS Surface Control Point Dimensionality is a vector of control point dimensionality values for each NURBS Surface in a list of Surfaces (i.e. there is a stored values for each NURBS Surface in the list).

In an uncompressed/decoded form dimensionality values have the following meaning:

Table M 6 — JT B-Rep NURBS Surface Control Point Dimensionality values

= 3	Non-Rational (each control point has 3 coordinates)
= 4	Rational (each control point has 4 coordinates)

NURBS Surface Control Point Dimensionality uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, NULL}: NURBS Surface Empty Fields

NURBS Surface Empty Fields is a vector of data. Each NURBS Surface in a list of Surfaces has one empty data field entry in this NURBS Surface Empty Fields vector. NURBS Surface Empty Fields uses the Int32 version of the CODEC to compress and encode data. Refer to Common Data Conventions and Construct,_Empty Field.

Non-Trivial Knot Vector NURBS Surface Indices

Non-Trivial Knot Vector NURBS Surface Indices data collection specifies for both U and V directions the Surface index identifiers (i.e. indices to particular NURBS Surfaces within a list of Surfaces) for all NURBS Surfaces containing non-trivial knot vectors. A description/definition for “non-trivial knot vector” can be found in Compressed Entity List for Non-Trivial Knot Vector.

This Surface index data is stored in a compressed format.




Figure M 16 — Non-Trivial Knot Vector NURBS Surface Indices data collection

Both Non-Trivial U Knot Vector Surface Indices and Non-Trivial V Knot Vector Surface Indices have the same data format as that documented for data collection Compressed Entity List for Non-Trivial Knot Vector.

NURBS Surface Degree

NURBS Surface Degree data collection defines the Surface degree in both U and V directions for each NURBS Surface in a list of Surfaces (i.e. there are stored values for each NURBS Surface in the list). This degree data for the list of Surfaces is stored in a compressed format.

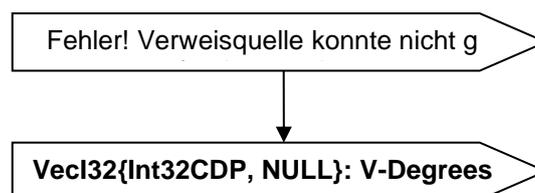


Figure M 17 — NURBS Surface Degree data collection

VecI32{Int32CDP, NULL}: U-Degrees

U-Degrees is a vector of Surface degree values in U direction for each NURBS Surface in a list of Surfaces. U-Degrees uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, NULL}: V-Degrees

V -Degrees is a vector of Surface degree values in V direction for each NURBS Surface in a list of Surfaces. V-Degrees uses the Int32 version of the CODEC to compress and encode data.

NURBS Surface Control Point Counts

NURBS Surface Control Point Counts defines the number of NURBS Surface control points for both U and V directions for each NURBS Surface in a list of Surfaces (i.e. there are stored values for each NURBS Surface in the list). The control point count data for the list of Surfaces in stored in a compressed format.

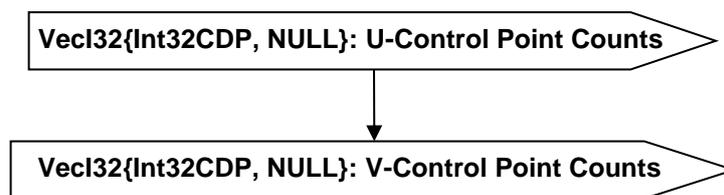


Figure M 18 — NURBS Surface Control Point Counts data collection

VecI32{Int32CDP, NULL}: U-Control Point Counts

U-Control Point Counts is a vector of control point counts in U direction for each NURBS Surface in a list of Surfaces. U-Control Point Counts uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, NULL}: V-Control Point Counts

V-Control Point Counts is a vector of control point counts in V direction for each NURBS Surface in a list of Surfaces. V-Control Point Counts uses the Int32 version of the CODEC to compress and encode data.

NURBS Surface Control Point Weights

NURBS Surface Control Point Weights data collection defines the Weight values for a conditional set of Control Points for a list of NURBS Surfaces. The storing of the Weight value for a particular Control Point is conditional, because if NURBS Surface Control Point Dimension is “non-rational” or the actual Control Point’s Weight value is “1”, then no Weight value is stored for the Control Point (i.e. Weight value can be inferred to be “1”).

The NURBS Surface Control Point Weights data is stored in a compressed format.



Figure M 19 — NURBS Surface Control Point Weights data collection

Complete description for Compressed Control Point Weights Data can be found in Compressed Control Point Weights Data.

NURBS Surface Control Points

NURBS Surface Control Points is the compressed and/or encoded representation of the Control Point coordinates for each NURBS Surface in a list of Surfaces (i.e. there are stored values for each NURBS Surface in the list). Note that these are non-homogeneous coordinates (i.e. Control Point coordinates have been divided by the corresponding Control Point Weight values).

VecF64{Int64CDP, NULL}: Control Points

Figure M 20 — NURBS Surface Control Points data collection

VecF64{Int64CDP, NULL}: Control Points

Control Points is a vector of Control Point coordinates for all the NURBS Surfaces in a list of Surfaces. All the NURBS Surfaces Control Point coordinates are cumulated into this single vector in the same order as the Surface appears in the Surface list (i.e. Surface-1 U Control Points, Surface-1 V Control Points, Surface-2 U Control Points, Surface-2 V Control Points, etc.). Control Points uses the Int64 version of the CODEC to compress and encode data in a “lossless” manner. Each deserialized 64 bit integer number should be converted to bit wise equivalent 64 bit floating number.

NURBS Surface Knot Vectors

NURBS Surface Knot Vectors defines the knot vectors for both U and V directions for each NURBS Surface having non-trivial knot vectors in a list of Surfaces (i.e. there are stored values for each non-trivial knot vector NURBS Surface in the list). The NURBS Surfaces for which knot vectors are stored (i.e. those containing non-trivial knot vectors) are identified in data collection Non-Trivial Knot Vector NURBS Surface Indices documented in Non-Trivial Knot Vector NURBS Surface Indices.

The knot vector data for the list of Surfaces is stored in a compressed format.

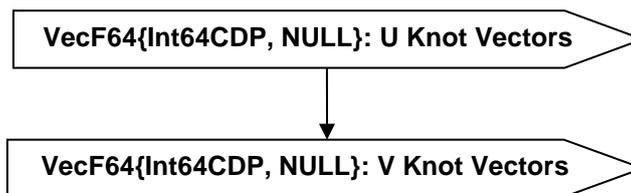


Figure M 21 — NURBS Surface Knot Vectors data collection

VecF64{Int64CDP, NULL}: U Knot Vectors

U Knot Vectors is a list of knot vector values in U direction for each NURBS Surface having non-trivial knot vectors in a list of Surfaces. All these NURBS Surface U direction non-trivial knot vectors are cumulated into this single list in the same order as the Surface appears in the Surface list (i.e. Surface-N Non-Trivial U Knot Vector, Surface-M Non-Trivial U Knot Vector, etc.). U Knot Vectors uses the Int64 version of the CODEC to compress and encode data. Each deserialized 64 bit integer number should be converted to bit wise equivalent 64 bit floating number.

VecF64{Int64CDP, NULL}: V Knot Vectors

V Knot Vectors is a list of knot vector values in V direction for each NURBS Surface having non-trivial knot vectors in a list of Surfaces. All these NURBS Surface V direction non-trivial knot vectors are cumulated into this single list in the same order as the Surface appears in the Surface list (i.e. Surface-N Non-Trivial V Knot Vector, Surface-M Non-Trivial V Knot Vector, etc.). V Knot Vectors uses the Int64 version of the CODEC to compress and encode data. Each deserialized 64 bit integer number should be converted to bit wise equivalent 64 bit floating number.

M.1.2.2.2 PCS Curves Geometric Data

PCS Curves Geometric Data collection contains the JT B-Rep’s Parameter Coordinate Space geometric Curve data (i.e. UV Curve data). This geometric PCS Curve data is divided up into two collection types; one data collection for what are considered “Trivial” PCS curves and one data collection for compressed/encoded PCS NURBS Curve data.

“Trivial” PCS Curves are those UV Curves whose definition is such that the actual UV Curve definition can be derived from the parametric domain definition by storing a limited amount of descriptive data for each UV curve (i.e. do not have to store the complete NURBS UV Curve definition).

The count/number of PCS Curves within a JT B-Rep is indicated by data field PCS Curve Count documented in Geometric Entity Counts.

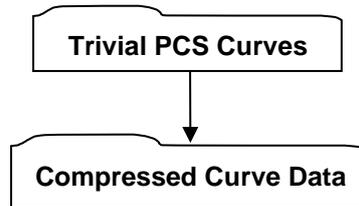


Figure M 22 — PCS Curves Geometric Data collection

Complete description for Compressed Curve Data can be found in Compressed Curve Data.

Trivial PCS Curves

Trivial PCS Curves data collection represents those UV curves whose definition is such (i.e. “trivial” enough) that the actual UV curve definition can be derived from the parametric domain definition by storing a limited amount of descriptive data for each UV curve (i.e. do not have to store the complete UV curve definition). These Trivial PCS Curves are grouped into three classifications (Trivial Domain Loop, Trivial Box Loop, or Trivial Domain UV Curve) and stored as described in the following subsections.

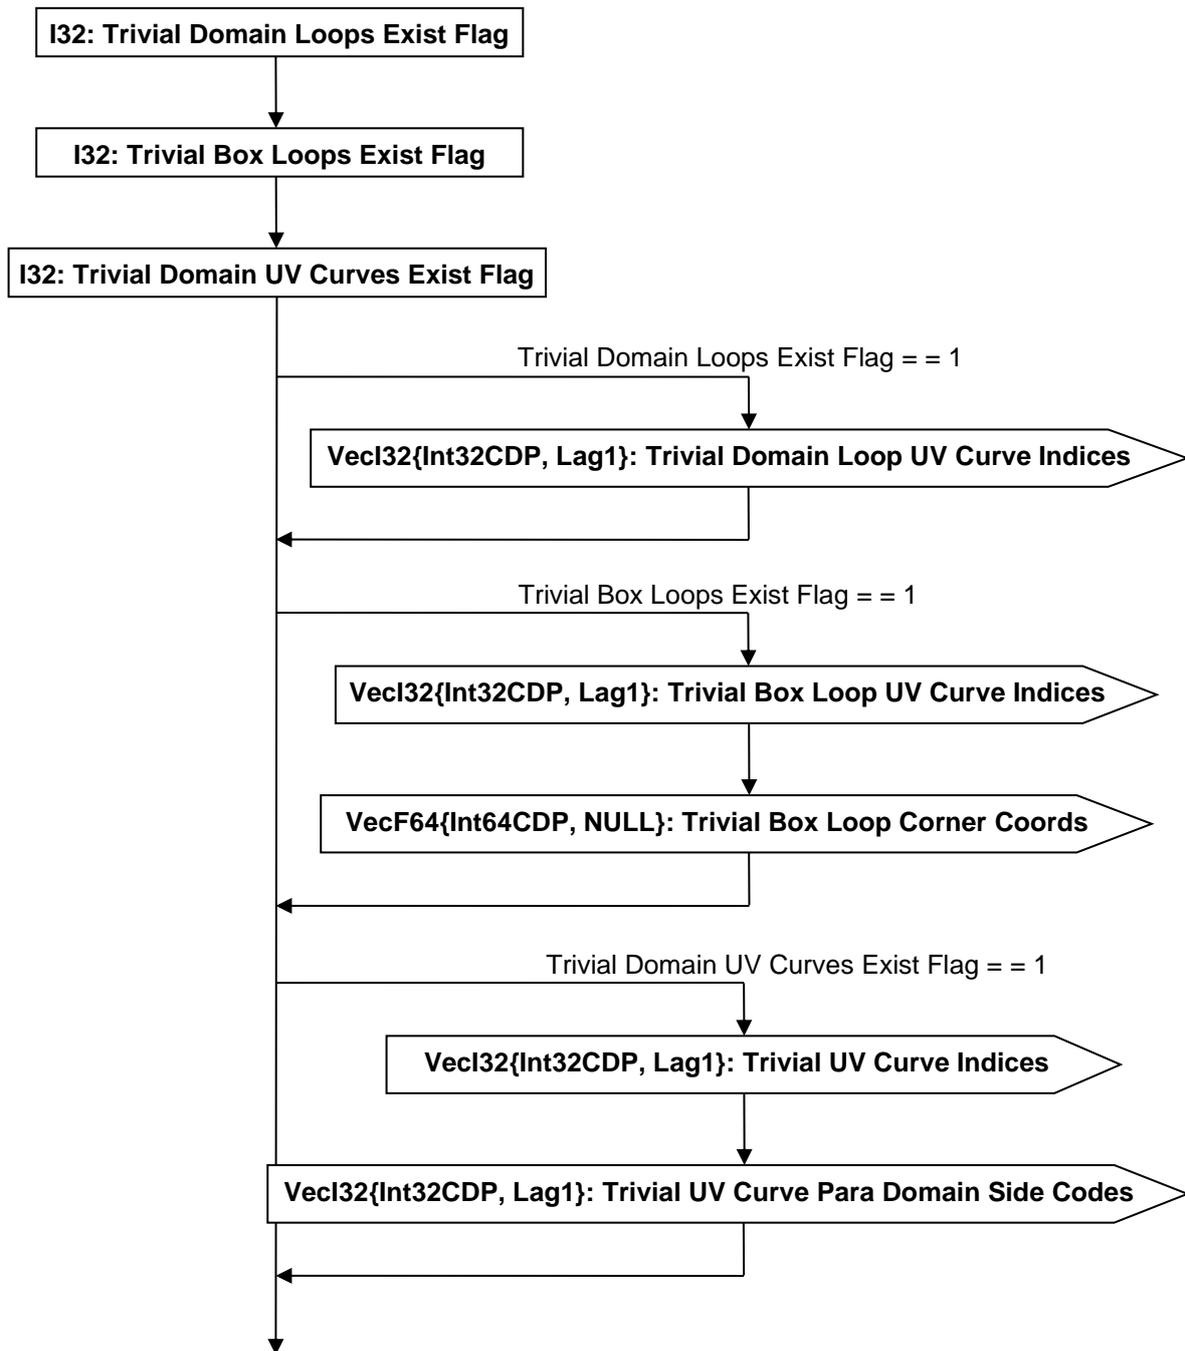


Figure M 23 — Trivial PCS Curves data collection

I32: Trivial Domain Loops Exist Flag

Trivial Domain Loops Exist Flag is a flag indicating whether “trivial” domain loops exist/follow. A Trivial Domain Loop is a Loop that encloses the entire parametric domain (i.e. all UV Curves of the Loop span the entire length of the Surface parametric domain). Given this criteria a Trivial Domain Loop shall always be made up of four Trivial Domain UV curves.

Table M 7 — Trivial Domain Loops Exist Flag values

= 0	Trivial Domain Loops do not exist.
= 1	Trivial Domain Loops exist.

I32: Trivial Box Loops Exist Flag

Trivial Box Loops Exist Flag is a flag indicating whether “trivial” box loops exist/follow. A trivial Box Loop is a Loop that forms a rectangle (i.e. corresponding curve end coordinates of opposite sides of the box are equal). Given this criteria a Trivial Box Loop shall always be made up of four UV curves.

Table M 8 — Trivial Box Loops Exist Flag values

= 0	Trivial Box Loops do not exist.
= 1	Trivial Box Loops exist.

“Equality of corresponding curve end coordinates of opposite sides of the box” is represented graphically in the figure below.

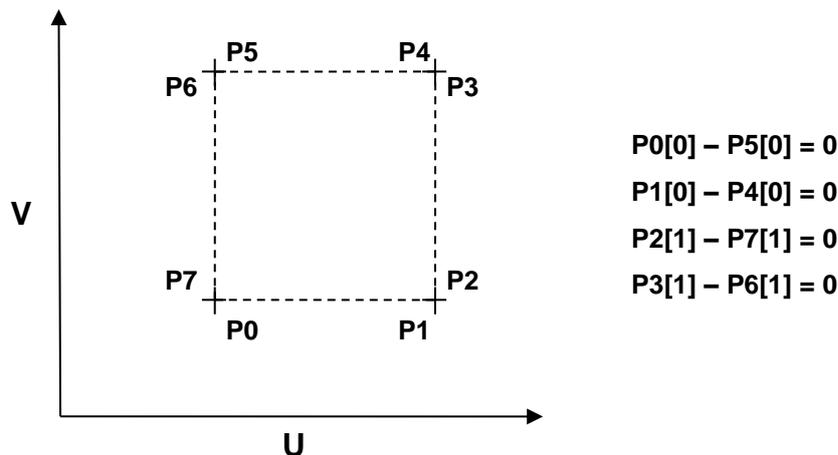


Figure M 24 — Equality of corresponding curve end coordinates of opposite sides of the box

I32: Trivial Domain UV Curves Exist Flag

Trivial Domain UV Curves Exist Flag is a flag indicating whether “trivial” domain UV curves (Loop CoEdges) exist/follow that are not part of a Trivial Domain Loop or Trivial Box Loop (i.e. a Loop contains some UV curves that span the entire length of the Surface parametric domain but not all the Loop UV curves meet this criteria and thus not captured as part of the Trivial Domain Loop data).

Table M 9 — Trivial Domain UV Curves Exist Flag values

= 0	Trivial Domain UV Curves do not exist.
= 1	Trivial Domain UV Curves exist.

VecI32{Int32CDP, Lag1}: Trivial Domain Loop UV Curve Indices

Trivial Domain Loop UV Curve Indices is a vector of all UV curve indices that are part of a Trivial Domain Loop. Note that each Trivial Domain Loop is always made up of four UV curves (thus four UV curve indices per Loop). Trivial Domain Loop UV Curve Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Trivial Box Loop UV Curve Indices

Trivial Box Loop UV Curve Indices is a vector of all UV Curve indices that are part of a Trivial Box Loop. Note that each Trivial Box Loop is always made up of four UV Curves (thus four UV Curve indices per Loop). Trivial Box Loop UV Curve Indices uses the Int32 version of the CODEC to compress and encode data.

VecF64{Int64CDP, NULL}: Trivial Box Loop Corner Coords

Trivial Box Loop Corner Coords is a vector of box corner coordinates for all Trivial Box Loops (i.e. each Box Loop will store two box corner coordinates). A Box Loop’s set of “box corner coordinates” are the coordinates of the two min/max diagonally opposite corners of the box. Note that if the Box Loop is a “hole”, then the max and min corners are the other ends of the respective box sides that contain the max and min corners. Trivial Box Loop Corner Coords uses the Int64 version of the

CODEC to compress and encode data. Each deserialized 64 bit integer number should be converted to bit wise equivalent 64 bit floating number.

VecI32{Int32CDP, Lag1}: Trivial UV Curve Indices

Trivial UV Curve Indices is a vector of all Loop UV Curve indices that are not part of a Trivial Domain Loop or Trivial Box Loop. Trivial UV Curve Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP, Lag1}: Trivial UV Curve Para Domain Side Codes

Trivial UV Curve Para Domain Side Codes is a vector containing a “side code” for each Trivial UV Curve indicating which parametric domain side the UV Curve lies on.

In an uncompressed/decoded form the parametric domain side values have the following meaning:

Table M 10 — Trivial UV Curve Para Domain Side Codes values

= 0	Bottom side of parametric domain
= 1	Right side of parametric domain
= 2	Top side of parametric domain
= 3	Left side of parametric domain

Trivial UV Curve Para Domain Side Codes uses the Int32 version of the CODEC to compress and encode data.

M.1.2.2.3 MCS Curves Geometric Data

MCS Curves Geometric Data collection contains the JT B-Rep’s Model Coordinate System geometric Curve data (i.e. XYZ Curve data). Currently only NURBS Curve types are supported within a JT B-Rep. The count/number of MCS Curves within a JT B-Rep is indicated by data field MCS Curve Count documented in Geometric Entity Counts.



Figure M 25 — MCS Curves Geometric Data collection

Complete description for Compressed Curve Data can be found in Compressed Curve Data.

M.1.2.2.4 Point Geometric Data

Point Geometric Data collection contains the JT B-Rep’s geometric Point data. Each Point is simply represented by a CoordF32 for the Point’s coordinate components. The count/number of Points within a JT B-Rep is indicated by data field Point Count documented in Geometric Entity Counts.

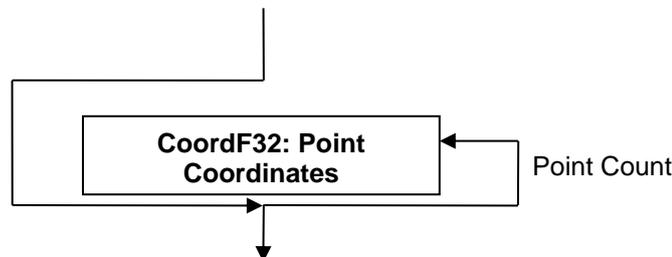


Figure M 26 — Point Geometric Data collection

CoordF32: Point Coordinates

Point Coordinates specifies the XYZ coordinate components for a Point.

M.1.2.3 Topological Entity Tag Counters

Topological Entity Tag Counters data collection specifies the next available “unique” tag value for each entity type in a JT B-Rep. These are rolling tag counters that are meant to be used for assigning a unique tag when a new entity is added to a JT B-Rep.

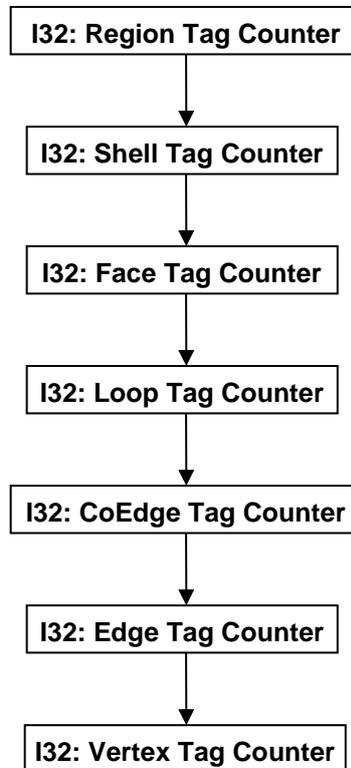


Figure M 27 — Topological Entity Tag Counters data collection

I32: Region Tag Counter

Region tag Counter specifies the next available “unique” tag value for Region entity.

I32: Shell Tag Counter

Shell Tag Counter specifies the next available “unique” tag value for Shell entity.

I32: Face Tag Counter

Face Tag Counter specifies the next available “unique” tag value for Face entity.

I32: Loop Tag Counter

Loop Tag Counter specifies the next available “unique” tag value for Loop entity.

I32: CoEdge Tag Counter

CoEdge Tag Counter specifies the next available “unique” tag value for CoEdge entity.

I32: Edge Tag Counter

Edge Tag Counter specifies the next available “unique” tag value for Edge entity.

I32: Vertex Tag Counter

Vertex Tag Counter specifies the next available “unique” tag value for Vertex entity.

M.1.2.3.1 B-Rep CAD Tag Data

The B-Rep CAD Tag Data collection contains the list of persistent IDs, as defined in the CAD System, to uniquely identify individual Faces and Edges in the JT B-Rep. The existence of this B-Rep CAD Tag

Data collection is dependent upon the value of previously read data field CAD Tags Flag as documented in JT B-Rep Element.

If B-Rep CAD Tag Data collection is present, there will be a CAD Tag for every Face and every Edge in the JT B-Rep and the list order will be Face CAD Tags followed by Edge CAD Tags. Therefore the total number of CAD Tags in the list should be equal to “Face Count + Edge Count” as documented in Topological Entity Counts.



Figure M 28 — B-Rep CAD Tag Data collection

Complete description for Compressed CAD Tag Data can be found in Compressed CAD Tag Data.

Annex N (deprecated) PMI Data Segment

JT files created prior to the Version 8 format description that have been migrated to a JTIAP Edition 3 format description may have PMI information represented in a PMI Data Segment. From a parsing point of view, a PMI Data Segment should be treated exactly the same as a PMI Manager Meta Data Element.

PMI Data Segments are deprecated and should not be written to JT file

Annex O

Mapping table JT to STEP

The following tables provide a mapping of STEP AP242 schema definitions that are relevant with regard to the JTIAP Edition 3 XT B-Rep data segment definitions.

O.1 Wireframe Geometry

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
GEOMETRICALLY_BOUNDED_WIREFRAME_SHAPE_REPRESENTATION → GEOMETRIC_CURVE_SET	E.5.3.4 BODY typedef enum { SCH_wire_body = 2, } for each curve in the geometric set
CARTESIAN_POINT	E.5.2.3 Point
B_SPLINE_CURVE (all subtypes)	E.5.2.1.4 B_CURVE (B-spline curve)
CIRCLE	E.5.2.1.2 CIRCLE
ELLIPSE	E.5.2.1.3 ELLIPSE
HYPERBOLA	E.5.2.1.4 B_CURVE (B-spline curve)
LINE	E.5.2.1.1 Line
PARABOLA	E.5.2.1.4 B_CURVE (B-spline curve)
POLYLINE	E.5.2.1.1 Line (for each segment)

O.2 Surfaces without topology

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
GEOMETRICALLY_BOUNDED_SURFACE_SHAPE_REPRESENTATION→GEOMETRIC_SET	E.5.3.4 BODY typedef enum { SCH_sheet_body = 3, }
CURVE_BOUNDED_SURFACE RECTANGULAR_TRIMMED_SURFACE	E.5.3.7 FACE
B_SPLINE_SURFACE (all subtypes)	E.5.2.2.9 B_SURFACE
CONICAL_SURFACE	E.5.2.2.3 CONE
CYLINDRICAL_SURFACE	E.5.2.2.2 CYLINDER
OFFSET_SURFACE	E.5.2.2.8 OFFSET_SURF
PLANE	E.5.2.2.1 PLANE
SPHERICAL_SURFACE	E.5.2.2.4 SPHERE
TOROIDAL_SURFACE	E.5.2.2.5 TORUS
SURFACE_OF_REVOLUTION	E.5.2.2.11 SPUN_SURF
SURFACE_OF_LINEAR_EXTRUSION	E.5.2.2.10 SWEEP_SURF
BOUNDARY_CURVE	E.5.3.11 EDGE
B_SPLINE_CURVE (all subtypes)	E.5.2.1.4 B_CURVE (B-spline curve)
CIRCLE	E.5.2.1.2 CIRCLE
ELLIPSE	E.5.2.1.3 ELLIPSE
HYPERBOLA	E.5.2.1.4 B_CURVE (B-spline curve)
LINE	E.5.2.1.1 Line
PARABOLA	E.5.2.1.4 B_CURVE (B-spline curve)
POLYLINE	E.5.2.1.4 B_CURVE (B-spline curve)

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
SURFACE_CURVE	Not supported
B_SPLINE_SURFACE (ALL SUBTYPES)	E.5.2.2.9 B_SURFACE
SPHERICAL_SURFACE	E.5.2.2.4 SPHERE
TOROIDAL_SURFACE	E.5.2.2.5 TORUS

O.3 Shapes represented by wireframe models with topology

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
EDGE_BASED_WIREFRAME_SHAPE_REPRESENTATION	E.5.3.4 BODY typedef enum { SCH_general_body = 6 }
SHELL_BASED_WIREFRAME_SHAPE_REPRESENTATION SHELL_BASED_WIREFRAME_MODEL	E.5.3.4 BODY typedef enum { SCH_general_body = 6 }
SHELL_BASED_WIREFRAME_SHAPE_REPRESENTATION WHICH POINTS TO AN SHELL_BASED_WIREFRAME_MODEL	E.5.3.4 BODY typedef enum { SCH_general_body = 6 }

O.4 Manifold Surfaces with Topology

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
MANIFOLD_SURFACE_SHAPE_REPRESENTATION SHELL_BASED_SURFACE_MODEL	E.5.3.4 BODY → typedef enum { SCH_sheet_body = 3, } A closed SHELL_BASED_SURFACE_MODEL will result in a closed sheet body.
CLOSED_SHELL OPEN_SHELL	E.5.3.6 SHELL
ADVANCED_FACE	E.5.3.7 FACE
B_SPLINE_SURFACE	E.5.2.2.9 B_SURFACE
CONICAL_SURFACE	E.5.2.2.3 CONE
CYLINDRICAL_SURFACE	E.5.2.2.2 CYLINDER
PLANE	E.5.2.2.1 PLANE
SPHERICAL_SURFACE	E.5.2.2.4 SPHERE
TOROIDAL_SURFACE	E.5.2.2.5 TORUS
SURFACE_OF_REVOLUTION	E.5.2.2.11 SPUN_SURF
SURFACE_OF_LINEAR_EXTRUSION	E.5.2.2.10 SWEEP_SURF
FACE_BOUND→EDGE_LOOP FACE_BOUND→VERTEX_LOOP FACE_OUTER_BOUND→EDGE_LOOP FACE_OUTER_BOUND→VERTEX_LOOP	E.5.3.8 LOOP
ORIENTED_EDGE→EDGE_CURVE	E.5.3.9 FIN (curve will be on the E.5.3.11 EDGE corresponding to the E.5.3.9 FIN)
B_SPLINE_CURVE	E.5.2.1.4 B_CURVE (B-spline curve)
CIRCLE	E.5.2.1.2 CIRCLE
ELLIPSE	E.5.2.1.3 ELLIPSE
HYPERBOLA	E.5.2.1.4 B_CURVE (B-spline curve)
LINE	E.5.2.1.1 Line

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
PARABOLA	E.5.2.1.4 B_CURVE (B-spline curve)
POLYLINE	E.5.2.1.1 Line
INTERSECTION_CURVE	E.5.2.1.4 B_CURVE (B-spline curve)
SEAM_CURVE	E.5.3.11 EDGE → E.5.2.1.4 B_CURVE
SURFACE_CURVE	2d curves are not translated
VERTEX_POINT	E.5.3.10 VERTEX
CARTESIAN_POINT	E.5.2.3 Point

0.5 Advanced boundary representation solids

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
ADVANCED_BREP_SHAPE_ REPRESENTATION-> MANIFOLD_SOLID_BREP BREP_WITH_VOIDS	E.5.3.4 BODY typedef enum { SCH_solid_body = 1, }
(ORIENTED_) CLOSED_SHELL	E.5.3.6 SHELL
ADVANCED_FACE	E.5.3.7 FACE
B_SPLINE_SURFACE (all subtypes)	E.5.2.2.9 B_SURFACE
CONICAL_SURFACE	E.5.2.2.3 CONE
CYLINDRICAL_SURFACE	E.5.2.2.2 CYLINDER
PLANE	E.5.2.2.1 PLANE
SPHERICAL_SURFACE	E.5.2.2.4 SPHERE
TOROIDAL_SURFACE	E.5.2.2.5 TORUS
SURFACE_OF_REVOLUTION	E.5.2.2.11 SPUN_SURF
SURFACE_OF_LINEAR_EXTRUSION	E.5.2.2.10 SWEPT_SURF
FACE_BOUND→EDGE_LOOP FACE_BOUND→VERTEX_LOOP FACE_OUTER_BOUND→EDGE_LOOP FACE_OUTER_BOUND→VERTEX_LOOP	E.5.3.8 LOOP
ORIENTED_EDGE→EDGE_CURVE	E.5.3.9 FIN (curve will be placed on the edge)
B_SPLINE_CURVE (all subtypes)	E.5.2.1.4 B_CURVE (B-spline curve)
CIRCLE	E.5.2.1.2 CIRCLE
ELLIPSE	E.5.2.1.3 ELLIPSE
HYPERBOLA	E.5.2.1.4 B_CURVE (B-spline curve)
LINE	E.5.2.1.1 Line
PARABOLA	E.5.2.1.4 B_CURVE (B-spline curve)
POLYLINE	E.5.2.1.4 B_CURVE (B-spline curve)
INTERSECTION_CURVE	-
SEAM_CURVE	-
SURFACE_CURVE	-
VERTEX_POINT	E.5.3.10 VERTEX
CARTESIAN_POINT	E.5.2.3 Point

O.6 Color

Face and Edge colours will be available on the XT face and edge entities through the SDL/TYSA_COLOUR attribute.

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
ADVANCED_FACE<-OVER_RIDING_STYLED_ITEM- >PRESENTATION_STYLE_ASSIGNMENT->SURFACE_STYLE_USAGE- >SURFACE_SIDE_STYLE->SURFACE_STYLE_FILL_AREA->FILL_AREA_STYLE- >FILL_AREA_STYLE_COLOUR->(COLOUR_RGB DRAUGHTING_PRE_DEFINED_COLOUR)	E.5.3.7 FACE → E.5.4.3 ATT_DEF_ID String name e.g. "SDL/TYSA_COLOUR"
EDGE_CURVE<-OVER_RIDING_STYLED_ITEM- >PRESENTATION_STYLE_ASSIGNMENT->SURFACE_STYLE_USAGE- >SURFACE_SIDE_STYLE->SURFACE_STYLE_FILL_AREA->FILL_AREA_STYLE- >FILL_AREA_STYLE_COLOUR->(COLOUR_RGB DRAUGHTING_PRE_DEFINED_COLOUR)	E.5.3.11 EDGE → E.5.4.3 ATT_DEF_ID String name e.g. "SDL/TYSA_COLOUR"

Body level colours will be put on the XT body through the SDL/TYSA_COLOUR_2 attribute.

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
MANIFOLD_SOLID_BREP<-STYLED_ITEM- >PRESENTATION_STYLE_ASSIGNMENT->SURFACE_STYLE_USAGE- >SURFACE_SIDE_STYLE->SURFACE_STYLE_FILL_AREA->FILL_AREA_STYLE- >FILL_AREA_STYLE_COLOUR->(COLOUR_RGB DRAUGHTING_PRE_DEFINED_COLOUR)	E.5.3.4 BODY → E.5.4.3 ATT_DEF_ID String name e.g. "SDL/TYSA_COLOUR_2"

Body level layers will be put on the XT body through the SDL/TYSA_LAYER attribute.

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
PRESENTATION_LAYER_ASSIGNMENT->MANIFOLD_SOLID_BREP	E.5.3.4 BODY → E.5.4.3 ATT_DEF_ID String name e.g. "SDL/TYSA_LAYER"

O.7 Name

Body names will be communicated through the SDL/TYSA_UNAME attribute.

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
manifold_solid_brep name attribute #48=MANIFOLD_SOLID_BREP('UNAME';#51);	E.5.3.4 BODY → E.5.4.3 ATT_DEF_ID String name e.g. "SDL/TYSA_UNAME"

O.8 Wireframe style

A user-defined attribute "TRANSLATOR/DRAW_STYLE" attribute will be added to the EDGE and/or VERTEX to communicate the wireframe thickness and style information.

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
STEP WIREFRAME ENTITY<-STYLED_ITEM- >PRESENTATION_STYLE_ASSIGNMENT->CURVE_STYLE- >DRAUGHTING_PRE_DEFINED_CURVE_FONT	E.5.3.11 EDGE → E.5.4.3 ATT_DEF_ID String name e.g. "TRANSLATOR/DRAW_STYLE"
CARTESIAN_POINT (STANDALONE STEP POINT ENTITY)<-STYLED_ITEM- >PRESENTATION_STYLE_ASSIGNMENT->POINT_STYLE- >PRE_DEFINED_POINT_MARKER_SYMBOL	E.5.3.10 VERTEX → E.5.4.3 ATT_DEF_ID String name e.g. "TRANSLATOR/DRAW_STYLE "

O.9 Visibility

Body invisibility will be communicated through the attribute – SDL/TYSA_INVISIBLE.

STEP AP 242 Express Schema Definition	JT Format XT B-Rep data segment definition
INVISIBILITY->STYLED_ITEM->MANIFOLD_SOLID_BREP	E.5.3.4 BODY → E.5.4.3 ATT_DEF_ID String name e.g. " SDL/TYSA_INVISIBLE"

Annex P

Procedural Geometry – Evaluation and Approximation

The following section describes in detail algorithms used for evaluation of procedural geometry elements of type Intersection Curve and Blend Edge Surface.

P.1 Introduction & Scope

These notes are intended to help people understand the procedural geometry that is used in JT/XT data. Specifically, we discuss procedural intersection curves (“icurve” for short), and rolling-ball blend surfaces. The chapter includes mathematical background and pseudocode that can be used to evaluate a point at a given parametric location on either an icurve or a blend surface; this evaluation procedure provides a clear and completely unambiguous definition of the geometry.

Once the evaluation functions are available, it is quite straightforward to approximate an icurve or a blend surface with b-spline geometry of some sort. This is just general-purpose approximation technology, but we explain how to do it, anyway. Internally, Parasolid makes very little use of spline approximations, so this is not an area where we invest heavily, and the algorithms given below could probably be improved. The spline geometry is easier to import into other CAD systems, and might possibly deliver better performance in some types of computations. The disadvantage, of course, is that the b-spline geometry will occupy more space, and it will only replicate the true procedural geometry within some tolerance.

P.2 Notation

Upright bold upper-case letters like **A**, **B**, **C**, **P**, **X** denote 3D points and vectors. Points and vectors are not the same thing, of course, but the context should make things clear. Italic lower-case letters like *s*, *t*, *u*, *v*, *w* denote real numbers, which are often parameter values on curves and surfaces.

P.3 Pseudocode

The pseudocode is written in a language that is roughly C#. We assume that we have Point and Vector classes that represent 3D points and vectors respectively. These classes have obvious functions, like Vector.Norm (computes the length of the given vector), and so on. We also assume that the usual arithmetic operators (+, -, *) have been overloaded in these classes, so that $P - Q$ is the difference of two points (which is a vector), $U + V$ is the sum of two vectors, $U * V$ is their dot product, and so on.

The procedural geometry algorithms used inside Parasolid are extremely complex. Parasolid has a zero-regression policy. So, if we develop a new algorithm that improves 99% of all data cases, we sometimes retain the old algorithm to avoid regressions in the other 1%. There are many different paths through the code, and the descriptions below represent only the primary ones (i.e. the ones that are most often followed, and the ones that we regard as the best).

P.4 Intersection Curve

P.4.1 Intersection Curve Basics

Suppose we have two surfaces **A** and **B** with parameterizations $(s, t) \mapsto \mathbf{A}(s, t)$ and $(u, v) \mapsto \mathbf{B}(u, v)$, and we are interested in their curve of intersection, **C**. Specifically, suppose we are given a parameter value w , and we want to calculate the corresponding point $\mathbf{C}(w)$ on the icurve. If we can do this for any given w , then we have a clear and unambiguous definition of the icurve, and approximating it by an explicit spline curve should be straightforward.

In a JT file, the representation of an icurve is a sequence of “chart points” $\mathbf{P}_0, \dots, \mathbf{P}_n$. To each chart point \mathbf{P}_i we assign a parameter value $w = w_i$; detailed procedures for doing this are explained later, but, for now, assume that this has already been done, and that the w_i values are strictly increasing.

We assume that the given parameter value w lies in the range $w_0 \leq w \leq w_n$. Therefore, we can find an index i such that $w_i \leq w \leq w_{i+1}$.


We first find a point $L(w)$ on the chord $P_i P_{i+1}$. We let r denote the ratio

$$r = \frac{w - w_i}{w_{i+1} - w_i}$$


and then

$$L(w) = (1 - r)P_i + rP_{i+1} = \frac{w_{i+1} - w}{w_{i+1} - w_i}P_i + \frac{w - w_i}{w_{i+1} - w_i}P_{i+1}$$


We see that $L(w)$ divides the chord in the ratio r to $1 - r$, as shown below:



Next, we construct the plane $\pi(w)$ that passes through the point $L(w)$ and is perpendicular to the chord $P_i P_{i+1}$. The point $C(w)$ of the intersection curve is the intersection of the two surfaces A and B and the plane $\pi(w)$, as shown in the pictures below

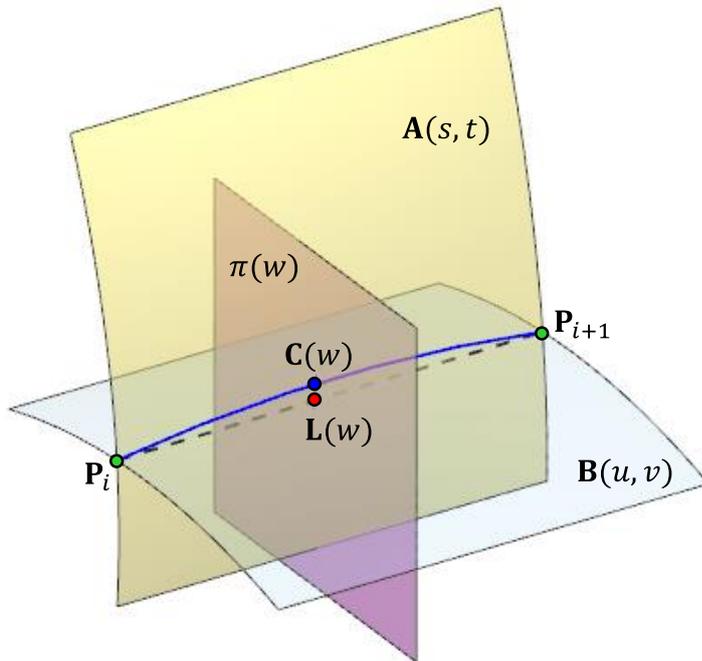

The construction is clearer if we omit the two surfaces and look at the plane $\pi(w)$ edge-on:

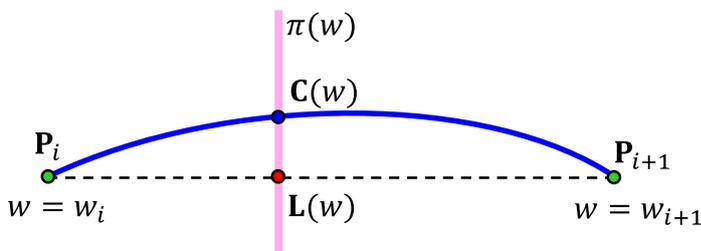

P.4.2 Populating Chart Points

An icurve consists primarily of a sequence of “chart points”. Each chart point is represented by a structure called an hvec. The name “hvec” is an abbreviation for “heptavector”, so-called because the structure originally had 7 members. The members are described in the following declaration:

```

struct hvec {
  Point      CurvePoint;      // Point on curve
  double[]   st;              // Parameter value pair (s,t) on first surface
  double[]   uv;              // Parameter value pair (u,v) on second surface
  Vector     CurveTangent;    // Curve tangent vector (a unit vector)
  double     w;               // Curve parameter value }
  
```


In the hvecs structures of an icurve in a JT file, only the CurvePoint fields are populated. The remaining elements of the hvec structures can all be derived from these as explained below.

P.4.2.1 Getting Surface Parameter Values

First, we need to calculate the surface parameter values at each chart point P_i . In other words, we need to find two parameter pairs (s,t) and (u,v) such that $A(s,t) = P_i$ and $B(u,v) = P_i$. The computations for the two surfaces are similar, and independent of each other, so we just illustrate with the surface B .

If the surface B is simple and analytic, the calculations are easy, so we omit them.

If the surface B is complex, we need to use an iterative numerical method. The major problem with the numerical approach is that the iteration needs a good starting point. To obtain one, we use a construction based on the (parameterized) tangent plane π at the previous chart point, P_{i-1} , as shown below:

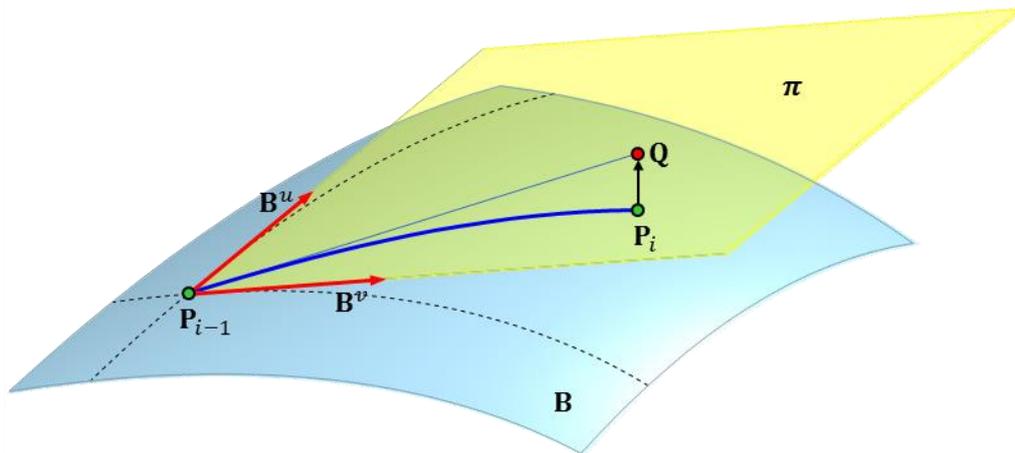

Let B^u and B^v denote the partial derivatives of the surface B at the previous point P_{i-1} . Then the equation of the tangent plane at P_{i-1} can be written as

$$\pi(\delta u, \delta v) = P_{i-1} + \delta u B^u + \delta v B^v$$

We want to find values of u and v such that the point $\pi(u, v)$ on the tangent plane is as close as possible to the point P_i .

This means that $\pi(u, v)$ must be the orthogonal projection of P_i onto the plane π , so

$$(\pi(\delta u, \delta v) - P_i) \cdot B^u = 0$$

$$(\pi(\delta u, \delta v) - P_i) \cdot B^v = 0$$

Substituting for $\pi(\delta u, \delta v)$, and rearranging, this gives

$$\delta u (B^u \cdot B^u) + \delta v (B^u \cdot B^v) = (P_i - P_{i-1}) \cdot B^u$$

$$\delta u (B^u \cdot B^v) + \delta v (B^v \cdot B^v) = (P_i - P_{i-1}) \cdot B^v$$

This is a system of two linear equations in the unknowns δu and δv , which we can easily solve (by Cramer's rule, for example). So, if (u_0, v_0) denote the surface parameter values at P_{i-1} , then it is

reasonable to assume that $\mathbf{B}(u_0 + \delta u, v_0 + \delta v) \approx \mathbf{P}_i$, so $(u, v) = (u_0 + \delta u, v_0 + \delta v)$ will be suitable starting values in an iterative algorithm that finds (u, v) such that $\mathbf{B}(u, v) = \mathbf{P}_i$.

Finding (u, v) such that $\mathbf{B}(u, v) = \mathbf{P}_i$ will be impossible, in floating point arithmetic, of course, so a more practical approach is to try to find (u, v) that minimizes $\|\mathbf{B}(u, v) - \mathbf{P}_i\|^2$. Since the point \mathbf{P}_i lies very close to the surface \mathbf{B} , this minimum will be very small, and this is may be helpful in locating it. The pseudocode for this process is as follows:

```
// Finds parameter values at a given point on a surface
// Input:
//   B      -- the surface
//   P      -- a point on the surface
//   nearUV -- (u,v) values such that B(u,v) is close to P. Same as (u0,v0) in
notes above.
// Returns:
//   The (u,v) values such that B(u,v) = P

double[] SurfaceParametersAtPoint(Surface B, Point P, double[] nearUV)
{
  // Calculate position and partial derivatives at previous chart point
  Point   Q = B.Position(nearUV);      // Position at nearUV = (u0,v0)
  Vector  Bu = B.DerivDu (nearUV);    // Partial deriv wrt u at nearUV
  Vector  Bv = B.DerivDv (nearUV);    // Partial deriv wrt v nearUV

  // Construct linear equations for finding uv delta values, and solve
  double a = Bu * Bu;  double b = Bu * Bv;  double h = (P - Q) * Bu;
  double c = Bu * Bv;  double d = Bv * Bv;  double k = (P - Q) * Bv;
  double[] deltaUV = LinearSystemSolve(a, b, c, d, h, k);

  // Add on delta values: startUV = nearUV + deltaUV
  double[] startUV = { nearUV[0] + deltaUV[0], nearUV[1] + deltaUV[1] };

  // Minimize to find closest point on surface, where B(u,v) = P,
  double outUV = FindMinimum(SurfaceDistance2, double[] startUV);
  return outUV;
}
```

Here we have assumed the existence of three other standard functions.

First, a simple linear system solver:

```
// Computes (x,y) that are solutions to the system:
//   a*x + b*y = h
//   c*x + d*y = k
// Input:
//   a,b,c,d -- coefficients
//   h,k     -- right-hand sides
// Returns:
//   Solution (x,y) of the linear system

double[] LinearSystemSolve(double a, double b, double c, double d, double h, double
k)
```

Next, a function that calculates (squared) distance from a point to the surface B:

```
// Calculates squared distance from a given point to a point on a surface
// Input:
//   surf -- the surface
//   P    -- the point
// Returns:
//   Squared distance from point P to point surf(u,v)

double SurfaceDistance2(Surface surf, Point P, double[] uv)
{
  Position Q = surf.Point(uv);
  double dist2 = (P - Q) * (P - Q);
  return dist2;
}
```

and, finally, an iterative numerical minimization function

```
// Minimizes a real-valued function of two variables
// Input:
//   f      -- the real-valued function to be minimized
//   start  -- the starting values of the variables, from which to start iteration
// Returns:
//   Arguments for which the function f is a local minimum

double[] FindMinimum(RealFunction2 f, double[] start)
```

There is nothing very special about the minimization function that is required here. Parasolid uses a home-grown function, but it is unremarkable. It uses a maximum of 20 iterations, and it terminates when either the function value or the step size is less than a small tolerance `epsilonDistance`, whose value is 10^{-8} . Examples of suitable functions can be found in the Numerical Recipes book [7], in the GNU Scientific Library [8], in MINPACK[9], or in numerous other places. Specifically, the functions `frpmin` or `dfpmin` from the Numerical Recipes book have the necessary functionality.

We do exactly the same computation to find parameter values (s, t) on the first surface, **A**, such that $\mathbf{A}(s, t) = \mathbf{P}_i$. We write the (s, t) and (u, v) values into the `hvec`.

P.4.2.2 Special Case: the First Point

In the previous section, we calculated surface parameter values at the current chart point by “stepping” from the previous point to get to a place where we could start an iterative algorithm. Of course, if there is no previous point, this doesn’t work, so we need some other way to start our iteration. Unfortunately, a brute-force global search is the only option. One possible way to do this is outlined below. Again, we use the surface **B** as an example.

The objective is to find parameter values (u, v) such that $\mathbf{B}(u, v)$ is close to the current point **P**; these (u, v) values can then be used to start an iterative minimization, as described in the previous section. The basic idea is to test the value of $\mathbf{B}(u, v)$ at some $m \times n$ locations $(u, v) = (u_i, v_j)$, and simply choose the location that’s closest to **P**. The question is: what values should be used for m and n . Some suggestions are outlined below:

Surface Type	Description
Bezier patch	If the patch has degrees $p \times q$, use an array size somewhere between $p \times q$ and $2p \times 2q$.
NURBs surface	Treat each constituent Bézier patch as described above
Offset surface	Use the same array of locations as on the base surface
Extruded surface	Do a 2D calculation in a plane that’s perpendicular to the extrusion direction. If the generator curve is a spline of degree p , use somewhere between p and $2p$ points on each of its Bézier segments.
Revolved surface	Again, do the computation in 2D, in a plane containing the surface’s axis of rotation. If the generator curve is a spline, handle as above.

If the global searching method is implemented in a function `GlobalSearch`, then the pseudocode for this approach is as follows:

```
// Do global search to get a near point
double[] nearUV = GlobalSearch(B, P);

// Use this near point as input to SurfaceParametersAtPoint
double outUV = SurfaceParametersAtPoint(B, P, nearUV)
```

This basic calculation should work adequately, but there are many ways to improve it. Firstly, convex hull or boxing algorithms can be used to eliminate large portions of the surface that are clearly further from **P** than the current minimum. This will not produce better results, but it will certainly improve performance. Also, a tessellation could be used instead of an array of points — this would require point-to-triangle distance calculations rather than point-to-point calculations, but it will yield better starting values. The tessellation can be a simple one constructed from the $m \times n$ array of points described above, or more sophisticated tessellation algorithms could be used.

If stepping from the previous chart point (as described in section) fails, then the global search method described in this section can be used as a backup. In fact, the global search could be used at every point, in principle, though this is likely to result in poor performance.

P.4.2.3 Getting the Tangent Vector

The next thing that's needed in the hvec is the CurveTangent vector. This is just the unitized cross product of the two surface normals at the point, so it's easy to compute:

```
Vector normA = A.Normal(st);
Vector normB = B.Normal(uv);
Vector curveTangent = Vector.UnitCross(normA, normB);
```

Obviously this calculation won't work if the two surface normal are parallel (because the surfaces are tangent), but this should not happen at a chart point.

P.4.2.4 Getting Chart Point Parameters


Finally, we need to assign a parameter value w_i to each chart point P_i . These parameter values do not have any influence on the shape of the icurve — they are used only to identify an interval $[w_i, w_{i+1}]$ containing the given value w , and to compute a local parameter r (a ratio) within this interval. The computation of points on the icurve will work no matter what sequence of values w_0, \dots, w_n we use (as long as they are increasing). The w_i values do not affect the shape of the icurve, they only affect the mapping $w \mapsto C(w)$. So, if we only care about the shape of the icurve, and not about its parameterization, it doesn't much matter what w_i values we assign to the chart points.

The simplest option would be to make the w_i values evenly spaced — we would just set $w_i = i$ or $w_i = i/n$ for $i = 0, 1, \dots, n$. Saying this another way, this scheme makes the parameter increments $h_i = w_{i+1} - w_i$ constant. Another simple option would be to space the w_i according to chord-lengths, so

$$h_i = w_{i+1} - w_i = \|P_i - P_{i-1}\| \quad \text{for } i = 0, 1, \dots, n - 1$$

However, both of these simple schemes have a drawback: the icurve constructed this way will be G1 (it will have continuous unit tangent) but it will not necessarily be C1 (it will not have a continuous first derivative). In many situations, the lack of C1 continuity is not a problem — a jump in the length of the first derivative vector as the curve passes through a chart point is not likely to cause much trouble. In other situations, C1 continuity is desirable, and it turns out that this can be achieved by a careful choice of the parameter values w_i (or, more precisely, by the right choice of the parameter increments h_i). There is no special mathematics here: it is well-known that **any** piecewise G1 curve can be made C1 simply by adjusting parameter increments in this way. The details are given below.

Let T_i be the unit tangent of the icurve at the chart point P_i , let $V_i = P_{i+1} - P_i$ be the i -th chord vector, let $d_i = \|V_i\|$ be its length, and let $U_i = V_i/d_i$ be the unit vector along the i -th chord. Also, let α_i and β_i be the angles between the tangent T_i and the unit chord vectors U_i and U_{i-1} respectively, as shown in the diagram below:

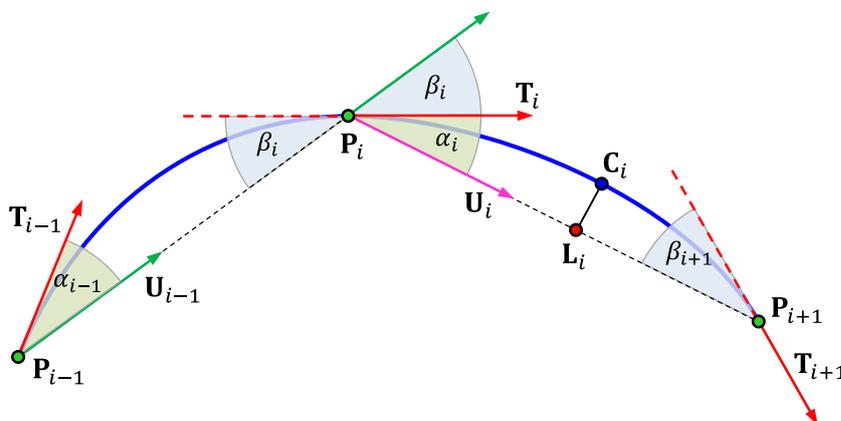

Our goal is to compute suitable values for the parameter increments $h_i = w_{i+1} - w_i$.

On the segment where $w_i \leq w \leq w_{i+1}$, the equation of the chord is

$$\mathbf{L}_i(w) = \frac{w_{i+1} - w}{w_{i+1} - w_i} \mathbf{P}_i + \frac{w - w_i}{w_{i+1} - w_i} \mathbf{P}_{i+1} = \mathbf{P}_i + \frac{w - w_i}{h_i} \mathbf{V}_i$$

and so

$$\mathbf{L}'_i(w) = \frac{\mathbf{V}_i}{h_i} = \frac{d_i \mathbf{U}_i}{h_i}$$

Since the vector $\mathbf{C}_i(w) - \mathbf{L}_i(w)$ is perpendicular to the chord $\mathbf{P}_i \mathbf{P}_{i+1}$, we have

$$[\mathbf{C}_i(w) - \mathbf{L}_i(w)] \cdot \mathbf{U}_i = 0$$

Differentiating with respect to w and substituting the expression for $\mathbf{L}'_i(w)$ from above gives

$$\left[\mathbf{C}'_i(w) - \frac{d_i \mathbf{U}_i}{h_i} \right] \cdot \mathbf{U}_i = 0$$

Then, since $\mathbf{U}_i \cdot \mathbf{U}_i = 1$, we get

$$\mathbf{C}'_i(w) \cdot \mathbf{U}_i = \frac{d_i}{h_i}$$

When $w = w_i$, we have $\mathbf{C}'_i(w_i) \cdot \mathbf{U}_i = \|\mathbf{C}'_i(w_i)\| \cos \alpha_i$, so

$$\|\mathbf{C}'_i(w_i)\| = \frac{d_i}{h_i \cos \alpha_i}$$

Doing the same sort of calculations on the icurve segment \mathbf{C}_{i-1} where $w_{i-1} \leq w \leq w_i$, we get

$$\mathbf{C}'_{i-1}(w) \cdot \mathbf{U}_{i-1} = \frac{d_{i-1}}{h_{i-1}}$$

and setting $w = w_i$ in this equation, we get

$$\|\mathbf{C}'_{i-1}(w_i)\| = \frac{d_{i-1}}{h_{i-1} \cos \beta_i}$$

To get C1 continuity at $w = w_i$, we need to have $\|\mathbf{C}'_{i-1}(w_i)\| = \|\mathbf{C}'_i(w_i)\|$, which implies that

$$\frac{d_{i-1}}{h_{i-1} \cos \beta_i} = \frac{d_i}{h_i \cos \alpha_i}$$

and hence

$$h_i = \frac{d_i \cos \beta_i}{d_{i-1} \cos \alpha_i} h_{i-1}$$

This is the form that's actually used in the Parasolid code. But $\cos \beta_i = (\mathbf{T}_i \cdot \mathbf{V}_{i-1}) / d_{i-1}$ and $\cos \alpha_i = (\mathbf{T}_i \cdot \mathbf{V}_i) / d_i$, so this can also be written

$$h_i = \frac{d_i^2 (\mathbf{T}_i \cdot \mathbf{V}_{i-1})}{d_{i-1}^2 (\mathbf{T}_i \cdot \mathbf{V}_i)} h_{i-1} = \frac{(\mathbf{V}_i \cdot \mathbf{V}_i) (\mathbf{T}_i \cdot \mathbf{V}_{i-1})}{(\mathbf{V}_{i-1} \cdot \mathbf{V}_{i-1}) (\mathbf{T}_i \cdot \mathbf{V}_i)} h_{i-1}$$

This is a very efficient computation since it involves no square roots or trigonometric functions.

The first parameter value w_0 and the first increment $h_0 = w_1 - w_0$ are arbitrary, but, for definiteness, their values are set using the [base_parameter](#) and [base_scale](#) properties of the chart, respectively. Once these are established, all other h_i and w_i values can be calculated recursively from the formula above.

The pseudocode to implement this is as follows:

```
// Calculates parameter values at chart points
// Input:
//   P -- array of chart points
//   T -- array of (unit) tangents at chart points
// Returns
//   Array of parameter values to be assigned to chart points
double[] ChartParameters(Position[] P, Vector[] T)
{
```

```

int n = P.Length;

double[] w = new double[n];           // parameter values at chart points
double[] h = new double[n-1];        // parameter increments between chart points
Vector[] V = new Vector[n-1];        // chord vectors
double[] c2 = new double[n-1];       // chord lengths (squared)

w[0] = base_parameter;
V[0] = P[1] - P[0];
d2[0] = V[0] * V[0];
h[0] = base_scale;
w[1] = w[0] + h[0];

for (int i = 1 ; i < n-1 ; i++)
{
    V[i] = P[i+1] - P[i];           // chord vector
    d2[i] = V[i] * V[i];           // squared length of chord V[i]
    double numer = d2[i]*(T[i] * V[i-1]);
    double denom = d2[i-1]*(T[i] * V[i]);
    h[i] = (numer/denom) * h[i-1];
    w[i+1] = w[i] + h[i];
}

return w;
}

```

This code is obviously very inefficient — several of the arrays we used are not really necessary. It is written to correspond closely with the mathematical description above, so the goal is clarity rather than efficiency.

P.4.3 Computing a Point & Tangent on an Intersection Curve

Now that the chart points are fully populated, we can describe the procedure for calculating a point and tangent at a given parameter value on our icurve.

P.4.3.1 Equations for the Point on the Intersection Curve


So, assume we have chart points P_0, \dots, P_n where the point P_i has curve parameter w_i and surface parameters (s_i, t_i) and (u_i, v_i) . We want to calculate a point on the curve at a given parameter value w which we assume to lie in the range $w_0 \leq w \leq w_n$. Therefore, we can find an index i such that $w_i \leq w \leq w_{i+1}$.

From section L.4.1, we recall that the chord $P_i P_{i+1}$ has the equation

$$L(w) = \frac{w_{i+1} - w}{w_{i+1} - w_i} P_i + \frac{w - w_i}{w_{i+1} - w_i} P_{i+1}$$

We construct the plane $\pi(w)$ that passes through the point $L(w)$ and is perpendicular to the chord $P_i P_{i+1}$. A 3D point X lies on this plane iff $(X - L(w)) \cdot (P_{i+1} - P_i) = 0$.

The point $C(w)$ of the intersection curve is the intersection of the two surfaces **A** and **B** and the plane $\pi(w)$, as shown in the picture below

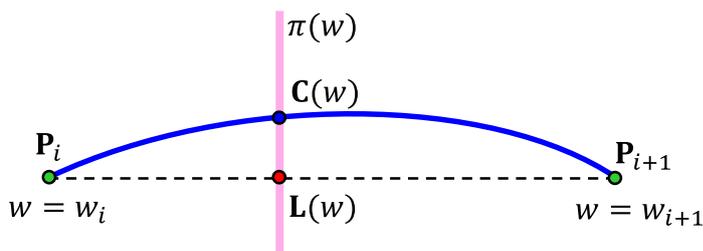

To compute the point $C(w)$, we have to find parameter values s, t, u, v that satisfy the equations

$$\mathbf{A}(s, t) = \mathbf{B}(u, v)$$

$$(\mathbf{A}(s, t) - \mathbf{L}(w)) \cdot (\mathbf{P}_{i+1} - \mathbf{P}_i) = 0$$

The first equation says that we have two points (one on each surface) that are identical, and the second equation says that one (and hence both) of these points lies on the plane $\pi(w)$. If we write

$$f_1(s, t, u, v) = \mathbf{A}_x(s, t) - \mathbf{B}_x(u, v)$$

$$f_2(s, t, u, v) = \mathbf{A}_y(s, t) - \mathbf{B}_y(u, v)$$

$$f_3(s, t, u, v) = \mathbf{A}_z(s, t) - \mathbf{B}_z(u, v)$$

$$f_4(s, t, u, v) = (\mathbf{A}(s, t) - \mathbf{L}(w)) \cdot (\mathbf{P}_{i+1} - \mathbf{P}_i)$$

then our problem reduces to finding the common roots s, t, u, v of the four equations $f_i(u, v, s, t) = 0$ ($i = 1, 2, 3, 4$). Once we have done this, we can also obtain the icurve tangent at the parameter value w : it will be in the direction of the cross product of the two surface normals:

$$\left(\frac{\partial \mathbf{A}}{\partial s} \times \frac{\partial \mathbf{A}}{\partial t} \right) \times \left(\frac{\partial \mathbf{B}}{\partial u} \times \frac{\partial \mathbf{B}}{\partial v} \right)$$


The four equations above are non-linear, of course, so they will have to be solved by an iterative numerical method. Again, there is nothing special about the root finder used in Parasolid. Suitable functions can be found in the Numerical Recipes book [7], in the GNU Scientific Library [8], or in numerous other places. Specifically, the function `newt` from the Numerical Recipes book has the required functionality.

There is no reason to fear that an iterative numerical procedure will deliver answers that are less accurate than a closed form formula. In fact, common closed-form formulas will deliver inaccurate answers if implemented poorly [10]. Accuracy depends on careful coding (avoiding loss of precision) rather than on the choice between numerical or analytical methods.

However, as in all numerical root-finding, the key is to find a good starting point. The recommended technique for doing this is described in the next section.

P.4.3.2 Estimating a Starting Point

To simplify notation, let's define $\mathbf{P} = \mathbf{P}_i$, $\mathbf{Q} = \mathbf{P}_{i+1}$, $\mathbf{U} = \mathbf{T}_i$, $\mathbf{V} = \mathbf{T}_{i+1}$, $\mathbf{K} = \mathbf{Q} - \mathbf{P}$.

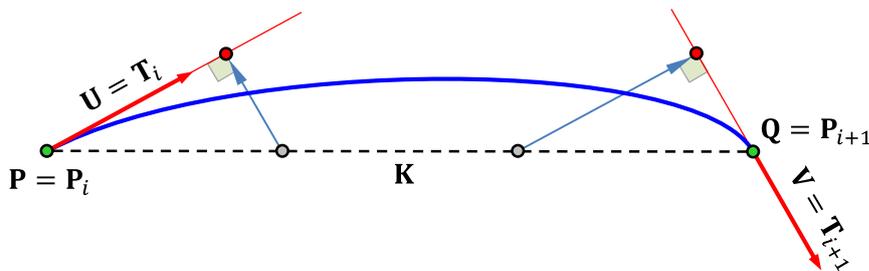

We are going to construct a cubic Bezier curve that approximates the icurve and can be used to generate starting points for our iteration. The first and fourth poles of the Bezier curve will obviously be \mathbf{P} and \mathbf{Q} respectively. To get the second pole, we project the grey point $\mathbf{P} + \frac{1}{3}\mathbf{K}$ onto the tangent line at \mathbf{P} , as shown in the diagram. The result is the red point, which is $\mathbf{P} + \frac{1}{3}(\mathbf{K} \cdot \mathbf{U})\mathbf{U}$. Similarly, for the third pole, we use the point $\mathbf{Q} - \frac{1}{3}(\mathbf{K} \cdot \mathbf{V})\mathbf{V}$. So, in summary, our Bezier curve has poles, \mathbf{P} , $\mathbf{P} + \frac{1}{3}(\mathbf{K} \cdot \mathbf{U})\mathbf{U}$, $\mathbf{Q} - \frac{1}{3}(\mathbf{K} \cdot \mathbf{V})\mathbf{V}$, and \mathbf{Q} , so its equation is:

$$\mathbf{C}(r) = (1 - r)^3 \mathbf{P} + 3r(1 - r)^2 \left(\mathbf{P} + \frac{1}{3} (\mathbf{K} \cdot \mathbf{U})\mathbf{U} \right) + 3r^2 (1 - r) \left(\mathbf{Q} - \frac{1}{3} (\mathbf{K} \cdot \mathbf{V})\mathbf{V} \right) + r^3 \mathbf{Q}$$

where, as before, r is the ratio

$$r = \frac{w - w_i}{w_{i+1} - w_i}$$

In fact, it is more convenient to express this cubic in Hermite form. If we define so-called blending functions h_0, h_1, k_0, k_1 by

$$h_0(t) = 1 - 3t^2 + 2t^3$$

$$h_1(t) = 3t^2 - 2t^3$$

$$k_0(t) = t - 2t^2 + t^3$$

$$k_1(t) = t^3 - t^2$$

Then the cubic curve can be written in the somewhat tidier form

$$\mathbf{C}(r) = h_0(r)\mathbf{P} + h_1(r)\mathbf{Q} + k_0(r)(\mathbf{K} \cdot \mathbf{U})\mathbf{U} + k_1(r)(\mathbf{K} \cdot \mathbf{V})\mathbf{V}$$

With either formula, it is easy to check that $\mathbf{C}(0) = \mathbf{P}$, $\mathbf{C}(1) = \mathbf{Q}$, and

$$\frac{d\mathbf{C}}{dr}(0) = (\mathbf{K} \cdot \mathbf{U})\mathbf{U} \quad ; \quad \frac{d\mathbf{C}}{dr}(1) = (\mathbf{K} \cdot \mathbf{V})\mathbf{V}$$

The basic function for performing this cubic interpolation is as follows:

```
// Calculate a point on a Hermite cubic curve
// Input:
// P0 -- start point of curve
// P1 -- end point of curve
// V0 -- first derivative vector at start point
// V1 -- first derivative vector at end point
// t -- parameter value at which to evaluate (0 <= t <= 1)
// Returns
// Point on cubic curve that interpolates P, Q, U, V

static Position HermiteCubic(Point P0, Point P1, Vector V0, Vector V1, double t)
{
    double t2 = t*t;
    double t3 = t*t2;

    double h0 = 1 - 3*t2 + 2*t3;
    double h1 = 3*t2 - 2*t3;
    double k0 = t - 2*t2 + t3;
    double k1 = t3 - t2;

    return h0*P0 + h1*P1 + k0*V0 + k1*V1;
}
```

This function is used to compute an estimated point on an icurve as follows:

```
// Define variable names as in math notes above
Point P = chart[i].CurvePoint;    Vector U = chart[i+1].CurveTangent;
Point Q = chart[i].CurvePoint;    Vector V = chart[i+1].CurveTangent;

//Get parameter values. We assume that wi < w < wip1
double wi = chart[i].w;
double wip1 = chart[i+1].w;

// Compute the ratio r
double r = (w - wi)/(wip1 - wi);

// Chord and derivative vectors
Vector K = Q - P;
Vector KUU = (K*U)*U;
Vector KVV = (K*V)*V;

// Calculate point Cr =C(r) on cubic approximation
Position Cr = HermiteCubic(P, Q, KUU, KVV, r);
```

From this point $\mathbf{C}(r)$, we can obtain surface parameter values (s, t) and (u, v) using the techniques described in section L.4.2.1. We step along tangent planes to get rough estimates, and then refine these estimates by iterative numerical methods. If $r < 0.5$, we use the tangent plane at \mathbf{P}_i , and if $r \geq 0.5$, we use the tangent plane at \mathbf{P}_{i+1} .

Then we use these (s, t) and (u, v) values as the starting point in an iterative numerical root finder, as described in section L.4.3.1 .

P.4.4 Approximating an Intersection Curve

The approximation process described here is completely generic — it can be applied to any curve for which points and first derivative vectors can be computed. The procedure has no relationship to JT/XT icurves, specifically.

The basic idea is to start with cubic segments constructed from set of points on the curve (the chart points, in the case of an icurve), and then add intermediate points to split these cubic segments as needed. The splitting is continued until the cubic segments are close enough to the original icurve. An implementation of this idea is provided in section L.4.4.4.

P.4.4.1 Fitting Hermite Cubics

At the i -th chart point, we know the location \mathbf{P}_i , the unit tangent vector \mathbf{T}_i , and the parameter value w_i . As in section L.4.2.4, let $\mathbf{V}_i = \mathbf{P}_{i+1} - \mathbf{P}_i$ denote the chord vector, and let $h_i = w_{i+1} - w_i$. Then, from the discussion in section L.4.3, we know that the icurve's first derivative vector at \mathbf{P}_i is given by

$$\frac{d\mathbf{C}}{dw}(w = w_i) = \frac{\|\mathbf{V}_i\|}{h_i \cos \alpha_i} \mathbf{T}_i = \frac{(\mathbf{V}_i \cdot \mathbf{V}_i)}{h_i(\mathbf{V}_i \cdot \mathbf{T}_i)} \mathbf{T}_i$$

Similarly, at the other end of the segment,

$$\frac{d\mathbf{C}}{dw}(w = w_{i+1}) = \frac{(\mathbf{V}_i \cdot \mathbf{V}_i)}{h_{i+1}(\mathbf{V}_i \cdot \mathbf{T}_{i+1})} \mathbf{T}_{i+1}$$

Note that this last equation holds true even if we have not made the special choices for the w_i values described in to make the icurve C1 continuous.

We can now use this data to construct a Hermite cubic approximation \mathbf{H} of the icurve on the interval $w_i \leq w \leq w_{i+1}$. The relevant Hermite cubic construction is given in the function [HermiteCubic](#).

Next we check to see if the Hermite cubic segment \mathbf{H} is sufficiently close to the icurve \mathbf{C} throughout the interval $w_i \leq w \leq w_{i+1}$; details of the method for doing this are described in the next section. If \mathbf{H} and \mathbf{C} are sufficiently close, then we're done; if not, we compute a point and tangent at some interior location in the interval $\bar{w} \in [w_i, w_{i+1}]$, and we treat the two intervals $[w_i, \bar{w}]$ and $[\bar{w}, w_{i+1}]$ as described above.

Continuing this testing and splitting process recursively, we eventually obtain a sequence of cubic segments that form an adequate approximation of the icurve (to within the caller-specified tolerance). Then we use well-known techniques to join these cubic segments together to get a cubic b-spline, as explained in section 5.3 below.

P.4.4.2 Estimating Approximation Error

The key to the process described in the previous section is the ability to measure the error between the original icurve \mathbf{C} and a cubic approximation \mathbf{H} on some interval $[w_i, w_{i+1}]$. If the approximation error is larger than some caller-specified value ε , then we have to split the segment into two and approximate each of the two pieces separately. There are many ways to measure the approximation error, and the choice we make will be a trade-off between certainty and performance.

If we were being rigorous, we would calculate either the "parametric" error

$$\text{error} = \max_{w_i \leq w \leq w_{i+1}} \|\mathbf{C}(w) - \mathbf{H}(w)\|$$

or perhaps even the "geometric" (Hausdorff) error


$$\text{error} = \max_{w_i \leq s \leq w_{i+1}} \min_{w_i \leq t \leq w_{i+1}} \|\mathbf{C}(s) - \mathbf{H}(t)\|$$

However, both of these are very difficult to calculate, especially the geometric error, so a simpler estimate is needed. If our estimate is overly pessimistic, we may generate more cubic segments than

we really need, but this is not a great disaster. A more realistic approach is to choose some n sample locations $\bar{w}_1, \dots, \bar{w}_n$ in $[w_i, w_{i+1}]$ and check the error only at these points. In other words, our error estimate is:

$$\text{error} = \max_{1 \leq i \leq n} \|\mathbf{C}(\bar{w}_i) - \mathbf{H}(\bar{w}_i)\|$$

Using larger values of n will reduce performance but will provide a more reliable approximation, of course. The simplest approach is to choose $n = 1$, which means that we simply use one sample location at $\bar{w} = \frac{1}{2}(w_i + w_{i+1})$. This is especially fast because the value of $\mathbf{C}(w)$ used in measuring the error can be re-used if we find that we need to split the segment into two. Our prior experiences (and perhaps some theorems in approximation theory) tell us that the error when approximating by a Hermite cubic typically looks like this:

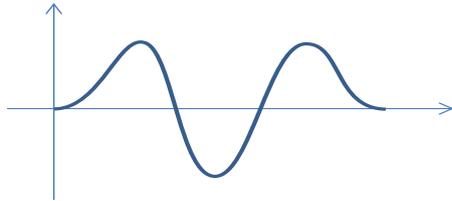


and this suggests checking the error at the values $\frac{1}{3}, \frac{1}{2}, \frac{2}{3}$. This test is implemented in the function [MeasureError](#) in section L.4.4.4.

P.4.4.3 Constructing a Cubic B-spline

Suppose that for $i = 0, 1, \dots, n$ we have a point \mathbf{P}_i , a derivative vector \mathbf{V}_i , and a parameter value w_i , and we wish to interpolate this data with a cubic b-spline. In other words, we want to construct a cubic b-spline \mathbf{S} such that $\mathbf{S}(w_i) = \mathbf{P}_i$ and $\mathbf{S}'(w_i) = \mathbf{V}_i$ for $i = 0, 1, \dots, n$.

Geometrically, the construction is very simple, as shown in the following diagram:

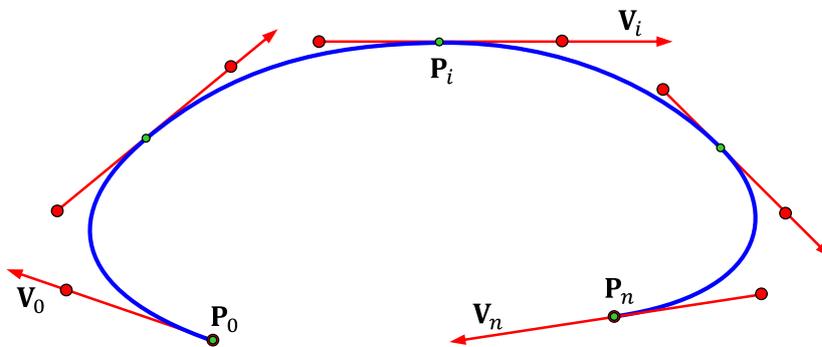

The small green points are the original points \mathbf{P}_i , and the red points are the poles (control points) of the cubic b-spline. The construction algorithm is as follows:

- V. The first pole is \mathbf{P}_0
- VI. The second pole is at $\mathbf{P}_0 + \frac{1}{3}(w_1 - w_0)\mathbf{V}_0$
- VII. Near the i -th point \mathbf{P}_i , there are two poles at $\mathbf{P}_i - \frac{1}{3}(w_i - w_{i-1})\mathbf{V}_i$ and $\mathbf{P}_i + \frac{1}{3}(w_{i+1} - w_i)\mathbf{V}_i$
- VIII. The last-but-one pole is at $\mathbf{P}_n - \frac{1}{3}(w_n - w_{n-1})\mathbf{V}_n$
- IX. The last pole is at \mathbf{P}_n

The spline's knot sequence is also easy to construct. It is

$$w_0, w_0, w_0, w_0, w_1, w_1, w_2, w_2, \dots, w_i, w_i, \dots, w_{n-1}, w_{n-1}, w_n, w_n, w_n, w_n$$

As we can see, each interior knot has multiplicity =2, and the end knots have multiplicity =4. This technique for creating a spline is implemented in a [Spline](#) constructor in section L.4.4.

P.4.4.4 Approximation Code

This section provides a complete implementation of the type of approximation function described in section above. The function is completely generic and can be applied to any curve on which we can calculate points and first-derivative vectors.

As before, the code emphasizes clarity rather than efficiency.

The approximation function is [CubicApproximation.Approximate](#). The [Main](#) function calls this function to construct an approximation of a curve described by an evaluator function [IntEval](#). This is just a “fake” evaluator function to illustrate the process. In the usage that is of immediate interest to us here, the real evaluator function would actually return points and derivatives of an icurve, using the methods described in section L.4.2.3. The approximation process is begun from a sequence of Point/Derivative quantities, which would be read from the chart of the icurve.

The code uses *Vector* and *Position* classes with obvious properties, as described in section L.3. You have to provide these classes in order for the code to work.

The code is as follows:

```
using System.Collections.Generic;          // For List class

public class MyProgram
{
    static void Main()
    {
        // Data to be passed to the curve evaluator function (cylinder radii, in this
        case)
        double a = 150;
        double b = 200;
        double[] data = { a, b };

        // Evaluator function for a cylinder/cylinder intersection curve.
        CurveEvaluator eval = IntEval;

        // Get initial points to start approximation process
        double pi = System.Math.PI;
        double t0 = 0;           CurvePoint pv0 = eval(data, t0);
        double t1 = pi/4;       CurvePoint pv1 = eval(data, t1);
        double t2 = pi/2;       CurvePoint pv2 = eval(data, t2);
        CurvePoint[] initPoints = { pv0, pv1, pv2 };

        // Define the desired approximation tolerance
        double tol = 0.0015;

        // Calculate a cubic spline approximation
        Spline approx = CubicApproximation.Approximate(eval, data, initPoints, tol);

        // Write out spline data to console
        approx.Write();
    }

    /// <summary>Sample evaluator function -- for an intersection curve</summary>
    private static CurvePoint IntEval(object data, double t)
    {
        double[] ab = (double[])data;
        double a = ab[0];      // Smaller radius; cylinder  $x^2 + y^2 = a^2$ 
        double b = ab[1];      // Larger radius; cylinder  $y^2 + z^2 = b^2$ 

        double cost = System.Math.Cos(t);
        double sint = System.Math.Sin(t);

        double x = a*cost;
        double y = a*sint;
        double z = System.Math.Sqrt(b*b - y*y);
        Position pt = new Position(x, y, z);
    }
}
```

```

    double dx = -a*sint;
    double dy = a*cost;
    double dz = -(a*a*cost*sint) / System.Math.Sqrt(b*b - a*a*sint*sint);
    Vector deriv = new Vector(dx, dy, dz);

    return new CurvePoint(pt, deriv, t);
  }
}

/// <summary>Provides functions for approximating a given curve by a cubic
spline</summary>
public class CubicApproximation
{
  /// <summary>
  /// Constructs a cubic b-spline approximation of a curve, starting from initial
  CurvePoint data
  /// </summary>
  /// <param name="eval">Evaluator function to calculate point/derivative on curve
  to be approximated</param>
  /// <param name="data">Data to be passed to the evaluator function</param>
  /// <param name="initPoints">Initial list of CurvePoint objects to start
  approximation</param>
  /// <param name="tol">The tolerance for the approximation process</param>
  /// <returns>A cubic b-spline approximating the given curve to within the given
  tolerance</returns>
  /// <remarks>
  /// This function is suitable for approximating a JT/XT icurve. The chart points
  of the icurve
  /// provide the initial list of CurvePoint items that this function receives.
  /// </remarks>
  public static Spline Approximate(CurveEvaluator eval, object data, CurvePoint[]
  initPoints, double tol)
  {
    // The list of points that will be used to construct the spline approximation
    List<CurvePoint> outPoints = new List<CurvePoint>();

    // Add the first point to the list
    outPoints.Add(initPoints[0]);

    // Cycle through inter-point intervals, adding split points
    for (int i = 0 ; i <= initPoints.Length - 2 ; i++)
    {
      CurvePoint[] splitPoints = TestAndSplit(eval, data, tol, initPoints[i],
      initPoints[i+1]);
      outPoints.AddRange(splitPoints);
    }

    // Create a cubic spline from the CurvePoint data
    return new Spline(outPoints.ToArray());
  }

  /// <summary>Recursively tests/splits a Hermite cubic segment until
  approximation tolerance is met</summary>
  /// <param name="eval">Evaluator function to calculate point/derivative on curve
  to be approximated</param>
  /// <param name="data">Data to be passed to the evaluator function</param>
  /// <param name="tol">Tolerance to be used to test whether approximation is good
  enough</param>
  /// <param name="ends">The two ends of the Hermite segment to be tested</param>
  /// <returns>Array of CurvePoint items that give a good piecewise cubic
  approximation</returns>
  private static CurvePoint[] TestAndSplit(CurveEvaluator eval, object data,
  double tol, params CurvePoint[] ends)

```

```

{
    // The list of CurvePoints that we will eventually output
    List<CurvePoint> outPoints = new List<CurvePoint>();

    CurvePoint pv0 = ends[0];    double t0 = pv0.T;
    CurvePoint pv1 = ends[1];    double t1 = pv1.T;

    double error = MeasureError(eval, data, ends);

    if (error < tol) // Success, so just add end-point to pointList
    {
        outPoints.Add(pv1);
    }
    else // Split segment and proceed two halves recursively
    {
        double tmid = (t0 + t1) / 2;
        CurvePoint splitPoint = eval(data, tmid);
        CurvePoint[] newPoints1 = TestAndSplit(eval, data, tol, pv0, splitPoint);
        outPoints.AddRange(newPoints1);
        CurvePoint[] newPoints2 = TestAndSplit(eval, data, tol, splitPoint, pv1);
        outPoints.AddRange(newPoints2);
    }

    return outPoints.ToArray();
}

/// <summary>Measures the error between a curve and a Hermite cubic
approximation</summary>
/// <param name="eval">Evaluator function to calculate point/derivative on curve
to be approximated</param>
/// <param name="data">Data to be passed to the evaluator function</param>
/// <param name="ends">The two ends of the Hermite segment to be tested</param>
/// <returns>An estimate of the error (deviation) between the curve and the
cubic</returns>
/// <remarks>
/// The error estimate is quite simplistic. Much more accurate estimates could
be computed,
/// but this would also be much slower.
/// </remarks>
private static double MeasureError(CurveEvaluator eval, object data, params
CurvePoint[] ends)
{
    Position P0 = ends[0].Point;    Vector V0 = ends[0].Derivative;    double
t0 = ends[0].T;
    Position P1 = ends[1].Point;    Vector V1 = ends[1].Derivative;    double
t1 = ends[1].T;

    double c = t1 - t0;
    double t;
    Position curvePoint;
    Position cubicPoint;
    double error, error1, error2;

    t = t0 + c/3;
    curvePoint = eval(data, t).Point;
    cubicPoint = HermiteCubic(P0, P1, V0, V1, t0, t1, t);
    error = Position.Distance(curvePoint, cubicPoint);

    t = t0 + c/2;
    curvePoint = eval(data, t).Point;
    cubicPoint = HermiteCubic(P0, P1, V0, V1, t0, t1, t);
    error1 = Position.Distance(curvePoint, cubicPoint);
    error = System.Math.Max(error, error1);

    t = t0 + 2*c/3;
    curvePoint = eval(data, t).Point;
    cubicPoint = HermiteCubic(P0, P1, V0, V1, t0, t1, t);

```

```

    error2 = Position.Distance(curvePoint, cubicPoint);
    error = System.Math.Max(error, error2);

    return error;
}

/// <summary>Calculate a point on a Hermite cubic curve</summary>
/// <param name="P0">Start point</param>
/// <param name="P1">End point</param>
/// <param name="V0">Start first derivative</param>
/// <param name="V1">End first derivative</param>
/// <param name="t0">Start parameter</param>
/// <param name="t1">End parameter</param>
/// <param name="t">Parameter value at which to evaluate</param>
/// <returns>Point on curve</returns>
private static Position HermiteCubic(Position P0,Position P1,Vector V0,Vector
V1,double t0,double t1,double t)
{
    double c = t1 - t0;
    double u = (t - t0)/c;
    double u2 = u*u;
    double u3 = u*u2;

    double h0 = 1 - 3*u2 + 2*u3;
    double h1 = 1 - h0;
    double k0 = u - 2*u2 + u3;
    double k1 = u3 - u2;

    return h0*P0 + h1*P1 + (k0*c)*V0 + (k1*c)*V1;
}
}

/// <summary>Represents a location on a curve</summary>
public class CurvePoint
{
    /// <summary>Point location</summary>
    public Position Point { get; set; }

    /// <summary>Derivative vector</summary>
    public Vector Derivative { get; set; }

    /// <summary>Parameter value</summary>
    public double T { get; set; }

    /// <summary>Constructor</summary>
    /// <param name="point">Point</param>
    /// <param name="deriv">Derivative vector</param>
    /// <param name="t">Parameter value</param>
    public CurvePoint(Position point, Vector deriv, double t)
    {
        this.Point = point;
        this.Derivative = deriv;
        this.T = t;
    }
}

/// <summary>Represents a polynomial b-spline</summary>
public class Spline
{
    /// <summary>The poles (control points) of the spline</summary>
    public Position[] Poles { get; set; }

    /// <summary>The knots of the spline</summary>
    public double[] Knots { get; set; }

    /// <summary>Constructs a cubic spline from an array of CurvePoint

```

```
objects</summary>
  /// <param name="points">The Hermite points</param>
  /// <remarks>
  /// The cubic spline interpolates the point and derivative values stored in the
CurvePoint array.
  /// </remarks>
  public Spline(CurvePoint[] points)
  {
    int npts = points.Length;

    List<double> knotList = new List<double>();
    List<Position> poleList = new List<Position>();

    Position P;
    Vector V;
    double h, k;

    // Initial knot has multiplicity = 4
    for (int i = 1; i <= 4; i++) knotList.Add(points[0].T);

    // Construct first two poles
    P = points[0].Point;
    V = points[0].Derivative;
    k = points[1].T - points[0].T;
    poleList.Add(P);
    poleList.Add(P + k*V/3);

    //Cycle through interior knots
    for (int i = 1; i < npts - 1; i++)
    {
      P = points[i].Point;
      V = points[i].Derivative;
      h = points[i].T - points[i - 1].T;
      k = points[i + 1].T - points[i].T;
      poleList.Add(P - h*V/3);
      poleList.Add(P + k*V/3);
      knotList.Add(points[i].T);
      knotList.Add(points[i].T);
    }

    // Construct last two poles
    P = points[npts - 1].Point;
    V = points[npts - 1].Derivative;
    h = points[npts - 1].T - points[npts - 2].T;
    poleList.Add(P - h*V/3);
    poleList.Add(P);

    //Last knot has multiplicity = 4
    for (int i = 1; i <= 4; i++) knotList.Add(points[npts - 1].T);

    this.Knots = knotList.ToArray();
    this.Poles = poleList.ToArray();
  }

  /// <summary>Write out spline knots and poles to the console</summary>
  public void Write()
  {
    System.Console.WriteLine("Knot values");
    System.Console.WriteLine("=====");

    for (int i = 0; i < this.Knots.Length; i++)
    {
      System.Console.WriteLine("t[{0}] = {1}", i, this.Knots[i].ToString("F8"));
    }

    System.Console.WriteLine("");
  }
}
```

```

System.Console.WriteLine("Poles (Control Points)");
System.Console.WriteLine("=====");



for (int i = 0; i < this.Poles.Length; i++)
{
    System.Console.Write("p[{0}] = ( ", i);
    System.Console.Write(this.Poles[i].X.ToString("F8") + " , ");
    System.Console.Write(this.Poles[i].Y.ToString("F8") + " , ");
    System.Console.Write(this.Poles[i].Z.ToString("F8") + " )\n");
}

System.Console.ReadLine();
}
}

/// <summary>
/// An evaluator function that calculates position and first derivative at a
parameter value on a curve
/// </summary>
/// <param name="data">Data to be used in evaluation</param>
/// <param name="t">Parameter value at which to evaluate</param>
/// <returns>PointVector containing the calculated point and first
derivative</returns>
/// <remarks>
/// You write a CurveEvaluator function to provide information
/// about a curve that you're approximating with a spline.
/// </remarks>
public delegate CurvePoint CurveEvaluator(object data, double t);

```

Running the code with tolerance values of 0.02 and 0.0015 produces the following results:

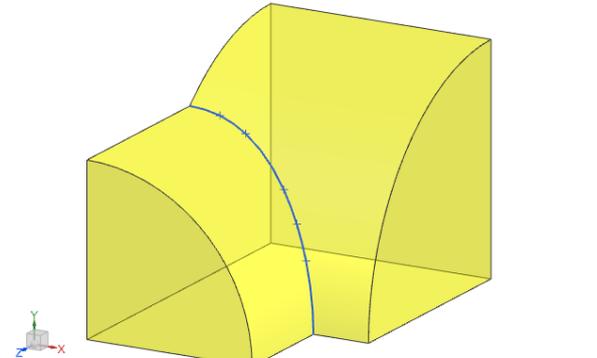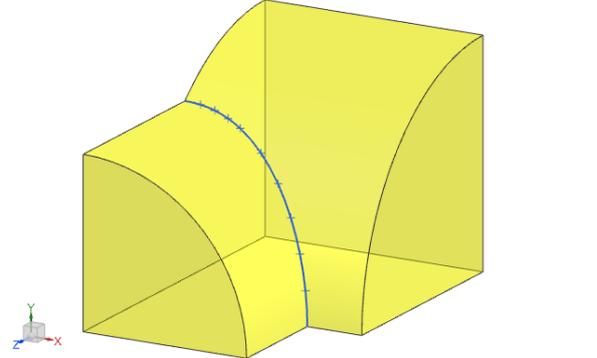Tolerance = 0.02	Tolerance = 0.0015
	
<p>Knot values ===== t[0] = 0.00000000 t[1] = 0.00000000 t[2] = 0.00000000 t[3] = 0.00000000 t[4] = 0.39269908 t[5] = 0.39269908 t[6] = 0.58904862 t[7] = 0.58904862 t[8] = 0.78539816 t[9] = 0.78539816 t[10] = 1.17809725 t[11] = 1.17809725 t[12] = 1.37444679 t[13] = 1.37444679 t[14] = 1.57079633 t[15] = 1.57079633 t[16] = 1.57079633 t[17] = 1.57079633</p> <p>Poles (Control Points) ===== p[0] = (150.00000000 , 0.00000000 , 200.00000000)</p>	<p>Knot values ===== t[0] = 0.00000000 t[1] = 0.00000000 t[2] = 0.00000000 t[3] = 0.00000000 t[4] = 0.19634954 t[5] = 0.19634954 t[6] = 0.39269908 t[7] = 0.39269908 t[8] = 0.58904862 t[9] = 0.58904862 t[10] = 0.78539816 t[11] = 0.78539816 t[12] = 0.98174770 t[13] = 0.98174770 t[14] = 1.17809725 t[15] = 1.17809725 t[16] = 1.27627202 t[17] = 1.27627202 t[18] = 1.37444679 t[19] = 1.37444679 t[20] = 1.47262156 t[21] = 1.47262156</p>


Tolerance = 0.02	Tolerance = 0.0015
<p>p[1] = (150.00000000 , 19.63495408 , 200.00000000) p[2] = (146.09590150 , 39.26218265 , 197.02054165) p[3] = (134.82494406 , 66.47268096 , 188.86777357) p[4] = (130.17473985 , 75.17260112 , 185.55245365) p[5] = (119.26614384 , 91.49846878 , 178.06926525) p[6] = (113.00802177 , 99.12401259 , 173.90077364) p[7] = (92.18200800 , 119.95002636 , 160.87320146) p[8] = (75.54284706 , 131.06795825 , 151.42586520) p[9] = (48.33234875 , 142.33891569 , 140.59439414) p[10] = (38.89238528 , 145.20249730 , 137.56536054) p[11] = (19.63471133 , 149.03308682 , 133.40589446) p[12] = (9.81747704 , 150.00000000 , 132.28756555) p[13] = (0.00000000 , 150.00000000 , 132.28756555)</p>	<p>t[22] = 1.57079633 t[23] = 1.57079633 t[24] = 1.57079633 t[25] = 1.57079633</p> <p>Poles (Control Points) =====</p> <p>p[0] = (150.00000000 , 0.00000000 , 200.00000000) p[1] = (150.00000000 , 9.81747704 , 200.00000000) p[2] = (149.03308682 , 19.63471133 , 199.27172642) p[3] = (145.20249730 , 38.89238528 , 196.42333163) p[4] = (142.33891569 , 48.33234875 , 194.30295229) p[5] = (134.82494406 , 66.47268096 , 188.86777357) p[6] = (130.17473985 , 75.17260112 , 185.55245365) p[7] = (119.26614384 , 91.49846878 , 178.06926525) p[8] = (113.00802177 , 99.12401259 , 173.90077364) p[9] = (99.12401259 , 113.00802177 , 165.21572552) p[10] = (91.49846878 , 119.26614384 , 160.69930611) p[11] = (75.17260112 , 130.17473985 , 151.99742483) p[12] = (66.47268096 , 134.82494406 , 147.81537485) p[13] = (52.86743180 , 140.46042278 , 142.39963932) p[14] = (48.24007148 , 142.11611878 , 140.73804072) p[15] = (38.84533170 , 144.96598194 , 137.80076707) p[16] = (34.07796679 , 146.16014468 , 136.52549402) p[17] = (24.44912982 , 148.07543944 , 134.44576098) p[18] = (19.58767265 , 148.79656849 , 133.64169964) p[19] = (9.81746945 , 149.75884951 , 132.56247459) p[20] = (4.90873852 , 150.00000000 , 132.28756555) p[21] = (0.00000000 , 150.00000000 , 132.28756555)</p>

In some systems (like NX), a b-spline knot sequence is expected to start with a value of 0, and end with a value of 1. To obtain a knot sequence of this form, you can just divide each of the above knots by 1.57079633. This will not change the shape of the curve.


P.5 Rolling-Ball Blend Surface

P.5.1 Computing a Point on a Blend Surface

Conceptually, a blend surface is the envelope of a spherical ball that is rolling across two base surfaces, staying in contact with both of them, as shown here:

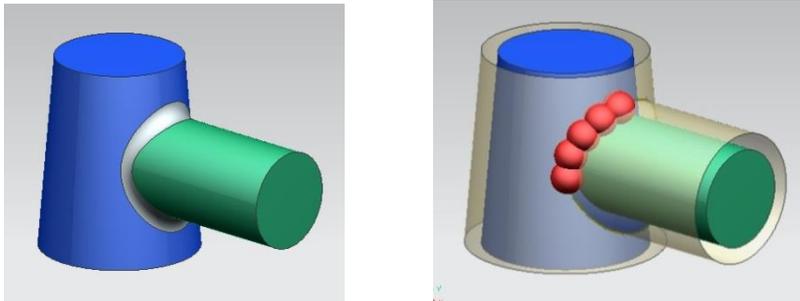

A more detailed depiction of the construction is shown in the pictures below.

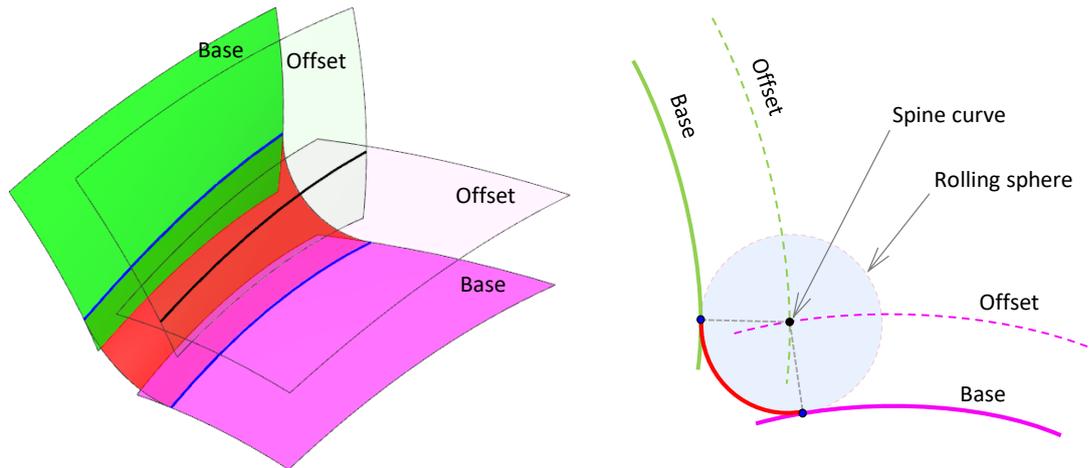

The curves shown in blue are the contact curves, where the rolling ball touches the base surfaces. Equivalently, we can think of the ball moving so that its center lies on a “spine” curve that is the intersection of two offset surfaces.

Whenever possible, simple analytic surfaces are used to perform blending operations, rather than using blend surfaces. So, many blends are modeled using cylindrical, toroidal or spherical surfaces. At the other extreme, very complex blends (e.g. varying radius ones, or ones with non-circular cross sections) are modeled using b-spline surfaces.

P.5.1.1 Stored Data

The stored data for a blend surface is as follows:

Field name	Data type	Description
type	char	Type of blend: ‘R’ or ‘E’ (see below)
surface	pointer[2]	Base surfaces (adjacent to original edge)
spine	pointer	Spine curve of the blend (locus of center of rolling ball)
range	double[2]	Offset distances to be applied to the base surfaces
thumb_weight	double[2]	Always [1,1]
boundary	pointer0[2]	Always [0, 0]
start	pointer0	Start LIMIT in certain degenerate cases
end	pointer0	End LIMIT in certain degenerate cases

The thumb-weight and boundary fields are obsolete, and can be ignored.

The two entries in the range array always have equal magnitudes, and this common magnitude is the radius of the blend surface.

P.5.1.2 Surface Equation

The equation of a rolling-ball blend surface is:

$$S(u, v) = C(u) + r \cos(v\alpha(u)) X(u) + r \sin(v\alpha(u)) Y(u)$$


where

- X. $C(u)$ is the spine curve
 - XI. r is the blend radius
 - XII. $X(u)$ and $Y(u)$ are unit vectors that are perpendicular to the tangent vector $C'(u)$, and to each other. $X(u)$ is in the direction $S(u, 0) - C(u)$.
 - XIII. $\alpha(u)$ is the angle subtended by points on the boundary curves at the spine
- X , Y and α are expressed as functions of u , since their values change with u .

We note the following basic facts that are apparent from the parametric equation:

- XIV. For all u and v , we have $\|\mathbf{S}(u, v) - \mathbf{C}(u)\| = r$
- XV. Setting $v = 0$, we get $\mathbf{S}(u, 0) = \mathbf{C}(u) + r\mathbf{X}(u)$, which is a curve lying on the first base surface
- XVI. Setting $v = 1$, we get a curve $\mathbf{S}(u, 1)$ lying on the second base surface
- XVII. If we fix u , we get a circular arc of radius r , with center at the point $\mathbf{C}(u)$, lying in the plane of the two vectors $\mathbf{X}(u)$ and $\mathbf{Y}(u)$

The following picture illustrates the situation:

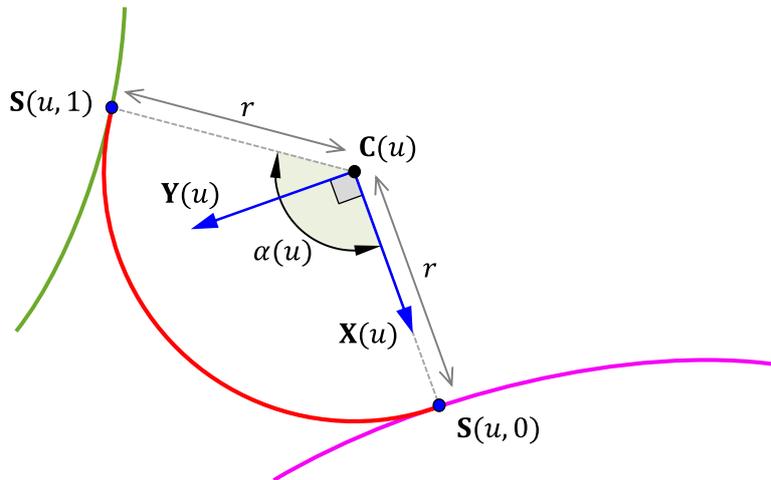

Transmit files can contain blends of the following types:

- XVIII. Type = 'R': a rolling ball blend
- XIX. Type = 'E': a cliff edge blend

For rolling ball blends, the spine curve will be the intersection of the two surfaces obtained by offsetting the supporting surfaces by an amount given by the respective entry in range[]. Note that the offsets to be applied may be positive or negative, and that the sense of the surface is significant; i.e. the offset vector is the natural unit surface normal, times the range, times -1 if the sense is negative.

For cliff edge blends, one of the surfaces will be a blended_edge with a range of $[0,0]$; its spine will be the cliff edge curve, and its supporting surfaces will be the surfaces of the faces adjacent to the cliff edge. Its type will be R.

The limit fields will only be non-null if the spine curve is periodic but the edge curve being blended has terminators – for example if the spine is elliptical but the blend degenerates. In this case the two LIMIT nodes, of type 'L', determine the extent of the spine.

P.5.1.3 Calculating a Point on a Blend Surface

The computation of a point on a blend surface is very similar to the computation of a point on an intersection curve, as described in section L.4.3 above.

Suppose we have two base surfaces **A** and **B** with parameterizations $(p, q) \mapsto \mathbf{A}(p, q)$ and $(s, t) \mapsto \mathbf{B}(s, t)$, and we want to calculate a point $\mathbf{S}(u, v)$ on the blend surface.

Let \mathbf{N}_A and \mathbf{N}_B denote the unit normal functions of the surfaces **A** and **B** respectively:

$$\mathbf{N}_A = \frac{\frac{\partial \mathbf{A}}{\partial p} \times \frac{\partial \mathbf{A}}{\partial q}}{\left\| \frac{\partial \mathbf{A}}{\partial p} \times \frac{\partial \mathbf{A}}{\partial q} \right\|} ; \quad \mathbf{N}_B = \frac{\frac{\partial \mathbf{B}}{\partial s} \times \frac{\partial \mathbf{B}}{\partial t}}{\left\| \frac{\partial \mathbf{B}}{\partial s} \times \frac{\partial \mathbf{B}}{\partial t} \right\|}$$

Then we can form the two offset surfaces:

$$\bar{\mathbf{A}}(p, q) = \mathbf{A}(p, q) + r\mathbf{N}_A(p, q)$$

$$\bar{\mathbf{B}}(s, t) = \mathbf{B}(s, t) + r\mathbf{N}_B(s, t)$$

Assume for the time being that the spine curve \mathbf{C} is an icurve (this is usually the case). If we use the techniques described in section L.4.3 to calculate the point $\mathbf{C}(u)$, we will obtain surface parameter values p, q, s, t such that

$$\bar{\mathbf{A}}(p, q) = \bar{\mathbf{B}}(s, t) = \mathbf{C}(u)$$

Although the parameter values p, q, s, t came from a computation on offset surfaces, they can also be used to calculate points on the original surfaces \mathbf{A} and \mathbf{B} , too, which will define the vectors $\mathbf{X}(u)$ and $\mathbf{Y}(u)$. The equation immediately above tells us that

$$\mathbf{A}(p, q) + r\mathbf{N}_A(p, q) = \mathbf{C}(u)$$


$$\mathbf{B}(s, t) + r\mathbf{N}_B(s, t) = \mathbf{C}(u)$$

So the point $\mathbf{A}(p, q)$ is the foot of the normal from the point $\mathbf{C}(u)$ to the surface \mathbf{A} . Similarly, $\mathbf{B}(s, t)$ is the foot of the normal from the point $\mathbf{C}(u)$ to the surface \mathbf{B} . The vectors $\mathbf{A}(p, q) - \mathbf{C}(u)$ and $\mathbf{B}(s, t) - \mathbf{C}(u)$ are perpendicular to the curve \mathbf{C} . Then we set

$$\mathbf{X}(u) = \frac{\mathbf{A}(p, q) - \mathbf{C}(u)}{\|\mathbf{A}(p, q) - \mathbf{C}(u)\|} \quad ; \quad \mathbf{W}(u) = \frac{\mathbf{B}(s, t) - \mathbf{C}(u)}{\|\mathbf{B}(s, t) - \mathbf{C}(u)\|}$$

$$\mathbf{Y}(u) = \frac{\mathbf{X}(u) \times (\mathbf{X}(u) \times \mathbf{W}(u))}{\|\mathbf{X}(u) \times (\mathbf{X}(u) \times \mathbf{W}(u))\|}$$

so $\mathbf{X}(u)$ and $\mathbf{Y}(u)$ are orthogonal unit vectors that lie in a plane perpendicular to the curve $\mathbf{C}(u)$.

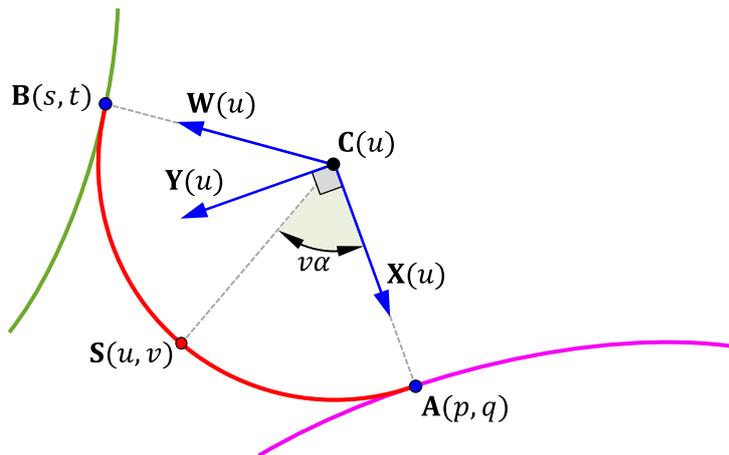

We let $\alpha(u)$ be the angle between $\mathbf{X}(u)$ and $\mathbf{W}(u)$. Then the point $\mathbf{S}(u, v)$ on the blend surface is:

$$\mathbf{S}(u, v) = \mathbf{C}(u) + r \cos(v\alpha(u)) \mathbf{X}(u) + r \sin(v\alpha(u)) \mathbf{Y}(u)$$

Alternatively, we know that $\mathbf{W}(u) = (\cos \alpha) \mathbf{X}(u) + (\sin \alpha) \mathbf{Y}(u)$. Dividing through by $\sin \alpha$, we get $\mathbf{Y}(u) = (\operatorname{cosec} \alpha) \mathbf{W}(u) - (\cot \alpha) \mathbf{X}(u)$. Substituting this into the formula above gives:

$$\mathbf{S}(u, v) = \mathbf{C}(u) + r(\cos v\alpha - \cot \alpha \sin v\alpha) \mathbf{X}(u) + r(\operatorname{cosec} \alpha \sin v\alpha) \mathbf{W}(u)$$

In fact, this is the formula that is actually used in the Parasolid code.

P.5.1.4 Blend Surface Pseudocode

We assume that we already have a function that computes surface parameter values corresponding to a given parameter value on an icurve, as described in section L.4.3:

```

/// <summary>Calculates surface parameters at a location on an icurve</summary>
/// <param name="A">First surface evaluation function, (s,t) --> A(s,t)</param>
/// <param name="B">Second surface evaluation function (u,v) --> B(u,v)</param>
/// <param name="w">Parameter value on icurve, C</param>
/// <returns>Surface parameter values (s,t,u,v)</returns>
/// <remarks>

```

```

/// The surface parameter values (s,t,u,v) are such that
///      A(s,t) = B(u,v) = C(w)
/// </remarks>
static double[] ICurveParams(SurfaceFunction A, SurfaceFunction B, double w)

```

Also, we assume that we have functions to compute points on the offset surfaces \bar{A} = offsetA and \bar{B} = offsetB. For example:

```

/// <summary>Compute point on offset surface OffsetA</summary>
/// <param name="u">Parameter value</param>
/// <param name="v">Parameter value</param>
/// <returns>Position on offset surface at parameter values (u,v)</returns>
public static Position OffsetA(double u, double v)
{
    Position P = surfaceA.Position(u,v);
    Vector N = surfaceA.UnitNormal(u,v);
    return P + d*N;
}

```

Then the code to compute a point on a blend surface is as follows:

```

/// <summary>Calculate a point on a blend surface at given parameter values
(u,v)</summary>
/// <param name="surfaceA">First surface</param>
/// <param name="surfaceB">Second surface</param>
/// <param name="r">Radius of blend surface</param>
/// <param name="u">Parameter value</param>
/// <param name="v">Parameter value</param>
/// <returns>Point S(u,v) on blend surface</returns>
public static Position Blend(Surface surfA, Surface surfB, double r, double u,
double v)
{
    // Compute surface parameter values at point on blend spine,
    // which is the intersection curve of two offset surfaces
    double[] pqst = ICurveParams(OffsetA, OffsetB, u);
    double p = pqst[0];    double q = pqst[1];
    double s = pqst[2];    double t = pqst[3];

    // Compute point on icurve.
    Position Cu = OffsetA(r, p, q);

    // Compute radial vectors. Note that these are not unitized.
    Position Apq = surfA.Position(p,q);    Vector X = Apq - Cu;
    Position Bst = surfB.Position(s,t);    Vector W = Bst - Cu;

    // Angular calculations in v direction
    double denom = r*r;
    double cosA = (X*W) / denom;
    double sinA = Vector.Norm(Vector.Cross(X, W));
    double A = System.Math.Atan2(sinA, cosA);

    double cosvA = System.Math.Cos(v*A);
    double sinvA = System.Math.Sin(v*A);
    double cotA = cosA / sinA;
    double cosecA = 1 / sinA;

    // Final point on blend surface
    Position Suv = Cu + (cosvA - cotA*sinvA)*X + (cosecA*sinvA)*W;
    return Suv;
}


```

P.5.2 Approximating a Blend Surface

Approximation of a blend surface can be performed using an approach that's very similar to the spline approximation technique described in section L.4.4. The basic calculation is the construction of certain rational Bezier patches, as outlined in section L.5.2.1 below, which interpolate the circular cross-sections of the blend plus some derivatives. These Bezier patches can be assembled into a smooth NURBS surface.

P.5.2.1 The Basic Bézier Patch


The construction starts with the following data that can easily be obtained from a blend surface:

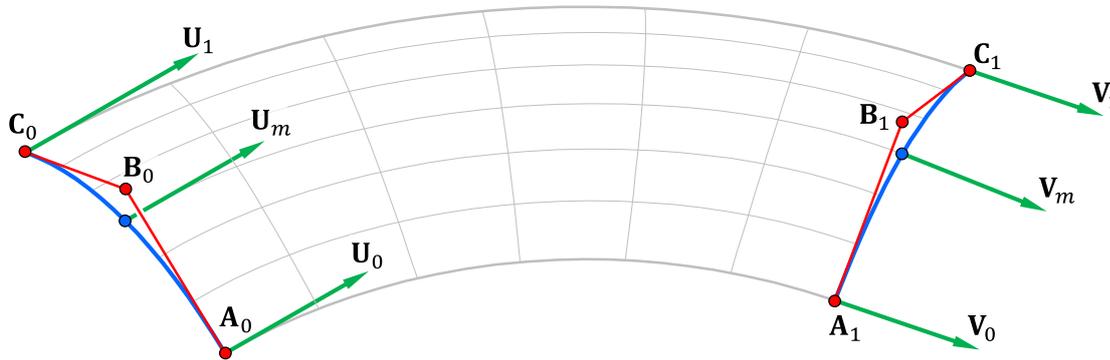

We have:

- XX. At one end, a circular arc, expressed as a rational quadratic Bézier curve with poles A_0, B_0, C_0 . The poles A_0 and C_0 have weights equal to one, and the pole B_0 has weight w_0 .
- XXI. Similarly, at the other end: a circular arc, expressed as a rational quadratic Bézier curve with poles A_1, B_1, C_1 . The poles A_1 and C_1 have weights of 1, and the pole B_1 has weight w_1 .
- XXII. Three derivative vectors U_0, U_m, U_1 at one end
- XXIII. Three derivative vectors V_0, V_m, V_1 at the other end

From this data, we can construct a Bézier patch $S(u, v)$, as shown here:

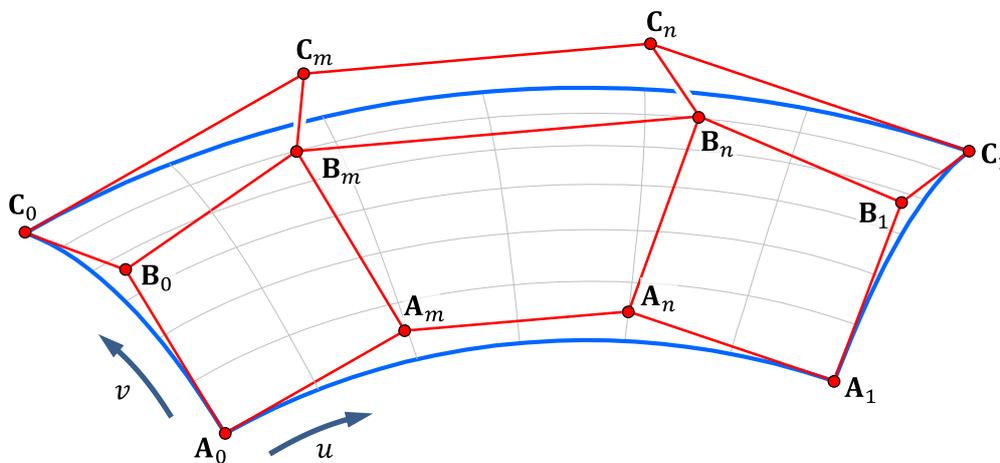

The patch is rational, and has degree 3 in the u -direction, and degree 2 in the v -direction. Its poles are constructed as follows:

- XXIV. The poles A_0, B_0, C_0 and their weights are copied directly from the circular arc.
- XXV. The poles A_1, B_1, C_1 and their weights are copied directly from the other circular arc.
- XXVI. $A_m = A_0 + \frac{1}{3}U_0$, and $C_m = C_0 + \frac{1}{3}U_1$
- XXVII. $B_m = B_0 + \frac{2}{3w_0}(U_m - \frac{1}{4}U_0 - \frac{1}{4}U_1)$; weight = w_0
- XXVIII. $A_n = A_1 - \frac{1}{3}V_0$, and $C_n = C_1 - \frac{1}{3}V_1$
- XXIX. $B_n = B_1 - \frac{2}{3w_1}(V_m - \frac{1}{4}V_0 - \frac{1}{4}V_1)$; weight = w_1

With this definition, it is straightforward to verify that

- XXX. $v \mapsto \mathbf{S}(0, v)$ is a circular arc coinciding with the given one
- XXXI. $v \mapsto \mathbf{S}(1, v)$ is a circular arc coinciding with the other given one
- XXXII. $\mathbf{S}^u(0,0) = \mathbf{U}_0$, $\mathbf{S}^u(0, \frac{1}{2}) = \mathbf{U}_m$, and $\mathbf{S}^u(0,1) = \mathbf{U}_1$
- XXXIII. $\mathbf{S}^u(1,0) = \mathbf{V}_0$, $\mathbf{S}^u(1, \frac{1}{2}) = \mathbf{V}_m$, and $\mathbf{S}^u(1,1) = \mathbf{V}_1$

So, the Bézier patch interpolates the two given circular arcs and the 6 given derivative vectors.

P.5.2.2 Approximation Code

Pseudocode for approximating a blend surface is as follows:

```

/// <summary>Create a b-surface approximation of a blend surface</summary>
/// <param name="blend">The blend surface to be approximated</param>
/// <param name="nodesU">Parameter values (fractional) at which to
interpolate</param>
/// <returns>The b-surface approximation</returns>
public static Bsurface ApproxBlend(BlendSurface blend, double[] nodesU)
{
    int n = nodesU.Length;

    Position[] A = new Position[2*n]; // Row of poles along edge v=0
    Position[] B = new Position[2*n]; // Middle row of poles
    Position[] C = new Position[2*n]; // Row of poles along edge v=1
    double[] wm = new double[2*n]; // Weights for middle row of poles

    double[] knotsU = new double[2*n + 4]; // Surface knots in u-direction
    double[] knotsV = { 0, 0, 0, 1, 1, 1 }; // Surface knots in v-direction

    knotsU[0] = 0; knotsU[2*n + 2] = 1;
    knotsU[1] = 0; knotsU[2*n + 3] = 1;

    double u0 = blend.MinU; double u1 = blend.MaxU;
    double v0 = blend.MinV; double v1 = blend.MaxV;
    double vm = (v0 + v1) / 2;

    double third = 1.0 / 3.0;

    double[] u = new double[n];
    for (int i = 0; i < n ; i++) u[i] = (1 - nodesU[i])*u0 + nodesU[i]*u1;
    for (int i = 0; i < n ; i++)
    {
        Spline bezierArc = blend.IsoCurveU(u[i]); // Rational quadratic
        double w = bezierArc.Weights[1]; // Weight at its middle pole
        wm[2*i] = w; wm[2*i + 1] = w;

        double h = (i > 0) ? u[i] - u[i-1] : 0.0;
        double k = (i < n - 1) ? u[i+1] - u[i] : 0.0;

        Vector U0 = blend.DerivDu(u[i], v0); Position P0 = bezierArc.Poles[0];
        Vector Um = blend.DerivDu(u[i], vm); Position Pm = bezierArc.Poles[1];
        Vector U1 = blend.DerivDu(u[i], v1); Position P1 = bezierArc.Poles[2];
        Vector D = (2/w) * (Um - 0.25*U0 - 0.25*U1);

        A[2*i] = P0 - third*h*U0; A[2*i + 1] = P0 + third*k*U0;
        B[2*i] = Pm - third*h*D; B[2*i + 1] = Pm + third*k*D;
        C[2*i] = P1 - third*h*U1; C[2*i + 1] = P1 + third*k*U1;

        knotsU[2*i + 2] = nodesU[i];
        knotsU[2*i + 3] = nodesU[i];
    }

    Position[,] poles = new Position[2*n, 3];
    double[,] weights = new double[2*n, 3];

    for (int i = 0; i < 2*n; i++)
    {
        poles[i, 0] = A[i]; poles[i, 1] = B[i]; poles[i, 2] = C[i];
    }
}

```

```


    weights[i, 0] = 1;    weights[i, 1] = wm[i];  weights[i, 2] = 1;
  }
  return Bsurface(poles, weights, knotsU, knotsV);
}

```

As you can see, one of the inputs to this function is an array `nodesU` of parameter values at which circular cross-sections and partial derivatives are to be interpolated. The idea is that this code will be called as in section L.4.4.4: you construct an approximation, measure the error, and add new values into the `nodesU` array if necessary. This refinement process continues until the desired approximation error has been achieved.

P.5.2.3 Example

We use an example that's very similar to the one used in section L.4.4.4. We have two cylinders, $x^2 + y^2 = 150^2$, and $y^2 + z^2 = 200^2$, and their intersection is blended with a radius of 50. The `ApproxBlend` function shown above was called with `nodesU = { 0, 0.6, 1 }`

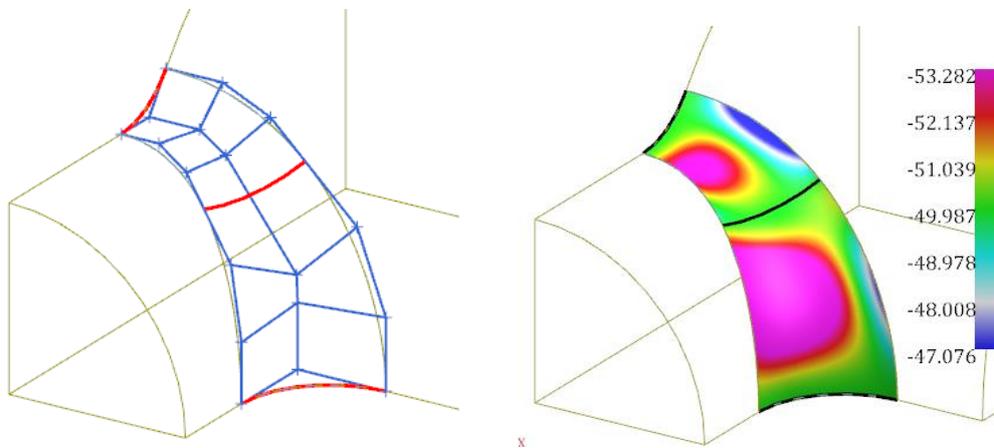

The image on the left shows the control points of the NURBS surface approximation that was produced, and the one on the right shows its minimum curvature values. The correct minimum curvature value (-50) is preserved near the three interpolated arcs, but not elsewhere. Since this surface has only two patches, the approximation is rather poor. Using a larger number of arcs (i.e. more entries in the `nodesU` array) would improve the accuracy, of course. The main approximation function should call `ApproxBlend` with a progressively more dense `nodesU` array until the desired accuracy is achieved.

For the simple surface shown above, the poles (control points) are

```

(100.00000000, 0.00000000, 250.00000000) (70.71067812, 0.00000000, 141.42135624) (150.00000000, 0.00000000, 200.00000000)
(100.00000000, 32.05918779, 250.00000000) (70.71067812, 24.64162626, 141.42135624) (150.00000000, 38.47102535, 200.00000000)
( 83.61937997, 62.80582420, 233.62398975) (82.28854357, 40.56677690, 165.79553058) (125.42906995, 75.36698904, 186.89919180)
( 42.38837901, 92.84163156, 208.63992245) (38.53818429, 76.94324822, 149.78734763) ( 63.58256851, 111.40995788, 166.91193796)
( 21.35441981, 100.00000000, 200.00000000) (25.43275108, 89.44271910, 156.52475842) ( 32.03162971, 120.00000000, 160.00000000)
( 0.00000000, 100.00000000, 200.00000000) ( 0.00000000, 89.44271910, 156.52475842) ( 0.00000000, 120.00000000, 160.00000000)

```

the corresponding weights are

```

1.00000000 ; 0.70710678 ; 1.00000000
1.00000000 ; 0.70710678 ; 1.00000000
1.00000000 ; 0.83426112 ; 1.00000000
1.00000000 ; 0.83426112 ; 1.00000000
1.00000000 ; 0.89442719 ; 1.00000000
1.00000000 ; 0.89442719 ; 1.00000000

```

and the knot vectors are

```

knotsU = { 0,0,0,0, 0.6, 0.6, 1,1,1,1 }
knotsV = { 0,0,0, ,1,1,1 }

```

P.5.2.4 Derivatives of Projected Curves

The algorithm given in sections L.5.2.1 and L.5.2.2 makes use of the partial derivatives with respect to u on the blend surface, so we need a way to calculate these.

As a first step, consider the general problem of finding the derivative of a curve that is a “normal projection” of a curve \mathbf{C} onto a surface \mathbf{S} . More specifically, suppose we have a curve $t \mapsto \mathbf{C}(t)$ that lies above a surface $(u, v) \mapsto \mathbf{S}(u, v)$. For each given t , we can find $u = u(t)$ and $v = v(t)$ such that the vector $\mathbf{R}(t) = \mathbf{S}(u(t), v(t)) - \mathbf{C}(t)$ is normal to the surface \mathbf{S} . In other words, the point $\mathbf{S}(u(t), v(t))$ is the “foot” of the normal from the point $\mathbf{C}(t)$ to the surface \mathbf{S} , and the curve $t \mapsto \mathbf{S}(u(t), v(t))$ is the normal projection of \mathbf{C} onto \mathbf{S} . The vector $\mathbf{R}(t)$ is normal to the surface \mathbf{S} , so we have

$$\mathbf{R}(t) \cdot \mathbf{S}^u = 0 \quad ; \quad \mathbf{R}(t) \cdot \mathbf{S}^v = 0$$

Here, as usual, \mathbf{S}^u and \mathbf{S}^v denote partial derivatives of \mathbf{S} with respect to u and v . Differentiating each of these equations with respect to t and rearranging, we get

$$\begin{aligned} [\mathbf{S}^u \cdot \mathbf{S}^u + \mathbf{R}(t) \cdot \mathbf{S}^{uu}] \frac{du}{dt} + [\mathbf{S}^u \cdot \mathbf{S}^v + \mathbf{R}(t) \cdot \mathbf{S}^{uv}] \frac{dv}{dt} &= \frac{d\mathbf{C}}{dt} \cdot \mathbf{S}^u \\ [\mathbf{S}^u \cdot \mathbf{S}^v + \mathbf{R}(t) \cdot \mathbf{S}^{uv}] \frac{du}{dt} + [\mathbf{S}^v \cdot \mathbf{S}^v + \mathbf{R}(t) \cdot \mathbf{S}^{vv}] \frac{dv}{dt} &= \frac{d\mathbf{C}}{dt} \cdot \mathbf{S}^v \end{aligned}$$

This is a system of two linear equations that we can solve to get du/dt and dv/dt . Then the derivative of the projected curve $\mathbf{P}(t) = \mathbf{S}(u(t), v(t))$ is

$$\frac{d\mathbf{P}}{dt} = \frac{du}{dt} \mathbf{S}^u + \frac{dv}{dt} \mathbf{S}^v$$

and the derivative of the vector \mathbf{R} is

$$\frac{d\mathbf{R}}{dt} = \frac{du}{dt} \mathbf{S}^u + \frac{dv}{dt} \mathbf{S}^v - \frac{d\mathbf{C}}{dt}$$

P.5.2.5 Blend Surface Derivatives

The blend surface equation we obtained at the end of section L.5.1.2 was:

$$\mathbf{S}(u, v) = \mathbf{C}(u) + r(\cos v\alpha - \cot \alpha \sin v\alpha)\mathbf{X}(u) + r(\operatorname{cosec} \alpha \sin v\alpha)\mathbf{W}(u)$$

Differentiating this with respect to u , we get

$$\begin{aligned} \frac{d\mathbf{S}}{du} &= \frac{d\mathbf{C}}{du} + \frac{d\alpha}{du} \{ \sin v\alpha (\operatorname{cosec}^2 \alpha - v) - v \cot \alpha \cos v\alpha \} r\mathbf{X} \\ &\quad + \frac{d\alpha}{du} \operatorname{cosec} \alpha (v \cos v\alpha - \sin v\alpha \cos \alpha \operatorname{cosec} \alpha) r\mathbf{W} \\ &\quad + (\cos v\alpha - \sin v\alpha \cot \alpha) r\mathbf{X}^u + (\sin v\alpha \operatorname{cosec} \alpha) r\mathbf{W}^u \end{aligned}$$

We can obtain \mathbf{X}^u and \mathbf{W}^u using the techniques described in the previous section, so the only remaining unknown is $d\alpha/du$.

But we know that $\mathbf{X} \cdot \mathbf{W} = r^2 \cos \alpha$, and differentiating this with respect to u gives

$$\mathbf{X} \cdot \mathbf{W}^u + \mathbf{W} \cdot \mathbf{X}^u = -r^2 \sin \alpha \frac{d\alpha}{du}$$

and so

$$\frac{d\alpha}{du} = - \frac{\mathbf{X} \cdot \mathbf{W}^u + \mathbf{W} \cdot \mathbf{X}^u}{r^2 \sin \alpha}$$

While all of the above might be interesting mathematics, for some people, a more practical approach is to use divided difference approximations to obtain partial derivatives. The following function does this – the recommendation is to use this approach instead of the analytical one above:

```

/// <summary>Evaluates approximate first derivative on a blend surface</summary>
/// <param name="blend">The blend surface</param>
/// <param name="u">Parameter value u at which to compute</param>
/// <param name="v">Parameter value v at which to compute</param>
/// <returns>Partial derivative wrt u at parameter values (u,v)</returns>
public static Vector ApproxDerivDu(BlendSurface blend, double u, double v)
{
    Position p0, pm, p1;

```

```
Vector deriv;

// Step needs to be chosen carefully; not too big, and not too small
double u0 = blend.MinU;   double u1 = blend.MaxU;
double step = 0.000001;
double du = (u1 - u0)*step;

if (u < u0 + du) // Near beginning, so use forward difference formula
{
    p0 = blend.Position(u,v);
    pm = blend.Position(u + du, v);
    p1 = blend.Position(u + 2*du, v);
    deriv = (3 * (pm - p0) - (p1 - pm)) / (2 * du);
}

else if (u > u1 - du) // Near the end, so use backward difference formula
{
    p0 = blend.Position(u - 2*du, v);
    pm = blend.Position(u - du, v);
    p1 = blend.Position(u, v);
    deriv = (3*(p1 - pm) - (pm - p0)) / (2*du);
}

else // Normal case in interior of interval [u0,u1], so use central difference
formula
{
    p0 = blend.Position(u - du, v);
    p1 = blend.Position(u + du, v);
    deriv = (p1 - p0) / (2.0 * du);
}

return deriv;
}
```

There are much more sophisticated algorithms for numerical estimation of derivatives; see section 5.7 of the [Numerical Recipes](#) book for details. In particular, the discussion of the choice of the variable [step](#) is well worth reading. If [step](#) is too large, the divided difference formula has a large truncation error, and if [step](#) is too small, the calculations will be ruined by subtractive cancellation. But our only use for partial derivatives is the construction of a blend surface approximation, so we do not need to know their values very accurately, and the simple function given above is more than adequate for our purpose. In fact, for the example given in section L.5.2.3, the derivative estimates given by the [ApproxDerivDu](#) function are everywhere within 0.00000019 of the correct values, which is certainly good enough.

P.5.2.6 Approximating Blend Surface Edges

The “contact curve” edges of a blend surface are icurves formed by intersections with special “blend bound” surfaces. Blend bound surfaces are complicated and require special techniques, so it would be nice if we could avoid them; it turns out that we can. Suppose we have constructed a b-spline approximation **S** of a blend surface **B**. Then the edges of **S** can easily be constructed, and these will provide spline curve approximations of the edges of **B**.

P.6 Blend Surface Questions and Answers

This section reproduces some earlier questions and answers about blend surfaces, for easy reference.

How does the blend radius *r*, correspond to the data stored in the XT Data? And is the parametric representation correct – can't *r* be positive for one surface and negative for another?

The blend radius *r* is the magnitude of the offset distance of each underlying surface and directly relates to the range values stored in the rolling ball blend surface data. The range value for each surface can be *+r* or *-r*. The *+* or *-* indicates the direction of the offset of the underlying surface taking into account the surface sense.

When interpreting the parametric representation quoted in the XT Data Description, the current formula is correct since the blend radius r itself is always a positive value (even though the offset value in the range field may be negative):

$$\mathbf{R}(u, v) = \mathbf{C}(u) + r \cos(v\alpha(u)) \mathbf{X}(u) + r \sin(v\alpha(u)) \mathbf{Y}(u)$$

However, to avoid confusion you may prefer to think of the formula as follows:

$$\mathbf{R}(u, v) = \mathbf{C}(u) + |r| \cos(v\alpha(u)) \mathbf{X}(u) + |r| \sin(v\alpha(u)) \mathbf{Y}(u)$$

What is the spine curve of a rolling ball blend surface?

Conceptually, for a rolling ball blend surface, the spine curve describes the path of the center of the ball as it moves along the two underlying surfaces, maintaining point contact with both surfaces at any one time as it does so.

This is explained in the XT Data Description as follows:

For rolling ball blends, the spine curve will be the intersection of the two surfaces obtained by offsetting the supporting surfaces by an amount given by the respective entry in range[]. Note that the offsets to be applied may be positive or negative, and that the sense of the surface is significant; i.e. the offset vector is the natural unit surface normal, times the range, times -1 if the sense is negative.

What type of curves can be referenced as the spine of the rolling ball blend surface?

For a rolling ball blend surface that has been created using the Parasolid Kernel, the most common types of spine curves are ellipses, intersection curves, rational b-spline curves which exactly represent a portion of an ellipse.

Additionally, for cliff blends (type = E) created by the Parasolid Kernel, it is also common to see lines, b-curves and circles representing the spine of the supporting (zero radius rolling ball blend) surface.

The format does not preclude using any exact 3D curve as the spine curve within the blended_edge data structure.

How is the rolling ball blend surface parameterized?

The XT Data Description explains the parameterization as follows:


The u parameter is inherited from the spine, the constant u lines being circles perpendicular to the spine curve. The v parameter is zero [0] at the blend boundary on the first surface, and one [1] on the blend boundary on the second surface; unless the sense of the spine curve is negative, in which case it is the other way round. The v parameter is proportional to the angle around the circle.

Given an $[x,y,z]$ point on a blend surface, how do I determine the corresponding $[u,v]$?

A blend surface is such that the following is always true:

- XXXIV. Given a point \mathbf{P} on the blend surface, find the closest point \mathbf{P}_1 on the blend spine. The parameter of that point \mathbf{P}_1 on the curve, provides the u parameter of \mathbf{P} .
- XXXV. Given the point, \mathbf{P}_1 on the spine curve, find the closest points \mathbf{P}_2 and \mathbf{P}_3 on each of the underlying surfaces. These points \mathbf{P}_2 and \mathbf{P}_3 will both lie on the corresponding blend boundaries.
- XXXVI. One of the points \mathbf{P}_2 and \mathbf{P}_3 will have v parameter [0] and the other will have v parameter [1], dependent on the sense of the spine curve.
- XXXVII. Points \mathbf{P} , \mathbf{P}_2 and \mathbf{P}_3 will all lie on the same circular arc on the underlying blend surface. The v parameter of \mathbf{P} will be proportional to its angular location along the arc between \mathbf{P}_2 and \mathbf{P}_3 .

The following picture illustrates further

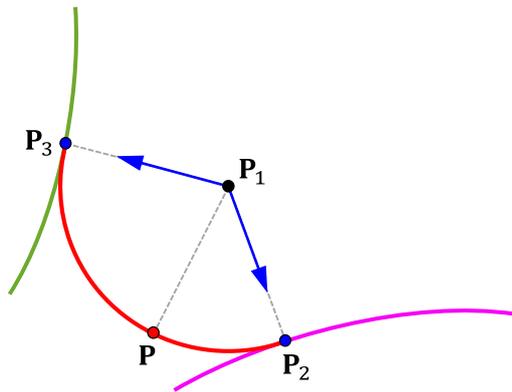


What is a 'cliff-edge blend'? How does it relate to the `blended_edge` structure?

The presence of a 'cliff-edge blend' (referred to in the following explanation as just 'cliff blend') is denoted when the **blend_type** field of the `blended_edge` structure is set to 'E' (rather than 'R'). This indicates that the `blended_edge` structure represents a cliff blend.

Conceptually, a cliff blend is one where a rolling ball blend surface would overflow a face boundary. In order to stay within the face boundary, the rolling ball moves along this 'cliff' edge whilst also maintaining contact with the other surface and such that the resultant cliff blend surface meets that other surface tangentially.

A simple example of a rolling ball blend surface (in yellow) and a cliff blend surface (in blue) are shown in the picture below. The cliff (edge/curve) is also shown (in red). Note that this is shown for representation purposes only; if such a part had been constructed using the Parasolid Kernel, the yellow surface would be simplified exactly to a torus as part of the blend construction.

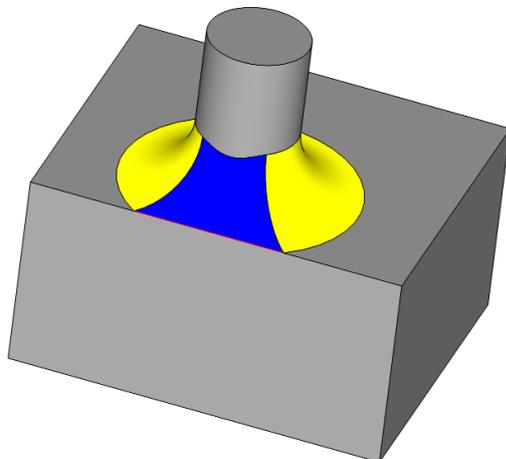

For a cliff blend, the spine curve is represented in a different way to the spine of a rolling ball blend surface. This is explained in the XT Data Description as follows:

For cliff edge blends, one of the surfaces will be a `blended_edge` with a range of [0,0]; its spine will be the cliff edge curve, and its supporting surfaces will be the surfaces of the faces adjacent to the cliff edge. Its type will be R.

For example in the case pictured above, the elements of the structure include the following:

For the rolling ball blend surface in yellow:

- One of the elements of the **surface** array is the cylinder
- The other element of the **surface** array is the planar surface of the top face
- The **spine** is a curve representing the intersection of the offsets of the two surfaces above

- The **range** is [+/-r, +/-r] (the sign for each takes into account the surface normal and surface sense)
- The **blend_type** is R

For the cliff blend surface in blue:

- One of the elements of the surface array is the cylinder
- The other element of the surface array is a rolling ball blend surface with range = [0,0]
- Conceptually this is a representation of the cliff curve as a zero radius blend (see below for more details)
- The spine is derived in exactly the same way as for a rolling ball blend (based on the intersection of the offsets of the two surfaces)
- The range is [+/-r,+/-r]
- The blend_type is E

For the other element of the surface array above:

- One of the elements of its surface array is the front-facing planar surface adjacent to the edge
- The other element of its surface array is the top-facing planar surface adjacent to the edge in the original model
- Note that these two surfaces intersect to give the cliff curve
- The range is [0,0]
- The spine is the cliff curve (formed by intersecting the two surfaces), and can be conceptually thought of as the curve of the cliff edge
- The blend_type is R

P.7 Bibliography

The following documents are referenced in this document:

- 14 ISO/IS 14306:2012 – JT file format specification for 3D Visualization (2012-12-14)
- 15 JT Implementor Forum – Implementation Guidelines, Version 0.9 (May 27, 2014)
- 16 JT Content Harmonization (v3.0) – Progress Report and Proposal for JT and Accompanying Formats (2013-05-21)
- 17 Layer Filter Support in JT Files (v2.0; February, 2013) – provided by Siemens
- 18 JT-v10-file-format-reference-rev-A_tcm1023-224370.pdf – JT File Format Reference Version 10.0 Rev-A – provided by Siemens
- 19 JT OPEN ADVANCED MATERIALS (March, 2012) – provided by Siemens
- 20 Numerical Recipes, by Press, Teukolsky, Vetterling, Flannery.
- 21 <http://www.gnu.org/software/gsl/>
- 22 <http://en.wikipedia.org/wiki/MINPACK>
- 23 http://en.wikipedia.org/wiki/Loss_of_significance

Annex Q (informative)

JT PMI Properties

Q.1 PMI Properties Syntax	481
Q.2 PMI Properties General	482
Q.3 PMI Properties “A”	512
Q.3.1 AltText[%d] / AltText[%d].Item[%d].<property>	512
Q.3.2 AltText[%d].<property>	520
Q.3.3 Area[%d].<property>	525
Q.3.4 AttributeName[%d]	525
Q.4 PMI Properties “C”	526
Q.4.1 CLIP_<NAME>	526
Q.4.2 ChamferSymbol / ChamferSymbol.Item[%d].<property>	527
Q.4.3 ChamferSymbol.<property>	535
Q.4.4 Column[%d] / Column[%d].ColumnValue[%d]	540
Q.4.5 Column[%d].<property>	542
Q.4.6 ConstraintPlane.<property>	547
Q.4.7 ConstraintPlane[%d].<property>	547
Q.4.8 CoordinateSystem.<property>	547
Q.4.9 CoordinatedEntity[%d].Item[%d].<property>	548
Q.4.10 CoordinatedEntity[%d].<property>	556
Q.4.11 CpsLetters[%d].Item[%d].<property>	561
Q.4.12 CpsLetters[%d].<property>	569
Q.4.13 CrosshatchPattern.<property>	574
Q.4.14 Curve[%d]	575
Q.5 PMI Properties “D”	575
Q.5.1 DatumFeatureSymbolText[%d].Text.Item[%d].<property>	575
Q.5.2 DatumFeatureSymbolText[%d].<property>	584
Q.5.3 DatumTargetReference[%d]	589
Q.5.4 Description	590
Q.5.5 DimensionText[%d].Text.Item[%d].<property>	590
Q.5.6 DimensionText[%d].<property>	598
Q.5.7 DisplayPlane.<property>	604
Q.5.8 DualDimensionText[%d].Text.Item[%d].<property>	604
Q.5.9 DualDimensionText[%d].<properties>	613
Q.5.10 DualUnitSymbol[%d].Item[%d].<property>	618
Q.5.11 DualUnitSymbol[%d].<property>	626

Q.5.12 DualValueText.Item[%d].<property>	631
Q.5.13 DualValueText.<property>	639
Q.6 PMI Properties “F”	644
Q.6.1 FCFText[%d].Text.Item[%d].<property>	644
Q.6.2 FCFText[%d].<property>.....	653
Q.6.3 FCF[%d].<property>	658
Q.6.4 FCF[%d].FCFText[%d].Text.Item[%d].<property>	659
Q.6.5 FCF[%d].FCFText[%d].<property>	667
Q.6.6 FCF[%d].<property>	673
Q.6.7 FCF[%d].Leader[%d].<property>	676
Q.6.8 FCF[%d].Outline.<property>.....	680
Q.6.9 FCF[%d].PMI<property>.....	682
Q.6.10 FCF[%d].Primary.Datum[%d].<property>	683
Q.6.11 FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].<property>	683
Q.6.12 FCF[%d].Primary.Datum[%d].TextLabel.Outline.<property>	691
Q.6.13 FCF[%d].Primary.Datum[%d].TextLabel.<property>.....	694
Q.6.14 FCF[%d].Primary.Datum[%d].<property>	697
Q.6.15 FCF[%d].Primary.ExtendedText.Item[%d].<property>.....	697
Q.6.16 FCF[%d].<property>	706
Q.6.17 FCF[%d].Secondary.Datum[%d]. <property>	711
Q.6.18 FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].<property>	712
Q.6.19 FCF[%d].Secondary.Datum[%d].<property>	720
Q.6.20 FCF[%d].Secondary.ExtendedText.Item[%d].<property>.....	726
Q.6.21 FCF[%d].<property>	734
Q.6.22 FCF[%d].Tertiary.Datum[%d].<property>.....	740
Q.6.23 FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].<property>	740
Q.6.24 FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.<property>	748
Q.6.25 FCF[%d].Tertiary.Datum[%d].TextLabel.<property>	751
Q.6.26 FCF[%d].Tertiary.Datum[%d].<property>.....	754
Q.6.27 FCF[%d].Tertiary.ExtendedText.Item[%d].<property>	755
Q.6.28 FCF[%d].Tertiary.ExtendedText.Outline.<property>.....	763
Q.6.29 FCF[%d].Tertiary.ExtendedText.<property>	766
Q.6.30 FCF[%d].Text.Item[%d].<property>	769
Q.6.31 FCF[%d].Text.Outline.<property>	776
Q.6.32 FCF[%d].Text.<property>.....	779
Q.6.33 FCF[%d].TextFormat[%d].Item[%d].<property>	781
Q.6.34 FCF[%d].TextFormat[%d].<property>.....	789
Q.6.35 FCF[%d].ToleranceCompartment[%d]. AfterIndicator.DatumGroup.Datum[%d]<property>	791

Q.6.36	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].<property>	808
Q.6.37	FCF[%d].ToleranceCompartment[%d].<property>	817
Q.6.38	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]<property>	824
Q.6.39	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.<property>	835
Q.6.40	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.<property>	839
Q.6.41	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].<property>	842
Q.6.42	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].<property>	843
Q.6.43	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.<property>	852
Q.6.44	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.symbol	859
Q.6.45	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.type	859
Q.6.46	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].<property>	860
Q.6.47	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.<property>	869
Q.6.48	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.<property>	872
Q.6.49	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].<property>	875
Q.6.50	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.<property>	885
Q.6.51	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.<property>	889
Q.6.52	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].<property>	892
Q.6.53	FCF[%d].ToleranceCompartment[%d].FreeState	893
Q.6.54	FCF[%d].ToleranceCompartment[%d].Statistical	893
Q.6.55	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].<property>	893
Q.6.56	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.<property>	902

Q.6.57 FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].<property>	908
Q.6.58 FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.<property>	917
Q.6.59 FCF[%d].ToleranceCompartment[%d].TextPrefix.<property>	920
Q.6.60 FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].<property>	923
Q.6.61 FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.<property>	932
Q.6.62 FCF[%d].ToleranceCompartment[%d].TextSuffix.<property>	935
Q.6.63	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].<propert	
y>	938
Q.6.64 FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.<property>	947
Q.6.65 FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.<property>	950
Q.6.66 FCF[%d].ToleranceCompartment[%d].<property>	953
Q.6.67 FCF[%d].UnitSymbol[%d].Item[%d].<property>	955
Q.6.68 FCF[%d].UnitSymbol[%d].Outline.<property>	962
Q.6.69 FCF[%d].UnitSymbol[%d].<property>	965
Q.6.70 FCF[%d].<property>	968
Q.6.71 Face[%d]	974
Q.6.72 FeatureIdentification	974
Q.6.73 FitDesignationText[%d].Text.Item[%d].<property>	975
Q.6.74 FitDesignationText[%d].Text.Outline.<property>	983
Q.6.75 FitDesignationText[%d].Text.<property>	986
Q.6.76 FreeState	989
Q.7 PMI Properties “G”	989
Q.7.1 GeneralAttribute[%d]	989
Q.7.2 GeneralAttribute[%d].ListValue[%d]	991
Q.7.3 GeneralText.Item[%d].<properties>	991
Q.7.4 GeneralText.Outline.<property>	999
Q.7.5 GeneralText.<property>	1001
Q.7.6 GeneralToleranceISO.<property>	1004
Q.7.7 GrooveGapTextFormat[%d].Item[%d].<properties>	1004
Q.7.8 GrooveGapTextFormat[%d].<property>	1013
Q.8 PMI Properties “J-L”	1014
Q.8.1 JT END ARROW TYPE	1014
Q.8.2 JTTK MULTICAD <name>	1014
Q.8.3 Keyword[%d]	1016
Q.8.4 Layer	1016
Q.8.5 LayText.Item[%d].<property>	1016
Q.8.6 LayText.Outline.<property>	1024
Q.8.7 LayText.<property>	1026
Q.8.8 LeaderText[%d].Text.Item[%d].<property>	1029

Q.8.9 LeaderText[%d].Text.Outline.<property>	1037
Q.8.10 Leader[%d].<property>	1042
Q.9 PMI Properties “N”	1052
Q.9.1 Nomenclature.Item[%d].<properties>	1052
Q.9.2 Nomenclature.Outline.<property>	1060
Q.9.3 Nomenclature.<property>	1063
Q.9.4 Note.Item[%d].<property>	1065
Q.9.5 Note.Outline.<property>	1072
Q.9.6 Note.<property>	1075
Q.9.7 NoteText[%d].Text.Item[%d].<property>	1077
Q.9.8 NoteText[%d].Text.Outline.<property>	1085
Q.9.9 NoteText[%d].Text.<property>	1088
Q.10 PMI Properties “O”	1091
Q.10.1 OpenField.Item[%d].<property>	1091
Q.10.2 OpenField.Outline.<property>	1098
Q.10.3 OpenField.bold.<property>	1101
Q.10.4 Organisation.<property>	1103
Q.10.5 Outline.<property>	1104
Q.11 PMI Properties “P”	1111
Q.11.1 PMIGeometryColor	1111
Q.11.2 PMITextBackgroundColor	1111
Q.11.3 PMITextFlatToScreenOpacity	1111
Q.11.4 PMITextForegroundColor	1112
Q.11.5 PMITextInPlaneOpacity	1112
Q.11.6 ParameterDimension[%d].DimensionText[%d] Text.Item[%d].<property>	1112
Q.11.7 ParameterDimension[%d].DimensionText[%d].<property>	1121
Q.11.8 ParameterDimension[%d].DisplayPlane.<property>	1127
Q.11.9 ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].<property>	1127
Q.11.10 ParameterDimension[%d].DualDimensionText[%d].<property>	1136
Q.11.11 ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].<property>	1142
Q.11.12 ParameterDimension[%d].DualUnitSymbol[%d].Outline.<property>	1150
Q.11.13 ParameterDimension[%d].DualUnitSymbol[%d].<property>	1153
Q.11.14 ParameterDimension[%d].DualValueText.Item[%d].<property>	1156
Q.11.15 ParameterDimension[%d].DualValueText.Outline.<property>	1165
Q.11.16 ParameterDimension[%d].DualValueText.<property>	1167
Q.11.17 ParameterDimension[%d].<property>	1170
Q.11.18 ParameterDimension[%d].Leader[%d].<property>	1173
Q.11.19 ParameterDimension[%d].Outline.<property>	1177
Q.11.20 ParameterDimension[%d]. PMIGeometryColor	1180

Q.11.21 ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].<property>	1181
Q.11.22 ParameterDimension[%d].ReferenceText[%d].Text.Outline.<property>	1190
Q.11.23 ParameterDimension[%d].ReferenceText[%d].Text.<property>	1193
Q.11.24 ParameterDimension[%d].StyleText.Item[%d].Outline.<property>	1196
Q.11.25 ParameterDimension[%d].StyleText.Item[%d].<property>	1199
Q.11.26 ParameterDimension[%d].StyleText.<property>	1204
Q.11.27 ParameterDimension[%d].TextFormat[%d].Item[%d].<property>	1210
Q.11.28 ParameterDimension[%d].TextFormat[%d].<property>	1218
Q.11.29 ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].<property>	1220
Q.11.30 ParameterDimension[%d].ToleranceTextFormat[%d].<property>	1229
Q.11.31 ParameterDimension[%d].UnitSymbol[%d].Item[%d].<property>	1230
Q.11.32 ParameterDimension[%d].UnitSymbol[%d].Outline.<property>	1238
Q.11.33 ParameterDimension[%d].UnitSymbol[%d].<property>	1241
Q.11.34 ParameterDimension[%d].ValueText.Item[%d].<property>	1244
Q.11.35 ParameterDimension[%d].ValueText.Outline.<property>	1252
Q.11.36 ParameterDimension[%d].ValueText.<property>	1255
Q.11.37 ParameterDimension[%d].<property>	1258
Q.11.38 ParameterFitDesignation[%d].<property>	1269
Q.11.39	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].<property>	1270
Q.11.40	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.<property>	1279
Q.11.41 ParameterFitDesignation[%d].FitDesignationText[%d].Text.<property>	1282
Q.11.42 ParameterFitDesignation[%d].FitDesignationText[%d].<property>	1286
Q.11.43 ParameterFitDesignation[%d].Leader[%d].<property>	1288
Q.11.44 ParameterFitDesignation[%d].Outline.<property>	1292
Q.11.45 ParameterFitDesignation[%d].PMI<property>	1295
Q.11.46 ParameterFitDesignation[%d].TextFormat[%d].Item[%d].<property>	1296
Q.11.47 ParameterFitDesignation[%d].TextFormat[%d].<property>	1304
Q.11.48	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].<property>	1306
Q.11.49 ParameterFitDesignation[%d].ToleranceTextFormat[%d].<property>	1315
Q.11.50 ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].<property>	1316
Q.11.51 ParameterFitDesignation[%d].UnitSymbol[%d].Outline.<property>	1324
Q.11.52 ParameterFitDesignation[%d].UnitSymbol[%d].<property>	1327
Q.11.53 ParameterFitDesignation[%d].ValueText.Item[%d].<property>	1330
Q.11.54 ParameterFitDesignation[%d].ValueText.Outline.<property>	1339
Q.11.55 ParameterFitDesignation[%d].ValueText.<property>	1342

Q.11.56 ParameterFitDesignation[%d].<property>	1345
Q.11.57 PartNumber.Item[%d].<property>	1355
Q.11.58 PartNumber.<property>	1363
Q.11.59 Position[%d].	1367
Q.11.60 Primary.Datum[%d].TextLabel.Item[%d].<property>	1368
Q.11.61 Primary.Datum[%d].TextLabel.Outline.<property>	1376
Q.11.62 Primary.Datum[%d].TextLabel.<property>	1379
Q.11.63 Primary.ExtendedText.Item[%d].<property>	1382
Q.11.64 Primary.ExtendedText.Outline.<property>	1390
Q.11.65 Primary.ExtendedText.<property>	1393
Q.11.66 ProcessText.Item[%d].<property>	1395
Q.11.67 ProcessText.Outline.<property>	1403
Q.11.68 ProcessText.<property>	1406
Q.12 PMI Properties “R”	1408
Q.12.1 ReferenceText[%d].Text.Item[%d].<property>	1408
Q.12.2 ReferenceText[%d].Text.Outline.<property>	1416
Q.12.3 ReferenceText[%d].Text.<property>	1420
Q.12.4 RevisionModifier	1423
Q.12.5 Row[%d].Cell[%d].CellValue[%d].<property>	1423
Q.12.6 Row[%d].Cell[%d].Outline.<property>	1424
Q.12.7 Row[%d].Cell[%d].<property>	1428
Q.12.8 Row[%d].Outline.<property>	1429
Q.12.9 Row[%d].RowValue[%d].<property>	1433
Q.12.10 Row[%d].<property>	1434
Q.13 PMI Properties “S”	1436
Q.13.1 Safety Classification	1436
Q.13.2 Secondary.Datum[%d].TextLabel.Item[%d].<property>	1436
Q.13.3 Secondary.Datum[%d].TextLabel.Outline.<property>	1444
Q.13.4 Secondary.Datum[%d].TextLabel.<property>	1447
Q.13.5 Secondary.Datum[%d].<property>	1450
Q.13.6 Secondary.ExtendedText.Item[%d].<property>	1450
Q.13.7 Secondary.ExtendedText.Outline.<property>	1458
Q.13.8 Secondary.ExtendedText.<property>	1461
Q.13.9 Site.<property>	1464
Q.13.10 Statistical	1464
Q.13.11 StyleText.Item[%d].<property>	1465
Q.13.12 StyleText.Outline.<property>	1472
Q.13.13 StyleText.<property>	1475
Q.13.14 SurfaceFinish[%d].<property>	1477

Q.13.15 SurfaceFinish[%d].LayText.Item[%d].<property>	1480
Q.13.16 SurfaceFinish[%d].LayText.Outline.<property>	1488
Q.13.17 SurfaceFinish[%d].LayText.<property>	1491
Q.13.18 SurfaceFinish[%d].Leader[%d].<property>	1493
Q.13.19 SurfaceFinish[%d].Outline.<property>.....	1498
Q.13.20 SurfaceFinish[%d].PMI<property>.....	1500
Q.13.21 SurfaceFinish[%d].ProcessText.Item[%d].<property>	1501
Q.13.22 SurfaceFinish[%d].ProcessText.Outline.<property>	1509
Q.13.23 SurfaceFinish[%d].ProcessText.<property>.....	1512
Q.13.24 SurfaceFinish[%d].RevisionModifier	1515
Q.13.25 SurfaceFinish[%d].SafetyClassification.....	1515
Q.13.26 SurfaceFinish[%d].TextFormat[%d].Item[%d].<property>	1515
Q.13.27 SurfaceFinish[%d].TextFormat[%d].<property>.....	1523
Q.13.28 SurfaceFinish[%d].UnitSymbol[%d].Item[%d].<property>	1525
Q.13.29 SurfaceFinish[%d].UnitSymbol[%d].Outline.<property>.....	1533
Q.13.30 SurfaceFinish[%d].UnitSymbol[%d].<property>	1536
Q.13.31 SurfaceFinish[%d].<property>	1538
Q.13.32 PMI Properties “T”	1545
Q.13.33 Tertiary.Datum[%d].<property>.....	1545
Q.13.34 Tertiary.Datum[%d].TextLabel.Item[%d].<property>	1546
Q.13.35 Tertiary.Datum[%d].TextLabel.<property>.....	1554
Q.13.36 Tertiary.ExtendedText.Item[%d].<property>.....	1559
Q.13.37 Tertiary.ExtendedText.<property>	1567
Q.13.38 Text.Item[%d].<property>	1573
Q.13.39 Text.<property>.....	1580
Q.13.40 TextFormat[%d].Item[%d].<property>	1585
Q.13.41 TextFormat[%d].<property>	1599
Q.13.42 Text[%d].Item[%d].<property>	1602
Q.13.43 Text[%d].Outline.<property>	1610
Q.13.44 Text[%d].<property>.....	1612
Q.13.45	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].<proper ty>	1615
Q.13.46	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].<property>	1631
Q.13.47	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.<pro perty>.....	1640
Q.13.48 ToleranceCompartment[%d].AfterIndicator.<property>.....	1647

Q.13.49	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].<property>	1647
Q.13.50	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].<property>	1664
Q.13.51	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.<property>	1673
Q.13.52	ToleranceCompartment[%d].BeforeIndicator.<property>	1679
Q.13.53	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].<property>	1680
Q.13.54	ToleranceCompartment[%d].DatumGroup.ExtendedText.<property>	1689
Q.13.55	ToleranceCompartment[%d].DatumGroup.Reference[%d].FreeState	1695
Q.13.56	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].<property>	1695
Q.13.57	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.<property>	1704
Q.13.58	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.<property>	1707
Q.13.59	ToleranceCompartment[%d].DatumGroup.Reference[%d].<property>	1711
Q.13.60	ToleranceCompartment[%d].FreeState	1712
Q.13.61	ToleranceCompartment[%d].Statistical	1712
Q.13.62	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].<property>	1712
Q.13.63	ToleranceCompartment[%d].TextMaxBonusValue.Outline.<property>	1720
Q.13.64	ToleranceCompartment[%d].TextMaxBonusValue.<property>	1723
Q.13.65	ToleranceCompartment[%d].TextPrefix.Item[%d].<property>	1726
Q.13.66	ToleranceCompartment[%d].TextSuffix.Item[%d].<property>	1740
Q.13.67	ToleranceCompartment[%d].TextSuffix.<property>	1748
Q.13.68	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].<property>	1754
Q.13.69	ToleranceCompartment[%d].TextUnitBasisValue.Outline.<property>	1762
Q.13.70	ToleranceCompartment[%d].TextUnitBasisValue.<property>	1766
Q.13.71	ToleranceCompartment[%d].<property>	1768
Q.13.72	ToleranceTextFormat[%d].Item[%d].<property>	1770
Q.13.73	ToleranceTextFormat[%d].<property>	1778
Q.14	PMI Properties "U"	1780
Q.14.1	UnitSymbol[%d].Item[%d].<property>	1780
Q.14.2	UnitSymbol[%d].<property>	1794
Q.14.3	UserDefinedSymbolText[%d].Text.Item[%d].<property>	1805
Q.14.4	UserDefinedSymbolText[%d].<property>	1813

Q.15 PMI Properties “V”	1819
Q.15.1 ValueText.Item[#] .<property>	1819
Q.15.2 ValueText.<property>	1827
Q.15.3 ValueToCustomer	1832
Q.16 PMI Properties “JtTk”	1833
Q.16.1 ___JtTkIntersectionReference___reference0	1833
Q.16.2 ___JtTkIntersectionReference___reference1	1833
Q.16.3 ___JtTkOriginReference___reference	1834

Q.1 PMI Properties Syntax

The table below lists properties that can be found in JT parts that contain Generic PMI Entities .

Tables are provided for each “Generic PMI Entity type”. A full list of Generic PMI Entity Types can be found in the “Generic PMI Entities” logical collection description from the “PMI Manager Meta Data Element”.

Each table lists the property keys that are valid for the specific Generic PMI entity Type. For example, all valid PMI properties for Dimensions can be found in the table PMI_DIM_TYPE (0x0082). In some cases, a Generic Entity type shares a common set of Property keys. In these cases more than one Generic PMI Entity Type is listed for the table. For example, PMI_SPOT_WELD_TYPE (0x0004), PMI_ARC_SPOT_WELD_TYPE (0x0018), PMI_RES_SPOT_WELD_TYPE (0x0020), PMI_DOLLOP_TYPE (0x0028), PMI_CLINCH_TYPE (0x0040) all share the same property keys.

There are four columns in each table;

1. “Key” Property Atom Value String – the string value found in the “Key PMI Property Atom” as described in “PMI Property”. A full description of “PMI Property” can be found in the “PMI Model Views” logical collection.
2. “Value” Property Atom Value String Encoding Format - the string value found in “Value PMI Property Atom” as described in “PMI Property”. A full description of “PMI Property” can be found in the “PMI Model Views” logical collection.
3. Prequist Key – keys required for the proper use of the listed property key
4. Additional Note – additional information for the property key

The PMI Properties table makes use of C programming string format specifiers in order to describe the content expected by the property key as all properties are natively stored as UTF16 encoded strings. For example “%.16g” indicates an encoded double value, “%s” a string and “%d” an integer.

Note: Implementers should use the descriptions found in PMI Manager Meta Data Element as opposed to working with PMI Data Segment.

Note: The following comment applies for all properties where the value format is “0x00%02x%02x%02x” such that the values of blue, green and red for the colour are encoded in the string

- This defines an hexadecimal integer representing RGB colour where value has “0x00bbgrr” form. The low-order byte contains a value for the relative intensity of red; the second byte contains a value for the relative intensity of green; and the third byte contains a value for the relative intensity of blue. The high-order byte shall be zero. The maximum value for a single byte is 0xFF (i.e. intensity value is in the range [0:255]).

Q.2 PMI Properties General

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
accountabilityId	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"		
aftDistance	0x0242	"%.16g"	type	Expects type property to be closed
aftThroughAll	0x0242	"%d"	type	Expects type property to be closed
alignment	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=middle, "1"=bottom		
allAround	0x0008 0x0041 0x0081 0x0082 0x0084 0x0100 0x0235 0x0244 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"		
allAroundLeader	0x0041	"%d"		
allOver	0x0081 0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
angle	0x0306	"%.16g"		
angleFormat	0x0081 0x0082 0X030D 0X030F	String representing enumeration such that: "0"=degrees, "1"=seconds, "2"=minutes, "3"=wholedegrees		
angleNumerator	0x0082 0X030D 0X030F	"%.16g"		
appendedTextSpaceFactor	0x0082 0X030D 0X030F	"%.16g"		
approachDirection	0x0004	"%.16g %.16g %.16g"		
areaShape	0x0088	String representing enumeration such that: "0"=diameter, "1"=sphericaldiameter, "2"=square		
arrowPlacement1	0x0242	String representing enumeration such that: "0"=unset, "1"=origin, "2"=top, "3"=bottomright,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"4"=topright		
arrowPlacement2	0x0242	String representing enumeration such that: "0"=unset, "1"=origin, "2"=top, "3"=bottomright, "4"=topright		
arrowSideAboveLine	0x0008	"%d"		
arrowSideCompoundLongitudinalSize	0x0008	"%s"		
arrowSideCompoundMainSize	0x0008	"%s"		
arrowSideCompoundStaggeredSize	0x0008	"%s"		
arrowSideCompoundWeld	0x0008	"%d"		
arrowSideFinishSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=unspecified, "2"=machining, "3"=grinding, "4"=chipping, "5"=none, "6"=hammering, "7"=peening, "8"=rolling, "9"=finishing		
arrowSideGrooveAngle	0x0008	"%s"		
arrowSideGrooveGap	0x0008	"%s"		
arrowSideLongitudinalSize	0x0008	"%s"		
arrowSideMainSize	0x0008	"%s"		
arrowSideStaggeredSize	0x0008	"%s"		
arrowSideSupplementalSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
arrowSideSupplementalSymbol2	0x0008	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flushesk, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
arrowSideSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge		
arrowTowardsCutter	0x0242	"%d"		
attachmentType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=angulardimension, "1"=ongometry, "2"=lineardimension, "3"=leader, "4"=stacked, "5"=ordinatedimension, "6"=radialdimension, "7"=diametraldimension, "8"=noleader, "9"=stackedleft, "10"=stackedright, "11"=stackedabove		
axisDirection	0x0230 0x0238	"%.16g %.16g %.16g"		
balloonId	0x0235	"%s"		
basic	0x0082 0X030D 0X030F	"%d"		
blanked	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241	"%d"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
bold	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%d"		
bottomExtensionLine	0x0041	%d"		
category	0x0100 0x0235 0x0239 0x0244	%s"		
causality	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=key, "1"=functional, "2"=reference, "3"=associated, "4"=pmi		
center	0x0306	%.16g %.16g %.16g"		
centercrossSize	0x0306	%.16g"		
centerlineType	0x0306	String representing enumeration such that: "0"=centerline2d, "1"=centerline3d, "2"=centermark, "3"=circularcenterline, "4"=boltcirclecenterline, "5"=symmetriccenterline, "6"=offsetcenterline		
chamferDisplayType	0X030F	String representing enumeration such that: "0"=symbol, "1"=size, "2"=sizeangle, "3"=anglesize		
chamferLeaderType	0X030F	String representing enumeration such that: "0"=perpendicular, "1"=parallel, "2"=linear		
chamferSeparatorCapital	0X030F	%d"		
chamferSpacing	0X030F	%.16g"		
chamferSymbolType	0X030F	String representing enumeration such that: "0"=none, "1"=prefix, "2"=suffix		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
changeLevel	0x0118	String representing enumeration such that: "0"=soft, "1"=medium, "2"=hard		
characteristic	0x0081	String representing enumeration such that: "0"=profileofaline, "1"=circularrunout, "2"=perpendicularity, "3"=position, "4"=totalrunout, "5"=profileofasurface, "6"=cylindricity, "7"=symmetry, "8"=angularity, "9"=parallelism, "10"=concentricity, "11"=flatness, "12"=circularity, "13"=straightness, "14"=axisintersection		
circularCenterlineMethod	0x0306	String representing enumeration such that: "0"=center, "1"=points		
clampingDirection	0x0004	%.16g %.16g %.16g"		
columnCount	0x0311	%"d"		
commaAsDecimal	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	%"d"		
conformsToFaces	0x0246	%"d"		
contour	0x0008	String representing enumeration such that: "0"=unset, "1"=closed, "2"=open, "3"=trilateral, "4"=allaround		
coordinatePlane	0x0118	String representing enumeration such that: "0"=y, "1"=xz, "2"=xy, "3"=yz, "4"=z, "5"=xyz, "6"=x		
coordinateSystemRef	0x0239	%"d"		Reference to an existing CoordinateSystem Should not be used alongside 'CoordinateSystem.origin', 'CoordinateSystem.xaxis' and 'CoordinateSystem.zaxis'

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
coordinationDirection	0x0042	"%.16g %.16g %.16g"		
counterbored	0x0230	"%d"		
curveRef	0x0242	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singlar semantic aspect with an entity.	type	Expects type property to not be plane
datumOnLeader	0x0081 0x0084 0x0100 0x0235 0x0244	String representing enumeration such that: "0"=none, "1"=solid, "2"=filled		
delta	0x0004 0x0008	"%d"		
depth[%d]	0x0230	"%.16g"		
descriptiveModifier	0x0233	"%s"		
deviation	0x0082 0X030D 0X030F	"%s"		
diameter	0x0004 0x0088 0x0238	"%.16g"		
diameterOverride	0x0238	"%d"		
diameterPlacement	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after		
diameter[%d]	0x0230	"%.16g"		
dimensionLeadingZero	0x0082 0X030D 0X030F	"%d"		
dimensionLineBetweenArrows	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
dimensionLineSplit	0x0307 0x0313	String representing enumeration such that: "0"=none, "1"=limitfit, "2"=valuelimitfit		
dimensionLineTrim	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
dimensionTrailingZero	0x0082 0X030D 0X030F	"%d"		
direction	0x0041 0x0081 0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g %.16g %.16g"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
displayClearance	0x0307 0x0313	"%d"		
displayOption	0x0306	String representing enumeration such that: "0"=linenone, "1"=line, "2"=linewithextension, "3"=point		
displayTolerance	0x0307 0x0313	"%d"		
displayType	0x0004 0x0042 0x0100 0x0230 0x0235 0x0238 0x0244	String representing enumeration such that: "0"=flatToSurface "1"=flatToScreen		
documentation	0x0082 0X030D 0X030F	"%d"		
dualDimensionLineCenter	0x0082 0X030D 0X030F	"%d"		
dualLowerDeltaDenominator	0x0082 0X030D 0X030F	"%d"		
dualPlacement	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after		
dualPrecision	0x0082 0X030D 0X030F	"%d"		
dualTolerancePrecision	0x0082 0X030D 0X030F	"%d"		
dualType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=positional, "1"=bracket, "2"=lineseparated		
dualUnit	0x0082 0X030D 0X030F	"%s"		
dualUnitText	0x0082 0X030D 0X030F	"%d"		
dualUpperDeltaDenominator	0x0082 0X030D 0X030F	"%d"		
dualValueDenominator	0x0082 0X030D 0X030F	"%d"		
fastenerSubType	0x0230	"%s"		
fcfTextUnderline	0x0081	String representing enumeration such that: "0"=none, "1"=top, "2"=all		
featureOfSize	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
fieldSpaceFactor	0x0008	"%.16g"		
fieldWeld	0x0008	"%d"		
fieldWeldDirection	0x0008	String representing enumeration		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		such that: "0"=up, "1"=down		
fieldWeldType	0x0008	String representing enumeration such that: "0"=common, "1"=eskd		
filename	0x0114	"%s"		
fitGrade	0x0082 0X030D 0X030F	"%d"		
flag	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"		
foldLocation	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g %.16g %.16g"		
font	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		
foreDistance	0x0242	"%.16g"	type	Expects type property to be closed
foreThroughAll	0x0242	"%d"	type	Expects type property to be closed
fraction	0x0082 0X030D 0X030F	"%d"		
fractionSize	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=full, "1"=twothirds, "2"=threequarters		
fullCircle	0x0306	"%d"		
functionalSubscript	0x0118	"%s"		
glue	0x0008	"%d"		
grade	0x0082 0X030D 0X030F	"%d"		
grooveGapTextStyle	0x0008	String representing enumeration such that: "0"=inside, "1"=outside,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=arrow		
group	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		
groupId	0x0004	"%s"		
holeDeviation	0x0307 0x0313	"%s"		
holeGrade	0x0307 0x0313	"%d"		
holeLowerDelta	0x0307 0x0313	"%.16g"		
holeUpperDelta	0x0307 0x0313	"%.16g"		
horizontalLine	0x0307 0x0313	"%d"		
hotSpotPosition	0x0118	"%.16g %.16g %.16g"		
iOverride	0x0239	"%.16g"		
iPrefix	0x0239	"%s"		
iSuffix	0x0239	"%s"		
identificationBelowReference	0x0008	"%d"		
identificationLine	0x0008	"%d"		
identifier	0x0100 0x0231 0x0232 0x0233 0x0235 0x0239 0x0244	"%s"		
inFront	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"		
includeI	0x0239	"%d"		
includeJ	0x0239	"%d"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
includeK	0x0239	"%d"		
includeLabel	0x0239	"%d"		
includeLabels	0x0240 0x0241	"%d"		
includeLevel	0x0239	"%d"		
includeX	0x0239	"%d"		
includeY	0x0239	"%d"		
includeZ	0x0239	"%d"		
index	0x0088	"%d"		
indexDirection	0x0230	"%.16g %.16g %.16g"		
individualExtensions	0x0306	"%d"		
individuallyApplied	0x0084	"%d"		
innerDiameter	0x0088	"%.16g"		
inspection	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
inspectionDisplay	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=none, "2"=before, "3"=after, "4"=beforeafter, "5"=all		
invertSymbol	0x0041	"%d"		
invertText	0x0041	"%d"		
isReference	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
italic	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"		
italicAngle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	"%.16g"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
itemName	0x0233	"%s"		
jOverride	0x0239	"%.16g"		
jPrefix	0x0239	"%s"		
jSuffix	0x0239	"%s"		
jisArrowSidePartialPenetrationGrooveWeld	0x0008	"%d"		
jisOtherSidePartialPenetrationGrooveWeld	0x0008	"%d"		
jisStaggeredFilletWeld	0x0008	"%d"		
jisSurfaceTexture	0x0041	"%d"		
jointId	0x0004	"%s"		
justification	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		
kOverride	0x0239	"%.16g"		
kPrefix	0x0239	"%s"		
kSuffix	0x0239	"%s"		
label	0x0084 0x0088	"%s"		
labelPrefix	0x0239	"%s"		
labelSuffix	0x0239	"%s"		
language	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245	"%s"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
lay	0x0041	String representing enumeration such that: "0"=parallel, "1"=multidirectional, "2"=perpendicular, "3"=circular, "4"=particulate, "5"=angularboth, "6"=radial, "7"=userdefined		
leadingZero	0x0081	"%d"		
length	0x0088	"%.16g"		
level	0x0042	"%s"		
levelPrefix	0x0239	"%s"		
levelSuffix	0x0239	"%s"		
limitDisplay	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=none, "1"=limitfit		
limitFitAlignment	0x0307 0x0313	String representing enumeration such that: "0"=middle, "1"=bottom		
limitFitOrder	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=valuelimitfittolerance, "1"=tolerancevaluelimitfit, "2"=valuetolerancelimitfit		
limitFitParenthesis	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=none, "1"=valuelimitfit, "2"=limitfit, "3"=tolerance, "4"=value, "5"=valuetolerance		
lineFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"		
lineGap	0x0008	"%.16g"		
lineStyle	0x0114 0x0242	String representing enumeration such that: "0"=unset,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
linearPlacement	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after		
locationOnCurve	0x0241	"%.16g"		
lowerDelta	0x0041 0x0082 0X030D 0X030F	"%.16g"		
lowerDeltaDenominator	0x0082 0X030D 0X030F	"%d"		
machiningAllowance	0x0041	"%s"		
mainEdgeType	0x0118	String representing enumeration such that: "0"=ce, "1"=e, "2"=e, "3"=ek, "4"=co		
mainHoleType	0x0118	String representing enumeration such that: "0"=dl, "1"=h, "2"=hk, "3"=ch, "4"=hk, "5"=ac, "6"=h, "7"=bl, "8"=ch		
mainRectSlotFreeformType	0x0118	String representing enumeration such that: "0"=dl, "1"=h, "2"=hk, "3"=bl, "4"=hk, "5"=ac, "6"=h, "7"=ch		
mainSurfaceType	0x0118	String representing enumeration such that: "0"=sk, "1"=co, "2"=j, "3"=s, "4"=sl, "5"=sk, "6"=cs, "7"=s, "8"=ck		
majorAngle	0x0082 0X030D 0X030F	"%d"		
manual	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
materialSide	0x0242	"%d"		
maxBonus	0x0081	"%d"		
maxBonusPrecision	0x0081	"%d"		
maxBonusValue	0x0081	"%.16g"		
maxRoughness	0x0041	"%s"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
maxRoughness2	0x0041	"%s"		
measurementDirection	0x0042	"%.16g %.16g %.16g"		
minRoughness	0x0041	"%s"		
minRoughness2	0x0041	"%s"		
modifier	0x0041	"%d"		
movable	0x0088	"%d"		
movableTargetStubDirection	0x0088	String representing enumeration such that: "0"=left, "1"=right, "2"=inferred		
movableTargetStubLength	0x0088	"%.16g"		
moveableModifierAngle	0x0088	"%.16g"		
nameComponents.displayName	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		
nameComponents.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		
nameModifier	0x0233	"%s"		
namedFromCPS	0x0305	"%d"		
narrowLeaderAngle	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"		
narrowOffset	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"		
normalDirection	0x0004 0x0042 0x0118 0x0238	"%.16g %.16g %.16g"		
notToScale	0x0082 0x0307 0X030D 0X030F	"%d"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0313			
optDirection	0x0230	"%.16g %.16g %.16g"		
ordinateBaselineZero	0x0082 0X030D 0X030F	"%d"		
origin	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=first, "1"=second		
origin	0x030A 0x030B	"%.16g %.16g %.16g"		
originAnchor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=topleft, "1"=topcentre, "2"=topright, "3"=middleleft, "4"=middlecentre, "5"=middleright, "6"=bottomleft, "7"=bottomcentre, "8"=bottomright		
otherSideCompoundLongitudinalSize	0x0008	"%s"		
otherSideCompoundMainSize	0x0008	"%s"		
otherSideCompoundStaggeredSize	0x0008	"%s"		
otherSideCompoundWeld	0x0008	"%d"		
otherSideFinishSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=unspecified, "2"=machining, "3"=grinding, "4"=chipping, "5"=none, "6"=hammering, "7"=peening, "8"=rolling, "9"=finishing		
otherSideGrooveAngle	0x0008	"%s"		
otherSideGrooveGap	0x0008	"%s"		
otherSideLongitudinalSize	0x0008	"%s"		
otherSideMainSize	0x0008	"%s"		
otherSideStaggeredSize	0x0008	"%s"		
otherSideSupplementalSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
otherSideSupplementalSymbol2	0x0008	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
otherSideSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge		
outlineColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Outline.colour which would match the more modern Outline syntax and require prerequisite Outline
outlineStyle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,		For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Outline.style which would

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"5"=dashed, "6"=solid, "7"=centreline		match the more modern Outline syntax and require prerequisite Outline
outlineType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Outline.type which would match the more modern Outline syntax and require prerequisite Outline
outlineWidth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"		measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Outline
outlineWidth.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245	%"s"		For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Outline.width.name which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			prerequisite Outline
overrun	0x0306	"%.16g"		
panZoom	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"		
parallelToScreenAnchor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"		
parallelToScreenRotationPoint	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"		
parallelToScreenScale	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"		
parameterLineFactor	0X030D 0x0313	"%.16g"		
parameterSpaceFactor	0X030D 0x0313	"%.16g"		
parenthesis	0x0041	String representing enumeration such that: "0"=none, "1"=left, "2"=right, "3"=both		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
patternCount	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
pinDirection	0x0118	"%.16g %.16g %.16g"		
pitchDiaDeviation	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"		
pitchDiaGrade	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
pitchDiameterLowerDelta	0x0307 0x0313	"%.16g"		
pitchDiameterUpperDelta	0x0307 0x0313	"%.16g"		
planar	0x0088	"%d"		
planeColour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		
point1	0x0088	"%.16g %.16g %.16g"		
point2	0x0088	"%.16g %.16g %.16g"		
position	0x0004 0x0042 0x0230 0x0238	"%.16g %.16g %.16g"		
precision	0x0004 0x0008 0x0041 0x0082 0x0088 0x0118 0x0230 0x0238 0x0239 0x0241 0x0307 0X030D 0X030F 0x0313	"%d"		
profileType	0x0081	String representing enumeration such that: "0"=bilateral, "1"=unilateralinside, "2"=unilateraloutside, "3"=bilateralunequal		
profileValue	0x0081	"%.16g"		
profileValue2	0x0081	"%.16g"		
projected	0x0082 0X030D 0X030F	"%d"		
projectedBelow	0x0081	"%d"		
projectedPrecision	0x0081	"%d"		
punchDirection	0x0118	"%.16g %.16g %.16g"		
radialPlacement	0x0082 0x0307 0X030D 0X030F	String representing enumeration		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0313	such that: "0"=before, "1"=above, "2"=below, "3"=after		
radius	0x0088 0x0235 0x030A 0x030B	("%.16g"		
referenceContent	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=value, "1"=prefix, "2"=tolerance		
referenceDisplay	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=parenthesis, "1"=reference, "2"=matched		
referenceSign	0x0008	"%d"		
referenceSignType	0x0008	String representing enumeration such that: "0"=eferencesignfork, "1"=eferencesignbox		
removeCoincidentEntities	0x0305	"%d"		
revision	0x0100 0x0231 0x0232 0x0233 0x0235 0x0239 0x0244	"%s"		
roughness	0x0041	"%s"		
roughness2	0x0041	"%s"		
roughness3	0x0041	"%s"		
roughnessCutoff	0x0041	"%s"		
roughnessSpacing	0x0041	"%s"		
rowCount	0x0311	"%d"		
scale	0x0114	("%.16g"		
shadedPlane	0x0242	"%d"		
shaftDeviation	0x0307 0x0313	"%s"		
shaftGrade	0x0307 0x0313	"%d"		
shaftLowerDelta	0x0307 0x0313	("%.16g"		
shaftUpperDelta	0x0307 0x0313	("%.16g"		
shapeTextOutsideSymbol	0x0088	"%d"		
shortDash	0x0306	("%.16g"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
singleLine	0x0041 0x0307 0x0313	"%d"		
singleSideFirst	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
singleSideLength	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"		
singleSided	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
size	0x0088	"%s"		
solder	0x0008	"%d"		
spaceFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"		
stackFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"		
staggeredWeld	0x0008	"%d"		
standard	0x0008	String representing enumeration such that: "0"=ansiaws_a24-98 "1"=iso_2556 "2"=jis_z_3021 "3"=din "4"=eskd "5"=gb		
standard	0x0081 0x0082 0x0084 0x0088 0x0100 0x0235 0x0239 0x0240 0x0241 0x0244 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=asme_y145m_1994, "1"=jis, "2"=iso, "3"=bs, "4"=ansi_y145m_1982, "5"=asme_y1441m_2003, "6"=din, "7"=gm_addendum_1994, "8"=asme_y145_2009, "9"=gb		
standard	0x0242	String representing enumeration such that: "0"=unset, "1"=iso,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=asme_y1441m		
standard	0x0041	String representing enumeration such that: "0"=jis, "1"=ansi_y1436_1993, "2"=iso, "3"=asme_y1436m_1996, "4"=din, "5"=gb, "6"=iso_1302_2002, "7"=eskd, "8"=din_en_iso_1302_2002, "9"=jis_1982		
statisticalPlacement	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after		
strikethrough	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double		
style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=lineardiametral, "1"=radial, "2"=controlledradial, "3"=diametral, "4"=limits, "5"=ordinate, "6"=sphericalradial, "7"=sphericaldiametral, "8"=narrow, "9"=none		
subType	0x0118	String representing enumeration such that: "0"=mechanicallyfastened, "1"=manufacturingandassembly, "2"=diesmolds, "3"=fixing, "4"=temporarytransferred, "5"=permanentlytransferred, "6"=coordination, "7"=correctable, "8"=auxiliaryrest, "9"=scribedcoordinationline, "10"=accessclearancehole, "11"=detached, "12"=blank, "13"=jclamps		
subscript	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230	String representing enumeration such that: "0"=sub, "1"=super		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
symbol	0x0118	String representing enumeration such that: "0"=rectangle, "1"=edge, "2"=hole, "3"=freeform, "4"=slot, "5"=surface		
symbolColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		
symbolSizeFactor	0x0008	"%.16g"		
symbolType	0x0230	"%s"		
symmetric	0x0008	"%d"		
tParm	0x030A	"%.16g %.16g"		
terminator	0x0088	String representing enumeration such that: "0"=none, "1"=x, "2"=plus		
textAspect	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"		
textBox	0x0239	"%d"		
textColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
textDirection	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	("%.16g %.16g %.16g")		
textHeight	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	("%.16g")		
textLeaderPosition	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=none, "1"=aboveleader, "2"=afterleader, "3"=abovestub, "4"=afterstub		
textLineWidth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	("%.16g")		measurementType must be replaced with meterWidth or pixelWidth
textLineWidth.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	("%s")		
textOrientation	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=horizontal, "1"=vertical		
textOrigin	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088	("%.16g %.16g %.16g")		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
textPlaneOrientation	0x0242	String representing enumeration such that: "0"=unset, "1"=parallel, "2"=perpendicular		
textRotationPoint	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"		
textStubDirection	0x0088	String representing enumeration such that: "0"=left, "1"=right, "2"=inferred		
textStubLength	0x0088	"%.16g"		
textThickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		
thickness	0x0004	"%.16g"		
thicknesses	0x0004	"%d"		
threadClass	0x0082 0X030D 0X030F	"%d"		
threaded	0x0230	"%d"		
toleranceAngleFormat	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=degrees, "1"=seconds, "2"=minutes, "3"=wholodegrees		
toleranceDisplay	0x0041 0x0082 0x0307 0X030D	String representing enumeration such that: "0"=minuslimit1,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0313	"1"=bilateral, "2"=pluslimit1, "3"=pluslimit2, "4"=equalbilateral, "5"=minuslimit2, "6"=upperunilateral, "7"=lowerunilateral		
toleranceLeadingZero	0x0041 0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
tolerancePrecision	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
toleranceTextSpaceFactor	0x0082 0X030D 0X030F	"%.16g"		
toleranceTrailingZero	0x0041 0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
trailingZero	0x0081	"%d"		
twoArrows	0x0242	"%d"		
type	0x0242	String representing enumeration such that: "0"=plane, "1"=open, "2"=closed		
type	0x0241	String representing enumeration such that: "0"=bundlenote, "1"=dressingnote		
type	0x0004	String representing enumeration such that: "0"=unset, "1"=resistance, "2"=projection		
type	0x0041	String representing enumeration such that: "0"=basic, "1"=mrr, "2"=mrp		
type	0x0088	String representing enumeration such that: "0"=cylindrical, "1"=line, "2"=arbitrary, "3"=circular, "4"=point, "5"=annular, "6"=area, "7"=rectangular, "8"=spherical		
type	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=curvelength, "1"=linear, "2"=angular, "3"=radial		
type	0x0244	String representing enumeration such that: "0"=exportcontrol, "1"=productproprietaryinfo,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=governmentsecurityinfo		
type	0x0230	"%s"		
underline	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=over, "1"=under		
unit	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		
unitText	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"		
upperDelta	0x0041 0x0082 0X030D 0X030F	"%.16g"		
upperDeltaDenominator	0x0082 0X030D 0X030F	"%d"		
uriRefs[%d]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		
usage	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		
uvParm	0x030B	"%.16g %.16g %.16g %.16g"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
valid	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=true, "1"=false, "2"=unknown		
value	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"		
valueDenominator	0x0082 0X030D 0X030F	"%d"		
valueLeadingZero	0x0307 0x0313	"%d"		
valueTrailingZero	0x0307 0x0313	"%d"		
wavinessHeight	0x0041	"%s"		
wavinessSpacing	0x0041	"%s"		
width	0x0088	"%.16g"		
width.measurementType	0x0306	"%.16g"		measurementType must be replaced with meterWidth or pixelWidth
width.name	0x0306	"%s"		
xOverride	0x0239	"%.16g"		
xPrefix	0x0239	"%s"		
xSuffix	0x0239	"%s"		
xaxis	0x030A 0x030B	"%.16g %.16g %.16g"		
yOverride	0x0239	"%.16g"		
yPrefix	0x0239	"%s"		
ySuffix	0x0239	"%s"		
zOverride	0x0239	"%.16g"		
zPrefix	0x0239	"%s"		
zSuffix	0x0239	"%s"		
zaxis	0x030A 0x030B	"%.16g %.16g %.16g"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
zeroToleranceDisplay	0x0041 0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=displayzero, "1"=blank, "2"=suppresstrailingzero, "3"=omit		
zeroToleranceSign	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=plus, "2"=minus		

Q.3 PMI Properties “A”

Q.3.1 AltText[%d] / AltText[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
AltText[%d]	0x0100 0x0235 0x0244	NULL		
AltText[%d].Item[%d]	0x0100 0x0235 0x0244	NULL	AltText[%d]	
AltText[%d].Item[%d].Outline	0x0100 0x0235 0x0244	NULL	AltText[%d].Item[%d]	
AltText[%d].Item[%d].Outline.Bottom	0x0100 0x0235 0x0244	NULL	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.Bottom.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Item[%d].Outline.Bottom	
AltText[%d].Item[%d].Outline.Bottom.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	AltText[%d].Item[%d].Outline.Bottom	
AltText[%d].Item[%d].Outline.Bottom.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d].Item[%d].Outline.Bottom	
AltText[%d].Item[%d].Outline.Bottom.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
AltText[%d].Item[%d].Outline.Bottom.width.name	0x0100 0x0235 0x0244	"%s"	AltText[%d].Item[%d].Outline.Bottom	
AltText[%d].Item[%d].Outline.Left	0x0100 0x0235 0x0244	NULL	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.Left.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Item[%d].Outline.Left	
AltText[%d].Item[%d].Outline.Left.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	AltText[%d].Item[%d].Outline.Left	
AltText[%d].Item[%d].Outline.Left.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d].Item[%d].Outline.Left	
AltText[%d].Item[%d].Outline.Left.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
AltText[%d].Item[%d].Outline.Left.width.name	0x0100 0x0235 0x0244	"%s"	AltText[%d].Item[%d].Outline.Left	
AltText[%d].Item[%d].Outline.Right	0x0100 0x0235 0x0244	NULL	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.Right.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Item[%d].Outline.Right	
AltText[%d].Item[%d].Outline.Right.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	AltText[%d].Item[%d].Outline.Right	
AltText[%d].Item[%d].Outline.Right.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d].Item[%d].Outline.Right	
AltText[%d].Item[%d].Outline.Right.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
AltText[%d].Item[%d].Outline.Right.width.name	0x0100 0x0235 0x0244	"%s"	AltText[%d].Item[%d].Outline.Right	
AltText[%d].Item[%d].Outline.Top	0x0100 0x0235 0x0244	NULL	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.Top.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Item[%d].Outline.Top	
AltText[%d].Item[%d].Outline.Top.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	AltText[%d].Item[%d].Outline.Top	
AltText[%d].Item[%d].Outline.Top.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d].Item[%d].Outline.Top	
AltText[%d].Item[%d].Outline.Top.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
AltText[%d].Item[%d].Outline.Top.width.name	0x0100 0x0235 0x0244	"%s"	AltText[%d].Item[%d].Outline.Top	
AltText[%d].Item[%d].Outline.direction	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.doubleOffset	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.fillColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.filled	0x0100 0x0235 0x0244	"%d"	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.origin	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.outlineHeight	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.outlineWidth	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].Outline.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick,	AltText[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ness		"2"=thin		
AltText[%d].Item[%d].Outline.visible	0x0100 0x0235 0x0244	"%d"	AltText[%d].Item[%d].Outline	
AltText[%d].Item[%d].bold	0x0100 0x0235 0x0244	"%d"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].font	0x0100 0x0235 0x0244	"%s"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].format	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	AltText[%d].Item[%d]	
AltText[%d].Item[%d].italic	0x0100 0x0235 0x0244	"%d"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].italicAngle	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].justification	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	AltText[%d].Item[%d]	
AltText[%d].Item[%d].language	0x0100 0x0235 0x0244	"%s"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].lineFactor	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].lineWeldSupplementalSymbol	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete,	AltText[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=meltthrough		
AltText[%d].Item[%d].lineWeldSymbol	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jis spot, "49"=jis spot flatelectrode, "50"=eskdheat, "51"=eskds smooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallarround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge	AltText[%d].Item[%d]	
AltText[%d].Item[%d].outlineColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red	AltText[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		for the colour are encoded in the string		key, but also suggest support reading AltText[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite AltText[%d].Item[%d].Outline
AltText[%d].Item[%d].outlineStyle	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	AltText[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading AltText[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require Prerequisite AltText[%d].Item[%d].Outline
AltText[%d].Item[%d].outlineType	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	AltText[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading AltText[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite AltText[%d].Item[%d].Outline
AltText[%d].Item[%d].outlineWidth. measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading AltText[%d].Item[%d].Outline.width. .measurementType which would match the more modern Outline syntax and require Prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				AltText[%d].Item[%d].Outline
AltText[%d].Item[%d].outlineWidth.name	0x0100 0x0235 0x0244	"%s"	AltText[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading AltText[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite AltText[%d].Item[%d].Outline
AltText[%d].Item[%d].spaceFactor	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].strikethrough	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=none, "1"=single, "2"=double	AltText[%d].Item[%d]	
AltText[%d].Item[%d].string	0x0100 0x0235 0x0244	"%s"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].subscript	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=sub, "1"=super	AltText[%d].Item[%d]	
AltText[%d].Item[%d].symbol	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness,	AltText[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
AltText[%d].Item[%d].textAspect	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].textColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Item[%d]	
AltText[%d].Item[%d].textHeight	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].textLineWidth. h.measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
AltText[%d].Item[%d].textLineWidth. h.name	0x0100 0x0235 0x0244	"%s"	AltText[%d].Item[%d]	
AltText[%d].Item[%d].textThickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d].Item[%d]	
AltText[%d].Item[%d].underline	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=over, "1"=under	AltText[%d].Item[%d]	

Q.3.2 AltText[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
AltText[%d].Outline	0x0100 0x0235 0x0244	NULL	AltText[%d]	
AltText[%d].Outline.Bottom	0x0100 0x0235 0x0244	NULL	AltText[%d].Outline	
AltText[%d].Outline.Bottom.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Outline.Bottom	
AltText[%d].Outline.Bottom.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	AltText[%d].Outline.Bottom	
AltText[%d].Outline.Bottom.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d].Outline.Bottom	
AltText[%d].Outline.Bottom.width.measurementType	0x0100 0x0235 0x0244	%.16g"	AltText[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
AltText[%d].Outline.Bottom.width.name	0x0100 0x0235 0x0244	%"s"	AltText[%d].Outline.Bottom	
AltText[%d].Outline.Left	0x0100 0x0235 0x0244	NULL	AltText[%d].Outline	
AltText[%d].Outline.Left.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Outline.Left	
AltText[%d].Outline.Left.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	AltText[%d].Outline.Left	
AltText[%d].Outline.Left.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
AltText[%d].Outline.Left.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
AltText[%d].Outline.Left.width.name	0x0100 0x0235 0x0244	"%s"	AltText[%d].Outline.Left	
AltText[%d].Outline.Right	0x0100 0x0235 0x0244	NULL	AltText[%d].Outline	
AltText[%d].Outline.Right.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Outline.Right	
AltText[%d].Outline.Right.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	AltText[%d].Outline.Right	
AltText[%d].Outline.Right.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d].Outline.Right	
AltText[%d].Outline.Right.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
AltText[%d].Outline.Right.width.name	0x0100 0x0235 0x0244	"%s"	AltText[%d].Outline.Right	
AltText[%d].Outline.Top	0x0100 0x0235 0x0244	NULL	AltText[%d].Outline	
AltText[%d].Outline.Top.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Outline.Top	
AltText[%d].Outline.Top.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	AltText[%d].Outline.Top	
AltText[%d].Outline.Top.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
AltText[%d].Outline.Top.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
AltText[%d].Outline.Top.width.name	0x0100 0x0235 0x0244	"%s"	AltText[%d].Outline.Top	
AltText[%d].Outline.direction	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	AltText[%d].Outline	
AltText[%d].Outline.doubleOffset	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Outline	
AltText[%d].Outline.fillColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d].Outline	
AltText[%d].Outline.filled	0x0100 0x0235 0x0244	"%d"	AltText[%d].Outline	
AltText[%d].Outline.origin	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	AltText[%d].Outline	
AltText[%d].Outline.outlineHeight	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Outline	
AltText[%d].Outline.outlineWidth	0x0100 0x0235 0x0244	"%.16g"	AltText[%d].Outline	
AltText[%d].Outline.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d].Outline	
AltText[%d].Outline.visible	0x0100 0x0235 0x0244	"%d"	AltText[%d].Outline	
AltText[%d].bold	0x0100 0x0235 0x0244	"%d"	AltText[%d]	
AltText[%d].font	0x0100 0x0235 0x0244	"%s"	AltText[%d]	
AltText[%d].italic	0x0100 0x0235 0x0244	"%d"	AltText[%d]	
AltText[%d].italicAngle	0x0100 0x0235 0x0244	"%.16g"	AltText[%d]	
AltText[%d].justification	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	AltText[%d]	
AltText[%d].language	0x0100 0x0235 0x0244	"%s"	AltText[%d]	
AltText[%d].lineFactor	0x0100 0x0235 0x0244	"%.16g"	AltText[%d]	
AltText[%d].maxExtend	0x0100 0x0235 0x0244	"%d"	AltText[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
AltText[%d].name	0x0100 0x0235 0x0244	"%s"	AltText[%d]	
AltText[%d].outlineColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading AltText[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite AltText[%d].Outline
AltText[%d].outlineStyle	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	AltText[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading AltText[%d].Outline.style which would match the more modern Outline syntax and require Prerequisite AltText[%d].Outline
AltText[%d].outlineType	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	AltText[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading AltText[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite AltText[%d].Outline
AltText[%d].outlineWidth.measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading AltText[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				AltText[%d].Outline
AltText[%d].outlineWidth.name	0x0100 0x0235 0x0244	"%s"	AltText[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading AltText[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite AltText[%d].Outline
AltText[%d].spaceFactor	0x0100 0x0235 0x0244	"%.16g"	AltText[%d]	
AltText[%d].strikethrough	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=none, "1"=single, "2"=double	AltText[%d]	
AltText[%d].subscript	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=sub, "1"=super	AltText[%d]	
AltText[%d].textAspect	0x0100 0x0235 0x0244	"%.16g"	AltText[%d]	
AltText[%d].textColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	AltText[%d]	
AltText[%d].textHeight	0x0100 0x0235 0x0244	"%.16g"	AltText[%d]	
AltText[%d].textLineWidth.measurementType	0x0100 0x0235 0x0244	"%.16g"	AltText[%d]	measurementType must be replaced with meterWidth or pixelWidth
AltText[%d].textLineWidth.name	0x0100 0x0235 0x0244	"%s"	AltText[%d]	
AltText[%d].textOrientation	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=horizontal, "1"=vertical	AltText[%d]	
AltText[%d].textThickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	AltText[%d]	
AltText[%d].underline	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=over, "1"=under	AltText[%d]	

Q.3.3 Area[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Area[%d]	0x0246	NULL		
Area[%d].ConstraintPlane.origin	0x0246	"%.16g %.16g %.16g"	Area[%d].ConstraintPlane	
Area[%d].ConstraintPlane.xaxis	0x0246	"%.16g %.16g %.16g"	Area[%d].ConstraintPlane	
Area[%d].ConstraintPlane.zaxis	0x0246	"%.16g %.16g %.16g"	Area[%d].ConstraintPlane	
Area[%d].CurveRef[%d]	0x0246	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path. This property formating is used to semantically tie a singlar semantic aspect with an entity.	Area[%d]	
Area[%d].diameter	0x0246	"%.16g"	Area[%d]	
Area[%d].height	0x0246	"%.16g"	Area[%d]	
Area[%d].innerDiameter	0x0246	"%.16g"	Area[%d]	
Area[%d].insidePoint	0x0246	"%.16g %.16g %.16g"	Area[%d]	
Area[%d].length	0x0246	"%.16g"	Area[%d]	
Area[%d].originAnchor	0x0246	String representing enumeration such that: "0"=topleft, "1"=topcentre, "2"=topright, "3"=middleleft, "4"=middlecentre, "5"=middleright, "6"=bottomleft, "7"=bottomcentre, "8"=bottomright	Area[%d]	
Area[%d].type	0x0246	String representing enumeration such that: "0"=rectangular, "1"=circular, "2"=annular, "3"=cylindrical, "4"=general	Area[%d]	
Area[%d].width	0x0246	"%.16g"	Area[%d]	

Q.3.4 AttributeName[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
--------------	---------------------------	------------------------------	------------------	-----------------

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
AttributeName[%d]	0x0240 0x0241	"%s"		

Q.4 PMI Properties “C”

Q.4.1 CLIP_<NAME>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CLIP_CAPPING	0x0305	"%d"		
CLIP_CAPPING_COLOR	0x0305	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		
CLIP_CAPPING_USE_BODY_COLOR	0x0305	"True" or "False"		
CLIP_CURVE	0x0305	"%d"		
CLIP_CURVE_COLOR	0x0305	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		
CLIP_CURVE_USE_BODY_COLOR	0x0305	"True" or "False"		
CLIP_HATCH_ANGLE	0x0305	"%.16g"		
CLIP_HATCH_ASSEMBLY_ADJACENT_METHOD	0x0305	Enumerated string supporting values "None", "Diagonal" and "Variable"		
CLIP_HATCH_ASSEMBLY_ADJACENT_THRESHOLD	0x0305	"%.16g"		
CLIP_HATCH_COLOR	0x0305	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		
CLIP_HATCH_MATERIAL_DEFAULT	0x0305	"%s"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CLIP_HATCH_NOMATERIAL_DE FAULT	0x0305	%s		The string should be the name of the pattern to use when a intersected part has no material with a pattern definition.
CLIP_HATCH_PATTERN	0x0305	%s		The string should be the name of the pattern to use.
CLIP_HATCH_REF_AXIS	0x0305	"%.16g %.16g %.16g"		
CLIP_HATCH_ROTATE	0x0305	"%d"		
CLIP_HATCH_SPACING	0x0305	"%.16g"		
CLIP_HATCH_SPACING_ANGLE _DIR	0x0305	%d %d %d %d %d		The spacing, angle and direction that the hatching of the section has
CLIP_HATCH_TYPE	0x0305	"GLOBAL" or "MATERIAL"		If GLOBAL then the CLIP_HATCH_PATTERN property should also be present. If MATERIAL CLIP_HATCH_NOMATERIAL_DE FAULT should be
CLIP_NORMAL	0x0305	"%.16g,%.16g,%.16g"		
CLIP_POSITION	0x0305	"%.16g,%.16g,%.16g"		
CLIP_RENDER	0x0305	String representing enumeration such that: "0"=shaded, "1"=wireframe		
CLIP_STYLE	0x0305	Enumerated string supporting values "Both", "Near", "Far" and "None"		
CLIP_WIREFRAME	0x0305	"True" or "False"		

Q.4.2 ChamferSymbol / ChamferSymbol.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ChamferSymbol	0X030F	NULL		
ChamferSymbol.Item[%d]	0X030F	NULL	ChamferSymbol	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ChamferSymbol.Item[%d].Outline	0X030F	NULL	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].Outline.Bottom	0X030F	NULL	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.Bottom.colour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Item[%d].Outline.Bottom	
ChamferSymbol.Item[%d].Outline.Bottom.style	0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ChamferSymbol.Item[%d].Outline.Bottom	
ChamferSymbol.Item[%d].Outline.Bottom.thickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Item[%d].Outline.Bottom	
ChamferSymbol.Item[%d].Outline.Bottom.width.measurementType	0X030F	"%.16g"	ChamferSymbol.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ChamferSymbol.Item[%d].Outline.Bottom.width.name	0X030F	"%s"	ChamferSymbol.Item[%d].Outline.Bottom	
ChamferSymbol.Item[%d].Outline.Left	0X030F	NULL	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.Left.colour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Item[%d].Outline.Left	
ChamferSymbol.Item[%d].Outline.Left.style	0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ChamferSymbol.Item[%d].Outline.Left	
ChamferSymbol.Item[%d].Outline.Left.thickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Item[%d].Outline.Left	
ChamferSymbol.Item[%d].Outline.Left.width.measurementType	0X030F	"%.16g"	ChamferSymbol.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				pixelWidth
ChamferSymbol.Item[%d].Outline.Left.width.name	0X030F	"%s"	ChamferSymbol.Item[%d].Outline.Left	
ChamferSymbol.Item[%d].Outline.Right	0X030F	NULL	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.Right.colour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Item[%d].Outline.Right	
ChamferSymbol.Item[%d].Outline.Right.style	0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ChamferSymbol.Item[%d].Outline.Right	
ChamferSymbol.Item[%d].Outline.Right.thickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Item[%d].Outline.Right	
ChamferSymbol.Item[%d].Outline.Right.width.measurementType	0X030F	"%.16g"	ChamferSymbol.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ChamferSymbol.Item[%d].Outline.Right.width.name	0X030F	"%s"	ChamferSymbol.Item[%d].Outline.Right	
ChamferSymbol.Item[%d].Outline.Top	0X030F	NULL	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.Top.colour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Item[%d].Outline.Top	
ChamferSymbol.Item[%d].Outline.Top.style	0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ChamferSymbol.Item[%d].Outline.Top	
ChamferSymbol.Item[%d].Outline.Top.thickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ChamferSymbol.Item[%d].Outline.Top.width.measurementType	0X030F	"%.16g"	ChamferSymbol.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ChamferSymbol.Item[%d].Outline.Top.width.name	0X030F	"%s"	ChamferSymbol.Item[%d].Outline.Top	
ChamferSymbol.Item[%d].Outline.direction	0X030F	"%.16g %.16g %.16g"	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.doubleOffset	0X030F	"%.16g"	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.fillColour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.filled	0X030F	"%d"	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.origin	0X030F	"%.16g %.16g %.16g"	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.outlineHeight	0X030F	"%.16g"	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.outlineWidth	0X030F	"%.16g"	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.thickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].Outline.visible	0X030F	"%d"	ChamferSymbol.Item[%d].Outline	
ChamferSymbol.Item[%d].bold	0X030F	"%d"	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].font	0X030F	"%s"	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].format	0X030F	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].italic	0X030F	"%d"	ChamferSymbol.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ChamferSymbol.Item[%d].italicAngle	0X030F	"%.16g"	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].justification	0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].language	0X030F	"%s"	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].lineFactor	0X030F	"%.16g"	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].lineWeldSupplementalSymbol	0X030F	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].lineWeldSymbol	0X030F	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=single]	ChamferSymbol.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=melthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskdiameter, "56"=eskdnumber, "57"=isoedge		
ChamferSymbol.Item[%d].outlineColour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ChamferSymbol.Item[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite ChamferSymbol.Item[%d].Outline
ChamferSymbol.Item[%d].outlineStyle	0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	ChamferSymbol.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ChamferSymbol.Item[%d].Outline.style which would match the more

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		modern Outline syntax and require Prerequisite ChamferSymbol.Item[%d].Outline
ChamferSymbol.Item[%d].outlineType	0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ChamferSymbol.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ChamferSymbol.Item[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite ChamferSymbol.Item[%d].Outline
ChamferSymbol.Item[%d].outlineWidth.measurementType	0X030F	%.16g"	ChamferSymbol.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ChamferSymbol.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite ChamferSymbol.Item[%d].Outline
ChamferSymbol.Item[%d].outlineWidth.name	0X030F	%"s"	ChamferSymbol.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ChamferSymbol.Item[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite ChamferSymbol.Item[%d].Outline
ChamferSymbol.Item[%d].spaceFactor	0X030F	%.16g"	ChamferSymbol.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ChamferSymbol.Item[%d].strikethrough	0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].string	0X030F	"%s"	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].subscript	0X030F	String representing enumeration such that: "0"=sub, "1"=super	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].symbol	0X030F	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular,	ChamferSymbol.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ChamferSymbol.Item[%d].textAspect	0X030F	("%.16g"	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].textColour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].textHeight	0X030F	("%.16g"	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].textLineWidth.measurementType	0X030F	("%.16g"	ChamferSymbol.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ChamferSymbol.Item[%d].textLineWidth.name	0X030F	"%s"	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].textThickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Item[%d]	
ChamferSymbol.Item[%d].underline	0X030F	String representing enumeration such that: "0"=over, "1"=under	ChamferSymbol.Item[%d]	

Q.4.3 ChamferSymbol.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ChamferSymbol.Outline	0X030F	NULL	ChamferSymbol	
ChamferSymbol.Outline.Bottom	0X030F	NULL	ChamferSymbol.Outline	
ChamferSymbol.Outline.Bottom.colour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Outline.Bottom	
ChamferSymbol.Outline.Bottom.style	0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	ChamferSymbol.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
ChamferSymbol.Outline.Bottom.thickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Outline.Bottom	
ChamferSymbol.Outline.Bottom.width.measurementType	0X030F	"%.16g"	ChamferSymbol.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ChamferSymbol.Outline.Bottom.width.name	0X030F	"%s"	ChamferSymbol.Outline.Bottom	
ChamferSymbol.Outline.Left	0X030F	NULL	ChamferSymbol.Outline	
ChamferSymbol.Outline.Left.colour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Outline.Left	
ChamferSymbol.Outline.Left.style	0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ChamferSymbol.Outline.Left	
ChamferSymbol.Outline.Left.thickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Outline.Left	
ChamferSymbol.Outline.Left.width.measurementType	0X030F	"%.16g"	ChamferSymbol.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ChamferSymbol.Outline.Left.width.name	0X030F	"%s"	ChamferSymbol.Outline.Left	
ChamferSymbol.Outline.Right	0X030F	NULL	ChamferSymbol.Outline	
ChamferSymbol.Outline.Right.colour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Outline.Right	
ChamferSymbol.Outline.Right.style	0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	ChamferSymbol.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
ChamferSymbol.Outline.Right.thickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Outline.Right	
ChamferSymbol.Outline.Right.width.measurementType	0X030F	"%.16g"	ChamferSymbol.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ChamferSymbol.Outline.Right.width.name	0X030F	"%s"	ChamferSymbol.Outline.Right	
ChamferSymbol.Outline.Top	0X030F	NULL	ChamferSymbol.Outline	
ChamferSymbol.Outline.Top.colour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Outline.Top	
ChamferSymbol.Outline.Top.style	0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ChamferSymbol.Outline.Top	
ChamferSymbol.Outline.Top.thickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Outline.Top	
ChamferSymbol.Outline.Top.width.measurementType	0X030F	"%.16g"	ChamferSymbol.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ChamferSymbol.Outline.Top.width.name	0X030F	"%s"	ChamferSymbol.Outline.Top	
ChamferSymbol.Outline.direction	0X030F	"%.16g %.16g %.16g"	ChamferSymbol.Outline	
ChamferSymbol.Outline.doubleOffset	0X030F	"%.16g"	ChamferSymbol.Outline	
ChamferSymbol.Outline.fillColour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol.Outline	
ChamferSymbol.Outline.filled	0X030F	"%d"	ChamferSymbol.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ChamferSymbol.Outline.origin	0X030F	"%.16g %.16g %.16g"	ChamferSymbol.Outline	
ChamferSymbol.Outline.outlineHeight	0X030F	"%.16g"	ChamferSymbol.Outline	
ChamferSymbol.Outline.outlineWidth	0X030F	"%.16g"	ChamferSymbol.Outline	
ChamferSymbol.Outline.thickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol.Outline	
ChamferSymbol.Outline.visible	0X030F	"%d"	ChamferSymbol.Outline	
ChamferSymbol.bold	0X030F	"%d"	ChamferSymbol	
ChamferSymbol.font	0X030F	"%s"	ChamferSymbol	
ChamferSymbol.italic	0X030F	"%d"	ChamferSymbol	
ChamferSymbol.italicAngle	0X030F	"%.16g"	ChamferSymbol	
ChamferSymbol.justification	0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ChamferSymbol	
ChamferSymbol.language	0X030F	"%s"	ChamferSymbol	
ChamferSymbol.lineFactor	0X030F	"%.16g"	ChamferSymbol	
ChamferSymbol.maxExtend	0X030F	"%d"	ChamferSymbol	
ChamferSymbol.name	0X030F	"%s"	ChamferSymbol	
ChamferSymbol.outlineColour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ChamferSymbol.Outline.colour which would match the more modern Outline syntax and require Prerequisite ChamferSymbol.Outline
ChamferSymbol.outlineStyle	0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	ChamferSymbol	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		ChamferSymbol.Outline.style which would match the more modern Outline syntax and require Prerequisite ChamferSymbol.Outline
ChamferSymbol.outlineType	0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ChamferSymbol	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ChamferSymbol.Outline.type which would match the more modern Outline syntax and require Prerequisite ChamferSymbol.Outline
ChamferSymbol.outlineWidth.measurementType	0X030F	"%.16g"	ChamferSymbol	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ChamferSymbol.Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite ChamferSymbol.Outline
ChamferSymbol.outlineWidth.name	0X030F	"%s"	ChamferSymbol	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ChamferSymbol.Outline.width.name which would match the more modern Outline syntax and require Prerequisite ChamferSymbol.Outline
ChamferSymbol.spaceFactor	0X030F	"%.16g"	ChamferSymbol	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ChamferSymbol.strikethrough	0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ChamferSymbol	
ChamferSymbol.subscript	0X030F	String representing enumeration such that: "0"=sub, "1"=super	ChamferSymbol	
ChamferSymbol.textAspect	0X030F	"%.16g"	ChamferSymbol	
ChamferSymbol.textColour	0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ChamferSymbol	
ChamferSymbol.textHeight	0X030F	"%.16g"	ChamferSymbol	
ChamferSymbol.textLineWidth.measurementType	0X030F	"%.16g"	ChamferSymbol	measurementType must be replaced with meterWidth or pixelWidth
ChamferSymbol.textLineWidth.name	0X030F	"%s"	ChamferSymbol	
ChamferSymbol.textOrientation	0X030F	String representing enumeration such that: "0"=horizontal, "1"=vertical	ChamferSymbol	
ChamferSymbol.textThickness	0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ChamferSymbol	
ChamferSymbol.underline	0X030F	String representing enumeration such that: "0"=over, "1"=under	ChamferSymbol	

Q.4.4 Column[%d] / Column[%d].ColumnValue[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
--------------	---------------------------	------------------------------	------------------	-----------------

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Column[%d]	0x0311	NULL		%d index cannot exceed/equal columnCount.
Column[%d].ColumnValue[%d]	0x0311	NULL	Column[%d]	
Column[%d].ColumnValue[%d].List.Value[%d]	0x0311	NULL	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].List.Value[%d].description	0x0311	"%s"	Column[%d].ColumnValue[%d].List.Value[%d]	
Column[%d].ColumnValue[%d].List.Value[%d].value	0x0311	"%s"	Column[%d].ColumnValue[%d].List.Value[%d]	
Column[%d].ColumnValue[%d].List.type	0x0311	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].editable	0x0311	"%d"	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].format	0x0311	"%s"	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].maxExclusive	0x0311	"%.16g"	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].maxInclusive	0x0311	"%.16g"	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].maxLength	0x0311	"%d"	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].minExclusive	0x0311	"%.16g"	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].minInclusive	0x0311	"%.16g"	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].minLength	0x0311	"%d"	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].referenceRef	0x0311	"%s"	Column[%d].ColumnValue[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Column[%d].ColumnValue[%d].stepValue	0x0311	"%.16g"	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].title	0x0311	"%s"	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].type	0x0311	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Column[%d].ColumnValue[%d]	
Column[%d].ColumnValue[%d].value	0x0311	"%s"	Column[%d].ColumnValue[%d]	

Q.4.5 Column[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Column[%d].Outline	0x0311	NULL	Column[%d]	
Column[%d].Outline.Bottom	0x0311	NULL	Column[%d].Outline	
Column[%d].Outline.Bottom.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Column[%d].Outline.Bottom	
Column[%d].Outline.Bottom.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Column[%d].Outline.Bottom	
Column[%d].Outline.Bottom.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Column[%d].Outline.Bottom	
Column[%d].Outline.Bottom.width.measurementType	0x0311	"%.16g"	Column[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Column[%d].Outline.Bottom.width	0x0311	"%s"	Column[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
name				
Column[%d].Outline.Left	0x0311	NULL	Column[%d].Outline	
Column[%d].Outline.Left.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Column[%d].Outline.Left	
Column[%d].Outline.Left.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Column[%d].Outline.Left	
Column[%d].Outline.Left.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Column[%d].Outline.Left	
Column[%d].Outline.Left.width.measurementType	0x0311	"%.16g"	Column[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Column[%d].Outline.Left.width.name	0x0311	"%s"	Column[%d].Outline.Left	
Column[%d].Outline.Right	0x0311	NULL	Column[%d].Outline	
Column[%d].Outline.Right.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Column[%d].Outline.Right	
Column[%d].Outline.Right.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Column[%d].Outline.Right	
Column[%d].Outline.Right.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Column[%d].Outline.Right	
Column[%d].Outline.Right.width.measurementType	0x0311	"%.16g"	Column[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Column[%d].Outline.Right.width.name	0x0311	"%s"	Column[%d].Outline.Right	
Column[%d].Outline.Top	0x0311	NULL	Column[%d].Outline	
Column[%d].Outline.Top.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Column[%d].Outline.Top	
Column[%d].Outline.Top.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Column[%d].Outline.Top	
Column[%d].Outline.Top.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Column[%d].Outline.Top	
Column[%d].Outline.Top.width.measurementType	0x0311	"%.16g"	Column[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Column[%d].Outline.Top.width.name	0x0311	"%s"	Column[%d].Outline.Top	
Column[%d].Outline.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Column[%d].Outline	
Column[%d].Outline.direction	0x0311	"%.16g %.16g %.16g"	Column[%d].Outline	
Column[%d].Outline.doubleOffset	0x0311	"%.16g"	Column[%d].Outline	
Column[%d].Outline.fillColour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Column[%d].Outline	
Column[%d].Outline.filled	0x0311	"%d"	Column[%d].Outline	
Column[%d].Outline.origin	0x0311	"%.16g %.16g %.16g"	Column[%d].Outline	
Column[%d].Outline.outlineHeight	0x0311	"%.16g"	Column[%d].Outline	
Column[%d].Outline.outlineWidth	0x0311	"%.16g"	Column[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Column[%d].Outline.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Column[%d].Outline	
Column[%d].Outline.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Column[%d].Outline	
Column[%d].Outline.type	0x0311	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	Column[%d].Outline	
Column[%d].Outline.visible	0x0311	"%d"	Column[%d].Outline	
Column[%d].Outline.width.measurementType	0x0311	"%.16g"	Column[%d].Outline	measurementType must be replaced with meterWidth or pixelWidth
Column[%d].Outline.width.name	0x0311	"%s"	Column[%d].Outline	
Column[%d].blanked	0x0311	"%d"	Column[%d]	
Column[%d].bold	0x0311	"%d"	Column[%d]	
Column[%d].commaAsDecimal	0x0311	"%d"	Column[%d]	
Column[%d].font	0x0311	"%s"	Column[%d]	
Column[%d].italic	0x0311	"%d"	Column[%d]	
Column[%d].italicAngle	0x0311	"%.16g"	Column[%d]	
Column[%d].justification	0x0311	String representing enumeration such that: "0"=right, "1"=centre,	Column[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		
Column[%d].language	0x0311	"%s"	Column[%d]	
Column[%d].lineFactor	0x0311	"%.16g"	Column[%d]	
Column[%d].number	0x0311	"%d"	Column[%d]	
Column[%d].spaceFactor	0x0311	"%.16g"	Column[%d]	
Column[%d].strikethrough	0x0311	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Column[%d]	
Column[%d].subscript	0x0311	String representing enumeration such that: "0"=sub, "1"=super	Column[%d]	
Column[%d].symbolColour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Column[%d]	
Column[%d].textAspect	0x0311	"%.16g"	Column[%d]	
Column[%d].textColour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Column[%d]	
Column[%d].textDirection	0x0311	"%.16g %.16g %.16g"	Column[%d]	
Column[%d].textHeight	0x0311	"%.16g"	Column[%d]	
Column[%d].textLineWidth.measurementType	0x0311	"%.16g"	Column[%d]	measurementType must be replaced with meterWidth or pixelWidth
Column[%d].textLineWidth.name	0x0311	"%s"	Column[%d]	
Column[%d].textOrigin	0x0311	"%.16g %.16g %.16g"	Column[%d]	
Column[%d].textThickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Column[%d]	
Column[%d].underline	0x0311	String representing enumeration such that: "0"=over, "1"=under	Column[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Column[%d].width	0x0311	"%.16g"	Column[%d]	

Q.4.6 ConstraintPlane.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ConstraintPlane.origin	0x0242	"%.16g %.16g %.16g"	ConstraintPlane	
ConstraintPlane.xaxis	0x0242	"%.16g %.16g %.16g"	ConstraintPlane	
ConstraintPlane.zaxis	0x0242	"%.16g %.16g %.16g"	ConstraintPlane	

Q.4.7 ConstraintPlane[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ConstraintPlane[%d]	0x0242	"%.16g %.16g %.16g"	type	Expects type property to be plane
ConstraintPlane[%d].materialSide	0x0242	"%.16g %.16g %.16g"	ConstraintPlane[%d]	
ConstraintPlane[%d].origin	0x0242	"%.16g %.16g %.16g"	ConstraintPlane[%d]	
ConstraintPlane[%d].xaxis	0x0242	"%.16g %.16g %.16g"	ConstraintPlane[%d]	
ConstraintPlane[%d].zaxis	0x0242	"%.16g %.16g %.16g"	ConstraintPlane[%d]	

Q.4.8 CoordinateSystem.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CoordinateSystem.origin	0x0239	"%.16g %.16g %.16g"		Should not be used along side 'coordinateSystemRef' Should also have 'CoordinateSystem.xaxis' and 'CoordinateSystem.zaxis'
CoordinateSystem.xaxis	0x0239	"%.16g %.16g %.16g"		Should not be used along side 'coordinateSystemRef' Should also have 'CoordinateSystem.origin' and 'CoordinateSystem.zaxis'
CoordinateSystem.zaxis	0x0239	"%.16g %.16g %.16g"		Should not be used along side 'coordinateSystemRef' Should also have 'CoordinateSystem.origin' and 'CoordinateSystem.xaxis'

Q.4.9 CoordinatedEntity[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CoordinatedEntity[%d]	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL		
CoordinatedEntity[%d].Item[%d]	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d]	
CoordinatedEntity[%d].Item[%d].Outline	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].Outline.Bottom	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.Bottom.colour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d].Item[%d].Outline.Bottom	
CoordinatedEntity[%d].Item[%d].Outline.Bottom.style	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CoordinatedEntity[%d].Item[%d].Outline.Bottom	
CoordinatedEntity[%d].Item[%d].Outline.Bottom.thickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d].Item[%d].Outline.Bottom	
CoordinatedEntity[%d].Item[%d].Outline.Bottom.width.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
CoordinatedEntity[%d].Item[%d].Outline.Bottom.width.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Item[%d].Outline.Bottom	
CoordinatedEntity[%d].Item[%d].Outline.Left	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.Left.colour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d].Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CoordinatedEntity[%d].Item[%d].Outline.Left.style	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CoordinatedEntity[%d].Item[%d].Outline.Left	
CoordinatedEntity[%d].Item[%d].Outline.Left.thickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d].Item[%d].Outline.Left	
CoordinatedEntity[%d].Item[%d].Outline.Left.width.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
CoordinatedEntity[%d].Item[%d].Outline.Left.width.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Item[%d].Outline.Left	
CoordinatedEntity[%d].Item[%d].Outline.Right	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.Right.colour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d].Item[%d].Outline.Right	
CoordinatedEntity[%d].Item[%d].Outline.Right.style	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CoordinatedEntity[%d].Item[%d].Outline.Right	
CoordinatedEntity[%d].Item[%d].Outline.Right.thickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d].Item[%d].Outline.Right	
CoordinatedEntity[%d].Item[%d].Outline.Right.width.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
CoordinatedEntity[%d].Item[%d].Outline.Right.width.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Item[%d].Outline.Right	
CoordinatedEntity[%d].Item[%d].Outline.Top	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.Top.colour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red	CoordinatedEntity[%d].Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		for the colour are encoded in the string		
CoordinatedEntity[%d].Item[%d].Outline.Top.style	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CoordinatedEntity[%d].Item[%d].Outline.Top	
CoordinatedEntity[%d].Item[%d].Outline.Top.thickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d].Item[%d].Outline.Top	
CoordinatedEntity[%d].Item[%d].Outline.Top.width.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
CoordinatedEntity[%d].Item[%d].Outline.Top.width.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Item[%d].Outline.Top	
CoordinatedEntity[%d].Item[%d].Outline.direction	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g %.16g %.16g"	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.doubleOffset	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.fillColour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.filled	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%d"	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.origin	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g %.16g %.16g"	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.outlineHeight	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.outlineWidth	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline.thickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d].Item[%d].Outline	
CoordinatedEntity[%d].Item[%d].Outline	0x0004 0x0008 0x0042 0x0118	"%d"	CoordinatedEntity[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
utline.visible	0x0230 0x0238		utline	
CoordinatedEntity[%d].Item[%d].bold	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%d"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].font	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].format	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].italic	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%d"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].italicAngle	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].justification	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].language	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].lineFactor	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].lineWeldSupplementalSymbol	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr,	CoordinatedEntity[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
CoordinatedEntity[%d].Item[%d].lineWeldSymbol	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=single, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskdiameter,	CoordinatedEntity[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"56"=eskdnumber, "57"=isoedge		
CoordinatedEntity[%d].Item[%d].outlineColour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CoordinatedEntity[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite CoordinatedEntity[%d].Item[%d].Outline
CoordinatedEntity[%d].Item[%d].outlineStyle	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CoordinatedEntity[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CoordinatedEntity[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require Prerequisite CoordinatedEntity[%d].Item[%d].Outline
CoordinatedEntity[%d].Item[%d].outlineType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	CoordinatedEntity[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CoordinatedEntity[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite CoordinatedEntity[%d].Item[%d].Outline
CoordinatedEntity[%d].Item[%d].outlineWidth.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	%.16g"	CoordinatedEntity[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				reading CoordinatedEntity[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite CoordinatedEntity[%d].Item[%d].Outline
CoordinatedEntity[%d].Item[%d].OutlineWidth.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CoordinatedEntity[%d].Item[%d].OutlineWidth.name which would match the more modern Outline syntax and require Prerequisite CoordinatedEntity[%d].Item[%d].Outline
CoordinatedEntity[%d].Item[%d].SpaceFactor	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].Strikethrough	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=none, "1"=single, "2"=double	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].String	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].Subscript	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=sub, "1"=super	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].Symbol	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout,	CoordinatedEntity[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
CoordinatedEntity[%d].Item[%d].textAspect	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	%.16g"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].textColour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].textHeight	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	%.16g"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].textLineWidth.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	%.16g"	CoordinatedEntity[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
CoordinatedEntity[%d].Item[%d].textLineWidth.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	%"s"	CoordinatedEntity[%d].Item[%d]	
CoordinatedEntity[%d].Item[%d].textThickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick,	CoordinatedEntity[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
CoordinatedEntity[%d].Item[%d].underline	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=over, "1"=under	CoordinatedEntity[%d].Item[%d]	

Q.4.10 CoordinatedEntity[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CoordinatedEntity[%d].Outline	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d]	
CoordinatedEntity[%d].Outline.Bottom	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.Bottom.colour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d].Outline.Bottom	
CoordinatedEntity[%d].Outline.Bottom.style	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CoordinatedEntity[%d].Outline.Bottom	
CoordinatedEntity[%d].Outline.Bottom.thickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d].Outline.Bottom	
CoordinatedEntity[%d].Outline.Bottom.width.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
CoordinatedEntity[%d].Outline.Bottom.width.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Outline.Bottom	
CoordinatedEntity[%d].Outline.Left	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.Left.colour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d].Outline.Left	
CoordinatedEntity[%d].Outline.Left	0x0004 0x0008 0x0042 0x0118	String representing enumeration	CoordinatedEntity[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.style	0x0230 0x0238	such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
CoordinatedEntity[%d].Outline.Left.thickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d].Outline.Left	
CoordinatedEntity[%d].Outline.Left.width.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	%.16g"	CoordinatedEntity[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
CoordinatedEntity[%d].Outline.Left.width.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Outline.Left	
CoordinatedEntity[%d].Outline.Right	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.Right.colour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d].Outline.Right	
CoordinatedEntity[%d].Outline.Right.style	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CoordinatedEntity[%d].Outline.Right	
CoordinatedEntity[%d].Outline.Right.thickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d].Outline.Right	
CoordinatedEntity[%d].Outline.Right.width.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	%.16g"	CoordinatedEntity[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
CoordinatedEntity[%d].Outline.Right.width.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Outline.Right	
CoordinatedEntity[%d].Outline.Top	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	NULL	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.Top.colour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	CoordinatedEntity[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
CoordinatedEntity[%d].Outline.Top.style	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CoordinatedEntity[%d].Outline.Top	
CoordinatedEntity[%d].Outline.Top.thickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d].Outline.Top	
CoordinatedEntity[%d].Outline.Top.width.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
CoordinatedEntity[%d].Outline.Top.width.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d].Outline.Top	
CoordinatedEntity[%d].Outline.direction	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g %.16g %.16g"	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.doubleOffset	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.fillColour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.filled	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%d"	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.origin	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g %.16g %.16g"	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.outlineHeight	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.outlineWidth	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.thickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d].Outline	
CoordinatedEntity[%d].Outline.visible	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%d"	CoordinatedEntity[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CoordinatedEntity[%d].bold	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%d"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].font	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].italic	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%d"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].italicAngle	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].justification	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	CoordinatedEntity[%d]	
CoordinatedEntity[%d].language	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].lineFactor	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].maxExtend	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%d"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].outlineColour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CoordinatedEntity[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite CoordinatedEntity[%d].Outline
CoordinatedEntity[%d].outlineStyle	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CoordinatedEntity[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CoordinatedEntity[%d].Outline.style which would match the more modern Outline syntax and require Prerequisite CoordinatedEntity[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CoordinatedEntity[%d].outlineType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	CoordinatedEntity[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CoordinatedEntity[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite CoordinatedEntity[%d].Outline
CoordinatedEntity[%d].outlineWidth.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	%.16g"	CoordinatedEntity[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CoordinatedEntity[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite CoordinatedEntity[%d].Outline
CoordinatedEntity[%d].outlineWidth.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	%"s"	CoordinatedEntity[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CoordinatedEntity[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite CoordinatedEntity[%d].Outline
CoordinatedEntity[%d].spaceFactor	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	%.16g"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].strikethrough	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=none, "1"=single, "2"=double	CoordinatedEntity[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CoordinatedEntity[%d].subscript	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=sub, "1"=super	CoordinatedEntity[%d]	
CoordinatedEntity[%d].textAspect	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].textColour	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CoordinatedEntity[%d]	
CoordinatedEntity[%d].textHeight	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].textLineWidth.measurementType	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%.16g"	CoordinatedEntity[%d]	measurementType must be replaced with meterWidth or pixelWidth
CoordinatedEntity[%d].textLineWidth.name	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	"%s"	CoordinatedEntity[%d]	
CoordinatedEntity[%d].textOrientation	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=horizontal, "1"=vertical	CoordinatedEntity[%d]	
CoordinatedEntity[%d].textThickness	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CoordinatedEntity[%d]	
CoordinatedEntity[%d].underline	0x0004 0x0008 0x0042 0x0118 0x0230 0x0238	String representing enumeration such that: "0"=over, "1"=under	CoordinatedEntity[%d]	

Q.4.11 CpsLetters[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CpsLetters[%d]	0x0242	NULL		
CpsLetters[%d].Item[%d]	0x0242	NULL	CpsLetters[%d]	
CpsLetters[%d].Item[%d].Outline	0x0242	NULL	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].Outline.Bottom	0x0242	NULL	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.Bottom.colour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	CpsLetters[%d].Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
CpsLetters[%d].Item[%d].Outline.Bottom.style	0x0242	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CpsLetters[%d].Item[%d].Outline.Bottom	
CpsLetters[%d].Item[%d].Outline.Bottom.thickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Item[%d].Outline.Bottom	
CpsLetters[%d].Item[%d].Outline.Bottom.width.measurementType	0x0242	"%.16g"	CpsLetters[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
CpsLetters[%d].Item[%d].Outline.Bottom.width.name	0x0242	"%s"	CpsLetters[%d].Item[%d].Outline.Bottom	
CpsLetters[%d].Item[%d].Outline.Left	0x0242	NULL	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.Left.colour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Item[%d].Outline.Left	
CpsLetters[%d].Item[%d].Outline.Left.style	0x0242	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CpsLetters[%d].Item[%d].Outline.Left	
CpsLetters[%d].Item[%d].Outline.Left.thickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Item[%d].Outline.Left	
CpsLetters[%d].Item[%d].Outline.Left.width.measurementType	0x0242	"%.16g"	CpsLetters[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
CpsLetters[%d].Item[%d].Outline.Left.width.name	0x0242	"%s"	CpsLetters[%d].Item[%d].Outline.Left	
CpsLetters[%d].Item[%d].Outline.Right	0x0242	NULL	CpsLetters[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CpsLetters[%d].Item[%d].Outline.Right.colour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Item[%d].Outline.Right	
CpsLetters[%d].Item[%d].Outline.Right.style	0x0242	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CpsLetters[%d].Item[%d].Outline.Right	
CpsLetters[%d].Item[%d].Outline.Right.thickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Item[%d].Outline.Right	
CpsLetters[%d].Item[%d].Outline.Right.width.measurementType	0x0242	%.16g"	CpsLetters[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
CpsLetters[%d].Item[%d].Outline.Right.width.name	0x0242	%"s"	CpsLetters[%d].Item[%d].Outline.Right	
CpsLetters[%d].Item[%d].Outline.Top	0x0242	NULL	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.Top.colour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Item[%d].Outline.Top	
CpsLetters[%d].Item[%d].Outline.Top.style	0x0242	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CpsLetters[%d].Item[%d].Outline.Top	
CpsLetters[%d].Item[%d].Outline.Top.thickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Item[%d].Outline.Top	
CpsLetters[%d].Item[%d].Outline.Top.width.measurementType	0x0242	%.16g"	CpsLetters[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
CpsLetters[%d].Item[%d].Outline.Top.width.name	0x0242	%"s"	CpsLetters[%d].Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CpsLetters[%d].Item[%d].Outline.direction	0x0242	"%.16g %.16g %.16g"	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.doubleOffset	0x0242	"%.16g"	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.fillColour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.filled	0x0242	"%d"	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.origin	0x0242	"%.16g %.16g %.16g"	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.outlineHeight	0x0242	"%.16g"	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.outlineWidth	0x0242	"%.16g"	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.thickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].Outline.visible	0x0242	"%d"	CpsLetters[%d].Item[%d].Outline	
CpsLetters[%d].Item[%d].bold	0x0242	"%d"	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].font	0x0242	"%s"	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].format	0x0242	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].italic	0x0242	"%d"	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].italicAngle	0x0242	"%.16g"	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].justification	0x0242	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft,	CpsLetters[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=bottomright, "8"=bottomcentre		
CpsLetters[%d].Item[%d].language	0x0242	"%s"	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].lineFactor	0x0242	"%.16g"	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].lineWeldSupplementalSymbol	0x0242	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].lineWeldSymbol	0x0242	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge,	CpsLetters[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
CpsLetters[%d].Item[%d].outlineColour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CpsLetters[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite CpsLetters[%d].Item[%d].Outline
CpsLetters[%d].Item[%d].outlineStyle	0x0242	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CpsLetters[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CpsLetters[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require Prerequisite CpsLetters[%d].Item[%d].Outline
CpsLetters[%d].Item[%d].outlineType	0x0242	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square,	CpsLetters[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		CpsLetters[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite CpsLetters[%d].Item[%d].Outline
CpsLetters[%d].Item[%d].outlineWidth.measurementType	0x0242	%.16g"	CpsLetters[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CpsLetters[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite CpsLetters[%d].Item[%d].Outline
CpsLetters[%d].Item[%d].outlineWidth.name	0x0242	%"s"	CpsLetters[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CpsLetters[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite CpsLetters[%d].Item[%d].Outline
CpsLetters[%d].Item[%d].spaceFactor	0x0242	%.16g"	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].strikethrough	0x0242	String representing enumeration such that: "0"=none, "1"=single, "2"=double	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].string	0x0242	%"s"	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].subscript	0x0242	String representing enumeration	CpsLetters[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		such that: "0"=sub, "1"=super		
CpsLetters[%d].Item[%d].symbol	0x0242	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].textAspect	0x0242	"%.16g"	CpsLetters[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CpsLetters[%d].Item[%d].textColour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].textHeight	0x0242	"%.16g"	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].textLineWidth.measurementType	0x0242	"%.16g"	CpsLetters[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
CpsLetters[%d].Item[%d].textLineWidth.name	0x0242	"%s"	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].textThickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Item[%d]	
CpsLetters[%d].Item[%d].underline	0x0242	String representing enumeration such that: "0"=over, "1"=under	CpsLetters[%d].Item[%d]	

Q.4.12 CpsLetters[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CpsLetters[%d].Outline	0x0242	NULL	CpsLetters[%d]	
CpsLetters[%d].Outline.Bottom	0x0242	NULL	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.Bottom.colour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Outline.Bottom	
CpsLetters[%d].Outline.Bottom.style	0x0242	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CpsLetters[%d].Outline.Bottom	
CpsLetters[%d].Outline.Bottom.thickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Outline.Bottom	
CpsLetters[%d].Outline.Bottom.width	0x0242	"%.16g"	CpsLetters[%d].Outline.Bottom	measurementType must be

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
th.measurementType				replaced with meterWidth or pixelWidth
CpsLetters[%d].Outline.Bottom.width.name	0x0242	"%s"	CpsLetters[%d].Outline.Bottom	
CpsLetters[%d].Outline.Left	0x0242	NULL	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.Left.colour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Outline.Left	
CpsLetters[%d].Outline.Left.style	0x0242	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CpsLetters[%d].Outline.Left	
CpsLetters[%d].Outline.Left.thickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Outline.Left	
CpsLetters[%d].Outline.Left.width.measurementType	0x0242	"%.16g"	CpsLetters[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
CpsLetters[%d].Outline.Left.width.name	0x0242	"%s"	CpsLetters[%d].Outline.Left	
CpsLetters[%d].Outline.Right	0x0242	NULL	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.Right.colour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Outline.Right	
CpsLetters[%d].Outline.Right.style	0x0242	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CpsLetters[%d].Outline.Right	
CpsLetters[%d].Outline.Right.thickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CpsLetters[%d].Outline.Right.width .measurementType	0x0242	("%.16g"	CpsLetters[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
CpsLetters[%d].Outline.Right.width .name	0x0242	"%s"	CpsLetters[%d].Outline.Right	
CpsLetters[%d].Outline.Top	0x0242	NULL	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.Top.colour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Outline.Top	
CpsLetters[%d].Outline.Top.style	0x0242	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CpsLetters[%d].Outline.Top	
CpsLetters[%d].Outline.Top.thickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Outline.Top	
CpsLetters[%d].Outline.Top.width. measurementType	0x0242	("%.16g"	CpsLetters[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
CpsLetters[%d].Outline.Top.width. name	0x0242	"%s"	CpsLetters[%d].Outline.Top	
CpsLetters[%d].Outline.direction	0x0242	("%.16g %.16g %.16g"	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.doubleOffset	0x0242	("%.16g"	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.fillColour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.filled	0x0242	"%d"	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.origin	0x0242	("%.16g %.16g %.16g"	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.outlineHeight	0x0242	("%.16g"	CpsLetters[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CpsLetters[%d].Outline.outlineWidth	0x0242	"%.16g"	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.thickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d].Outline	
CpsLetters[%d].Outline.visible	0x0242	"%d"	CpsLetters[%d].Outline	
CpsLetters[%d].bold	0x0242	"%d"	CpsLetters[%d]	
CpsLetters[%d].font	0x0242	"%s"	CpsLetters[%d]	
CpsLetters[%d].italic	0x0242	"%d"	CpsLetters[%d]	
CpsLetters[%d].italicAngle	0x0242	"%.16g"	CpsLetters[%d]	
CpsLetters[%d].justification	0x0242	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	CpsLetters[%d]	
CpsLetters[%d].language	0x0242	"%s"	CpsLetters[%d]	
CpsLetters[%d].lineFactor	0x0242	"%.16g"	CpsLetters[%d]	
CpsLetters[%d].maxExtend	0x0242	"%d"	CpsLetters[%d]	
CpsLetters[%d].name	0x0242	"%s"	CpsLetters[%d]	
CpsLetters[%d].outlineColour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CpsLetters[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite CpsLetters[%d].Outline
CpsLetters[%d].outlineStyle	0x0242	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	CpsLetters[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CpsLetters[%d].Outline.style which would match the more modern Outline syntax and require Prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				CpsLetters[%d].Outline
CpsLetters[%d].outlineType	0x0242	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	CpsLetters[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CpsLetters[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite CpsLetters[%d].Outline
CpsLetters[%d].outlineWidth.measurementType	0x0242	"%.16g"	CpsLetters[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CpsLetters[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite CpsLetters[%d].Outline
CpsLetters[%d].outlineWidth.name	0x0242	"%s"	CpsLetters[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading CpsLetters[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite CpsLetters[%d].Outline
CpsLetters[%d].spaceFactor	0x0242	"%.16g"	CpsLetters[%d]	
CpsLetters[%d].strikethrough	0x0242	String representing enumeration such that: "0"=none, "1"=single, "2"=double	CpsLetters[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CpsLetters[%d].subscript	0x0242	String representing enumeration such that: "0"=sub, "1"=super	CpsLetters[%d]	
CpsLetters[%d].textAspect	0x0242	"%.16g"	CpsLetters[%d]	
CpsLetters[%d].textColour	0x0242	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	CpsLetters[%d]	
CpsLetters[%d].textHeight	0x0242	"%.16g"	CpsLetters[%d]	
CpsLetters[%d].textLineWidth.measurementType	0x0242	"%.16g"	CpsLetters[%d]	measurementType must be replaced with meterWidth or pixelWidth
CpsLetters[%d].textLineWidth.name	0x0242	"%s"	CpsLetters[%d]	
CpsLetters[%d].textOrientation	0x0242	String representing enumeration such that: "0"=horizontal, "1"=vertical	CpsLetters[%d]	
CpsLetters[%d].textThickness	0x0242	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	CpsLetters[%d]	
CpsLetters[%d].underline	0x0242	String representing enumeration such that: "0"=over, "1"=under	CpsLetters[%d]	

Q.4.13 CrosshatchPattern.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
CrosshatchPattern.angle	0x0243 0x0246	"%.16g"	CrosshatchPattern	
CrosshatchPattern.pattern	0x0243 0x0246	String representing enumeration such that: "0"=unset, "1"=rubber, "2"=lead, "3"=user, "4"=steel, "5"=brass, "6"=solid, "7"=iron, "8"=aluminum, "9"=glass, "10"=electricalwinding, "11"=refractory,	CrosshatchPattern	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"12"=thermalinsulation		
CrosshatchPattern.rotate	0x0243 0x0246	"%d"	CrosshatchPattern	
CrosshatchPattern.spacing	0x0243 0x0246	"%.16g"	CrosshatchPattern	

Q.4.14 Curve[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Curve[%d]	0x0305	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singlar semantic aspect with an entity.		

Q.5 PMI Properties “D”

Q.5.1 DatumFeatureSymbolText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DatumFeatureSymbolText[%d]	0x0084	NULL		DatumFeatureSymbolText[%d] index expected to range from 0-3 inclusive.Each instance of this is expected to have a different position such that DatumFeatureSymbolText[x].position != DatumFeatureSymbolText[y].position for any combination of x and y
DatumFeatureSymbolText[%d].Text	0x0084	NULL	DatumFeatureSymbolText[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d]	0x0084	NULL	DatumFeatureSymbolText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DatumFeatureSymbolText[%d].Text.Item[%d].Outline	0x0084	NULL	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom	0x0084	NULL	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom.colour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom.style	0x0084	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom.thickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0x0084	%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom.width.name	0x0084	%"s"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Bottom	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left	0x0084	NULL	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left.colour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left.style	0x0084	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left.thickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left.width.measurementType	0x0084	("%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Left	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right	0x0084	NULL	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right.colour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right.style	0x0084	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right.thickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right.width.measurementType	0x0084	("%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right.width.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Right	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top	0x0084	NULL	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top.colour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top.style	0x0084	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top.thickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top.width.measurementType	0x0084	%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top.width.name	0x0084	%"s"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline.Top	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.direction	0x0084	%.16g %.16g %.16g"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.doubleOffset	0x0084	%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.fillColour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.filled	0x0084	%"d"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.origin	0x0084	%.16g %.16g %.16g"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.outlineHeight	0x0084	%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.outlineWidth	0x0084	%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.thickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].Outline.visible	0x0084	%"d"	DatumFeatureSymbolText[%d].Text.Item[%d].Outline	
DatumFeatureSymbolText[%d].Text.Item[%d].bold	0x0084	%"d"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].font	0x0084	%"s"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].format	0x0084	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean,	DatumFeatureSymbolText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none		
DatumFeatureSymbolText[%d].Text.Item[%d].italic	0x0084	"%d"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].italicAngle	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].justification	0x0084	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].language	0x0084	"%s"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].lineFactor	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0084	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].lineWeldSymbol	0x0084	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel,	DatumFeatureSymbolText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge		
DatumFeatureSymbolText[%d].Text.Item[%d].outlineColour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DatumFeatureSymbolText[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				DatumFeatureSymbolText[%d].Text.Item[%d].Outline
DatumFeatureSymbolText[%d].Text.Item[%d].outlineStyle	0x0084	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DatumFeatureSymbolText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DatumFeatureSymbolText[%d].Text.Item[%d].Outline.style which would match the more modern Outline syntax and require Prerequisite DatumFeatureSymbolText[%d].Text.Item[%d].Outline
DatumFeatureSymbolText[%d].Text.Item[%d].outlineType	0x0084	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	DatumFeatureSymbolText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DatumFeatureSymbolText[%d].Text.Item[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite DatumFeatureSymbolText[%d].Text.Item[%d].Outline
DatumFeatureSymbolText[%d].Text.Item[%d].outlineWidth.measurementType	0x0084	%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DatumFeatureSymbolText[%d].Text.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite DatumFeatureSymbolText[%d].Text.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DatumFeatureSymbolText[%d].Text.Item[%d].outlineWidth.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DatumFeatureSymbolText[%d].Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite DatumFeatureSymbolText[%d].Text.Item[%d].Outline
DatumFeatureSymbolText[%d].Text.Item[%d].spaceFactor	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].strikethrough	0x0084	String representing enumeration such that: "0"=none, "1"=single, "2"=double	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].string	0x0084	"%s"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].subscript	0x0084	String representing enumeration such that: "0"=sub, "1"=super	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].symbol	0x0084	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope,	DatumFeatureSymbolText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
DatumFeatureSymbolText[%d].Text.Item[%d].textAspect	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].textColour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].textHeight	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].textLineWidth.measurementType	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
DatumFeatureSymbolText[%d].Text.Item[%d].textLineWidth.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].textThickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text.Item[%d]	
DatumFeatureSymbolText[%d].Text.Item[%d].underline	0x0084	String representing enumeration such that: "0"=over, "1"=under	DatumFeatureSymbolText[%d].Text.Item[%d]	

Q.5.2 DatumFeatureSymbolText[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DatumFeatureSymbolText[%d].Text.Outline	0x0084	NULL	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.Outline.Bottom	0x0084	NULL	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.Bottom.colour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Outline.Bottom	
DatumFeatureSymbolText[%d].Text.Outline.Bottom.style	0x0084	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DatumFeatureSymbolText[%d].Text.Outline.Bottom	
DatumFeatureSymbolText[%d].Text.Outline.Bottom.thickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text.Outline.Bottom	
DatumFeatureSymbolText[%d].Text.Outline.Bottom.width.measurementType	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
DatumFeatureSymbolText[%d].Text.Outline.Bottom.width.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text.Outline.Bottom	
DatumFeatureSymbolText[%d].Text.Outline.Left	0x0084	NULL	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.Left.colour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Outline.Left	
DatumFeatureSymbolText[%d].Text.Outline.Left.style	0x0084	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DatumFeatureSymbolText[%d].Text.Outline.Left	
DatumFeatureSymbolText[%d].Text.Outline.Left.thickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DatumFeatureSymbolText[%d].Text.Outline.Left.width.measurementType	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
DatumFeatureSymbolText[%d].Text.Outline.Left.width.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text.Outline.Left	
DatumFeatureSymbolText[%d].Text.Outline.Right	0x0084	NULL	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.Right.colour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Outline.Right	
DatumFeatureSymbolText[%d].Text.Outline.Right.style	0x0084	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DatumFeatureSymbolText[%d].Text.Outline.Right	
DatumFeatureSymbolText[%d].Text.Outline.Right.thickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text.Outline.Right	
DatumFeatureSymbolText[%d].Text.Outline.Right.width.measurementType	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
DatumFeatureSymbolText[%d].Text.Outline.Right.width.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text.Outline.Right	
DatumFeatureSymbolText[%d].Text.Outline.Top	0x0084	NULL	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.Top.colour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Outline.Top	
DatumFeatureSymbolText[%d].Text.Outline.Top.style	0x0084	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DatumFeatureSymbolText[%d].Text.Outline.Top	
DatumFeatureSymbolText[%d].Text	0x0084	String representing enumeration such that: "0"=normal, "1"=thick,	DatumFeatureSymbolText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Outline.Top.thickness		"2"=thin	xt.Outline.Top	
DatumFeatureSymbolText[%d].Text.Outline.Top.width.measurementType	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
DatumFeatureSymbolText[%d].Text.Outline.Top.width.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text.Outline.Top	
DatumFeatureSymbolText[%d].Text.Outline.direction	0x0084	"%.16g %.16g %.16g"	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.doubleOffset	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.fillColour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.filled	0x0084	"%d"	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.origin	0x0084	"%.16g %.16g %.16g"	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.outlineHeight	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.outlineWidth	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.thickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.Outline.visible	0x0084	"%d"	DatumFeatureSymbolText[%d].Text.Outline	
DatumFeatureSymbolText[%d].Text.bold	0x0084	"%d"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.font	0x0084	"%s"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.italic	0x0084	"%d"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.italicAngle	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DatumFeatureSymbolText[%d].Text.justification	0x0084	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.language	0x0084	"%s"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.lineFactor	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.maxExtend	0x0084	"%d"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.outlineColour	0x0084	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DatumFeatureSymbolText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DatumFeatureSymbolText[%d].Text.Outline.colour which would match the more modern Outline syntax and require Prerequisite DatumFeatureSymbolText[%d].Text.Outline
DatumFeatureSymbolText[%d].Text.outlineStyle	0x0084	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DatumFeatureSymbolText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DatumFeatureSymbolText[%d].Text.Outline.style which would match the more modern Outline syntax and require Prerequisite DatumFeatureSymbolText[%d].Text.Outline
DatumFeatureSymbolText[%d].Text.outlineType	0x0084	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set,	DatumFeatureSymbolText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DatumFeatureSymbolText[%d].Text.Outline.type which would match the more modern Outline syntax and require Prerequisite DatumFeatureSymbolText[%d].Text

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		xt.Outline
DatumFeatureSymbolText[%d].Text.outlineWidth.measurementType	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DatumFeatureSymbolText[%d].Text.Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite DatumFeatureSymbolText[%d].Text.Outline
DatumFeatureSymbolText[%d].Text.outlineWidth.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DatumFeatureSymbolText[%d].Text.Outline.width.name which would match the more modern Outline syntax and require Prerequisite DatumFeatureSymbolText[%d].Text.Outline
DatumFeatureSymbolText[%d].Text.spaceFactor	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.strikethrough	0x0084	String representing enumeration such that: "0"=none, "1"=single, "2"=double	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.subscript	0x0084	String representing enumeration such that: "0"=sub, "1"=super	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.textAspect	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text	0x0084	"0x00%02x%02x%02x" such that	DatumFeatureSymbolText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.textColour		the values of blue, green and red for the colour are encoded in the string		
DatumFeatureSymbolText[%d].Text.textHeight	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.textLineWidth.measurementType	0x0084	"%.16g"	DatumFeatureSymbolText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
DatumFeatureSymbolText[%d].Text.textLineWidth.name	0x0084	"%s"	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.textOrientation	0x0084	String representing enumeration such that: "0"=horizontal, "1"=vertical	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.textThickness	0x0084	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].Text.underline	0x0084	String representing enumeration such that: "0"=over, "1"=under	DatumFeatureSymbolText[%d].Text	
DatumFeatureSymbolText[%d].position	0x0084	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	DatumFeatureSymbolText[%d]	

Q.5.3 DatumTargetReference[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DatumTargetReference[%d]	0x0084	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path. This property formating is used to semantically tie a singlar semantic aspect with an entity.		

Q.5.4 Description

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Description	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		

Q.5.5 DimensionText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DimensionText[%d]	0x0082 0X030D 0X030F	NULL		DimensionText[%d] index expected to range from 0-3 inclusive. Each instance of this is expected to have a different position such that DimensionText[x].position != DimensionText[y].position for any combination of x and y
DimensionText[%d].Text	0x0082 0X030D 0X030F	NULL	DimensionText[%d]	
DimensionText[%d].Text.Item[%d]	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text	
DimensionText[%d].Text.Item[%d].Outline	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].Outline.Bottom	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text.Item[%d].Outline	
DimensionText[%d].Text.Item[%d].Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text.Item[%d].Outline.Bottom	
DimensionText[%d].Text.Item[%d].Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DimensionText[%d].Text.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DimensionText[%d].Text.Item[%d].Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Item[%d].Outline.Bottom	
DimensionText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	DimensionText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
DimensionText[%d].Text.Item[%d].Outline.Bottom.width.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Item[%d].Outline.Bottom	
DimensionText[%d].Text.Item[%d].Outline.Left	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text.Item[%d].Outline	
DimensionText[%d].Text.Item[%d].Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text.Item[%d].Outline.Left	
DimensionText[%d].Text.Item[%d].Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DimensionText[%d].Text.Item[%d].Outline.Left	
DimensionText[%d].Text.Item[%d].Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Item[%d].Outline.Left	
DimensionText[%d].Text.Item[%d].Outline.Left.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	DimensionText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
DimensionText[%d].Text.Item[%d].Outline.Left.width.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Item[%d].Outline.Left	
DimensionText[%d].Text.Item[%d].Outline.Right	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text.Item[%d].Outline	
DimensionText[%d].Text.Item[%d].Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text.Item[%d].Outline.Right	
DimensionText[%d].Text.Item[%d].Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	DimensionText[%d].Text.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
DimensionText[%d].Text.Item[%d]. Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Item[%d]. Outline.Right	
DimensionText[%d].Text.Item[%d]. Outline.Right.width.measurementT ype	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Item[%d]. Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
DimensionText[%d].Text.Item[%d]. Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Item[%d]. Outline.Right	
DimensionText[%d].Text.Item[%d]. Outline.Top	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text.Item[%d]. Outline	
DimensionText[%d].Text.Item[%d]. Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text.Item[%d]. Outline.Top	
DimensionText[%d].Text.Item[%d]. Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DimensionText[%d].Text.Item[%d]. Outline.Top	
DimensionText[%d].Text.Item[%d]. Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Item[%d]. Outline.Top	
DimensionText[%d].Text.Item[%d]. Outline.Top.width.measurementTy pe	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Item[%d]. Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
DimensionText[%d].Text.Item[%d]. Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Item[%d]. Outline.Top	
DimensionText[%d].Text.Item[%d]. Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DimensionText[%d].Text.Item[%d]. Outline	
DimensionText[%d].Text.Item[%d]. Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Item[%d]. Outline	
DimensionText[%d].Text.Item[%d]. Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	DimensionText[%d].Text.Item[%d]. Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
DimensionText[%d].Text.Item[%d].Outline.filled	0x0082 0X030D 0X030F	"%d"	DimensionText[%d].Text.Item[%d].Outline	
DimensionText[%d].Text.Item[%d].Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DimensionText[%d].Text.Item[%d].Outline	
DimensionText[%d].Text.Item[%d].Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Item[%d].Outline	
DimensionText[%d].Text.Item[%d].Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Item[%d].Outline	
DimensionText[%d].Text.Item[%d].Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Item[%d].Outline	
DimensionText[%d].Text.Item[%d].Outline.visible	0x0082 0X030D 0X030F	"%d"	DimensionText[%d].Text.Item[%d].Outline	
DimensionText[%d].Text.Item[%d].bold	0x0082 0X030D 0X030F	"%d"	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].font	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].format	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].italic	0x0082 0X030D 0X030F	"%d"	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].italicAngle	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].language	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DimensionText[%d].Text.Item[%d].lineFactor	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=melthrough	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].lineWeldSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface,	DimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"30"=steepflankedsingle, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
DimensionText[%d].Text.Item[%d]. outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DimensionText[%d].Text.Item[%d]. Outline.colour which would match the more modern Outline syntax and require Prerequisite DimensionText[%d].Text.Item[%d]. Outline
DimensionText[%d].Text.Item[%d]. outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DimensionText[%d].Text.Item[%d]. Outline.style which would match the more modern Outline syntax and require Prerequisite DimensionText[%d].Text.Item[%d]. Outline
DimensionText[%d].Text.Item[%d]. outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft,	DimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DimensionText[%d].Text.Item[%d]. Outline.type which would match

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		the more modern Outline syntax and require Prerequisite DimensionText[%d].Text.Item[%d].Outline
DimensionText[%d].Text.Item[%d].outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DimensionText[%d].Text.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite DimensionText[%d].Text.Item[%d].Outline
DimensionText[%d].Text.Item[%d].outlineWidth.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DimensionText[%d].Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite DimensionText[%d].Text.Item[%d].Outline
DimensionText[%d].Text.Item[%d].spaceFactor	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].strikethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].string	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DimensionText[%d].Text.Item[%d].subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].symbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].	0x0082 0X030D 0X030F	%.16g"	DimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
textAspect				
DimensionText[%d].Text.Item[%d].textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].textHeight	0x0082 0X030D 0X030F	".16g"	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].textLineWidth.measurementType	0x0082 0X030D 0X030F	".16g"	DimensionText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
DimensionText[%d].Text.Item[%d].textLineWidth.name	0x0082 0X030D 0X030F	".s"	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Item[%d]	
DimensionText[%d].Text.Item[%d].underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	DimensionText[%d].Text.Item[%d]	

Q.5.6 DimensionText[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DimensionText[%d].Text.Outline	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text	
DimensionText[%d].Text.Outline.Bottom	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text.Outline.Bottom	
DimensionText[%d].Text.Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DimensionText[%d].Text.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DimensionText[%d].Text.Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Outline.Bottom	
DimensionText[%d].Text.Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	DimensionText[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
DimensionText[%d].Text.Outline.Bottom.width.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Outline.Bottom	
DimensionText[%d].Text.Outline.Left	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text.Outline.Left	
DimensionText[%d].Text.Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DimensionText[%d].Text.Outline.Left	
DimensionText[%d].Text.Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Outline.Left	
DimensionText[%d].Text.Outline.Left.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	DimensionText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
DimensionText[%d].Text.Outline.Left.width.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Outline.Left	
DimensionText[%d].Text.Outline.Right	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text.Outline.Right	
DimensionText[%d].Text.Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	DimensionText[%d].Text.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
DimensionText[%d].Text.Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Outline.Right	
DimensionText[%d].Text.Outline.Right.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
DimensionText[%d].Text.Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Outline.Right	
DimensionText[%d].Text.Outline.Top	0x0082 0X030D 0X030F	NULL	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text.Outline.Top	
DimensionText[%d].Text.Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DimensionText[%d].Text.Outline.Top	
DimensionText[%d].Text.Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Outline.Top	
DimensionText[%d].Text.Outline.Top.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
DimensionText[%d].Text.Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text.Outline.Top	
DimensionText[%d].Text.Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	DimensionText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
DimensionText[%d].Text.Outline.filled	0x0082 0X030D 0X030F	"%d"	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.Outline.visible	0x0082 0X030D 0X030F	"%d"	DimensionText[%d].Text.Outline	
DimensionText[%d].Text.bold	0x0082 0X030D 0X030F	"%d"	DimensionText[%d].Text	
DimensionText[%d].Text.font	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text	
DimensionText[%d].Text.italic	0x0082 0X030D 0X030F	"%d"	DimensionText[%d].Text	
DimensionText[%d].Text.italicAngle	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text	
DimensionText[%d].Text.justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	DimensionText[%d].Text	
DimensionText[%d].Text.language	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text	
DimensionText[%d].Text.lineFactor	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text	
DimensionText[%d].Text.maxExtent	0x0082 0X030D 0X030F	"%d"	DimensionText[%d].Text	
DimensionText[%d].Text.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text	
DimensionText[%d].Text.outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DimensionText[%d].Text.Outline.c

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				colour which would match the more modern Outline syntax and require Prerequisite DimensionText[%d].Text.Outline
DimensionText[%d].Text.outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DimensionText[%d].Text.Outline.style which would match the more modern Outline syntax and require Prerequisite DimensionText[%d].Text.Outline
DimensionText[%d].Text.outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	DimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DimensionText[%d].Text.Outline.type which would match the more modern Outline syntax and require Prerequisite DimensionText[%d].Text.Outline
DimensionText[%d].Text.outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DimensionText[%d].Text.Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite DimensionText[%d].Text.Outline
DimensionText[%d].Text.outlineWidth	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text	For compatibility reasons we

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
dth.name				suggest sticking with this form of key, but also suggest support reading DimensionText[%d].Text.Outline.width.name which would match the more modern Outline syntax and require Prerequisite DimensionText[%d].Text.Outline
DimensionText[%d].Text.spaceFactor	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text	
DimensionText[%d].Text.strikethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	DimensionText[%d].Text	
DimensionText[%d].Text.subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	DimensionText[%d].Text	
DimensionText[%d].Text.textAspect	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text	
DimensionText[%d].Text.textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DimensionText[%d].Text	
DimensionText[%d].Text.textHeight	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text	
DimensionText[%d].Text.textLineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DimensionText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
DimensionText[%d].Text.textLineWidth.name	0x0082 0X030D 0X030F	"%s"	DimensionText[%d].Text	
DimensionText[%d].Text.textOrientation	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=horizontal, "1"=vertical	DimensionText[%d].Text	
DimensionText[%d].Text.textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DimensionText[%d].Text	
DimensionText[%d].Text.underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	DimensionText[%d].Text	
DimensionText[%d].position	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=before, "1"=above,	DimensionText[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=below, "3"=after		

Q.5.7 DisplayPlane.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DisplayPlane.origin	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"		This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.xaxis' and 'DisplayPlane.zaxis'
DisplayPlane.xaxis	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"		This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.origin' and 'DisplayPlane.zaxis'
DisplayPlane.zaxis	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"		This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.origin' and 'DisplayPlane.xaxis'

Q.5.8 DualDimensionText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualDimensionText[%d]	0x0082 0X030D 0X030F	NULL		DualDimensionText[%d] index expected to range from 0-3 inclusive. Each instance of this is expected

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				to have a different position such that DimensionText[x].position != DimensionText[y].position for any combination of x and y
DualDimensionText[%d].Text	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d]	
DualDimensionText[%d].Text.Item[%d]	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.Item[%d].Outline	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].Outline.Bottom	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Item[%d].Outline.Bottom	
DualDimensionText[%d].Text.Item[%d].Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualDimensionText[%d].Text.Item[%d].Outline.Bottom	
DualDimensionText[%d].Text.Item[%d].Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Item[%d].Outline.Bottom	
DualDimensionText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
DualDimensionText[%d].Text.Item[%d].Outline.Bottom.width.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Item[%d].Outline.Bottom	
DualDimensionText[%d].Text.Item[%d].Outline.Left	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Item[%d].Outline.Left	
DualDimensionText[%d].Text.Item[%d].Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	DualDimensionText[%d].Text.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
DualDimensionText[%d].Text.Item[%d].Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Item[%d].Outline.Left	
DualDimensionText[%d].Text.Item[%d].Outline.Left.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
DualDimensionText[%d].Text.Item[%d].Outline.Left.width.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Item[%d].Outline.Left	
DualDimensionText[%d].Text.Item[%d].Outline.Right	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Item[%d].Outline.Right	
DualDimensionText[%d].Text.Item[%d].Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualDimensionText[%d].Text.Item[%d].Outline.Right	
DualDimensionText[%d].Text.Item[%d].Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Item[%d].Outline.Right	
DualDimensionText[%d].Text.Item[%d].Outline.Right.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
DualDimensionText[%d].Text.Item[%d].Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Item[%d].Outline.Right	
DualDimensionText[%d].Text.Item[%d].Outline.Top	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualDimensionText[%d].Text.Item[%d].Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualDimensionText[%d].Text.Item[%d].Outline.Top	
DualDimensionText[%d].Text.Item[%d].Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Item[%d].Outline.Top	
DualDimensionText[%d].Text.Item[%d].Outline.Top.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
DualDimensionText[%d].Text.Item[%d].Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Item[%d].Outline.Top	
DualDimensionText[%d].Text.Item[%d].Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.filled	0x0082 0X030D 0X030F	"%d"	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline.visible	0x0082 0X030D 0X030F	"%d"	DualDimensionText[%d].Text.Item[%d].Outline	
DualDimensionText[%d].Text.Item[%d].Outline	0x0082 0X030D 0X030F	"%d"	DualDimensionText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].bold			%d]	
DualDimensionText[%d].Text.Item[%d].font	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].format	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].italic	0x0082 0X030D 0X030F	"%d"	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].italicAngle	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].language	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].lineFactor	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp, "20"=surfacefinishmrrpcomplete,	DualDimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=meltthrough		
DualDimensionText[%d].Text.Item[%d].lineWeldSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].lineWeldSymbol	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red	DualDimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].outlineColour		for the colour are encoded in the string	%d]	key, but also suggest support reading DualDimensionText[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite DualDimensionText[%d].Text.Item[%d].Outline
DualDimensionText[%d].Text.Item[%d].outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualDimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualDimensionText[%d].Text.Item[%d].Outline.style which would match the more modern Outline syntax and require Prerequisite DualDimensionText[%d].Text.Item[%d].Outline
DualDimensionText[%d].Text.Item[%d].outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	DualDimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualDimensionText[%d].Text.Item[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite DualDimensionText[%d].Text.Item[%d].Outline
DualDimensionText[%d].Text.Item[%d].outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualDimensionText[%d].Text.Item[%d].Outline.width.measurementType which would match the more

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				modern Outline syntax and require Prerequisite DualDimensionText[%d].Text.Item[%d].Outline
DualDimensionText[%d].Text.Item[%d].outlineWidth.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualDimensionText[%d].Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite DualDimensionText[%d].Text.Item[%d].Outline
DualDimensionText[%d].Text.Item[%d].spaceFactor	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].strikethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].string	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].symbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry,	DualDimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
DualDimensionText[%d].Text.Item[%d].textAspect	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].textHeight	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].textLineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
DualDimensionText[%d].Text.Item[%d].textLineWidth.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d].textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Item[%d]	
DualDimensionText[%d].Text.Item[%d]	0x0082 0X030D 0X030F	String representing enumeration	DualDimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].underline		such that: "0"=over, "1"=under	%d]	

Q.5.9 DualDimensionText[%d].<properties>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualDimensionText[%d].Text.Outline	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.Outline.Bottom	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Outline.Bottom	
DualDimensionText[%d].Text.Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualDimensionText[%d].Text.Outline.Bottom	
DualDimensionText[%d].Text.Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Outline.Bottom	
DualDimensionText[%d].Text.Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
DualDimensionText[%d].Text.Outline.Bottom.width.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Outline.Bottom	
DualDimensionText[%d].Text.Outline.Left	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Outline.Left	
DualDimensionText[%d].Text.Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	DualDimensionText[%d].Text.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
DualDimensionText[%d].Text.Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Outline.Left	
DualDimensionText[%d].Text.Outline.Left.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
DualDimensionText[%d].Text.Outline.Left.width.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Outline.Left	
DualDimensionText[%d].Text.Outline.Right	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Outline.Right	
DualDimensionText[%d].Text.Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualDimensionText[%d].Text.Outline.Right	
DualDimensionText[%d].Text.Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Outline.Right	
DualDimensionText[%d].Text.Outline.Right.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
DualDimensionText[%d].Text.Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Outline.Right	
DualDimensionText[%d].Text.Outline.Top	0x0082 0X030D 0X030F	NULL	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Outline.Top	
DualDimensionText[%d].Text.Outline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset,	DualDimensionText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ne.Top.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ne.Top	
DualDimensionText[%d].Text.Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Outline.Top	
DualDimensionText[%d].Text.Outline.Top.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
DualDimensionText[%d].Text.Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text.Outline.Top	
DualDimensionText[%d].Text.Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.filled	0x0082 0X030D 0X030F	"%d"	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.Outline.visible	0x0082 0X030D 0X030F	"%d"	DualDimensionText[%d].Text.Outline	
DualDimensionText[%d].Text.bold	0x0082 0X030D 0X030F	"%d"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.font	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualDimensionText[%d].Text.italic	0x0082 0X030D 0X030F	"%d"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.italic Angle	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.language	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.lineFactor	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.maxExtend	0x0082 0X030D 0X030F	"%d"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualDimensionText[%d].Text.Outline.colour which would match the more modern Outline syntax and require Prerequisite DualDimensionText[%d].Text.Outline
DualDimensionText[%d].Text.outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualDimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualDimensionText[%d].Text.Outline.style which would match the more modern Outline syntax and require Prerequisite DualDimensionText[%d].Text.Outline
DualDimensionText[%d].Text.outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square,	DualDimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		DualDimensionText[%d].Text.Outline.type which would match the more modern Outline syntax and require Prerequisite DualDimensionText[%d].Text.Outline
DualDimensionText[%d].Text.outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualDimensionText[%d].Text.Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite DualDimensionText[%d].Text.Outline
DualDimensionText[%d].Text.outlineWidth.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualDimensionText[%d].Text.Outline.width.name which would match the more modern Outline syntax and require Prerequisite DualDimensionText[%d].Text.Outline
DualDimensionText[%d].Text.spaceFactor	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.striethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.subs	0x0082 0X030D 0X030F	String representing enumeration	DualDimensionText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
cript		such that: "0"=sub, "1"=super		
DualDimensionText[%d].Text.textAspect	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.textHeight	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.textLineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualDimensionText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
DualDimensionText[%d].Text.textLineWidth.name	0x0082 0X030D 0X030F	"%s"	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.textOrientation	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=horizontal, "1"=vertical	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualDimensionText[%d].Text	
DualDimensionText[%d].Text.underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	DualDimensionText[%d].Text	
DualDimensionText[%d].position	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	DualDimensionText[%d]	

Q.5.10 DualUnitSymbol[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualUnitSymbol[%d]	0x0082 0X030D 0X030F	NULL		
DualUnitSymbol[%d].Item[%d]	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d]	
DualUnitSymbol[%d].Item[%d].Outline	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].Outline	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ine.Bottom			ine	
DualUnitSymbol[%d].Item[%d].Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d].Item[%d].Outline.Bottom	
DualUnitSymbol[%d].Item[%d].Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualUnitSymbol[%d].Item[%d].Outline.Bottom	
DualUnitSymbol[%d].Item[%d].Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Item[%d].Outline.Bottom	
DualUnitSymbol[%d].Item[%d].Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
DualUnitSymbol[%d].Item[%d].Outline.Bottom.width.name	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d].Item[%d].Outline.Bottom	
DualUnitSymbol[%d].Item[%d].Outline.Left	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d].Item[%d].Outline.Left	
DualUnitSymbol[%d].Item[%d].Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualUnitSymbol[%d].Item[%d].Outline.Left	
DualUnitSymbol[%d].Item[%d].Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Item[%d].Outline.Left	
DualUnitSymbol[%d].Item[%d].Outline.Left.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
DualUnitSymbol[%d].Item[%d].Outline	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ine.Left.width.name			ine.Left	
DualUnitSymbol[%d].Item[%d].Outline.Right	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d].Item[%d].Outline.Right	
DualUnitSymbol[%d].Item[%d].Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualUnitSymbol[%d].Item[%d].Outline.Right	
DualUnitSymbol[%d].Item[%d].Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Item[%d].Outline.Right	
DualUnitSymbol[%d].Item[%d].Outline.Right.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	DualUnitSymbol[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
DualUnitSymbol[%d].Item[%d].Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d].Item[%d].Outline.Right	
DualUnitSymbol[%d].Item[%d].Outline.Top	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d].Item[%d].Outline.Top	
DualUnitSymbol[%d].Item[%d].Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualUnitSymbol[%d].Item[%d].Outline.Top	
DualUnitSymbol[%d].Item[%d].Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Item[%d].Outline.Top	
DualUnitSymbol[%d].Item[%d].Outline.Top.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	DualUnitSymbol[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				pixelWidth
DualUnitSymbol[%d].Item[%d].Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d].Item[%d].Outline.Top	
DualUnitSymbol[%d].Item[%d].Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.filled	0x0082 0X030D 0X030F	"%d"	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].Outline.visible	0x0082 0X030D 0X030F	"%d"	DualUnitSymbol[%d].Item[%d].Outline	
DualUnitSymbol[%d].Item[%d].bold	0x0082 0X030D 0X030F	"%d"	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].font	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].format	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].italic	0x0082 0X030D 0X030F	"%d"	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].italic	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
cAngle				
DualUnitSymbol[%d].Item[%d].justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].language	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].lineFactor	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].lineWeldSupplementalSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].lineWeldSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay,	DualUnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=singleu, "19"=singleigroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=melthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
DualUnitSymbol[%d].Item[%d].outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualUnitSymbol[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite DualUnitSymbol[%d].Item[%d].Outline
DualUnitSymbol[%d].Item[%d].outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	DualUnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualUnitSymbol[%d].Item[%d].Outline.style which would match the

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		more modern Outline syntax and require Prerequisite DualUnitSymbol[%d].Item[%d].Outline
DualUnitSymbol[%d].Item[%d].outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	DualUnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualUnitSymbol[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite DualUnitSymbol[%d].Item[%d].Outline
DualUnitSymbol[%d].Item[%d].outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualUnitSymbol[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite DualUnitSymbol[%d].Item[%d].Outline
DualUnitSymbol[%d].Item[%d].outlineWidth.name	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualUnitSymbol[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite DualUnitSymbol[%d].Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ine
DualUnitSymbol[%d].Item[%d].spaceFactor	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].strikethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].string	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].symbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi,	DualUnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
DualUnitSymbol[%d].Item[%d].text Aspect	0x0082 0X030D 0X030F	("%.16g")	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].text Colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].text Height	0x0082 0X030D 0X030F	("%.16g")	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].text LineWidth.measurementType	0x0082 0X030D 0X030F	("%.16g")	DualUnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
DualUnitSymbol[%d].Item[%d].text LineWidth.name	0x0082 0X030D 0X030F	("%s")	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].text Thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Item[%d]	
DualUnitSymbol[%d].Item[%d].underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	DualUnitSymbol[%d].Item[%d]	

Q.5.11 DualUnitSymbol[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualUnitSymbol[%d].Outline	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d]	
DualUnitSymbol[%d].Outline.Bottom	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	DualUnitSymbol[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
DualUnitSymbol[%d].Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualUnitSymbol[%d].Outline.Bottom	
DualUnitSymbol[%d].Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Outline.Bottom	
DualUnitSymbol[%d].Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	%.16g"	DualUnitSymbol[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
DualUnitSymbol[%d].Outline.Bottom.width.name	0x0082 0X030D 0X030F	%"s"	DualUnitSymbol[%d].Outline.Bottom	
DualUnitSymbol[%d].Outline.Left	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d].Outline.Left	
DualUnitSymbol[%d].Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualUnitSymbol[%d].Outline.Left	
DualUnitSymbol[%d].Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Outline.Left	
DualUnitSymbol[%d].Outline.Left.width.measurementType	0x0082 0X030D 0X030F	%.16g"	DualUnitSymbol[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
DualUnitSymbol[%d].Outline.Left.width.name	0x0082 0X030D 0X030F	%"s"	DualUnitSymbol[%d].Outline.Left	
DualUnitSymbol[%d].Outline.Right	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	DualUnitSymbol[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
DualUnitSymbol[%d].Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualUnitSymbol[%d].Outline.Right	
DualUnitSymbol[%d].Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Outline.Right	
DualUnitSymbol[%d].Outline.Right.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	DualUnitSymbol[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
DualUnitSymbol[%d].Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d].Outline.Right	
DualUnitSymbol[%d].Outline.Top	0x0082 0X030D 0X030F	NULL	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d].Outline.Top	
DualUnitSymbol[%d].Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualUnitSymbol[%d].Outline.Top	
DualUnitSymbol[%d].Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Outline.Top	
DualUnitSymbol[%d].Outline.Top.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	DualUnitSymbol[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
DualUnitSymbol[%d].Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d].Outline.Top	
DualUnitSymbol[%d].Outline.direction	0x0082 0X030D 0X030F	("%.16g %.16g %.16g"	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.doubl	0x0082 0X030D 0X030F	("%.16g"	DualUnitSymbol[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
eOffset				
DualUnitSymbol[%d].Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.filled	0x0082 0X030D 0X030F	"%d"	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].Outline.visible	0x0082 0X030D 0X030F	"%d"	DualUnitSymbol[%d].Outline	
DualUnitSymbol[%d].bold	0x0082 0X030D 0X030F	"%d"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].font	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].italic	0x0082 0X030D 0X030F	"%d"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].italicAngle	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	DualUnitSymbol[%d]	
DualUnitSymbol[%d].language	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].lineFactor	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].maxExtend	0x0082 0X030D 0X030F	"%d"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].name	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualUnitSymbol[%d].Outline.colour

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				r which would match the more modern Outline syntax and require Prerequisite DualUnitSymbol[%d].Outline
DualUnitSymbol[%d].outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualUnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualUnitSymbol[%d].Outline.style which would match the more modern Outline syntax and require Prerequisite DualUnitSymbol[%d].Outline
DualUnitSymbol[%d].outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	DualUnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualUnitSymbol[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite DualUnitSymbol[%d].Outline
DualUnitSymbol[%d].outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualUnitSymbol[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite DualUnitSymbol[%d].Outline
DualUnitSymbol[%d].outlineWidth.name	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualUnitSymbol[%d].Outline.width.name which would match the more

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				modern Outline syntax and require Prerequisite DualUnitSymbol[%d].Outline
DualUnitSymbol[%d].spaceFactor	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].strikethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	DualUnitSymbol[%d]	
DualUnitSymbol[%d].subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	DualUnitSymbol[%d]	
DualUnitSymbol[%d].textAspect	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualUnitSymbol[%d]	
DualUnitSymbol[%d].textHeight	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].textLineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualUnitSymbol[%d]	measurementType must be replaced with meterWidth or pixelWidth
DualUnitSymbol[%d].textLineWidth.name	0x0082 0X030D 0X030F	"%s"	DualUnitSymbol[%d]	
DualUnitSymbol[%d].textOrientation	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=horizontal, "1"=vertical	DualUnitSymbol[%d]	
DualUnitSymbol[%d].textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualUnitSymbol[%d]	
DualUnitSymbol[%d].underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	DualUnitSymbol[%d]	

Q.5.12 DualValueText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualValueText	0x0082 0X030D 0X030F	NULL		
DualValueText.Item[%d]	0x0082 0X030D 0X030F	NULL	DualValueText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualValueText.Item[%d].Outline	0x0082 0X030D 0X030F	NULL	DualValueText.Item[%d]	
DualValueText.Item[%d].Outline.Bottom	0x0082 0X030D 0X030F	NULL	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Item[%d].Outline.Bottom	
DualValueText.Item[%d].Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualValueText.Item[%d].Outline.Bottom	
DualValueText.Item[%d].Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Item[%d].Outline.Bottom	
DualValueText.Item[%d].Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	%.16g	DualValueText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
DualValueText.Item[%d].Outline.Bottom.width.name	0x0082 0X030D 0X030F	"%s"	DualValueText.Item[%d].Outline.Bottom	
DualValueText.Item[%d].Outline.Left	0x0082 0X030D 0X030F	NULL	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Item[%d].Outline.Left	
DualValueText.Item[%d].Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualValueText.Item[%d].Outline.Left	
DualValueText.Item[%d].Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Item[%d].Outline.Left	
DualValueText.Item[%d].Outline.Left.width.measurementType	0x0082 0X030D 0X030F	%.16g	DualValueText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				pixelWidth
DualValueText.Item[%d].Outline.Left.width.name	0x0082 0X030D 0X030F	"%s"	DualValueText.Item[%d].Outline.Left	
DualValueText.Item[%d].Outline.Right	0x0082 0X030D 0X030F	NULL	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Item[%d].Outline.Right	
DualValueText.Item[%d].Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualValueText.Item[%d].Outline.Right	
DualValueText.Item[%d].Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Item[%d].Outline.Right	
DualValueText.Item[%d].Outline.Right.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
DualValueText.Item[%d].Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	DualValueText.Item[%d].Outline.Right	
DualValueText.Item[%d].Outline.Top	0x0082 0X030D 0X030F	NULL	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Item[%d].Outline.Top	
DualValueText.Item[%d].Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualValueText.Item[%d].Outline.Top	
DualValueText.Item[%d].Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualValueText.Item[%d].Outline.Top.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
DualValueText.Item[%d].Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	DualValueText.Item[%d].Outline.Top	
DualValueText.Item[%d].Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.filled	0x0082 0X030D 0X030F	"%d"	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].Outline.visible	0x0082 0X030D 0X030F	"%d"	DualValueText.Item[%d].Outline	
DualValueText.Item[%d].bold	0x0082 0X030D 0X030F	"%d"	DualValueText.Item[%d]	
DualValueText.Item[%d].font	0x0082 0X030D 0X030F	"%s"	DualValueText.Item[%d]	
DualValueText.Item[%d].format	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	DualValueText.Item[%d]	
DualValueText.Item[%d].italic	0x0082 0X030D 0X030F	"%d"	DualValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualValueText.Item[%d].italicAngle	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d]	
DualValueText.Item[%d].justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	DualValueText.Item[%d]	
DualValueText.Item[%d].language	0x0082 0X030D 0X030F	"%s"	DualValueText.Item[%d]	
DualValueText.Item[%d].lineFactor	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d]	
DualValueText.Item[%d].lineWeldSupplementalSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	DualValueText.Item[%d]	
DualValueText.Item[%d].lineWeldSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove,	DualValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
DualValueText.Item[%d].outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualValueText.Item[%d].Outline.colour which would match the more modern Outline syntax and require Prerequisite DualValueText.Item[%d].Outline
DualValueText.Item[%d].outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualValueText.Item[%d].Outline.style which would match the more modern Outline syntax and require Prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				DualValueText.Item[%d].Outline
DualValueText.Item[%d].outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	DualValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualValueText.Item[%d].Outline.type which would match the more modern Outline syntax and require Prerequisite DualValueText.Item[%d].Outline
DualValueText.Item[%d].outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualValueText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite DualValueText.Item[%d].Outline
DualValueText.Item[%d].outlineWidth.name	0x0082 0X030D 0X030F	"%s"	DualValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualValueText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite DualValueText.Item[%d].Outline
DualValueText.Item[%d].spaceFactor	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d]	
DualValueText.Item[%d].strikethro	0x0082 0X030D 0X030F	String representing enumeration	DualValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ugh		such that: "0"=none, "1"=single, "2"=double		
DualValueText.Item[%d].string	0x0082 0X030D 0X030F	"%s"	DualValueText.Item[%d]	
DualValueText.Item[%d].subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	DualValueText.Item[%d]	
DualValueText.Item[%d].symbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross,	DualValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"62"=orientationconstraint, "63"=datumtranslation		
DualValueText.Item[%d].textAspect	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d]	
DualValueText.Item[%d].textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Item[%d]	
DualValueText.Item[%d].textHeight	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d]	
DualValueText.Item[%d].textLineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
DualValueText.Item[%d].textLineWidth.name	0x0082 0X030D 0X030F	"%s"	DualValueText.Item[%d]	
DualValueText.Item[%d].textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Item[%d]	
DualValueText.Item[%d].underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	DualValueText.Item[%d]	

Q.5.13 DualValueText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualValueText.Outline	0x0082 0X030D 0X030F	NULL	DualValueText	
DualValueText.Outline.Bottom	0x0082 0X030D 0X030F	NULL	DualValueText.Outline	
DualValueText.Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Outline.Bottom	
DualValueText.Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualValueText.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualValueText.Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Outline.Bottom	
DualValueText.Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	DualValueText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
DualValueText.Outline.Bottom.width.name	0x0082 0X030D 0X030F	"%s"	DualValueText.Outline.Bottom	
DualValueText.Outline.Left	0x0082 0X030D 0X030F	NULL	DualValueText.Outline	
DualValueText.Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Outline.Left	
DualValueText.Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualValueText.Outline.Left	
DualValueText.Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Outline.Left	
DualValueText.Outline.Left.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	DualValueText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
DualValueText.Outline.Left.width.name	0x0082 0X030D 0X030F	"%s"	DualValueText.Outline.Left	
DualValueText.Outline.Right	0x0082 0X030D 0X030F	NULL	DualValueText.Outline	
DualValueText.Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Outline.Right	
DualValueText.Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualValueText.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualValueText.Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Outline.Right	
DualValueText.Outline.Right.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
DualValueText.Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	DualValueText.Outline.Right	
DualValueText.Outline.Top	0x0082 0X030D 0X030F	NULL	DualValueText.Outline	
DualValueText.Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Outline.Top	
DualValueText.Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	DualValueText.Outline.Top	
DualValueText.Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Outline.Top	
DualValueText.Outline.Top.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
DualValueText.Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	DualValueText.Outline.Top	
DualValueText.Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualValueText.Outline	
DualValueText.Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Outline	
DualValueText.Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText.Outline	
DualValueText.Outline.filled	0x0082 0X030D 0X030F	"%d"	DualValueText.Outline	
DualValueText.Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	DualValueText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
DualValueText.Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Outline	
DualValueText.Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	DualValueText.Outline	
DualValueText.Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText.Outline	
DualValueText.Outline.visible	0x0082 0X030D 0X030F	"%d"	DualValueText.Outline	
DualValueText.bold	0x0082 0X030D 0X030F	"%d"	DualValueText	
DualValueText.font	0x0082 0X030D 0X030F	"%s"	DualValueText	
DualValueText.italic	0x0082 0X030D 0X030F	"%d"	DualValueText	
DualValueText.italicAngle	0x0082 0X030D 0X030F	"%.16g"	DualValueText	
DualValueText.justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	DualValueText	
DualValueText.language	0x0082 0X030D 0X030F	"%s"	DualValueText	
DualValueText.lineFactor	0x0082 0X030D 0X030F	"%.16g"	DualValueText	
DualValueText.maxExtend	0x0082 0X030D 0X030F	"%d"	DualValueText	
DualValueText.name	0x0082 0X030D 0X030F	"%s"	DualValueText	
DualValueText.outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualValueText.Outline.colour which would match the more modern Outline syntax and require Prerequisite DualValueText.Outline
DualValueText.outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	DualValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualValueText.Outline.style which would match the more modern

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		Outline syntax and require Prerequisite DualValueText.Outline
DualValueText.outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	DualValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualValueText.Outline.type which would match the more modern Outline syntax and require Prerequisite DualValueText.Outline
DualValueText.outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualValueText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualValueText.Outline.width.measurementType which would match the more modern Outline syntax and require Prerequisite DualValueText.Outline
DualValueText.outlineWidth.name	0x0082 0X030D 0X030F	"%s"	DualValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading DualValueText.Outline.width.name which would match the more modern Outline syntax and require Prerequisite DualValueText.Outline
DualValueText.spaceFactor	0x0082 0X030D 0X030F	"%.16g"	DualValueText	
DualValueText.strikethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single,	DualValueText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=double		
DualValueText.subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	DualValueText	
DualValueText.textAspect	0x0082 0X030D 0X030F	"%.16g"	DualValueText	
DualValueText.textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	DualValueText	
DualValueText.textHeight	0x0082 0X030D 0X030F	"%.16g"	DualValueText	
DualValueText.textLineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	DualValueText	measurementType must be replaced with meterWidth or pixelWidth
DualValueText.textLineWidth.name	0x0082 0X030D 0X030F	"%s"	DualValueText	
DualValueText.textOrientation	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=horizontal, "1"=vertical	DualValueText	
DualValueText.textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	DualValueText	
DualValueText.underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	DualValueText	

Q.6 PMI Properties "F"

Q.6.1 FCFText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCFText[%d]	0x0081	NULL			FCFText[%d] index expected to range from 0-3 inclusive. Each instance of this is expected to have a different position such that FCFText[x].position != FCFText[y].position for any

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
					combination of x and y
FCFText[%d].Text	0x0081	NULL		FCFText[%d]	
FCFText[%d].Text.Item[%d]	0x0081	NULL		FCFText[%d].Text	
FCFText[%d].Text.Item[%d].Out line	0x0081	NULL		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].Out line.Bottom	0x0081	NULL		FCFText[%d].Text.Item[%d].Out line	
FCFText[%d].Text.Item[%d].Out line.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text.Item[%d].Out line.Bottom	
FCFText[%d].Text.Item[%d].Out line.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCFText[%d].Text.Item[%d].Out line.Bottom	
FCFText[%d].Text.Item[%d].Out line.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Item[%d].Out line.Bottom	
FCFText[%d].Text.Item[%d].Out line.Bottom.width.measurement Type	0x0081	"%.16g"		FCFText[%d].Text.Item[%d].Out line.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCFText[%d].Text.Item[%d].Out line.Bottom.width.name	0x0081	"%s"		FCFText[%d].Text.Item[%d].Out line.Bottom	
FCFText[%d].Text.Item[%d].Out line.Left	0x0081	NULL		FCFText[%d].Text.Item[%d].Out line	
FCFText[%d].Text.Item[%d].Out line.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text.Item[%d].Out line.Left	
FCFText[%d].Text.Item[%d].Out line.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCFText[%d].Text.Item[%d].Out line.Left	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCFText[%d].Text.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Item[%d].Outline.Left	
FCFText[%d].Text.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"		FCFText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCFText[%d].Text.Item[%d].Outline.Left.width.name	0x0081	"%s"		FCFText[%d].Text.Item[%d].Outline.Left	
FCFText[%d].Text.Item[%d].Outline.Right	0x0081	NULL		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text.Item[%d].Outline.Right	
FCFText[%d].Text.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCFText[%d].Text.Item[%d].Outline.Right	
FCFText[%d].Text.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Item[%d].Outline.Right	
FCFText[%d].Text.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"		FCFText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCFText[%d].Text.Item[%d].Outline.Right.width.name	0x0081	"%s"		FCFText[%d].Text.Item[%d].Outline.Right	
FCFText[%d].Text.Item[%d].Outline.Top	0x0081	NULL		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text.Item[%d].Outline.Top	
FCFText[%d].Text.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed,		FCFText[%d].Text.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
		"4"=phantom, "5"=dashed, "6"=solid, "7"=centreline			
FCFText[%d].Text.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Item[%d].Outline.Top	
FCFText[%d].Text.Item[%d].Outline.Top.width.measurementType	0x0081	"%.16g"		FCFText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCFText[%d].Text.Item[%d].Outline.Top.width.name	0x0081	"%s"		FCFText[%d].Text.Item[%d].Outline.Top	
FCFText[%d].Text.Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].Outline.doubleOffset	0x0081	"%.16g"		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].Outline.filled	0x0081	"%d"		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].Outline.outlineHeight	0x0081	"%.16g"		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].Outline.outlineWidth	0x0081	"%.16g"		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].Outline.visible	0x0081	"%d"		FCFText[%d].Text.Item[%d].Outline	
FCFText[%d].Text.Item[%d].bold	0x0081	"%d"		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].font	0x0081	"%s"		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].for	0x0081	String representing enumeration such that: "0"=int, "1"=ints,		FCFText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
mat		"2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none			
FCFText[%d].Text.Item[%d].italic	0x0081	"%d"		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].italicAngle	0x0081	"%.16g"		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].language	0x0081	"%s"		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].lineFactor	0x0081	"%.16g"		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset,		FCFText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCFText[%d].Text.Item[%d].outl	0x0081	"0x00%02x%02x%02x" such that the values of blue, green	FCFText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
ineColour		and red for the colour are encoded in the string			key, but also suggest support reading FCFText[%d].Text.Item[%d].Out line.colour which would match the more modern Outline syntax and require prerequisite FCFText[%d].Text.Item[%d].Out line
FCFText[%d].Text.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCFText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCFText[%d].Text.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCFText[%d].Text.Item[%d].Out line
FCFText[%d].Text.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		FCFText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCFText[%d].Text.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCFText[%d].Text.Item[%d].Out line
FCFText[%d].Text.Item[%d].outlineWidth.measurementType	0x0081	%.16g"		FCFText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
					FCFText[%d].Text.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCFText[%d].Text.Item[%d].Outline
FCFText[%d].Text.Item[%d].outlineWidth.name	0x0081	"%s"		FCFText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCFText[%d].Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCFText[%d].Text.Item[%d].Outline
FCFText[%d].Text.Item[%d].spaceFactor	0x0081	"%.16g"		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].strokeThrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].string	0x0081	"%s"		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout,		FCFText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCFText[%d].Text.Item[%d].text Aspect	0x0081	"%.16g"	FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].text Colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].text Height	0x0081	"%.16g"	FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].text LineWidth.measurementType	0x0081	"%.16g"	FCFText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
					pixelWidth
FCFText[%d].Text.Item[%d].text LineWidth.name	0x0081	"%s"		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].text Thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Item[%d]	
FCFText[%d].Text.Item[%d].und erline	0x0081	String representing enumeration such that: "0"=over, "1"=under		FCFText[%d].Text.Item[%d]	

Q.6.2 FCFText[%d].<property>

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCFText[%d].Text.Outline	0x0081	NULL		FCFText[%d].Text	
FCFText[%d].Text.Outline.Botto m	0x0081	NULL		FCFText[%d].Text.Outline	
FCFText[%d].Text.Outline.Botto m.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text.Outline.Botto m	
FCFText[%d].Text.Outline.Botto m.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCFText[%d].Text.Outline.Botto m	
FCFText[%d].Text.Outline.Botto m.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Outline.Botto m	
FCFText[%d].Text.Outline.Botto m.width.measurementType	0x0081	"%.16g"		FCFText[%d].Text.Outline.Botto m	measurementType must be replaced with meterWidth or pixelWidth
FCFText[%d].Text.Outline.Botto m.width.name	0x0081	"%s"		FCFText[%d].Text.Outline.Botto m	
FCFText[%d].Text.Outline.Left	0x0081	NULL		FCFText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCFText[%d].Text.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text.Outline.Left	
FCFText[%d].Text.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCFText[%d].Text.Outline.Left	
FCFText[%d].Text.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Outline.Left	
FCFText[%d].Text.Outline.Left.width.measurementType	0x0081	"%.16g"		FCFText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCFText[%d].Text.Outline.Left.width.name	0x0081	"%s"		FCFText[%d].Text.Outline.Left	
FCFText[%d].Text.Outline.Right	0x0081	NULL		FCFText[%d].Text.Outline	
FCFText[%d].Text.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text.Outline.Right	
FCFText[%d].Text.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCFText[%d].Text.Outline.Right	
FCFText[%d].Text.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Outline.Right	
FCFText[%d].Text.Outline.Right.width.measurementType	0x0081	"%.16g"		FCFText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCFText[%d].Text.Outline.Right.width.name	0x0081	"%s"		FCFText[%d].Text.Outline.Right	
FCFText[%d].Text.Outline.Top	0x0081	NULL		FCFText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCFText[%d].Text.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text.Outline.Top	
FCFText[%d].Text.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCFText[%d].Text.Outline.Top	
FCFText[%d].Text.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Outline.Top	
FCFText[%d].Text.Outline.Top.width.measurementType	0x0081	"%.16g"		FCFText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCFText[%d].Text.Outline.Top.width.name	0x0081	"%s"		FCFText[%d].Text.Outline.Top	
FCFText[%d].Text.Outline.direction	0x0081	"%.16g %.16g %.16g"		FCFText[%d].Text.Outline	
FCFText[%d].Text.Outline.doubleOffset	0x0081	"%.16g"		FCFText[%d].Text.Outline	
FCFText[%d].Text.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text.Outline	
FCFText[%d].Text.Outline.filled	0x0081	"%d"		FCFText[%d].Text.Outline	
FCFText[%d].Text.Outline.origin	0x0081	"%.16g %.16g %.16g"		FCFText[%d].Text.Outline	
FCFText[%d].Text.Outline.outlineHeight	0x0081	"%.16g"		FCFText[%d].Text.Outline	
FCFText[%d].Text.Outline.outlineWidth	0x0081	"%.16g"		FCFText[%d].Text.Outline	
FCFText[%d].Text.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text.Outline	
FCFText[%d].Text.Outline.visibility	0x0081	"%d"		FCFText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
e					
FCFText[%d].Text.bold	0x0081	"%d"		FCFText[%d].Text	
FCFText[%d].Text.font	0x0081	"%s"		FCFText[%d].Text	
FCFText[%d].Text.italic	0x0081	"%d"		FCFText[%d].Text	
FCFText[%d].Text.italicAngle	0x0081	"%.16g"		FCFText[%d].Text	
FCFText[%d].Text.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		FCFText[%d].Text	
FCFText[%d].Text.language	0x0081	"%s"		FCFText[%d].Text	
FCFText[%d].Text.lineFactor	0x0081	"%.16g"		FCFText[%d].Text	
FCFText[%d].Text.maxExtend	0x0081	"%d"		FCFText[%d].Text	
FCFText[%d].Text.name	0x0081	"%s"		FCFText[%d].Text	
FCFText[%d].Text.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCFText[%d].Text.Outline.colour which would match the more modern Outline syntax and require prerequisite FCFText[%d].Text.Outline
FCFText[%d].Text.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCFText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCFText[%d].Text.Outline.style which would match the more modern Outline syntax and require prerequisite FCFText[%d].Text.Outline
FCFText[%d].Text.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond,		FCFText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCFText[%d].Text.Outline.type

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
		"8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle			which would match the more modern Outline syntax and require prerequisite FCFTText[%d].Text.Outline
FCFTText[%d].Text.outlineWidth.measurementType	0x0081	"%.16g"		FCFTText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCFTText[%d].Text.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCFTText[%d].Text.Outline
FCFTText[%d].Text.outlineWidth.name	0x0081	"%s"		FCFTText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCFTText[%d].Text.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCFTText[%d].Text.Outline
FCFTText[%d].Text.spaceFactor	0x0081	"%.16g"		FCFTText[%d].Text	
FCFTText[%d].Text.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double		FCFTText[%d].Text	
FCFTText[%d].Text.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super		FCFTText[%d].Text	
FCFTText[%d].Text.textAspect	0x0081	"%.16g"		FCFTText[%d].Text	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCFText[%d].Text.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCFText[%d].Text	
FCFText[%d].Text.textHeight	0x0081	"%.16g"		FCFText[%d].Text	
FCFText[%d].Text.textLineWidth.measurementType	0x0081	"%.16g"		FCFText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
FCFText[%d].Text.textLineWidth.name	0x0081	"%s"		FCFText[%d].Text	
FCFText[%d].Text.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical		FCFText[%d].Text	
FCFText[%d].Text.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCFText[%d].Text	
FCFText[%d].Text.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under		FCFText[%d].Text	
FCFText[%d].position	0x0081	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after		FCFText[%d]	

Q.6.3 FCF[%d].<property>

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCF[%d]	0x0308	NULL			
FCF[%d].Description	0x0308	"%s"		FCF[%d]	
FCF[%d].DisplayPlane.origin	0x0308	"%.16g %.16g %.16g"		FCF[%d]	This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.xaxis' and 'DisplayPlane.zaxis'
FCF[%d].DisplayPlane.xaxis	0x0308	"%.16g %.16g %.16g"		FCF[%d]	This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.origin' and

				'DisplayPlane.zaxis'
FCF[%d].DisplayPlane.zaxis	0x0308	"%.16g %.16g %.16g"	FCF[%d]	This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.origin' and 'DisplayPlane.xaxis'

Q.6.4 FCF[%d].FCFText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCF[%d].FCFText[%d]	0x0308	NULL		FCF[%d]	FCFText[%d] index expected to range from 0-3 inclusive. Each instance of this is expected to have a different position such that FCFText[x].position != FCFText[y].position for any combination of x and y
FCF[%d].FCFText[%d].Text	0x0308	NULL		FCF[%d].FCFText[%d]	
FCF[%d].FCFText[%d].Text.Item[%d]	0x0308	NULL		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.Item[%d].Outline	0x0308	NULL		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom	0x0308	NULL		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom.colour	0x0308	String representing enumeration such that: "0"=normal, "1"=thick,		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
m[%d].Outline.Bottom.thickness		"2"=thin		m[%d].Outline.Bottom	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0x0308	%.16g"		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom.width.name	0x0308	%"s"		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Bottom	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left	0x0308	NULL		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left.width.measurementType	0x0308	%.16g"		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left.width.name	0x0308	%"s"		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Left	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right	0x0308	NULL		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed,		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
		"6"=solid, "7"=centreline			
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right.width.measurementType	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right.width.name	0x0308	"%s"		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Right	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top	0x0308	NULL		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top.width.measurementType	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top.width.name	0x0308	"%s"		FCF[%d].FCFText[%d].Text.Item[%d].Outline.Top	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.doubleOffset	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCF[%d].FCFText[%d].Text.Item[%d].Outline.filled	0x0308	"%d"		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.outlineHeight	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.outlineWidth	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].Outline.visible	0x0308	"%d"		FCF[%d].FCFText[%d].Text.Item[%d].Outline	
FCF[%d].FCFText[%d].Text.Item[%d].bold	0x0308	"%d"		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].font	0x0308	"%s"		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].italic	0x0308	"%d"		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].italicAngle	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].language	0x0308	"%s"		FCF[%d].FCFText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCF[%d].FCFText[%d].Text.Item[%d].lineFactor	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1,		FCF[%d].FCFText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
		"27"=single, "28"=flaresinglebevelgroove, "29"=singlebroadrootface, "30"=steepflankedsingle, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge			
FCF[%d].FCFText[%d].Text.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].FCFText[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].FCFText[%d].Text.Item[%d].Outline
FCF[%d].FCFText[%d].Text.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCF[%d].FCFText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].FCFText[%d].Text.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].FCFText[%d].Text.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCF[%d].FCFText[%d].Text.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle		FCF[%d].FCFText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].FCFText[%d].Text.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].FCFText[%d].Text.Item[%d].Outline
FCF[%d].FCFText[%d].Text.Item[%d].outlineWidth.measurementType	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].FCFText[%d].Text.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].FCFText[%d].Text.Item[%d].Outline
FCF[%d].FCFText[%d].Text.Item[%d].outlineWidth.name	0x0308	"%s"		FCF[%d].FCFText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].FCFText[%d].Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].FCFText[%d].Text.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCF[%d].FCFText[%d].Text.Item[%d].spaceFactor	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].string	0x0308	"%s"		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction,		FCF[%d].FCFText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
		"46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation			
FCF[%d].FCFText[%d].Text.Item[%d].textAspect	0x0308	%.16g"		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].textHeight	0x0308	%.16g"		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].textLineWidth.measurementType	0x0308	%.16g"		FCF[%d].FCFText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].FCFText[%d].Text.Item[%d].textLineWidth.name	0x0308	%"s"		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCF[%d].FCFText[%d].Text.Item[%d]	
FCF[%d].FCFText[%d].Text.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under		FCF[%d].FCFText[%d].Text.Item[%d]	

Q.6.5 FCF[%d].FCFText[%d].<property>

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCF[%d].FCFText[%d].Text.Out line	0x0308	NULL		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.Out line.Bottom	0x0308	NULL		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Out line.Bottom	
FCF[%d].FCFText[%d].Text.Out line.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCF[%d].FCFText[%d].Text.Out line.Bottom	
FCF[%d].FCFText[%d].Text.Out line.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCF[%d].FCFText[%d].Text.Out line.Bottom	
FCF[%d].FCFText[%d].Text.Out line.Bottom.width.measurementType	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Out line.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].FCFText[%d].Text.Out line.Bottom.width.name	0x0308	"%s"		FCF[%d].FCFText[%d].Text.Out line.Bottom	
FCF[%d].FCFText[%d].Text.Out line.Left	0x0308	NULL		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Out line.Left	
FCF[%d].FCFText[%d].Text.Out line.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCF[%d].FCFText[%d].Text.Out line.Left	
FCF[%d].FCFText[%d].Text.Out line.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCF[%d].FCFText[%d].Text.Out line.Left	
FCF[%d].FCFText[%d].Text.Out	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Out	measurementType must be

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
line.Left.width.measurementType				line.Left	replaced with meterWidth or pixelWidth
FCF[%d].FCFText[%d].Text.Out line.Left.width.name	0x0308	"%s"		FCF[%d].FCFText[%d].Text.Out line.Left	
FCF[%d].FCFText[%d].Text.Out line.Right	0x0308	NULL		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Out line.Right	
FCF[%d].FCFText[%d].Text.Out line.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCF[%d].FCFText[%d].Text.Out line.Right	
FCF[%d].FCFText[%d].Text.Out line.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCF[%d].FCFText[%d].Text.Out line.Right	
FCF[%d].FCFText[%d].Text.Out line.Right.width.measurementType	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Out line.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].FCFText[%d].Text.Out line.Right.width.name	0x0308	"%s"		FCF[%d].FCFText[%d].Text.Out line.Right	
FCF[%d].FCFText[%d].Text.Out line.Top	0x0308	NULL		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Out line.Top	
FCF[%d].FCFText[%d].Text.Out line.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCF[%d].FCFText[%d].Text.Out line.Top	
FCF[%d].FCFText[%d].Text.Out line.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick,		FCF[%d].FCFText[%d].Text.Out line.Top	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
		"2"=thin			
FCF[%d].FCFText[%d].Text.Out line.Top.width.measurementType	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Out line.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].FCFText[%d].Text.Out line.Top.width.name	0x0308	"%s"		FCF[%d].FCFText[%d].Text.Out line.Top	
FCF[%d].FCFText[%d].Text.Out line.direction	0x0308	"%.16g %.16g %.16g"		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.doubleOffset	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.filled	0x0308	"%d"		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.origin	0x0308	"%.16g %.16g %.16g"		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.outlineHeight	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.outlineWidth	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.Out line.visible	0x0308	"%d"		FCF[%d].FCFText[%d].Text.Out line	
FCF[%d].FCFText[%d].Text.bold	0x0308	"%d"		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.font	0x0308	"%s"		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.italic	0x0308	"%d"		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.italicAngle	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
FCF[%d].FCFText[%d].Text.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.language	0x0308	"%s"		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.lineFactor	0x0308	"%.16g"		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.maxExtend	0x0308	"%d"		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.name	0x0308	"%s"		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		FCF[%d].FCFText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].FCFText[%d].Text.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].FCFText[%d].Text.Outline
FCF[%d].FCFText[%d].Text.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		FCF[%d].FCFText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].FCFText[%d].Text.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].FCFText[%d].Text.Outline
FCF[%d].FCFText[%d].Text.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong,		FCF[%d].FCFText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].FCFText[%d].Text.Outline.type which would match the more modern Outline syntax

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Prerequisite Key	Additional Note
		"12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scorerectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle			and require prerequisite FCF[%d].FCFText[%d].Text.Out line
FCF[%d].FCFText[%d].Text.out ineWidth.measurementType	0x0308	%.16g"		FCF[%d].FCFText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].FCFText[%d].Text.Out line.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].FCFText[%d].Text.Out line
FCF[%d].FCFText[%d].Text.out ineWidth.name	0x0308	%"s"		FCF[%d].FCFText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].FCFText[%d].Text.Out line.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].FCFText[%d].Text.Out line
FCF[%d].FCFText[%d].Text.spa ceFactor	0x0308	%.16g"		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.stri kethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double		FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.sub	0x0308	String representing enumeration		FCF[%d].FCFText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
script		such that: "0"=sub, "1"=super		
FCF[%d].FCFText[%d].Text.text Aspect	0x0308	"%.16g"	FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.text Colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.text Height	0x0308	"%.16g"	FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.text LineWidth.measurementType	0x0308	"%.16g"	FCF[%d].FCFText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].FCFText[%d].Text.text LineWidth.name	0x0308	"%s"	FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.text Orientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.text Thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].Text.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].FCFText[%d].Text	
FCF[%d].FCFText[%d].position	0x0308	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	FCF[%d].FCFText[%d]	

Q.6.6 FCF[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].FeatureIdentification	0x0308	"%s"	FCF[%d]	
FCF[%d].GeneralAttribute[%d]	0x0308	%d;%d;%s;%d;%s;%d;%d;%d;%d;%s;%d;%s; Such that the formatted value encodes a general attribute by: 1;<lengthofname>;<name>;<length of	FCF[%d]	It is expected that you will also have an additional property: key = <name> and value = <value> which is not hidden to go with this property which should be hidden.

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		value>;<value>;<DataType>;<MeasureEnum>;<editable?>;<lengthofunit>;<unit>;<lengthofcategory>;<category>; Where name, value, unit and category are strings editable indicates if the attribute is editable DataType is on of the following values: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime and MeasureEnum is on of the following values: "-1"=none, "0"=length, "1"=area, "2"=volume, "3"=mass, "4"=massdensity, "5"=fatiguestrengthcoefficient, "6"=time, "7"=angle, "8"=velocity, "9"=acceleration, "10"=force, "11"=forceperunitlength, "12"=pressure, "13"=moment, "14"=stress, "15"=strain, "16"=strainenergy, "17"=strainenergydensity, "18"=temperature, "19"=heatflux, "20"=convectioncoefficient, "21"=thermalconductivity, "22"=thermalexpansioncoefficient, "23"=specificheat, "24"=angularvelocity, "25"=angularacceleration, "26"=fatiguelife, "27"=heatflowrate, "28"=thermalenergy, "29"=massmomentofinertia, "30"=dynamicviscosity, "31"=heatgeneration, "32"=thermalconductance, "33"=conductanceperunitlength, "34"=thermalresistance, "35"=massflowrate, "36"=volumeflowrate, "37"=temperaturedifference, "38"=frequency, "39"=coefficientperunitlength, "40"=momentofinertiaarea, "41"=viscousdamping, "42"=energy, "43"=power.		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"44"=momentum, "45"=temperaturegradient, "46"=energyperunitmass, "47"=dissipationrateofenergyperunitmass, "48"=massflux, "49"=massperunitlength, "50"=massperunitarea, "51"=electriccurrent, "52"=electricalresistance, "53"=electricalresistivity, "54"=electricalconductance, "55"=voltage, "56"=voltagepertemperature, "57"=diffusivity, "58"=latentheatpermass, "59"=thermalenergyperarea, "60"=thermalpidgain, "61"=thermalpidintegraltermconstant, "62"=thermalpidderivativetermconstant, "63"=headlosscoefficient, "64"=tsaiwucoefficient, "65"=masslength, "66"=pervolume, "67"=warpingconstant, "68"=stresscompliance, "69"=lengthperunitpressure, "70"=pressureperunitlength, "71"=pressureperunitvelocity, "72"=momentperangle, "73"=coefficientperunittime, "74"=angularmomentumperunitangle, "75"=thermalcapacitance, "76"=inductance, "77"=voltageperangularvelocity, "78"=perarea, "79"=temperaturechangerate, "80"=jerk, "81"=angularjerk, "82"=magneticfieldstrength, "83"=magneticfluxdensity		
FCF[%d].GeneralAttribute[%d].ListValue[%d]	0x0308	"%s"	FCF[%d].GeneralAttribute[%d]	
FCF[%d].Keyword[%d]	0x0308	"%s"	FCF[%d]	
FCF[%d].LAYER	0x0308	"%d"	FCF[%d]	

Q.6.7 FCF[%d].Leader[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Leader[%d]	0x0308	NULL	FCF[%d]	
FCF[%d].Leader[%d].Jog[%d]	0x0308	"%.16g %.16g %.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].Reference	0x0308	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singlar semantic aspect with an entity.	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].Reference[1]	0x0308	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singlar semantic aspect with an entity.	FCF[%d].Leader[%d].Reference	This extension is for use when the Leader is referencing the intersection of two targets. This property contains the second target with the Leader[%d].Reference property containing the first
FCF[%d].Leader[%d].allAroundSymbolSize	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].arrowAngle	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].arrowColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].arrowLength	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].arrowLineThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].arrowLineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].arrowOutsideLength	0x0308	"%.16g"	FCF[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Leader[%d].arrowPlacement	0x0308	String representing enumeration such that: "0"=out, "1"=in	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].arrowType	0x0308	String representing enumeration such that: "0"=closed, "1"=open, "2"=filled, "3"=none, "4"=origin, "5"=cross, "6"=dot, "7"=filleddot, "8"=wedge, "9"=plus, "10"=x, "11"=closedsolid, "12"=closeddouble, "13"=closeddoublesolid, "14"=opendouble, "15"=filleddouble, "16"=integral, "17"=box, "18"=filledbox, "19"=datum, "20"=filleddatum, "21"=solidorigin, "22"=filledorigin, "23"=xorigin, "24"=solidbox, "25"=roundbackdart, "26"=solidroundbackdart, "27"=filledroundbackdart	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].arrowWidth.measurementType	0x0308	"%.16g"	FCF[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Leader[%d].arrowWidth.name	0x0308	"%s"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].dotDiameter	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionJogAngle	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionJogDefintion	0x0308	String representing enumeration such that: "0"=startend, "1"=startangle, "2"=endangle	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionJogEnd	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionJogOut	0x0308	"%d"	FCF[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Leader[%d].extensionJogStart	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionJogging	0x0308	String representing enumeration such that: "0"=on, "1"=off, "2"=application	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionLineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionLineExtension	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionLineGap	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionLineThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionLineType	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].extensionWidth.measurementType	0x0308	"%.16g"	FCF[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Leader[%d].extensionWidth.name	0x0308	"%s"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].halfArrow	0x0308	String representing enumeration such that: "0"=left, "1"=right, "2"=full	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].leaderAttachment	0x0308	String representing enumeration such that: "0"=top, "1"=middle, "2"=bottom	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].lineTextGap	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].lineType	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	FCF[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].Leader[%d].offsetCentre	0x0308	"%d"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].perpendicularToStub	0x0308	"%d"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].perpendicularToTerminator	0x0308	"%d"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].radiusToCentre	0x0308	"%d"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].stubAttachment	0x0308	String representing enumeration such that: "0"=side, "1"=underline	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].stubDirection	0x0308	String representing enumeration such that: "0"=left, "1"=right, "2"=inferred	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].stubLength	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].suppressed	0x0308	"%d"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].tParm	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].terminator	0x0308	"%.16g %.16g %.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].textOverLeaderFactor	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].textOverStubFactor	0x0308	"%.16g"	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Leader[%d]	
FCF[%d].Leader[%d].uvParm.U	0x0308	"%.16g"	FCF[%d].Leader[%d]	Expect to also have Leader[%d].uvParam.V.
FCF[%d].Leader[%d].uvParm.V	0x0308	"%.16g"	FCF[%d].Leader[%d]	Expect to also have Leader[%d].uvParam.U.
FCF[%d].Leader[%d].width.measurementType	0x0308	"%.16g"	FCF[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Leader[%d].width.name	0x0308	"%s"	FCF[%d].Leader[%d]	

Q.6.8 FCF[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Outline	0x0308	NULL	FCF[%d]	
FCF[%d].Outline.Bottom	0x0308	NULL	FCF[%d].Outline	
FCF[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Outline.Bottom	
FCF[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Outline.Bottom	
FCF[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Outline.Bottom	
FCF[%d].Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].Outline.Bottom	
FCF[%d].Outline.Left	0x0308	NULL	FCF[%d].Outline	
FCF[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Outline.Left	
FCF[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Outline.Left	
FCF[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].Outline.Left	
FCF[%d].Outline.Right	0x0308	NULL	FCF[%d].Outline	
FCF[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Outline.Right	
FCF[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Outline.Right	
FCF[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Outline.Right	
FCF[%d].Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].Outline.Right	
FCF[%d].Outline.Top	0x0308	NULL	FCF[%d].Outline	
FCF[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Outline.Top	
FCF[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Outline.Top	
FCF[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Outline.Top	
FCF[%d].Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
rementType				pixelWidth
FCF[%d].Outline.Top.width.name	0x0308	"%s"	FCF[%d].Outline.Top	
FCF[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].Outline	
FCF[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].Outline	
FCF[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Outline	
FCF[%d].Outline.filled	0x0308	"%d"	FCF[%d].Outline	
FCF[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Outline	
FCF[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Outline	
FCF[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Outline	
FCF[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Outline	
FCF[%d].Outline.visible	0x0308	"%d"	FCF[%d].Outline	

Q.6.9 FCF[%d].PMI<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].PMIGeometryColor	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d]	
FCF[%d].PMITextBackgroundColor	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d]	
FCF[%d].PMITextFlatToScreenOpacity	0x0308	"%s"	FCF[%d]	
FCF[%d].PMITextForegroundColor	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
FCF[%d].PMITextInPlaneOpacity	0x0308	"%s"	FCF[%d]	

Q.6.10 FCF[%d].Primary.Datum[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary	0x0308	NULL	FCF[%d]	
FCF[%d].Primary.Datum[%d]	0x0308	NULL	FCF[%d].Primary	
FCF[%d].Primary.Datum[%d].Free State	0x0308	NULL	FCF[%d].Primary.Datum[%d]	

Q.6.11 FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.Datum[%d].TextLabel	0x0308	NULL	FCF[%d].Primary.Datum[%d]	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d]	0x0308	NULL	FCF[%d].Primary.Datum[%d].TextLabel	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].Outline	0x0308	NULL	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick,	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
kness		"2"=thin		
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Bottom.width.name	0x0308	%"s"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Bottom	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left.width.measurementType	0x0308	%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left.width.name	0x0308	%"s"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Left	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right.width .measurementType	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right.width .name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Right	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top.width. measurementType	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top.width. name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.Top	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].bold	0x0308	"%d"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].font	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].italic	0x0308	"%d"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft,	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=bottomright, "8"=bottomcentre		
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].language	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface,	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadroofface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.Datum[%d].Text

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	Label.Item[%d].Outline For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.Datum[%d].Text Label.Item[%d].Outline
FCF[%d].Primary.Datum[%d].Text	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Label.Item[%d].spaceFactor			Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].string	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Primary.Datum[%d].Text Label.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch,	FCF[%d].Primary.Datum[%d].Text Label.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].textAspect	0x0308	("%.16g"	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].textHeight	0x0308	("%.16g"	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].textLineWidth.measurementType	0x0308	("%.16g"	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].textLineWidth.name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Primary.Datum[%d].TextLabel.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Primary.Datum[%d].TextLabel.Item[%d]	

Q.6.12 FCF[%d].Primary.Datum[%d].TextLabel.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.Datum[%d].TextLabel.Outline	0x0308	NULL	FCF[%d].Primary.Datum[%d].TextLabel	
FCF[%d].Primary.Datum[%d].TextLabel.Outline.Bottom	0x0308	NULL	FCF[%d].Primary.Datum[%d].TextLabel.Outline	
FCF[%d].Primary.Datum[%d].TextLabel.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].TextLabel.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.Datum[%d].Text Label.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.Datum[%d].Text Label.Outline.Bottom	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].Text Label.Outline.Bottom	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.Datum[%d].Text Label.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label.Outline.Bottom	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Left	0x0308	NULL	FCF[%d].Primary.Datum[%d].Text Label.Outline	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].Text Label.Outline.Left	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.Datum[%d].Text Label.Outline.Left	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].Text Label.Outline.Left	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Left.width.measurementType	0x0308	%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.Datum[%d].Text Label.Outline.Left.width.name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label.Outline.Left	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Right	0x0308	NULL	FCF[%d].Primary.Datum[%d].Text Label.Outline	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red	FCF[%d].Primary.Datum[%d].Text Label.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		for the colour are encoded in the string		
FCF[%d].Primary.Datum[%d].Text Label.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.Datum[%d].Text Label.Outline.Right	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].Text Label.Outline.Right	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.Datum[%d].Text Label.Outline.Right.width.name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label.Outline.Right	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Top	0x0308	NULL	FCF[%d].Primary.Datum[%d].Text Label.Outline	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].Text Label.Outline.Top	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.Datum[%d].Text Label.Outline.Top	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].Text Label.Outline.Top	
FCF[%d].Primary.Datum[%d].Text Label.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.Datum[%d].Text Label.Outline.Top.width.name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label.Outline.Top	
FCF[%d].Primary.Datum[%d].Text Label.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].Primary.Datum[%d].Text Label.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.Datum[%d].TextLabel.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].TextLabel.Outline	
FCF[%d].Primary.Datum[%d].TextLabel.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].TextLabel.Outline	
FCF[%d].Primary.Datum[%d].TextLabel.Outline.filled	0x0308	"%d"	FCF[%d].Primary.Datum[%d].TextLabel.Outline	
FCF[%d].Primary.Datum[%d].TextLabel.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Primary.Datum[%d].TextLabel.Outline	
FCF[%d].Primary.Datum[%d].TextLabel.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].TextLabel.Outline	
FCF[%d].Primary.Datum[%d].TextLabel.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].TextLabel.Outline	
FCF[%d].Primary.Datum[%d].TextLabel.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].TextLabel.Outline	
FCF[%d].Primary.Datum[%d].TextLabel.Outline.visible	0x0308	"%d"	FCF[%d].Primary.Datum[%d].TextLabel.Outline	

Q.6.13 FCF[%d].Primary.Datum[%d].TextLabel.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.Datum[%d].TextLabel.bold	0x0308	"%d"	FCF[%d].Primary.Datum[%d].TextLabel	
FCF[%d].Primary.Datum[%d].TextLabel.font	0x0308	"%s"	FCF[%d].Primary.Datum[%d].TextLabel	
FCF[%d].Primary.Datum[%d].TextLabel.italic	0x0308	"%d"	FCF[%d].Primary.Datum[%d].TextLabel	
FCF[%d].Primary.Datum[%d].TextLabel.italicAngle	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].TextLabel	
FCF[%d].Primary.Datum[%d].TextLabel.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright,	FCF[%d].Primary.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		
FCF[%d].Primary.Datum[%d].Text Label.language	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label	
FCF[%d].Primary.Datum[%d].Text Label.lineFactor	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label	
FCF[%d].Primary.Datum[%d].Text Label.maxExtend	0x0308	"%d"	FCF[%d].Primary.Datum[%d].Text Label	
FCF[%d].Primary.Datum[%d].Text Label.name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label	
FCF[%d].Primary.Datum[%d].Text Label.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.Datum[%d].Text Label	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.Datum[%d].Text Label.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.Datum[%d].Text Label.Outline
FCF[%d].Primary.Datum[%d].Text Label.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.Datum[%d].Text Label	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.Datum[%d].Text Label.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.Datum[%d].Text Label.Outline
FCF[%d].Primary.Datum[%d].Text Label.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset,	FCF[%d].Primary.Datum[%d].Text Label	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.Datum[%d].Text Label.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.Datum[%d].Text Label.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle		
FCF[%d].Primary.Datum[%d].Text Label.outlineWidth.measurementT ype	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.Datum[%d].Text Label.Outline.width.measurementT ype which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.Datum[%d].Text Label.Outline
FCF[%d].Primary.Datum[%d].Text Label.outlineWidth.name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].Text Label	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.Datum[%d].Text Label.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.Datum[%d].Text Label.Outline
FCF[%d].Primary.Datum[%d].Text Label.spaceFactor	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label	
FCF[%d].Primary.Datum[%d].Text Label.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Primary.Datum[%d].Text Label	
FCF[%d].Primary.Datum[%d].Text Label.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Primary.Datum[%d].Text Label	
FCF[%d].Primary.Datum[%d].Text Label.textAspect	0x0308	"%.16g"	FCF[%d].Primary.Datum[%d].Text Label	
FCF[%d].Primary.Datum[%d].Text Label.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].Primary.Datum[%d].Text Label	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
FCF[%d].Primary.Datum[%d].TextLabel.textHeight	0x0308	("%.16g"	FCF[%d].Primary.Datum[%d].TextLabel	
FCF[%d].Primary.Datum[%d].TextLabel.textLineWidth.measurementType	0x0308	("%.16g"	FCF[%d].Primary.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.Datum[%d].TextLabel.textLineWidth.name	0x0308	"%s"	FCF[%d].Primary.Datum[%d].TextLabel	
FCF[%d].Primary.Datum[%d].TextLabel.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].Primary.Datum[%d].TextLabel	
FCF[%d].Primary.Datum[%d].TextLabel.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.Datum[%d].TextLabel	
FCF[%d].Primary.Datum[%d].TextLabel.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Primary.Datum[%d].TextLabel	

Q.6.14 FCF[%d].Primary.Datum[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.Datum[%d].datumRef	0x0308	"%s"	FCF[%d].Primary.Datum[%d]	
FCF[%d].Primary.Datum[%d].label	0x0308	"%s"	FCF[%d].Primary.Datum[%d]	
FCF[%d].Primary.Datum[%d].modifier	0x0308	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	FCF[%d].Primary.Datum[%d]	
FCF[%d].Primary.Datum[%d].projected	0x0308	"%d"	FCF[%d].Primary.Datum[%d]	

Q.6.15 FCF[%d].Primary.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.ExtendedText	0x0308	NULL	FCF[%d].Primary	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.ExtendedText.Item[%d]	0x0308	NULL	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.Item[%d].Outline	0x0308	NULL	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0308	".16g"	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Left	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0308	".16g"	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Right	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top.width.name	0x0308	%"s"	FCF[%d].Primary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.direction	0x0308	%.16g %.16g %.16g"	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.doubleOffset	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.filled	0x0308	%"d"	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.origin	0x0308	%.16g %.16g %.16g"	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.outlineHeight	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.outlineWidth	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].Outline.visible	0x0308	%"d"	FCF[%d].Primary.ExtendedText.Item[%d].Outline	
FCF[%d].Primary.ExtendedText.Item[%d].bold	0x0308	%"d"	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].font	0x0308	%"s"	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean,	FCF[%d].Primary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none		
FCF[%d].Primary.ExtendedText.Italic	0x0308	"%d"	FCF[%d].Primary.ExtendedText.Italic	
FCF[%d].Primary.ExtendedText.ItalicAngle	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText.Italic	
FCF[%d].Primary.ExtendedText.ItalicJustification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Primary.ExtendedText.Italic	
FCF[%d].Primary.ExtendedText.ItalicLanguage	0x0308	"%s"	FCF[%d].Primary.ExtendedText.Italic	
FCF[%d].Primary.ExtendedText.ItalicLineFactor	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText.Italic	
FCF[%d].Primary.ExtendedText.ItalicLineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].Primary.ExtendedText.Italic	
FCF[%d].Primary.ExtendedText.ItalicLineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel,	FCF[%d].Primary.ExtendedText.Italic	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].Primary.ExtendedText.Item[%d].OutlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.ExtendedText.Item[%d].Outline.colour

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				m[%d].Outline
FCF[%d].Primary.ExtendedText.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.ExtendedText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.ExtendedText.Item[%d].Outline
FCF[%d].Primary.ExtendedText.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].Primary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.ExtendedText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.ExtendedText.Item[%d].Outline
FCF[%d].Primary.ExtendedText.Item[%d].outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.ExtendedText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.ExtendedText.Item[%d].Outline
FCF[%d].Primary.ExtendedText.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].Primary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				key, but also suggest support reading FCF[%d].Primary.ExtendedText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.ExtendedText.Item[%d].Outline
FCF[%d].Primary.ExtendedText.Item[%d].spaceFactor	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].string	0x0308	%"s"	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal,	FCF[%d].Primary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].Primary.ExtendedText.Item[%d].textAspect	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].textHeight	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].textLineWidth.measurementType	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.ExtendedText.Item[%d].textLineWidth.name	0x0308	"%s"	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.Item[%d]	
FCF[%d].Primary.ExtendedText.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Primary.ExtendedText.Item[%d]	

Q.6.16 FCF[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.ExtendedText.Outline	0x0308	NULL	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.Outline.Bottom	0x0308	NULL	FCF[%d].Primary.ExtendedText.Outline	
FCF[%d].Primary.ExtendedText.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Outline.Bottom	
FCF[%d].Primary.ExtendedText.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.ExtendedText.Outline.Bottom	
FCF[%d].Primary.ExtendedText.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.Outline.Bottom	
FCF[%d].Primary.ExtendedText.Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.ExtendedText.Outline.Bottom.width.name	0x0308	%"s"	FCF[%d].Primary.ExtendedText.Outline.Bottom	
FCF[%d].Primary.ExtendedText.Outline.Left	0x0308	NULL	FCF[%d].Primary.ExtendedText.Outline	
FCF[%d].Primary.ExtendedText.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Outline.Left	
FCF[%d].Primary.ExtendedText.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.ExtendedText.Outline.Left	
FCF[%d].Primary.ExtendedText.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
FCF[%d].Primary.ExtendedText.Outline.Left.width.measurementType	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.ExtendedText.Outline.Left.width.name	0x0308	%"s"	FCF[%d].Primary.ExtendedText.Outline.Left	
FCF[%d].Primary.ExtendedText.Outline.Right	0x0308	NULL	FCF[%d].Primary.ExtendedText.Outline	
FCF[%d].Primary.ExtendedText.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Outline.Right	
FCF[%d].Primary.ExtendedText.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.ExtendedText.Outline.Right	
FCF[%d].Primary.ExtendedText.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.Outline.Right	
FCF[%d].Primary.ExtendedText.Outline.Right.width.measurementType	0x0308	%.16g"	FCF[%d].Primary.ExtendedText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.ExtendedText.Outline.Right.width.name	0x0308	%"s"	FCF[%d].Primary.ExtendedText.Outline.Right	
FCF[%d].Primary.ExtendedText.Outline.Top	0x0308	NULL	FCF[%d].Primary.ExtendedText.Outline	
FCF[%d].Primary.ExtendedText.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.Outline.Top	
FCF[%d].Primary.ExtendedText.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.ExtendedText.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.ExtendedText.O outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.O outline.Top	
FCF[%d].Primary.ExtendedText.O outline.Top.width.measurementType e	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText.O outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.ExtendedText.O outline.Top.width.name	0x0308	"%s"	FCF[%d].Primary.ExtendedText.O outline.Top	
FCF[%d].Primary.ExtendedText.O outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].Primary.ExtendedText.O outline	
FCF[%d].Primary.ExtendedText.O outline.doubleOffset	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText.O outline	
FCF[%d].Primary.ExtendedText.O outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText.O outline	
FCF[%d].Primary.ExtendedText.O outline.filled	0x0308	"%d"	FCF[%d].Primary.ExtendedText.O outline	
FCF[%d].Primary.ExtendedText.O outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Primary.ExtendedText.O outline	
FCF[%d].Primary.ExtendedText.O outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText.O outline	
FCF[%d].Primary.ExtendedText.O outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText.O outline	
FCF[%d].Primary.ExtendedText.O outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText.O outline	
FCF[%d].Primary.ExtendedText.O outline.visible	0x0308	"%d"	FCF[%d].Primary.ExtendedText.O outline	
FCF[%d].Primary.ExtendedText.bo ld	0x0308	"%d"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.fo nt	0x0308	"%s"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.ita lic	0x0308	"%d"	FCF[%d].Primary.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.ExtendedText.italicAngle	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.language	0x0308	"%s"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.lineFactor	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.maxExtend	0x0308	"%d"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.name	0x0308	"%s"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.ExtendedText.Outline
FCF[%d].Primary.ExtendedText.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Primary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.ExtendedText.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.ExtendedText.Outline
FCF[%d].Primary.ExtendedText.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft,	FCF[%d].Primary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.ExtendedText.Outline.type which would match the

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scorerectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		more modern Outline syntax and require prerequisite FCF[%d].Primary.ExtendedText.Outline
FCF[%d].Primary.ExtendedText.outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.ExtendedText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.ExtendedText.Outline
FCF[%d].Primary.ExtendedText.outlineWidth.name	0x0308	"%s"	FCF[%d].Primary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Primary.ExtendedText.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Primary.ExtendedText.Outline
FCF[%d].Primary.ExtendedText.spaceFactor	0x0308	"%.16g"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Primary.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Primary.ExtendedText.txtAspect	0x0308	("%.16g"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.txtColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.txtHeight	0x0308	("%.16g"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.txtLineWidth.measurementType	0x0308	("%.16g"	FCF[%d].Primary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Primary.ExtendedText.txtLineWidth.name	0x0308	("%s"	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.txtOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.txtThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Primary.ExtendedText	
FCF[%d].Primary.ExtendedText.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Primary.ExtendedText	
FCF[%d].RevisionModifier	0x0308	("%s"	FCF[%d]	
FCF[%d].SafetyClassification	0x0308	("%s"	FCF[%d]	

Q.6.17 FCF[%d].Secondary.Datum[%d]. <property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary	0x0308	NULL	FCF[%d]	
FCF[%d].Secondary.Datum[%d]	0x0308	NULL	FCF[%d].Secondary	
FCF[%d].Secondary.Datum[%d].FreeState	0x0308	NULL	FCF[%d].Secondary.Datum[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel	0x0308	NULL	FCF[%d].Secondary.Datum[%d]	

Q.6.18 FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left.width.measurementType	0x0308	".16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right.width.measurementType	0x0308	".16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top.width.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].bold	0x0308	"%d"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].font	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].italic	0x0308	"%d"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].language	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete,	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jjsstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jjsfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jjsstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround,	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].outlineWidth.masurementType	0x0308	%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].string	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis,	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].textAspect	0x0308	%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].textHeight	0x0308	%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].textLineWidth.measurementType	0x0308	%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].textLineWidth.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Secondary.Datum[%d].TextLabel.Item[%d]	

Q.6.19 FCF[%d].Secondary.Datum[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.Datum[%d].TextLabel.Outline	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left.width.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Left	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right.width.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top	0x0308	NULL	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top.width.measurementType	0x0308	%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top.width.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline.Top	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.direction	0x0308	%.16g %.16g %.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.doubleOffset	0x0308	%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.filled	0x0308	"%d"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.origin	0x0308	%.16g %.16g %.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.outlineHeight	0x0308	%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.outlineWidth	0x0308	%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.Outline.visible	0x0308	"%d"	FCF[%d].Secondary.Datum[%d].TextLabel.Outline	
FCF[%d].Secondary.Datum[%d].TextLabel.bold	0x0308	"%d"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.font	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.italic	0x0308	"%d"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.italicAngle	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.language	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.lineFactor	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.maxExtend	0x0308	"%d"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.Datum[%d].TextLabel.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.Datum[%d].TextLabel.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.Datum[%d].T extLabel.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.Datum[%d].T extLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.Datum[%d].T extLabel.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.Datum[%d].T extLabel.Outline
FCF[%d].Secondary.Datum[%d].T extLabel.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].Secondary.Datum[%d].T extLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.Datum[%d].T extLabel.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.Datum[%d].T extLabel.Outline
FCF[%d].Secondary.Datum[%d].T extLabel.outlineWidth.measureme ntType	0x0308	("%.16g")	FCF[%d].Secondary.Datum[%d].T extLabel	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.Datum[%d].T extLabel.Outline.width.measureme ntType which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.Datum[%d].T extLabel.Outline
FCF[%d].Secondary.Datum[%d].T extLabel.outlineWidth.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].T extLabel	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				key, but also suggest support reading FCF[%d].Secondary.Datum[%d].TextLabel.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.Datum[%d].TextLabel.Outline
FCF[%d].Secondary.Datum[%d].TextLabel.spaceFactor	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.textAspect	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.textHeight	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.Datum[%d].TextLabel.textLineWidth.name	0x0308	"%s"	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.Datum[%d].TextLabel	
FCF[%d].Secondary.Datum[%d].TextLabel.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Secondary.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.Datum[%d].datumRef	0x0308	"%s"	FCF[%d].Secondary.Datum[%d]	
FCF[%d].Secondary.Datum[%d].label	0x0308	"%s"	FCF[%d].Secondary.Datum[%d]	
FCF[%d].Secondary.Datum[%d].modifier	0x0308	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	FCF[%d].Secondary.Datum[%d]	
FCF[%d].Secondary.Datum[%d].projected	0x0308	"%d"	FCF[%d].Secondary.Datum[%d]	

Q.6.20 FCF[%d].Secondary.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.ExtendedText.Item[%d]	0x0308	NULL	FCF[%d].Secondary	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline	0x0308	NULL	FCF[%d].Secondary.ExtendedText.Item[%d]	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].Secondary.ExtendedText.Item[%d].Outline	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Bottom.width.me	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
asurementType			.Item[%d].Outline.Bottom	pixelWidth
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Bottom	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left	0x0308	NULL	FCF[%d].Secondary.ExtendedText .Item[%d].Outline	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Left	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Right	0x0308	NULL	FCF[%d].Secondary.ExtendedText .Item[%d].Outline	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Right	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Right	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText .Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0308	%.16g"	FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Right.width.name	0x0308	%"s"	FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Right	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].Secondary.ExtendedText.Item[%d].Outline	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0308	%.16g"	FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top.width.name	0x0308	%"s"	FCF[%d].Secondary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.direction	0x0308	%.16g %.16g %.16g"	FCF[%d].Secondary.ExtendedText.Item[%d].Outline	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.doubleOffset	0x0308	%.16g"	FCF[%d].Secondary.ExtendedText.Item[%d].Outline	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText.Item[%d].Outline	
FCF[%d].Secondary.ExtendedText.Item[%d].Outline.filled	0x0308	%"d"	FCF[%d].Secondary.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Secondary.ExtendedText .Item[%d].Outline	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Item[%d].Outline	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Item[%d].Outline	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText .Item[%d].Outline	
FCF[%d].Secondary.ExtendedText .Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].Secondary.ExtendedText .Item[%d].Outline	
FCF[%d].Secondary.ExtendedText .Item[%d].bold	0x0308	"%d"	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].font	0x0308	"%s"	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].italic	0x0308	"%d"	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].language	0x0308	"%s"	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].lineWeldSupplementalS	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave,	FCF[%d].Secondary.ExtendedText .Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ymbol		"4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
FCF[%d].Secondary.ExtendedText .Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint,	FCF[%d].Secondary.ExtendedText .Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspottflalectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].Secondary.ExtendedText .Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText .Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.ExtendedText .Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.ExtendedText .Item[%d].Outline
FCF[%d].Secondary.ExtendedText .Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.ExtendedText .Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.ExtendedText .Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.ExtendedText .Item[%d].Outline
FCF[%d].Secondary.ExtendedText .Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set,	FCF[%d].Secondary.ExtendedText .Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.ExtendedText .Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scorerectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		FCF[%d].Secondary.ExtendedText .Item[%d].Outline
FCF[%d].Secondary.ExtendedText .Item[%d].outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.ExtendedText .Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.ExtendedText .Item[%d].Outline
FCF[%d].Secondary.ExtendedText .Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].Secondary.ExtendedText .Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.ExtendedText .Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.ExtendedText .Item[%d].Outline
FCF[%d].Secondary.ExtendedText .Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].string	0x0308	"%s"	FCF[%d].Secondary.ExtendedText .Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.ExtendedText .Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText	0x0308	%.16g"	FCF[%d].Secondary.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.Item[%d].textAspect			.Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].textHeight	0x0308	".16g"	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].textLineWidth.measurementType	0x0308	".16g"	FCF[%d].Secondary.ExtendedText .Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.ExtendedText .Item[%d].textLineWidth.name	0x0308	".s"	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText .Item[%d]	
FCF[%d].Secondary.ExtendedText .Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Secondary.ExtendedText .Item[%d]	

Q.6.21 FCF[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.ExtendedText .Outline	0x0308	NULL	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText .Outline.Bottom	0x0308	NULL	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText .Outline.Bottom	
FCF[%d].Secondary.ExtendedText .Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centrelines	FCF[%d].Secondary.ExtendedText .Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.ExtendedText .Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText .Outline.Bottom	
FCF[%d].Secondary.ExtendedText .Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.ExtendedText .Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].Secondary.ExtendedText .Outline.Bottom	
FCF[%d].Secondary.ExtendedText .Outline.Left	0x0308	NULL	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red, for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText .Outline.Left	
FCF[%d].Secondary.ExtendedText .Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.ExtendedText .Outline.Left	
FCF[%d].Secondary.ExtendedText .Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText .Outline.Left	
FCF[%d].Secondary.ExtendedText .Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.ExtendedText .Outline.Left.width.name	0x0308	"%s"	FCF[%d].Secondary.ExtendedText .Outline.Left	
FCF[%d].Secondary.ExtendedText .Outline.Right	0x0308	NULL	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red, for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText .Outline.Right	
FCF[%d].Secondary.ExtendedText .Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	FCF[%d].Secondary.ExtendedText .Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].Secondary.ExtendedText .Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText .Outline.Right	
FCF[%d].Secondary.ExtendedText .Outline.Right.width.measurement Type	0x0308	("%.16g"	FCF[%d].Secondary.ExtendedText .Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.ExtendedText .Outline.Right.width.name	0x0308	"%s"	FCF[%d].Secondary.ExtendedText .Outline.Right	
FCF[%d].Secondary.ExtendedText .Outline.Top	0x0308	NULL	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText .Outline.Top	
FCF[%d].Secondary.ExtendedText .Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.ExtendedText .Outline.Top	
FCF[%d].Secondary.ExtendedText .Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText .Outline.Top	
FCF[%d].Secondary.ExtendedText .Outline.Top.width.measurementTy pe	0x0308	("%.16g"	FCF[%d].Secondary.ExtendedText .Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.ExtendedText .Outline.Top.width.name	0x0308	"%s"	FCF[%d].Secondary.ExtendedText .Outline.Top	
FCF[%d].Secondary.ExtendedText .Outline.direction	0x0308	("%.16g %.16g %.16g"	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.doubleOffset	0x0308	("%.16g"	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].Secondary.ExtendedText .Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
FCF[%d].Secondary.ExtendedText .Outline.filled	0x0308	"%d"	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .Outline.visible	0x0308	"%d"	FCF[%d].Secondary.ExtendedText .Outline	
FCF[%d].Secondary.ExtendedText .bold	0x0308	"%d"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText .font	0x0308	"%s"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText .italic	0x0308	"%d"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText .italicAngle	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText .justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText .language	0x0308	"%s"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText .lineFactor	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText .maxExtend	0x0308	"%d"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText .name	0x0308	"%s"	FCF[%d].Secondary.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Secondary.ExtendedText .outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.ExtendedText .Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.ExtendedText .Outline
FCF[%d].Secondary.ExtendedText .outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Secondary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.ExtendedText .Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.ExtendedText .Outline
FCF[%d].Secondary.ExtendedText .outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].Secondary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.ExtendedText .Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.ExtendedText .Outline
FCF[%d].Secondary.ExtendedText .outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].Secondary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.ExtendedText

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.ExtendedText.Outline
FCF[%d].Secondary.ExtendedText.outlineWidth.name	0x0308	"%s"	FCF[%d].Secondary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Secondary.ExtendedText.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Secondary.ExtendedText.Outline
FCF[%d].Secondary.ExtendedText.spaceFactor	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText.textAspect	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText.textHeight	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText.textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].Secondary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Secondary.ExtendedText.textLineWidth.name	0x0308	"%s"	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText	0x0308	String representing enumeration	FCF[%d].Secondary.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.textOrientation		such that: "0"=horizontal, "1"=vertical		
FCF[%d].Secondary.ExtendedText .textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Secondary.ExtendedText	
FCF[%d].Secondary.ExtendedText .underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Secondary.ExtendedText	

Q.6.22 FCF[%d].Tertiary.Datum[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary	0x0308	NULL	FCF[%d]	
FCF[%d].Tertiary.Datum[%d]	0x0308	NULL	FCF[%d].Tertiary	
FCF[%d].Tertiary.Datum[%d].Free State	0x0308	NULL	FCF[%d].Tertiary.Datum[%d]	

Q.6.23 FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.Datum[%d].TextLabel	0x0308	NULL	FCF[%d].Tertiary.Datum[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].TextLabel	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].Outline	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Bottom	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Bottom.width.name	0x0308	%"s"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Bottom	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left.width.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left.width.name	0x0308	%"s"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Left	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right.width .measurementType	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right.width .name	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Right	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top.width .measurementType	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top.width .name	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.Top	
FCF[%d].Tertiary.Datum[%d].Text	0x0308	"%.16g %.16g %.16g"	FCF[%d].Tertiary.Datum[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Label.Item[%d].Outline.direction			Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].bold	0x0308	"%d"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].font	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].italic	0x0308	"%d"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Tertiary.Datum[%d].Text	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Label.Item[%d].italicAngle			Label.Item[%d]	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].language	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp, "20"=surfacefinishmrrpcomplete, "21"=meltthrough	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay,	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatedelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.Datum[%d].Text

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		Label.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline
FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].outlineWidth.name	0x0308	%"s"	FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.Datum[%d].Text Label.Item[%d].Outline.width.name

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].string	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction,	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].textAspect	0x0308	%.16g"	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].textHeight	0x0308	%.16g"	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].textLineWidth.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].textLineWidth.name	0x0308	%"s"	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	
FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Tertiary.Datum[%d].TextLabel.Item[%d]	

Q.6.24 FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.Datum[%d].Text	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Label.Outline			Label	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].Text Label.Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom.width.measurementType	0x0308	("%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Bottom	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].Text Label.Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left.width.measur	0x0308	("%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
entType				pixelWidth
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left.width.name	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Left	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].Text Label.Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right.width.name	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Right	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Top	0x0308	NULL	FCF[%d].Tertiary.Datum[%d].Text Label.Outline	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Top	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Top	
FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].Text Label.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.Top.width.name	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.Top	
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline	
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline	
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline	
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.filled	0x0308	"%d"	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline	
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline	
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline	
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline	
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline	
FCF[%d].Tertiary.Datum[%d].TextLabel.Outline.visible	0x0308	"%d"	FCF[%d].Tertiary.Datum[%d].TextLabel.Outline	

Q.6.25 FCF[%d].Tertiary.Datum[%d].TextLabel.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.Datum[%d].TextLabel.bold	0x0308	"%d"	FCF[%d].Tertiary.Datum[%d].TextLabel	
FCF[%d].Tertiary.Datum[%d].Text	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Label.font			Label	
FCF[%d].Tertiary.Datum[%d].Text Label.italic	0x0308	"%d"	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.italicAngle	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.language	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.lineFactor	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.maxExtend	0x0308	"%d"	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.name	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].Text Label	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.Datum[%d].Text Label.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.Datum[%d].Text Label.Outline
FCF[%d].Tertiary.Datum[%d].Text Label.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.Datum[%d].Text Label	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.Datum[%d].Text Label.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.Datum[%d].Text Label.Outline
FCF[%d].Tertiary.Datum[%d].Text	0x0308	String representing enumeration	FCF[%d].Tertiary.Datum[%d].Text	For compatibility reasons we

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Label.outlineType		such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Label	suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.Datum[%d].Text Label.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.Datum[%d].Text Label.Outline
FCF[%d].Tertiary.Datum[%d].Text Label.outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.Datum[%d].Text Label.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.Datum[%d].Text Label.Outline
FCF[%d].Tertiary.Datum[%d].Text Label.outlineWidth.name	0x0308	%"s"	FCF[%d].Tertiary.Datum[%d].Text Label	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.Datum[%d].Text Label.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.Datum[%d].Text Label.Outline
FCF[%d].Tertiary.Datum[%d].Text Label.spaceFactor	0x0308	%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.Datum[%d].Text Label.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.textAspect	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.textHeight	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.textLineWidth.measurement Type	0x0308	"%.16g"	FCF[%d].Tertiary.Datum[%d].Text Label	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.Datum[%d].Text Label.textLineWidth.name	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.Datum[%d].Text Label	
FCF[%d].Tertiary.Datum[%d].Text Label.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Tertiary.Datum[%d].Text Label	

Q.6.26 FCF[%d].Tertiary.Datum[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.Datum[%d].datumRef	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d]	
FCF[%d].Tertiary.Datum[%d].label	0x0308	"%s"	FCF[%d].Tertiary.Datum[%d]	
FCF[%d].Tertiary.Datum[%d].modifier	0x0308	String representing enumeration such that: "0"=lmc, "1"=mmc,	FCF[%d].Tertiary.Datum[%d]	

		"2"=rfs	
FCF[%d].Tertiary.Datum[%d].projected	0x0308	"%d"	FCF[%d].Tertiary.Datum[%d]

Q.6.27 FCF[%d].Tertiary.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.ExtendedText	0x0308	NULL	FCF[%d].Tertiary	
FCF[%d].Tertiary.ExtendedText.Item[%d]	0x0308	NULL	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	0x0308	NULL	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Left	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Right	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top.width.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.Top	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].Tertiary.ExtendedText.Item[%d].Outline	
FCF[%d].Tertiary.ExtendedText.Item[%d].bold	0x0308	"%d"	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].font	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].italic	0x0308	"%d"	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].language	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete,	FCF[%d].Tertiary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
FCF[%d].Tertiary.ExtendedText.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskds smooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround,	FCF[%d].Tertiary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].Tertiary.ExtendedText.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.ExtendedText.Item[%d].Outline
FCF[%d].Tertiary.ExtendedText.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.ExtendedText.Item[%d].Outline
FCF[%d].Tertiary.ExtendedText.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].Tertiary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.ExtendedText.Item[%d].Outline
FCF[%d].Tertiary.ExtendedText.Item[%d].outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				key, but also suggest support reading FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.width.measurement Type which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.ExtendedText.Item[%d].Outline
FCF[%d].Tertiary.ExtendedText.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.ExtendedText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.ExtendedText.Item[%d].Outline
FCF[%d].Tertiary.ExtendedText.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].string	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc,	FCF[%d].Tertiary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].Tertiary.ExtendedText.Item[%d].textAspect	0x0308	%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].textHeight	0x0308	%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].textLineWidth.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.ExtendedText.Item[%d].textLineWidth.name	0x0308	%"s"	FCF[%d].Tertiary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.ExtendedText.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Item[%d]	
FCF[%d].Tertiary.ExtendedText.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Tertiary.ExtendedText.Item[%d]	

Q.6.28 FCF[%d].Tertiary.ExtendedText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.ExtendedText.Outline	0x0308	NULL	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.Outline.Bottom	0x0308	NULL	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText.Outline.Bottom	
FCF[%d].Tertiary.ExtendedText.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.ExtendedText.Outline.Bottom	
FCF[%d].Tertiary.ExtendedText.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Outline.Bottom	
FCF[%d].Tertiary.ExtendedText.Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.ExtendedText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.ExtendedText.Outline.Bottom.width.name	0x0308	%"s"	FCF[%d].Tertiary.ExtendedText.Outline.Bottom	
FCF[%d].Tertiary.ExtendedText.Outline.Left	0x0308	NULL	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.ExtendedText.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.ExtendedText.Outline.Left	
FCF[%d].Tertiary.ExtendedText.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Outline.Left	
FCF[%d].Tertiary.ExtendedText.Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.ExtendedText.Outline.Left.width.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Outline.Left	
FCF[%d].Tertiary.ExtendedText.Outline.Right	0x0308	NULL	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText.Outline.Right	
FCF[%d].Tertiary.ExtendedText.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.ExtendedText.Outline.Right	
FCF[%d].Tertiary.ExtendedText.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Outline.Right	
FCF[%d].Tertiary.ExtendedText.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.ExtendedText.Outline.Right.width.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Outline.Right	
FCF[%d].Tertiary.ExtendedText.Outline.Top	0x0308	NULL	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red	FCF[%d].Tertiary.ExtendedText.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		for the colour are encoded in the string		
FCF[%d].Tertiary.ExtendedText.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.ExtendedText.Outline.Top	
FCF[%d].Tertiary.ExtendedText.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Outline.Top	
FCF[%d].Tertiary.ExtendedText.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.ExtendedText.Outline.Top.width.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText.Outline.Top	
FCF[%d].Tertiary.ExtendedText.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.filled	0x0308	"%d"	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText.Outline	
FCF[%d].Tertiary.ExtendedText.O	0x0308	"%d"	FCF[%d].Tertiary.ExtendedText.O	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
utline.visible			utline	

Q.6.29 FCF[%d].Tertiary.ExtendedText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.ExtendedText.bold	0x0308	"%d"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.font	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.italic	0x0308	"%d"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.italicAngle	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.language	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.lineFactor	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.maxExtend	0x0308	"%d"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.ExtendedText.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Tertiary.ExtendedText.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Tertiary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.ExtendedText.outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.ExtendedText.outline
FCF[%d].Tertiary.ExtendedText.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FCF[%d].Tertiary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.ExtendedText.outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.ExtendedText.outline
FCF[%d].Tertiary.ExtendedText.outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].Tertiary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Tertiary.ExtendedText.outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.ExtendedText.outline
FCF[%d].Tertiary.ExtendedText.outlineWidth.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				key, but also suggest support reading FCF[%d].Tertiary.ExtendedText.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Tertiary.ExtendedText.Outline
FCF[%d].Tertiary.ExtendedText.spaceFactor	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.textAspect	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.textHeight	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].Tertiary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Tertiary.ExtendedText.textLineWidth.name	0x0308	"%s"	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Tertiary.ExtendedText	
FCF[%d].Tertiary.ExtendedText.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Tertiary.ExtendedText	

Q.6.30 FCF[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Text	0x0308	NULL	FCF[%d]	
FCF[%d].Text.Item[%d]	0x0308	NULL	FCF[%d].Text	
FCF[%d].Text.Item[%d].Outline	0x0308	NULL	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].Outline.Bo ttom	0x0308	NULL	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.Bo ttom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Item[%d].Outline.Bo ttom	
FCF[%d].Text.Item[%d].Outline.Bo ttom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Text.Item[%d].Outline.Bo ttom	
FCF[%d].Text.Item[%d].Outline.Bo ttom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Item[%d].Outline.Bo ttom	
FCF[%d].Text.Item[%d].Outline.Bo ttom.width.measurementType	0x0308	("%.16g"	FCF[%d].Text.Item[%d].Outline.Bo ttom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Text.Item[%d].Outline.Bo ttom.width.name	0x0308	"%s"	FCF[%d].Text.Item[%d].Outline.Bo ttom	
FCF[%d].Text.Item[%d].Outline.Lef t	0x0308	NULL	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.Lef t.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Item[%d].Outline.Lef t	
FCF[%d].Text.Item[%d].Outline.Lef t.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Text.Item[%d].Outline.Lef t	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Text.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Item[%d].Outline.Left	
FCF[%d].Text.Item[%d].Outline.Left.width.measurementType	0x0308	("%.16g"	FCF[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Text.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].Text.Item[%d].Outline.Left	
FCF[%d].Text.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Item[%d].Outline.Right	
FCF[%d].Text.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Text.Item[%d].Outline.Right	
FCF[%d].Text.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Item[%d].Outline.Right	
FCF[%d].Text.Item[%d].Outline.Right.width.measurementType	0x0308	("%.16g"	FCF[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Text.Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].Text.Item[%d].Outline.Right	
FCF[%d].Text.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Item[%d].Outline.Top	
FCF[%d].Text.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	FCF[%d].Text.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].Text.Item[%d].Outline.To p.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Item[%d].Outline.To p	
FCF[%d].Text.Item[%d].Outline.To p.width.measurementType	0x0308	"%.16g"	FCF[%d].Text.Item[%d].Outline.To p	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Text.Item[%d].Outline.To p.width.name	0x0308	"%s"	FCF[%d].Text.Item[%d].Outline.To p	
FCF[%d].Text.Item[%d].Outline.dir ection	0x0308	"%.16g %.16g %.16g"	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.do ubleOffset	0x0308	"%.16g"	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.fill Colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.fill ed	0x0308	"%d"	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.ori gin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.out lineHeight	0x0308	"%.16g"	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.out lineWidth	0x0308	"%.16g"	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.thi ckness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].Outline.visi ble	0x0308	"%d"	FCF[%d].Text.Item[%d].Outline	
FCF[%d].Text.Item[%d].bold	0x0308	"%d"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].font	0x0308	"%s"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints,	FCF[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none		
FCF[%d].Text.Item[%d].italic	0x0308	"%d"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].language	0x0308	"%s"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove,	FCF[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge		
FCF[%d].Text.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Text.Item[%d].Outline
FCF[%d].Text.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	FCF[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		reading FCF[%d].Text.Item[%d].Outline.sty le which would match the more modern Outline syntax and require prerequisite FCF[%d].Text.Item[%d].Outline
FCF[%d].Text.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FCF[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Text.Item[%d].Outline.typ e which would match the more modern Outline syntax and require prerequisite FCF[%d].Text.Item[%d].Outline
FCF[%d].Text.Item[%d].outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Text.Item[%d].Outline.wi dth.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Text.Item[%d].Outline
FCF[%d].Text.Item[%d].outlineWidth.name	0x0308	%"s"	FCF[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Text.Item[%d].Outline.wi dth.name which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				FCF[%d].Text.Item[%d].Outline
FCF[%d].Text.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].string	0x0308	"%s"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper,	FCF[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].Text.Item[%d].textAspect	0x0308	"%.16g"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].textHeight	0x0308	"%.16g"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Text.Item[%d].textLineWidth.name	0x0308	"%s"	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Item[%d]	
FCF[%d].Text.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Text.Item[%d]	

Q.6.31 FCF[%d].Text.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Text.Outline	0x0308	NULL	FCF[%d].Text	
FCF[%d].Text.Outline.Bottom	0x0308	NULL	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Outline.Bottom	
FCF[%d].Text.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset,	FCF[%d].Text.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].Text.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Outline.Bottom	
FCF[%d].Text.Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Text.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].Text.Outline.Bottom	
FCF[%d].Text.Outline.Left	0x0308	NULL	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Outline.Left	
FCF[%d].Text.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Text.Outline.Left	
FCF[%d].Text.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Outline.Left	
FCF[%d].Text.Outline.Left.width.measurementType	0x0308	%.16g"	FCF[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Text.Outline.Left.width.name	0x0308	"%s"	FCF[%d].Text.Outline.Left	
FCF[%d].Text.Outline.Right	0x0308	NULL	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Outline.Right	
FCF[%d].Text.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset,	FCF[%d].Text.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].Text.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Outline.Right	
FCF[%d].Text.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Text.Outline.Right.width.name	0x0308	"%s"	FCF[%d].Text.Outline.Right	
FCF[%d].Text.Outline.Top	0x0308	NULL	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Outline.Top	
FCF[%d].Text.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Text.Outline.Top	
FCF[%d].Text.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Outline.Top	
FCF[%d].Text.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Text.Outline.Top.width.name	0x0308	"%s"	FCF[%d].Text.Outline.Top	
FCF[%d].Text.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Text.Outline.filled	0x0308	"%d"	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text.Outline	
FCF[%d].Text.Outline.visible	0x0308	"%d"	FCF[%d].Text.Outline	

Q.6.32 FCF[%d].Text.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].Text.bold	0x0308	"%d"	FCF[%d].Text	
FCF[%d].Text.font	0x0308	"%s"	FCF[%d].Text	
FCF[%d].Text.italic	0x0308	"%d"	FCF[%d].Text	
FCF[%d].Text.italicAngle	0x0308	"%.16g"	FCF[%d].Text	
FCF[%d].Text.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].Text	
FCF[%d].Text.language	0x0308	"%s"	FCF[%d].Text	
FCF[%d].Text.lineFactor	0x0308	"%.16g"	FCF[%d].Text	
FCF[%d].Text.maxExtend	0x0308	"%d"	FCF[%d].Text	
FCF[%d].Text.name	0x0308	"%s"	FCF[%d].Text	
FCF[%d].Text.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Text.Outline.colour which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite FCF[%d].Text.Outline
FCF[%d].Text.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Text.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Text.Outline
FCF[%d].Text.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Text.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Text.Outline
FCF[%d].Text.outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].Text	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Text.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Text.Outline
FCF[%d].Text.outlineWidth.name	0x0308	"%s"	FCF[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Text.Outline.width.name which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite FCF[%d].Text.Outline
FCF[%d].Text.spaceFactor	0x0308	("%.16g"	FCF[%d].Text	
FCF[%d].Text.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].Text	
FCF[%d].Text.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].Text	
FCF[%d].Text.textAspect	0x0308	("%.16g"	FCF[%d].Text	
FCF[%d].Text.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].Text	
FCF[%d].Text.textHeight	0x0308	("%.16g"	FCF[%d].Text	
FCF[%d].Text.textLineWidth.measurementType	0x0308	("%.16g"	FCF[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].Text.textLineWidth.name	0x0308	"%s"	FCF[%d].Text	
FCF[%d].Text.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].Text	
FCF[%d].Text.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].Text	
FCF[%d].Text.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].Text	

Q.6.33 FCF[%d].TextFormat[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].TextFormat[%d]	0x0308	NULL	FCF[%d]	
FCF[%d].TextFormat[%d].Item[%d]	0x0308	NULL	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].Item[%d].Outline	0x0308	NULL	FCF[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom	
FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom	
FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom	
FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].TextFormat[%d].Item[%d].Outline.Bottom	
FCF[%d].TextFormat[%d].Item[%d].Outline.Left	0x0308	NULL	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].TextFormat[%d].Item[%d].Outline.Left	
FCF[%d].TextFormat[%d].Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].TextFormat[%d].Item[%d].Outline.Left	
FCF[%d].TextFormat[%d].Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].TextFormat[%d].Item[%d].Outline.Left	
FCF[%d].TextFormat[%d].Item[%d].Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].TextFormat[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].TextFormat[%d].Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].TextFormat[%d].Item[%d].Outline.Left	
FCF[%d].TextFormat[%d].Item[%d].Outline.Right	0x0308	NULL	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].TextFormat[%d].Item[%d].Outline.Right	
FCF[%d].TextFormat[%d].Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].TextFormat[%d].Item[%d].Outline.Right	
FCF[%d].TextFormat[%d].Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].TextFormat[%d].Item[%d].Outline.Right	
FCF[%d].TextFormat[%d].Item[%d].Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].TextFormat[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].TextFormat[%d].Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].TextFormat[%d].Item[%d].Outline.Right	
FCF[%d].TextFormat[%d].Item[%d].Outline.Top	0x0308	NULL	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].TextFormat[%d].Item[%d].Outline.Top	
FCF[%d].TextFormat[%d].Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].TextFormat[%d].Item[%d].Outline.Top	
FCF[%d].TextFormat[%d].Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].TextFormat[%d].Item[%d].Outline.Top	
FCF[%d].TextFormat[%d].Item[%d]	0x0308	"%.16g"	FCF[%d].TextFormat[%d].Item[%d]	measurementType must be

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.Outline.Top.width.measurementType			.Outline.Top	replaced with meterWidth or pixelWidth
FCF[%d].TextFormat[%d].Item[%d].Outline.Top.width.name	0x0308	"%s"	FCF[%d].TextFormat[%d].Item[%d].Outline.Top	
FCF[%d].TextFormat[%d].Item[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].TextFormat[%d].Item[%d].Outline	
FCF[%d].TextFormat[%d].Item[%d].bold	0x0308	"%d"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].font	0x0308	"%s"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].TextFormat[%d].Item[%d].italic	0x0308	"%d"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].language	0x0308	"%s"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove,	FCF[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].TextFormat[%d].Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].TextFormat[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].TextFormat[%d].Item[%d].Outline
FCF[%d].TextFormat[%d].Item[%d]	0x0308	String representing enumeration such that: "0"=unset,	FCF[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.outlineStyle		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		key, but also suggest support reading FCF[%d].TextFormat[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].TextFormat[%d].Item[%d].Outline
FCF[%d].TextFormat[%d].Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].TextFormat[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].TextFormat[%d].Item[%d].Outline
FCF[%d].TextFormat[%d].Item[%d].outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].TextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].TextFormat[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].TextFormat[%d].Item[%d].Outline
FCF[%d].TextFormat[%d].Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].TextFormat[%d].Item[%d].Outline.width.name which would

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				match the more modern Outline syntax and require prerequisite FCF[%d].TextFormat[%d].Item[%d].Outline
FCF[%d].TextFormat[%d].Item[%d].spaceFactor	0x0308	%.16g"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].string	0x0308	"%s"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance,	FCF[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].TextFormat[%d].Item[%d].textAspect	0x0308	%.16g"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].textHeight	0x0308	%.16g"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].textLineWidth.measurementType	0x0308	%.16g"	FCF[%d].TextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].TextFormat[%d].Item[%d].textLineWidth.name	0x0308	%"s"	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].TextFormat[%d].Item[%d]	
FCF[%d].TextFormat[%d].Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].TextFormat[%d].Item[%d]	

Q.6.34 FCF[%d].TextFormat[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].TextFormat[%d].bold	0x0308	%"d"	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].font	0x0308	%"s"	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].italic	0x0308	%"d"	FCF[%d].TextFormat[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].TextFormat[%d].italicAngle	0x0308	"%.16g"	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].language	0x0308	"%s"	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].lineFactor	0x0308	"%.16g"	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].textAspect	0x0308	"%.16g"	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].textHeight	0x0308	"%.16g"	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].TextFormat[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].TextFormat[%d].textLineWidth.name	0x0308	"%s"	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].TextFormat[%d]	
FCF[%d].TextFormat[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].TextFormat[%d]	

Q.6.35 FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d]	0x0308	NULL	FCF[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator	0x0308	NULL	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].FreeState	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
tum[%d].TextLabel.Item[%d].Outline.Right			m[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	0x0308	String representing enumeration such that: "0"=normal, "1"=thick,	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
tum[%d].TextLabel.Item[%d].Outline.Top.thickness		"2"=thin	m[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.width.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.width.name	0x0308	".s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.direction	0x0308	".16g .16g .16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.doubleOffset	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.filled	0x0308	".d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.origin	0x0308	".16g .16g .16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.outlineHeight	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.outlineWidth	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.outlineWidth	0x0308	String representing enumeration	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.thickness		such that: "0"=normal, "1"=thick, "2"=thin	d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jissstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip,	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineWidth.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].ToleranceCompartment[

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].string	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal,	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textAspect	0x0308	("%.16g")	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textHeight	0x0308	("%.16g")	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textLineWidth.measurementType	0x0308	("%.16g")	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textLineWidth.name	0x0308	("%s")	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.width.measurementType	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ur		string	m[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft,	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=bottomright, "8"=bottomcentre		
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.maxExtend	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse,	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
tum[%d].TextLabel.outlineType		"4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	m[%d].TextLabel	reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
tum[%d].TextLabel.spaceFactor			m[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textAspect	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].datumRef	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].label	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].modifier	0x0308	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].projected	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	

Q.6.36 FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
m.style		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
width.name				
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.outlineWidth	0x0308	String representing enumeration	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.thickness		such that: "0"=normal, "1"=thick, "2"=thin	d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].lineWeldSup	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave,	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
plementalSymbol		"4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint,	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"37"=jisstaggeredfilllet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspofflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond,	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scorerectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Ex	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Exten	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
tendedText.Item[%d].spaceFactor			dedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].string	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper,	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textAspect	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textHeight	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textLineWidth.h.measurementType	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textLineWidth.h.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	

Q.6.37 FCF[%d].ToleranceCompartment[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Ex	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.Exten	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
tendedText.Outline			dedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	0x0308	"0x00%02x%02x%02x" such that	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top.colour		the values of blue, green and red for the colour are encoded in the string	d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=toleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.maxExtend	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outlineWidth.measure	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
mentType			dedText	pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textAspect	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
tendedText.textColour		string	dedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.symbol	0x0308	String representing enumeration such that: "0"=parallel, "1"=perpendicular, "2"=angular, "3"=including	FCF[%d].ToleranceCompartment[%d].AfterIndicator	
FCF[%d].ToleranceCompartment[%d].AfterIndicator.type	0x0308	String representing enumeration such that: "0"=intersectionplane, "1"=orientationplane, "2"=collectionplane, "3"=directionfeature	FCF[%d].ToleranceCompartment[%d].AfterIndicator	

Q.6.38 FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator	0x0308	NULL	FCF[%d].ToleranceCompartment[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].FreeState	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
tline.Bottom.width.measurementType			Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
tline.Right.colour		string	Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Datum[%d].TextLabel.Item[%d].Outline.Top.width.measurementType			um[%d].TextLabel.Item[%d].Outline.Top	pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.outlineType	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.visible			d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.	0x0308	String representing enumeration such that: "0"=unset, "1"=convex,	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Dat	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Datum[%d].TextLabel.Item[%d].lineWeldSupplementalSymbol		"2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	um[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel,	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.	0x0308	String representing enumeration such that: "0"=box, "1"=triangle,	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Datum[%d].TextLabel.Item[%d].outlineType		"2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	um[%d].TextLabel.Item[%d]	key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineWidth.measurementType	0x0308	("%.16g")	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineWidth.name	0x0308	("%s")	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				%d].BeforeIndicator.DatumGroup. .Datum[%d].TextLabel.Item[%d]. Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup. Datum[%d].TextLabel.Item[%d].sp aceFactor	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Dat um[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup. Datum[%d].TextLabel.Item[%d].stri kethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Dat um[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup. Datum[%d].TextLabel.Item[%d].stri ng	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Dat um[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup. Datum[%d].TextLabel.Item[%d].su bscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Dat um[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup. Datum[%d].TextLabel.Item[%d].sy mbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane,	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Dat um[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textAspect	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textHeight	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textLineWidth.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textLineWidth.name	0x0308	".s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Q.6.39 FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline. <property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
tion			um[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	

Q.6.40 FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.maxExtend	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.colour

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				our which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				.Datum[%d].TextLabel.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textAspect	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Datum[%d].TextLabel.textHeight			um[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	

Q.6.41 FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].datumRef	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].label	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].modifier	0x0308	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].projected	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	

Q.6.42 FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.name	0x0308	".s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Ext	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ExtendedText.Item[%d].Outline.direction			endedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Ext	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ExtendedText.Item[%d].font			endedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flushesk, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp,	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"20"=surfacefinishmrpcomplete, "21"=meltthrough		
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisbeam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ExtendedText.Item[%d].outlineWidth.measurementType			endedText.Item[%d]	pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].string	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.	0x0308	String representing enumeration	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Ext	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ExtendedText.Item[%d].subscript		such that: "0"=sub, "1"=super	endedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Ext	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ExtendedText.Item[%d].textAspect			endedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textHeight	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textLineWidth.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textLineWidth.name	0x0308	".s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	

Q.6.43 FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.maxExtend	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textAspect	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textHeight	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textLineWidth.measurementType	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	

Q.6.44 FCF[%d].ToleranceCompartment[%d].BeforeIndicator.symbol

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.symbol	0x0308	String representing enumeration such that: "0"=parallel, "1"=perpendicular, "2"=angular, "3"=including	FCF[%d].ToleranceCompartment[%d].BeforeIndicator	

Q.6.45 FCF[%d].ToleranceCompartment[%d].BeforeIndicator.type

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].BeforeIndicator.type	0x0308	String representing enumeration such that: "0"=intersectionplane, "1"=orientationplane, "2"=collectionplane, "3"=directionfeature	FCF[%d].ToleranceCompartment[%d].BeforeIndicator	

Q.6.46 FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right.width.measu	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.fillColour	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].DatumGroup.ExtendedText.Item[%d].Outline.filled			d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.origin	0x0308	%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.outlineHeight	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.outlineWidth	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.visible	0x0308	%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].bold	0x0308	%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].font	0x0308	%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].italic	0x0308	%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].italicAngle	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright,	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange,	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		em[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=scoredcircle	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].string	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro,	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textAspect	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textHeight	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textLineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textLineWidth.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textLineDash	0x0308	String representing enumeration	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
em[%d].underline		such that: "0"=over, "1"=under	%d]	

Q.6.47 FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.O	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outli	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
outline.Right.width.name			ne.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.direction	0x0308	%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.doubleOffset	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.filled	0x0308	%"d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.filled	0x0308	%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].DatumGroup.ExtendedText.Outline.origin			d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.outlineHeight	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.outlineWidth	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.visible	0x0308	%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	

Q.6.48 FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.bold	0x0308	%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.font	0x0308	%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.italic	0x0308	%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.italicAngle	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.la	0x0308	%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
language				
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.maxExtend	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft,	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.type which would match the more modern Outline syntax

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText. Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText. Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText. Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText. Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText. Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.str	0x0308	String representing enumeration such that: "0"=none, "1"=single,	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ikethrough		"2"=double		
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.textAspect	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.textHeight	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.textLineWidth.measurementType	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	
FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].DatumGroup.ExtendedText	

Q.6.49 FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].FreeState	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d]	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d]	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left.width.measurementType	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].T	0x0308	String representing enumeration such that: "0"=normal, "1"=thick,	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
extLabel.Item[%d].Outline.Right.thickness		"2"=thin	Label.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Right.width.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Right.width.name	0x0308	".s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top.width.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top.width.name	0x0308	".s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.direction	0x0308	".16g % .16g % .16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.doubleOffset			d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list,	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=datetime, "11"=none		
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove,	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatedelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.colour

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				r which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				TextLabel.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].string	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis,	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textAspect	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textHeight	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	

Q.6.50 FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom.width.measurementType	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left.width.measurementType	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.width.measurementType	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.style		such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	d].DatumGroup.Reference[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].DatumGroup.Reference[%d].TextLabel.Outline.direction			d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.doubleOffset	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.filled	0x0308	%"d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.origin	0x0308	("%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.outlineHeight	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.outlineWidth	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.visible	0x0308	%"d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	

Q.6.51 FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.maxExtend	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.colour which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=scoredcircle	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.width.measurementType which would match the

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textAspect	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
extLabel.textLineWidth.measurementType			Label	pixelWidth
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	

Q.6.52 FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].datumRef	0x0308	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singular semantic aspect with an entity.	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d]	
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].label	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d]	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].modifier	0x0308	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d]	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.
FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d].projected	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].DatumGroup.Reference[%d]	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.

Q.6.53 FCF[%d].ToleranceCompartment[%d].FreeState

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].FreeState	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	

Q.6.54 FCF[%d].ToleranceCompartment[%d].Statistical

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].Statistical	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	

Q.6.55 FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	0x0308	NULL	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick,	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.Outline.Bottom.thickness		"2"=thin	utline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom.width.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom.width.name	0x0308	".s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left.width.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left.width.name	0x0308	".s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string,	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none		
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove,	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.lineWeldSymbol		"3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatedelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.width.measurementType

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				e which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].string	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis,	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textAspect	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textHeight	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.textLineWidth.measurementType			d].TextMaxBonusValue.Item[%d]	pixelWidth
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	

Q.6.56 FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Bottom.width.name			om	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.lineFact	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
or				
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.maxExtend	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright,	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"24"=squaredcircle		
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.outlineWidth.measurementType	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.OutlineWidth.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.OutlineWidth.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.Outline
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.spaceFactor	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.textAspect	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.textHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	
FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].TextMaxBonusValue	

Q.6.57 FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextPrefix	0x0308	NULL	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].TextPrefix.Item[%d].Outline.Left.width.name			d].TextPrefix.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top	0x0308	String representing enumeration such that: "0"=normal, "1"=thick,	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
op.thickness		"2"=thin		
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top.op.width.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top.op.width.name	0x0308	".s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.direction	0x0308	".16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.doubleOffset	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.filled	0x0308	".d"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.origin	0x0308	".16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.outlineHeight	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.outlineWidth	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.visible	0x0308	".d"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].bold	0x0308	".d"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		reading FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline.

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline. width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].string	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout,	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].textAspect	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].textHeight	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].textLineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].textLineWidth.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].TextPrefix.Item[%d]	

Q.6.58 FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right.width.	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
name				
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ht				
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	
FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline	

Q.6.59 FCF[%d].ToleranceCompartment[%d].TextPrefix.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextPrefix.bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.maxExtend	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextPrefix.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline
FCF[%d].ToleranceCompartment[%d].TextPrefix.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextPrefix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline
FCF[%d].ToleranceCompartment[%d].TextPrefix.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].ToleranceCompartment[%d].TextPrefix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline
FCF[%d].ToleranceCompartment[%d].TextPrefix.outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				reading FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline
FCF[%d].ToleranceCompartment[%d].TextPrefix.outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextPrefix.Outline
FCF[%d].ToleranceCompartment[%d].TextPrefix.spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.textAspect	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.textHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextPrefix	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextPrefix.outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextPrefix	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].TextPrefix.textLineWidth.name			d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextPrefix	
FCF[%d].ToleranceCompartment[%d].TextPrefix.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].TextPrefix	

Q.6.60 FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextSuffix	0x0308	NULL	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.do	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ableOffset				
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.origin	0x0308	".16g .16g .16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.outlineHeight	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.outlineWidth	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].italicAngle	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flushesk, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange,	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=esksmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=esknumber, "57"=isoedge		
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.style which would match the more

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].outlineWidth.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.width.name which would match

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].spaceFactor	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].string	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction,	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].textAspect	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].textHeight	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].textLineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].textLineWidth.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].TextSuffix.Item[%d]	

Q.6.61 FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick,	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ss		"2"=thin	d].TextSuffix.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left.width.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right.width.measurementType	0x0308	".16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	
FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline	

Q.6.62 FCF[%d].ToleranceCompartment[%d].TextSuffix.<property>

Property Key	Supported PML_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextSuffix.bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.maxExtend	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline
FCF[%d].ToleranceCompartment[%d].TextSuffix.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	FCF[%d].ToleranceCompartment[%d].TextSuffix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		%d].TextSuffix.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline
FCF[%d].ToleranceCompartment[%d].TextSuffix.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=scoredcircle	FCF[%d].ToleranceCompartment[%d].TextSuffix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline
FCF[%d].ToleranceCompartment[%d].TextSuffix.outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline
FCF[%d].ToleranceCompartment[%d].TextSuffix.outlineWidth.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextSuffix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline.width.nam

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				e which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextSuffix.Outline
FCF[%d].ToleranceCompartment[%d].TextSuffix.spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.textAspect	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.textHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextSuffix	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextSuffix.textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextSuffix	
FCF[%d].ToleranceCompartment[%d].TextSuffix.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].TextSuffix	

Q.6.63 FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].<property>

Property Key	Supported PML_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	0x0308	NULL	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline.Right.width.name			line.Right	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.direction	0x0308	%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.doubleOffset	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.filled	0x0308	%"d"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.filled	0x0308	%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].TextUnitBasisValue.Item[%d].Outline.origin			d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.outlineHeight	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.outlineWidth	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.visible	0x0308	%"d"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].bold	0x0308	%"d"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].font	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].italic	0x0308	%"d"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].italicAngle	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].fontWeight	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].TextUnitBasisValue.Item[%d].language			d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].lineFactor	0x0308	("%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp, "20"=surfacefinishmrrpcomplete, "21"=meltthrough	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge,	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatedelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge		
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				.Outline
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].string	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius,	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textAspect	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textLineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	

Q.6.64 FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right.width.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right.width.name	0x0308	%"s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	0x0308	NULL	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top.width.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.filled	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.outlineType	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].TextUnitBasisValue.Outline.thickness		such that: "0"=normal, "1"=thick, "2"=thin	d].TextUnitBasisValue.Outline	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Visible	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline	

Q.6.65 FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.bold	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.font	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.italic	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.italicAngle	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.language	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.lineFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.maxExtent	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.outlineWidth.measurementType	0x0308	%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.width.measurementType which

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.outlineWidth.name	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.Outline
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.spaceFactor	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.textAspect	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.textHeight	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.textLineWidth	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
idth.name				
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	
FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue.underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].ToleranceCompartment[%d].TextUnitBasisValue	

Q.6.66 FCF[%d].ToleranceCompartment[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].commonZone	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].derivedFeature	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].dynamicProfile	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].leastSquaresFeature	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].maxBonus	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].maxBonusValue	0x0308	"%.16g"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].maxBonusValueString	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].maximumInscribedFeature	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].minimaxFeature	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].minimumCircumscribedFeature	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ToleranceCompartment[%d].modifier	0x0308	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].precision	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].prefix	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].projected	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].projectedValue	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].projectionVector	0x0308	"%.16g %.16g %.16g"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].reciprocityRequirement	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].suffix	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].tangentPlane	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].unequal	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].unequalDisplay	0x0308	String representing enumeration such that: "0"=circleg, "1"=uz	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].unequalValue	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].unitBasis	0x0308	"%d"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].unitBasisValue	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].value	0x0308	"%s"	FCF[%d].ToleranceCompartment[%d]	
FCF[%d].ToleranceCompartment[%d].zoneShape	0x0308	String representing enumeration such that: "0"=diameter, "1"=sphericaldiameter, "2"=square	FCF[%d].ToleranceCompartment[%d]	

Q.6.67 FCF[%d].UnitSymbol[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].UnitSymbol[%d]	0x0308	NULL	FCF[%d]	
FCF[%d].UnitSymbol[%d].Item[%d]	0x0308	NULL	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].Outline	0x0308	NULL	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	0x0308	NULL	FCF[%d].UnitSymbol[%d].Item[%d].Outline	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.width.measurementType	0x0308	("%.16g"	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left	0x0308	NULL	FCF[%d].UnitSymbol[%d].Item[%d].Outline	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left.width.measurementType	0x0308	".16g"	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left.width.name	0x0308	".s"	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Left	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right	0x0308	NULL	FCF[%d].UnitSymbol[%d].Item[%d].Outline	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right.width.measurementType	0x0308	".16g"	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right.width.name	0x0308	".s"	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Right	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Top	0x0308	NULL	FCF[%d].UnitSymbol[%d].Item[%d].Outline	
FCF[%d].UnitSymbol[%d].Item[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d].Item[%d].Outline.Top	
FCF[%d].UnitSymbol[%d].Item[%d].Outline	0x0308	String representing enumeration such that: "0"=unset,	FCF[%d].UnitSymbol[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.Outline.Top.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Outline.Top	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Item[%d]. Outline.Top	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.Top.width.measurementTy pe	0x0308	%.16g"	FCF[%d].UnitSymbol[%d].Item[%d]. Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.Top.width.name	0x0308	%"s"	FCF[%d].UnitSymbol[%d].Item[%d]. Outline.Top	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.direction	0x0308	%.16g %.16g %.16g"	FCF[%d].UnitSymbol[%d].Item[%d]. Outline	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.doubleOffset	0x0308	%.16g"	FCF[%d].UnitSymbol[%d].Item[%d]. Outline	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d].Item[%d]. Outline	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.filled	0x0308	%"d"	FCF[%d].UnitSymbol[%d].Item[%d]. Outline	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.origin	0x0308	%.16g %.16g %.16g"	FCF[%d].UnitSymbol[%d].Item[%d]. Outline	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.outlineHeight	0x0308	%.16g"	FCF[%d].UnitSymbol[%d].Item[%d]. Outline	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.outlineWidth	0x0308	%.16g"	FCF[%d].UnitSymbol[%d].Item[%d]. Outline	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Item[%d]. Outline	
FCF[%d].UnitSymbol[%d].Item[%d]. .Outline.visible	0x0308	%"d"	FCF[%d].UnitSymbol[%d].Item[%d]. Outline	
FCF[%d].UnitSymbol[%d].Item[%d]. .bold	0x0308	%"d"	FCF[%d].UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].UnitSymbol[%d].Item[%d].font	0x0308	"%s"	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].format	0x0308	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].italic	0x0308	"%d"	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].italicAngle	0x0308	"%. 16g"	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].language	0x0308	"%s"	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].lineFactor	0x0308	"%. 16g"	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].lineWeldSupplementalSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	FCF[%d].UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].UnitSymbol[%d].Item[%d].lineWeldSymbol	0x0308	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	FCF[%d].UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		reading FCF[%d].UnitSymbol[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].UnitSymbol[%d].Item[%d].Outline
FCF[%d].UnitSymbol[%d].Item[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].UnitSymbol[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].UnitSymbol[%d].Item[%d].Outline
FCF[%d].UnitSymbol[%d].Item[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FCF[%d].UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].UnitSymbol[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].UnitSymbol[%d].Item[%d].Outline
FCF[%d].UnitSymbol[%d].Item[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].UnitSymbol[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].UnitSymbol[%d].Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].UnitSymbol[%d].Item[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].string	0x0308	"%s"	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].symbol	0x0308	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch,	FCF[%d].UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FCF[%d].UnitSymbol[%d].Item[%d].textAspect	0x0308	".16g"	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].textHeight	0x0308	".16g"	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].textLineWidth.measurementType	0x0308	".16g"	FCF[%d].UnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].UnitSymbol[%d].Item[%d].textLineWidth.name	0x0308	".s"	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Item[%d]	
FCF[%d].UnitSymbol[%d].Item[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].UnitSymbol[%d].Item[%d]	

Q.6.68 FCF[%d].UnitSymbol[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].UnitSymbol[%d].Outline	0x0308	NULL	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].Outline.Bottom	0x0308	NULL	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.Bottom.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].UnitSymbol[%d].Outline.Bottom.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].UnitSymbol[%d].Outline.Bottom	
FCF[%d].UnitSymbol[%d].Outline.Bottom.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Outline.Bottom	
FCF[%d].UnitSymbol[%d].Outline.Bottom.width.measurementType	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].UnitSymbol[%d].Outline.Bottom.width.name	0x0308	"%s"	FCF[%d].UnitSymbol[%d].Outline.Bottom	
FCF[%d].UnitSymbol[%d].Outline.Left	0x0308	NULL	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.Left.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d].Outline.Left	
FCF[%d].UnitSymbol[%d].Outline.Left.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].UnitSymbol[%d].Outline.Left	
FCF[%d].UnitSymbol[%d].Outline.Left.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Outline.Left	
FCF[%d].UnitSymbol[%d].Outline.Left.width.measurementType	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].UnitSymbol[%d].Outline.Left.width.name	0x0308	"%s"	FCF[%d].UnitSymbol[%d].Outline.Left	
FCF[%d].UnitSymbol[%d].Outline.Right	0x0308	NULL	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.Right.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red	FCF[%d].UnitSymbol[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		for the colour are encoded in the string		
FCF[%d].UnitSymbol[%d].Outline.Right.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].UnitSymbol[%d].Outline.Right	
FCF[%d].UnitSymbol[%d].Outline.Right.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Outline.Right	
FCF[%d].UnitSymbol[%d].Outline.Right.width.measurementType	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].UnitSymbol[%d].Outline.Right.width.name	0x0308	"%s"	FCF[%d].UnitSymbol[%d].Outline.Right	
FCF[%d].UnitSymbol[%d].Outline.Top	0x0308	NULL	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.Top.colour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d].Outline.Top	
FCF[%d].UnitSymbol[%d].Outline.Top.style	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].UnitSymbol[%d].Outline.Top	
FCF[%d].UnitSymbol[%d].Outline.Top.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Outline.Top	
FCF[%d].UnitSymbol[%d].Outline.Top.width.measurementType	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].UnitSymbol[%d].Outline.Top.width.name	0x0308	"%s"	FCF[%d].UnitSymbol[%d].Outline.Top	
FCF[%d].UnitSymbol[%d].Outline.direction	0x0308	"%.16g %.16g %.16g"	FCF[%d].UnitSymbol[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].UnitSymbol[%d].Outline.doubleOffset	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.fillColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.filled	0x0308	"%d"	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.origin	0x0308	"%.16g %.16g %.16g"	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.outlineHeight	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.outlineWidth	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.thickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d].Outline	
FCF[%d].UnitSymbol[%d].Outline.visible	0x0308	"%d"	FCF[%d].UnitSymbol[%d].Outline	

Q.6.69 FCF[%d].UnitSymbol[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].UnitSymbol[%d].bold	0x0308	"%d"	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].font	0x0308	"%s"	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].italic	0x0308	"%d"	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].italicAngle	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].language	0x0308	"%s"	FCF[%d].UnitSymbol[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
e				
FCF[%d].UnitSymbol[%d].lineFactor	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].maxExtent	0x0308	"%d"	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].name	0x0308	"%s"	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].UnitSymbol[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].UnitSymbol[%d].Outline
FCF[%d].UnitSymbol[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].UnitSymbol[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].UnitSymbol[%d].Outline
FCF[%d].UnitSymbol[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FCF[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].UnitSymbol[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].UnitSymbol[%d].Outline
FCF[%d].UnitSymbol[%d].outlineWidth	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d]	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
idth.measurementType				pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].UnitSymbol[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].UnitSymbol[%d].Outline
FCF[%d].UnitSymbol[%d].outlineWidth.name	0x0308	"%s"	FCF[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].UnitSymbol[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].UnitSymbol[%d].Outline
FCF[%d].UnitSymbol[%d].spaceFactor	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].textAspect	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].textHeight	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].textLineWidth.measurementType	0x0308	"%.16g"	FCF[%d].UnitSymbol[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].UnitSymbol[%d].textLine	0x0308	"%s"	FCF[%d].UnitSymbol[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Width.name				
FCF[%d].UnitSymbol[%d].textOrientation	0x0308	String representing enumeration such that: "0"=horizontal, "1"=vertical	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d].UnitSymbol[%d]	
FCF[%d].UnitSymbol[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d].UnitSymbol[%d]	

Q.6.70 FCF[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].ValueToCustomer	0x0308	"%s"	FCF[%d]	
FCF[%d].____JtTkIntersectionReference__reference0	0x0308	ORIGINreference1	FCF[%d].____JtTkIntersectionReference__reference1	ORIGIN is optional and should only be added if the Intersection reference is also an Origin reference reference0 and reference1 should be in the format "%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path. Should exist in pairs, with the opposite ordering of values also persited, to identify both way which references are tied together as an intersection reference
FCF[%d].____JtTkIntersectionReference__reference1	0x0308	ORIGINreference0	FCF[%d].____JtTkIntersectionReference__reference0	ORIGIN is optional and should only be added if the Intersection reference is also an Origin reference reference0 and reference1 should be in the format "%d %d %d %s" such that first in is the dst id, second the dst type, third the

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				reason(optional) and the string the path. Should exist in pairs, with the opposite ordering of values also persited, to identify both way which references are tied together as an intersection reference
FCF[%d].____JtTkOriginReference__reference	0x0308	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path.	FCF[%d]	reference is the property value encoded also into the key identifying which reference is an origin reference.
FCF[%d].accountabilityId	0x0308	"%d"	FCF[%d]	
FCF[%d].allAround	0x0308	"%d"	FCF[%d]	
FCF[%d].allOver	0x0308	"%d"	FCF[%d]	
FCF[%d].angleFormat	0x0308	String representing enumeration such that: "0"=degrees, "1"=seconds, "2"=minutes, "3"=wholedegrees	FCF[%d]	
FCF[%d].attachmentType	0x0308	String representing enumeration such that: "0"=angulardimension, "1"=ongeometry, "2"=lineardimension, "3"=leader, "4"=stacked, "5"=ordinatedimension, "6"=radialdimension, "7"=diametraldimension, "8"=noleader, "9"=stackedleft, "10"=stackedright, "11"=stackedabove	FCF[%d]	
FCF[%d].blanked	0x0308	"%d"	FCF[%d]	
FCF[%d].bold	0x0308	"%d"	FCF[%d]	
FCF[%d].characteristic	0x0308	String representing enumeration such that: "0"=profileofaline, "1"=circularrunout, "2"=perpendicularity, "3"=position, "4"=totalrunout, "5"=profileofasurface, "6"=cylindricity, "7"=symmetry,	FCF[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"8"=angularity, "9"=parallelism, "10"=concentricity, "11"=flatness, "12"=circularity, "13"=straightness, "14"=axisintersection		
FCF[%d].commaAsDecimal	0x0308	"%d"	FCF[%d]	
FCF[%d].datumOnLeader	0x0308	String representing enumeration such that: "0"=none, "1"=solid, "2"=filled	FCF[%d]	
FCF[%d].direction	0x0308	"%.16g %.16g %.16g"	FCF[%d]	
FCF[%d].fcfTextUnderline	0x0308	String representing enumeration such that: "0"=none, "1"=top, "2"=all	FCF[%d]	
FCF[%d].flag	0x0308	"%d"	FCF[%d]	
FCF[%d].font	0x0308	"%s"	FCF[%d]	
FCF[%d].group	0x0308	"%s"	FCF[%d]	
FCF[%d].inFront	0x0308	"%d"	FCF[%d]	
FCF[%d].italic	0x0308	"%d"	FCF[%d]	
FCF[%d].italicAngle	0x0308	"%.16g"	FCF[%d]	
FCF[%d].justification	0x0308	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FCF[%d]	
FCF[%d].language	0x0308	"%s"	FCF[%d]	
FCF[%d].leadingZero	0x0308	"%d"	FCF[%d]	
FCF[%d].lineFactor	0x0308	"%.16g"	FCF[%d]	
FCF[%d].maxBonus	0x0308	"%d"	FCF[%d]	
FCF[%d].maxBonusPrecision	0x0308	"%d"	FCF[%d]	
FCF[%d].maxBonusValue	0x0308	"%.16g"	FCF[%d]	
FCF[%d].nameComponents.displayName	0x0308	"%s"	FCF[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].nameComponents.name	0x0308	"%s"	FCF[%d]	
FCF[%d].originAnchor	0x0308	String representing enumeration such that: "0"=topleft, "1"=topcentre, "2"=topright, "3"=middleleft, "4"=middlecentre, "5"=middleright, "6"=bottomleft, "7"=bottomcentre, "8"=bottomright	FCF[%d]	
FCF[%d].outlineColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FCF[%d].Outline
FCF[%d].outlineStyle	0x0308	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FCF[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FCF[%d].Outline
FCF[%d].outlineType	0x0308	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FCF[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FCF[%d].Outline
FCF[%d].outlineWidth.measurementType	0x0308	"%.16g"	FCF[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				suggest sticking with this form of key, but also suggest support reading FCF[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite FCF[%d].Outline
FCF[%d].outlineWidth.name	0x0308	"%s"	FCF[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FCF[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FCF[%d].Outline
FCF[%d].panZoom	0x0308	"%d"	FCF[%d]	
FCF[%d].parallelToScreenAnchor	0x0308	"%.16g"	FCF[%d]	
FCF[%d].parallelToScreenRotationPoint	0x0308	"%.16g %.16g %.16g"	FCF[%d]	
FCF[%d].parallelToScreenScale	0x0308	"%.16g"	FCF[%d]	
FCF[%d].profileType	0x0308	String representing enumeration such that: "0"=bilateral, "1"=unilateralinside, "2"=unilateraloutside, "3"=bilateralunequal	FCF[%d]	
FCF[%d].profileValue	0x0308	"%.16g"	FCF[%d]	
FCF[%d].profileValue2	0x0308	"%.16g"	FCF[%d]	
FCF[%d].projectedBelow	0x0308	"%d"	FCF[%d]	
FCF[%d].projectedPrecision	0x0308	"%d"	FCF[%d]	
FCF[%d].spaceFactor	0x0308	"%.16g"	FCF[%d]	
FCF[%d].stackFactor	0x0308	"%.16g"	FCF[%d]	
FCF[%d].standard	0x0308	String representing enumeration such that: "0"=asme_y145m_1994, "1"=jis, "2"=iso, "3"=bs, "4"=ansi_y145m_1982,	FCF[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=asme_y1441m_2003, "6"=din, "7"=gm_addendum_1994, "8"=asme_y145_2009, "9"=gb		
FCF[%d].strikethrough	0x0308	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FCF[%d]	
FCF[%d].subscript	0x0308	String representing enumeration such that: "0"=sub, "1"=super	FCF[%d]	
FCF[%d].symbolColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d]	
FCF[%d].textAspect	0x0308	"%.16g"	FCF[%d]	
FCF[%d].textColour	0x0308	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FCF[%d]	
FCF[%d].textDirection	0x0308	"%.16g %.16g %.16g"	FCF[%d]	
FCF[%d].textHeight	0x0308	"%.16g"	FCF[%d]	
FCF[%d].textLineWidth.measur ementType	0x0308	"%.16g"	FCF[%d]	measurementType must be replaced with meterWidth or pixelWidth
FCF[%d].textLineWidth.name	0x0308	"%s"	FCF[%d]	
FCF[%d].textOrigin	0x0308	"%.16g %.16g %.16g"	FCF[%d]	
FCF[%d].textRotationPoint	0x0308	"%.16g %.16g %.16g"	FCF[%d]	
FCF[%d].textThickness	0x0308	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FCF[%d]	
FCF[%d].trailingZero	0x0308	"%d"	FCF[%d]	
FCF[%d].underline	0x0308	String representing enumeration such that: "0"=over, "1"=under	FCF[%d]	
FCF[%d].unit	0x0308	"%s"	FCF[%d]	
FCF[%d].uriRefs[%d]	0x0308	"%s"	FCF[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FCF[%d].usage	0x0308	"%s"	FCF[%d]	
FCF[%d].valid	0x0308	String representing enumeration such that: "0"=true, "1"=false, "2"=unknown	FCF[%d]	

Q.6.71 Face[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Face[%d]	0x0246	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path. This property formating is used to semantically tie a singlar semantic aspect with an entity.		

Q.6.72 FeatureIdentification

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FeatureIdentification	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		

Q.6.73 FitDesignationText[%d].Text.Item[%d].<property>

Property Key	Supported PML_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d]	0x0307 0x0313	NULL		FitDesignationText[%d] index expected to range from 0-3 inclusive. Each instance of this is expected to have a different position such that FitDesignationText[x].position != FitDesignationText[y].position for any combination of x and y
FitDesignationText[%d].Text	0x0307 0x0313	NULL	FitDesignationText[%d]	
FitDesignationText[%d].Text.Item[%d]	0x0307 0x0313	NULL	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.Item[%d].Outline	0x0307 0x0313	NULL	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].Outline.Bottom	0x0307 0x0313	NULL	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].Outline.Bottom.colour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Item[%d].Outline.Bottom	
FitDesignationText[%d].Text.Item[%d].Outline.Bottom.style	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FitDesignationText[%d].Text.Item[%d].Outline.Bottom	
FitDesignationText[%d].Text.Item[%d].Outline.Bottom.thickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Item[%d].Outline.Bottom	
FitDesignationText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FitDesignationText[%d].Text.Item[%d].Outline.Bottom.width.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Item[%d].Outline.Bottom	
FitDesignationText[%d].Text.Item[%d].Outline.Left	0x0307 0x0313	NULL	FitDesignationText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d].Text.Item[%d].Outline.Left.colour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Item[%d].Outline.Left	
FitDesignationText[%d].Text.Item[%d].Outline.Left.style	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FitDesignationText[%d].Text.Item[%d].Outline.Left	
FitDesignationText[%d].Text.Item[%d].Outline.Left.thickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Item[%d].Outline.Left	
FitDesignationText[%d].Text.Item[%d].Outline.Left.width.measurementType	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FitDesignationText[%d].Text.Item[%d].Outline.Left.width.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Item[%d].Outline.Left	
FitDesignationText[%d].Text.Item[%d].Outline.Right	0x0307 0x0313	NULL	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].Outline.Right.colour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Item[%d].Outline.Right	
FitDesignationText[%d].Text.Item[%d].Outline.Right.style	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FitDesignationText[%d].Text.Item[%d].Outline.Right	
FitDesignationText[%d].Text.Item[%d].Outline.Right.thickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Item[%d].Outline.Right	
FitDesignationText[%d].Text.Item[%d].Outline.Right.width.measurementType	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FitDesignationText[%d].Text.Item[%d].Outline.Right.width.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d].Text.Item[%d].Outline.Top	0x0307 0x0313	NULL	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].Outline.Top.colour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Item[%d].Outline.Top	
FitDesignationText[%d].Text.Item[%d].Outline.Top.style	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FitDesignationText[%d].Text.Item[%d].Outline.Top	
FitDesignationText[%d].Text.Item[%d].Outline.Top.thickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Item[%d].Outline.Top	
FitDesignationText[%d].Text.Item[%d].Outline.Top.width.measurementType	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FitDesignationText[%d].Text.Item[%d].Outline.Top.width.name	0x0307 0x0313	%"s"	FitDesignationText[%d].Text.Item[%d].Outline.Top	
FitDesignationText[%d].Text.Item[%d].Outline.direction	0x0307 0x0313	%.16g %.16g %.16g"	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].Outline.doubleOffset	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].Outline.fillColour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].Outline.filled	0x0307 0x0313	%"d"	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].Outline.origin	0x0307 0x0313	%.16g %.16g %.16g"	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].Outline.outlineHeight	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].Outline.outlineWidth	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d].Text.Item[%d].Outline.thickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].Outline.visible	0x0307 0x0313	"%d"	FitDesignationText[%d].Text.Item[%d].Outline	
FitDesignationText[%d].Text.Item[%d].bold	0x0307 0x0313	"%d"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].font	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].format	0x0307 0x0313	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].italic	0x0307 0x0313	"%d"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].italicAngle	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].justification	0x0307 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].language	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].lineFactor	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert,	FitDesignationText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
FitDesignationText[%d].Text.Item[%d].lineWeldSymbol	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=jis seam,d] "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotplatelectrode,	FitDesignationText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
FitDesignationText[%d].Text.Item[%d].outlineColour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FitDesignationText[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite FitDesignationText[%d].Text.Item[%d].Outline
FitDesignationText[%d].Text.Item[%d].outlineStyle	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FitDesignationText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FitDesignationText[%d].Text.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite FitDesignationText[%d].Text.Item[%d].Outline
FitDesignationText[%d].Text.Item[%d].outlineType	0x0307 0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	FitDesignationText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FitDesignationText[%d].Text.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite FitDesignationText[%d].Text.Item[%d].Outline
FitDesignationText[%d].Text.Item[%d].outlineWidth.measurementType	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
e			d]	pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FitDesignationText[%d].Text.Item[%d].Outline.width.measurement Type which would match the more modern Outline syntax and require prerequisite FitDesignationText[%d].Text.Item[%d].Outline
FitDesignationText[%d].Text.Item[%d].outlineWidth.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FitDesignationText[%d].Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite FitDesignationText[%d].Text.Item[%d].Outline
FitDesignationText[%d].Text.Item[%d].spaceFactor	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].strikethrough	0x0307 0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].string	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].subscript	0x0307 0x0313	String representing enumeration such that: "0"=sub, "1"=super	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].symbol	0x0307 0x0313	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis,	FitDesignationText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
FitDesignationText[%d].Text.Item[%d].textAspect	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].textColour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].textHeight	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].textLineWidth.measurementType	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d].Text.Item[%d].textLineWidth.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].textThickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Item[%d]	
FitDesignationText[%d].Text.Item[%d].underline	0x0307 0x0313	String representing enumeration such that: "0"=over, "1"=under	FitDesignationText[%d].Text.Item[%d]	

Q.6.74 FitDesignationText[%d].Text.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d].Text.Outline	0x0307 0x0313	NULL	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.Outline.Bottom	0x0307 0x0313	NULL	FitDesignationText[%d].Text.Outline	
FitDesignationText[%d].Text.Outline.Bottom.colour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Outline.Bottom	
FitDesignationText[%d].Text.Outline.Bottom.style	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FitDesignationText[%d].Text.Outline.Bottom	
FitDesignationText[%d].Text.Outline.Bottom.thickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Outline.Bottom	
FitDesignationText[%d].Text.Outline.Bottom.width.measurementType	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
FitDesignationText[%d].Text.Outline.Bottom.width.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Outline.Bottom	
FitDesignationText[%d].Text.Outline.Left	0x0307 0x0313	NULL	FitDesignationText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d].Text.Outline.Left.colour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Outline.Left	
FitDesignationText[%d].Text.Outline.Left.style	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FitDesignationText[%d].Text.Outline.Left	
FitDesignationText[%d].Text.Outline.Left.thickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Outline.Left	
FitDesignationText[%d].Text.Outline.Left.width.measurementType	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
FitDesignationText[%d].Text.Outline.Left.width.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Outline.Left	
FitDesignationText[%d].Text.Outline.Right	0x0307 0x0313	NULL	FitDesignationText[%d].Text.Outline	
FitDesignationText[%d].Text.Outline.Right.colour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Outline.Right	
FitDesignationText[%d].Text.Outline.Right.style	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FitDesignationText[%d].Text.Outline.Right	
FitDesignationText[%d].Text.Outline.Right.thickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Outline.Right	
FitDesignationText[%d].Text.Outline.Right.width.measurementType	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
FitDesignationText[%d].Text.Outline.Right.width.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d].Text.Outline.Top	0x0307 0x0313	NULL	FitDesignationText[%d].Text.Outline	
FitDesignationText[%d].Text.Outline.Top.colour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Outline.Top	
FitDesignationText[%d].Text.Outline.Top.style	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FitDesignationText[%d].Text.Outline.Top	
FitDesignationText[%d].Text.Outline.Top.thickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Outline.Top	
FitDesignationText[%d].Text.Outline.Top.width.measurementType	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
FitDesignationText[%d].Text.Outline.Top.width.name	0x0307 0x0313	%"s"	FitDesignationText[%d].Text.Outline.Top	
FitDesignationText[%d].Text.Outline.direction	0x0307 0x0313	%.16g %.16g %.16g"	FitDesignationText[%d].Text.Outline	
FitDesignationText[%d].Text.Outline.doubleOffset	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Outline	
FitDesignationText[%d].Text.Outline.fillColour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text.Outline	
FitDesignationText[%d].Text.Outline.filled	0x0307 0x0313	%"d"	FitDesignationText[%d].Text.Outline	
FitDesignationText[%d].Text.Outline.origin	0x0307 0x0313	%.16g %.16g %.16g"	FitDesignationText[%d].Text.Outline	
FitDesignationText[%d].Text.Outline.outlineHeight	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Outline	
FitDesignationText[%d].Text.Outline.outlineWidth	0x0307 0x0313	%.16g"	FitDesignationText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d].Text.Outline.thickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text.Outline	
FitDesignationText[%d].Text.Outline.visible	0x0307 0x0313	"%d"	FitDesignationText[%d].Text.Outline	

Q.6.75 FitDesignationText[%d].Text.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d].Text.bold	0x0307 0x0313	"%d"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.font	0x0307 0x0313	"%s"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.italic	0x0307 0x0313	"%d"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.italicAngle FitDesignationText[%d].Text.	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.justification	0x0307 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.language	0x0307 0x0313	"%s"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.lineFactor	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.maxExtend	0x0307 0x0313	"%d"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.outlineColour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FitDesignationText[%d].Text.Outline.colour which would match the more modern Outline syntax and require prerequisite FitDesignationText[%d].Text.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FitDesignationText[%d].Text.outlineStyle	0x0307 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	FitDesignationText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FitDesignationText[%d].Text.OutlineStyle which would match the more modern Outline syntax and require prerequisite FitDesignationText[%d].Text.Outline
FitDesignationText[%d].Text.outlineType	0x0307 0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	FitDesignationText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FitDesignationText[%d].Text.OutlineType which would match the more modern Outline syntax and require prerequisite FitDesignationText[%d].Text.Outline
FitDesignationText[%d].Text.outlineWidth.measurementType	0x0307 0x0313	"%.16g"	FitDesignationText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FitDesignationText[%d].Text.OutlineWidth.measurementType which would match the more modern Outline syntax and require prerequisite FitDesignationText[%d].Text.Outline
FitDesignationText[%d].Text.outlineWidth.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading FitDesignationText[%d].Text.OutlineWidth.name which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				FitDesignationText[%d].Text.Outline
FitDesignationText[%d].Text.spaceFactor	0x0307 0x0313	("%.16g"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.strikethrough	0x0307 0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.subscript	0x0307 0x0313	String representing enumeration such that: "0"=sub, "1"=super	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.textAspect	0x0307 0x0313	("%.16g"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.textColour	0x0307 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.textHeight	0x0307 0x0313	("%.16g"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.textLineWidth.measurementType	0x0307 0x0313	("%.16g"	FitDesignationText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
FitDesignationText[%d].Text.textLineWidth.name	0x0307 0x0313	"%s"	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.textOrientation	0x0307 0x0313	String representing enumeration such that: "0"=horizontal, "1"=vertical	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.textThickness	0x0307 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	FitDesignationText[%d].Text	
FitDesignationText[%d].Text.underline	0x0307 0x0313	String representing enumeration such that: "0"=over, "1"=under	FitDesignationText[%d].Text	
FitDesignationText[%d].position	0x0307 0x0313	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	FitDesignationText[%d]	

Q.6.76 FreeState

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
FreeState	0x0082 0x0307 0X030D 0X030F 0x0313	NULL		

Q.7 PMI Properties “G”

Q.7.1 GeneralAttribute[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
GeneralAttribute[%d]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0104 0x0110 0x0111 0x0112 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030A 0x030B 0X030D 0X030F 0x0311 0x0313	%d;%d;%s;%d;%s;%d;%d;%d;%d; %s;%d;%s; Such that the formatted value encodes a general attribute by: 1;<lengthofname>;<name>;<length of value>;<value>;<DataType>;<Mea sureEnum>;<editable?>;<lengthof unit>;<unit>;<lengthofcategory>;<c ategory>; Where name, value, unit and category are strings editable indicates if the attribute is editable DataType is on of the following values: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime and MeasureEnum is on of the following values: "- 1"=none, "0"=length, "1"=area, "2"=volume, "3"=mass, "4"=massdensity, "5"=fatiguestrengthcoefficient, "6"=time, "7"=angle, "8"=velocity, "9"=acceleration, "10"=force, "11"=forceperunitlength, "12"=pressure, "13"=moment, "14"=stress, "15"=strain, "16"=strainenergy, "17"=strainenergydensity, "18"=temperature, "19"=heatflux, "20"=convectioncoefficient, "21"=thermalconductivity, "22"=thermalexpansioncoefficient,		It is expected that you will also have an additional property: key = <name> and value = <value> which is not hidden to go with this property which should be hidden.

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"23"=specificheat, "24"=angularvelocity, "25"=angularacceleration, "26"=fatiguelife, "27"=heatflowrate, "28"=thermalenergy, "29"=massmomentofinertia, "30"=dynamicviscosity, "31"=heatgeneration, "32"=thermalconductance, "33"=conductanceperunitlength, "34"=thermalresistance, "35"=massflowrate, "36"=volumeflowrate, "37"=temperaturedifference, "38"=frequency, "39"=coefficientperunitlength, "40"=momentofinertiaarea, "41"=viscousdamping, "42"=energy, "43"=power, "44"=momentum, "45"=temperaturegradient, "46"=energyperunitmass, "47"=dissipationrateofenergyperunitmass, "48"=massflux, "49"=massperunitlength, "50"=massperunitarea, "51"=electriccurrent, "52"=electricalresistance, "53"=electricalresistivity, "54"=electricalconductance, "55"=voltage, "56"=voltagepertemperature, "57"=diffusivity, "58"=latentheatpermass, "59"=thermalenergyperarea, "60"=thermalpidgain, "61"=thermalpidintegraltermconstant, "62"=thermalpidderivativetermconstant, "63"=headlosscoefficient, "64"=tsaiwucoefficient, "65"=masslength, "66"=pervolume, "67"=warpingconstant, "68"=stresscompliance, "69"=lengthperunitpressure, "70"=pressureperunitlength, "71"=pressureperunitvelocity,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"72"=momentperangle, "73"=coefficientperunittime, "74"=angularmomentumperunitang le, "75"=thermalcapacitance, "76"=inductance, "77"=voltageperangularvelocity, "78"=perarea, "79"=temperaturechangerate, "80"=jerk, "81"=angularjerk, "82"=magneticfieldstrength, "83"=magneticfluxdensity		

Q.7.2 GeneralAttribute[%d].ListValue[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
GeneralAttribute[%d].ListValue[%d]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0104 0x0110 0x0111 0x0112 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030A 0x030B 0X030D 0X030F 0x0311 0x0313	"%s"	GeneralAttribute[%d]	

Q.7.3 GeneralText.Item[%d].<properties>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
GeneralText	0x0230	NULL		
GeneralText.Item[%d]	0x0230	NULL	GeneralText	
GeneralText.Item[%d].Outline	0x0230	NULL	GeneralText.Item[%d]	
GeneralText.Item[%d].Outline.Bottom	0x0230	NULL	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.Bottom.colour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	GeneralText.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
GeneralText.Item[%d].Outline.Bottom.style	0x0230	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	GeneralText.Item[%d].Outline.Bottom	
GeneralText.Item[%d].Outline.Bottom.thickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Item[%d].Outline.Bottom	
GeneralText.Item[%d].Outline.Bottom.width.measurementType	0x0230	("%.16g"	GeneralText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
GeneralText.Item[%d].Outline.Bottom.width.name	0x0230	("%s"	GeneralText.Item[%d].Outline.Bottom	
GeneralText.Item[%d].Outline.Left	0x0230	NULL	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.Left.colour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	GeneralText.Item[%d].Outline.Left	
GeneralText.Item[%d].Outline.Left.style	0x0230	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	GeneralText.Item[%d].Outline.Left	
GeneralText.Item[%d].Outline.Left.thickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Item[%d].Outline.Left	
GeneralText.Item[%d].Outline.Left.width.measurementType	0x0230	("%.16g"	GeneralText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
GeneralText.Item[%d].Outline.Left.width.name	0x0230	("%s"	GeneralText.Item[%d].Outline.Left	
GeneralText.Item[%d].Outline.Right	0x0230	NULL	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.Right	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red	GeneralText.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
t.colour		for the colour are encoded in the string		
GeneralText.Item[%d].Outline.Right.style	0x0230	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	GeneralText.Item[%d].Outline.Right	
GeneralText.Item[%d].Outline.Right.thickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Item[%d].Outline.Right	
GeneralText.Item[%d].Outline.Right.width.measurementType	0x0230	"%.16g"	GeneralText.Item[%d].Outline.Right	<i>measurementType</i> must be replaced with meterWidth or pixelWidth
GeneralText.Item[%d].Outline.Right.width.name	0x0230	"%s"	GeneralText.Item[%d].Outline.Right	
GeneralText.Item[%d].Outline.Top	0x0230	NULL	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.Top.colour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	GeneralText.Item[%d].Outline.Top	
GeneralText.Item[%d].Outline.Top.style	0x0230	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	GeneralText.Item[%d].Outline.Top	
GeneralText.Item[%d].Outline.Top.thickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Item[%d].Outline.Top	
GeneralText.Item[%d].Outline.Top.width.measurementType	0x0230	"%.16g"	GeneralText.Item[%d].Outline.Top	<i>measurementType</i> must be replaced with meterWidth or pixelWidth
GeneralText.Item[%d].Outline.Top.width.name	0x0230	"%s"	GeneralText.Item[%d].Outline.Top	
GeneralText.Item[%d].Outline.direction	0x0230	"%.16g %.16g %.16g"	GeneralText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
GeneralText.Item[%d].Outline.doubleOffset	0x0230	"%.16g"	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.fillColour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.filled	0x0230	"%d"	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.origin	0x0230	"%.16g %.16g %.16g"	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.outlineHeight	0x0230	"%.16g"	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.outlineWidth	0x0230	"%.16g"	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.thickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].Outline.visible	0x0230	"%d"	GeneralText.Item[%d].Outline	
GeneralText.Item[%d].bold	0x0230	"%d"	GeneralText.Item[%d]	
GeneralText.Item[%d].font	0x0230	"%s"	GeneralText.Item[%d]	
GeneralText.Item[%d].format	0x0230	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	GeneralText.Item[%d]	
GeneralText.Item[%d].italic	0x0230	"%d"	GeneralText.Item[%d]	
GeneralText.Item[%d].italicAngle	0x0230	"%.16g"	GeneralText.Item[%d]	
GeneralText.Item[%d].justification	0x0230	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	GeneralText.Item[%d]	
GeneralText.Item[%d].language	0x0230	"%s"	GeneralText.Item[%d]	
GeneralText.Item[%d].lineFactor	0x0230	"%.16g"	GeneralText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
GeneralText.Item[%d].lineWeldSupplementalSymbol	0x0230	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	GeneralText.Item[%d]	
GeneralText.Item[%d].lineWeldSymbol	0x0230	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip,	GeneralText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=melthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
GeneralText.Item[%d].outlineColour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	GeneralText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading <i>GeneralText.Item[%d].Outline.colour</i> which would match the more modern Outline syntax and require prerequisite <i>GeneralText.Item[%d].Outline</i>
GeneralText.Item[%d].outlineStyle	0x0230	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	GeneralText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading <i>GeneralText.Item[%d].Outline.style</i> which would match the more modern Outline syntax and require prerequisite <i>GeneralText.Item[%d].Outline</i>
GeneralText.Item[%d].outlineType	0x0230	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota,	GeneralText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading <i>GeneralText.Item[%d].Outline.type</i> which would match the more modern Outline syntax and require prerequisite <i>GeneralText.Item[%d].Outline</i>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle		
GeneralText.Item[%d].outlineWidth .measurementType	0x0230	"%.16g"	GeneralText.Item[%d]	<i>measurementType</i> must be replaced with <i>meterWidth</i> or <i>pixelWidth</i> For compatibility reasons we suggest sticking with this form of key, but also suggest support reading <i>GeneralText.Item[%d].Outline.width.measurementType</i> which would match the more modern Outline syntax and require prerequisite <i>GeneralText.Item[%d].Outline</i>
GeneralText.Item[%d].outlineWidth .name	0x0230	"%s"	GeneralText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading <i>GeneralText.Item[%d].Outline.width.name</i> which would match the more modern Outline syntax and require prerequisite <i>GeneralText.Item[%d].Outline</i>
GeneralText.Item[%d].spaceFactor	0x0230	"%.16g"	GeneralText.Item[%d]	
GeneralText.Item[%d].strikethrough	0x0230	String representing enumeration such that: "0"=none, "1"=single, "2"=double	GeneralText.Item[%d]	
GeneralText.Item[%d].string	0x0230	"%s"	GeneralText.Item[%d]	
GeneralText.Item[%d].subscript	0x0230	String representing enumeration such that: "0"=sub, "1"=super	GeneralText.Item[%d]	
GeneralText.Item[%d].symbol	0x0230	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees,	GeneralText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=phi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
GeneralText.Item[%d].textAspect	0x0230	"%.16g"	GeneralText.Item[%d]	
GeneralText.Item[%d].textColour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	GeneralText.Item[%d]	
GeneralText.Item[%d].textHeight	0x0230	"%.16g"	GeneralText.Item[%d]	
GeneralText.Item[%d].textLineWidth. h.measurementType	0x0230	"%.16g"	GeneralText.Item[%d]	<i>measurementType</i> must be replaced with <i>meterWidth</i> or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				pixelWidth
GeneralText.Item[%d].textLineWidth.name	0x0230	"%s"	GeneralText.Item[%d]	
GeneralText.Item[%d].textThickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Item[%d]	
GeneralText.Item[%d].underline	0x0230	String representing enumeration such that: "0"=over, "1"=under	GeneralText.Item[%d]	

Q.7.4 GeneralText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
GeneralText.Outline	0x0230	NULL	GeneralText	
GeneralText.Outline.Bottom	0x0230	NULL	GeneralText.Outline	
GeneralText.Outline.Bottom.colour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	GeneralText.Outline.Bottom	
GeneralText.Outline.Bottom.style	0x0230	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	GeneralText.Outline.Bottom	
GeneralText.Outline.Bottom.thickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Outline.Bottom	
GeneralText.Outline.Bottom.width. <i>measurementType</i>	0x0230	"%.16g"	GeneralText.Outline.Bottom	<i>measurementType</i> must be replaced with meterWidth or pixelWidth
GeneralText.Outline.Bottom.width.name	0x0230	"%s"	GeneralText.Outline.Bottom	
GeneralText.Outline.Left	0x0230	NULL	GeneralText.Outline	
GeneralText.Outline.Left.colour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	GeneralText.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
GeneralText.Outline.Left.style	0x0230	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	GeneralText.Outline.Left	
GeneralText.Outline.Left.thickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Outline.Left	
GeneralText.Outline.Left.width.measurementType	0x0230	"%.16g"	GeneralText.Outline.Left	<i>measurementType</i> must be replaced with meterWidth or pixelWidth
GeneralText.Outline.Left.width.name	0x0230	"%s"	GeneralText.Outline.Left	
GeneralText.Outline.Right	0x0230	NULL	GeneralText.Outline	
GeneralText.Outline.Right.colour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	GeneralText.Outline.Right	
GeneralText.Outline.Right.style	0x0230	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	GeneralText.Outline.Right	
GeneralText.Outline.Right.thickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Outline.Right	
GeneralText.Outline.Right.width.measurementType	0x0230	"%.16g"	GeneralText.Outline.Right	<i>measurementType</i> must be replaced with meterWidth or pixelWidth
GeneralText.Outline.Right.width.name	0x0230	"%s"	GeneralText.Outline.Right	
GeneralText.Outline.Top	0x0230	NULL	GeneralText.Outline	
GeneralText.Outline.Top.colour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	GeneralText.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
GeneralText.Outline.Top.style	0x0230	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	GeneralText.Outline.Top	
GeneralText.Outline.Top.thickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Outline.Top	
GeneralText.Outline.Top.width.measurementType	0x0230	"%.16g"	GeneralText.Outline.Top	<i>measurementType</i> must be replaced with <i>meterWidth</i> or <i>pixelWidth</i>
GeneralText.Outline.Top.width.name	0x0230	"%s"	GeneralText.Outline.Top	
GeneralText.Outline.direction	0x0230	"%.16g %.16g %.16g"	GeneralText.Outline	
GeneralText.Outline.doubleOffset	0x0230	"%.16g"	GeneralText.Outline	
GeneralText.Outline.fillColour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	GeneralText.Outline	
GeneralText.Outline.filled	0x0230	"%d"	GeneralText.Outline	
GeneralText.Outline.origin	0x0230	"%.16g %.16g %.16g"	GeneralText.Outline	
GeneralText.Outline.outlineHeight	0x0230	"%.16g"	GeneralText.Outline	
GeneralText.Outline.outlineWidth	0x0230	"%.16g"	GeneralText.Outline	
GeneralText.Outline.thickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	GeneralText.Outline	
GeneralText.Outline.visible	0x0230	"%d"	GeneralText.Outline	

Q.7.5 GeneralText.<property>

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
--------------	---------------------------	--------------	-----------------	----------------	-----------------

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
GeneralText.bold	0x0230	"%d"		GeneralText	
GeneralText.font	0x0230	"%s"		GeneralText	
GeneralText.italic	0x0230	"%d"		GeneralText	
GeneralText.italicAngle	0x0230	"%.16g"		GeneralText	
GeneralText.justification	0x0230	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=toleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		GeneralText	
GeneralText.language	0x0230	"%s"		GeneralText	
GeneralText.lineFactor	0x0230	"%.16g"		GeneralText	
GeneralText.maxExtend	0x0230	"%d"		GeneralText	
GeneralText.name	0x0230	"%s"		GeneralText	
GeneralText.outlineColour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		GeneralText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading <i>GeneralText.Outline.colour</i> which would match the more modern Outline syntax and require prerequisite <i>GeneralText.Outline</i>
GeneralText.outlineStyle	0x0230	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		GeneralText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading <i>GeneralText.Outline.style</i> which would match the more modern Outline syntax and require prerequisite <i>GeneralText.Outline</i>
GeneralText.outlineType	0x0230	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota,		GeneralText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading <i>GeneralText.Outline.type</i> which would match the more modern Outline syntax and require prerequisite <i>GeneralText.Outline</i>

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
		"18"=symmetricalpart, "19"=symmetricalset, "20"=scorerectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle			
GeneralText.outlineWidth.measurementType	0x0230	"%.16g"		GeneralText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading <i>GeneralText.Outline.width.measurementType</i> which would match the more modern Outline syntax and require prerequisite <i>GeneralText.Outline</i>
GeneralText.outlineWidth.name	0x0230	"%s"		GeneralText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading <i>GeneralText.Outline.width.name</i> which would match the more modern Outline syntax and require prerequisite <i>GeneralText.Outline</i>
GeneralText.spaceFactor	0x0230	"%.16g"		GeneralText	
GeneralText.strikethrough	0x0230	String representing enumeration such that: "0"=none, "1"=single, "2"=double		GeneralText	
GeneralText.subscript	0x0230	String representing enumeration such that: "0"=sub, "1"=super		GeneralText	
GeneralText.textAspect	0x0230	"%.16g"		GeneralText	
GeneralText.textColour	0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		GeneralText	
GeneralText.textHeight	0x0230	"%.16g"		GeneralText	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
GeneralText.textLineWidth.measurementType	0x0230	"%.16g"		GeneralText	measurementType must be replaced with meterWidth or pixelWidth
GeneralText.textLineWidth.name	0x0230	"%s"		GeneralText	
GeneralText.textOrientation	0x0230	String representing enumeration such that: "0"=horizontal, "1"=vertical		GeneralText	
GeneralText.textThickness	0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		GeneralText	
GeneralText.underline	0x0230	String representing enumeration such that: "0"=over, "1"=under		GeneralText	

Q.7.6 GeneralToleranceISO.<property>

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
GeneralToleranceISO	0x0082 0X030D 0X030F	NULL			
GeneralToleranceISO.tolerance Class	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=fine, "1"=medium, "2"=coarse, "3"=verycoarse,		GeneralToleranceISO	

Q.7.7 GrooveGapTextFormat[%d].Item[%d].<properties>

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
GrooveGapTextFormat[%d]	0x0008	NULL			
GrooveGapTextFormat[%d].Item[%d]	0x0008	NULL		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].Item[%d].Outline	0x0008	NULL		GrooveGapTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
GrooveGapTextFormat[%d].Item[%d].Outline.Bottom	0x0008	NULL		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		GrooveGapTextFormat[%d].Item[%d].Outline.Bottom	
GrooveGapTextFormat[%d].Item[%d].Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		GrooveGapTextFormat[%d].Item[%d].Outline.Bottom	
GrooveGapTextFormat[%d].Item[%d].Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		GrooveGapTextFormat[%d].Item[%d].Outline.Bottom	
GrooveGapTextFormat[%d].Item[%d].Outline.Bottom.width.measurementType	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
GrooveGapTextFormat[%d].Item[%d].Outline.Bottom.width.name	0x0008	"%s"		GrooveGapTextFormat[%d].Item[%d].Outline.Bottom	
GrooveGapTextFormat[%d].Item[%d].Outline.Left	0x0008	NULL		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		GrooveGapTextFormat[%d].Item[%d].Outline.Left	
GrooveGapTextFormat[%d].Item[%d].Outline.Left.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		GrooveGapTextFormat[%d].Item[%d].Outline.Left	
GrooveGapTextFormat[%d].Item[%d].Outline.Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		GrooveGapTextFormat[%d].Item[%d].Outline.Left	
GrooveGapTextFormat[%d].Item[%d].Outline.Left.width.measurementType	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
GrooveGapTextFormat[%d].Item[%d].Outline.Left.width.name	0x0008	"%s"		GrooveGapTextFormat[%d].Item[%d].Outline.Left	
GrooveGapTextFormat[%d].Item[%d].Outline.Right	0x0008	NULL		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		GrooveGapTextFormat[%d].Item[%d].Outline.Right	
GrooveGapTextFormat[%d].Item[%d].Outline.Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		GrooveGapTextFormat[%d].Item[%d].Outline.Right	
GrooveGapTextFormat[%d].Item[%d].Outline.Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		GrooveGapTextFormat[%d].Item[%d].Outline.Right	
GrooveGapTextFormat[%d].Item[%d].Outline.Right.width.measurementType	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
GrooveGapTextFormat[%d].Item[%d].Outline.Right.width.name	0x0008	"%s"		GrooveGapTextFormat[%d].Item[%d].Outline.Right	
GrooveGapTextFormat[%d].Item[%d].Outline.Top	0x0008	NULL		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		GrooveGapTextFormat[%d].Item[%d].Outline.Top	
GrooveGapTextFormat[%d].Item[%d].Outline.Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		GrooveGapTextFormat[%d].Item[%d].Outline.Top	
GrooveGapTextFormat[%d].Item[%d].Outline.Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		GrooveGapTextFormat[%d].Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
GrooveGapTextFormat[%d].Item[%d].Outline.Top.width.measurementType	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
GrooveGapTextFormat[%d].Item[%d].Outline.Top.width.name	0x0008	"%s"		GrooveGapTextFormat[%d].Item[%d].Outline.Top	
GrooveGapTextFormat[%d].Item[%d].Outline.direction	0x0008	"%.16g %.16g %.16g"		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.doubleOffset	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.filled	0x0008	"%d"		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.origin	0x0008	"%.16g %.16g %.16g"		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.outlineHeight	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.outlineWidth	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].Outline.visible	0x0008	"%d"		GrooveGapTextFormat[%d].Item[%d].Outline	
GrooveGapTextFormat[%d].Item[%d].bold	0x0008	"%d"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].font	0x0008	"%s"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].format	0x0008	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list,		GrooveGapTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
		"10"=datetime, "11"=none			
GrooveGapTextFormat[%d].Item[%d].italic	0x0008	"%d"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].italicAngle	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].language	0x0008	"%s"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].lineFactor	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].lineWeldSupplementalSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].lineWeldSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove,		GrooveGapTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
		"8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=melthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge			
GrooveGapTextFormat[%d].Item[%d].outlineColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		GrooveGapTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading GrooveGapTextFormat[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite GrooveGapTextFormat[%d].Item[

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
					%d].Outline
GrooveGapTextFormat[%d].Item[%d].outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		GrooveGapTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading GrooveGapTextFormat[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite GrooveGapTextFormat[%d].Item[%d].Outline
GrooveGapTextFormat[%d].Item[%d].outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		GrooveGapTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading GrooveGapTextFormat[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite GrooveGapTextFormat[%d].Item[%d].Outline
GrooveGapTextFormat[%d].Item[%d].outlineWidth.measurementType	0x0008	%.16g"		GrooveGapTextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading GrooveGapTextFormat[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite GrooveGapTextFormat[%d].Item[%d].Outline

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
GrooveGapTextFormat[%d].Item[%d].outlineWidth.name	0x0008	"%s"		GrooveGapTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading GrooveGapTextFormat[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite GrooveGapTextFormat[%d].Item[%d].Outline
GrooveGapTextFormat[%d].Item[%d].spaceFactor	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].strikethrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].string	0x0008	"%s"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].symbol	0x0008	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro,		GrooveGapTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
		"34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation			
GrooveGapTextFormat[%d].Item[%d].textAspect	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].textHeight	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].textLineWidth.measurementType	0x0008	"%.16g"		GrooveGapTextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
GrooveGapTextFormat[%d].Item[%d].textLineWidth.name	0x0008	"%s"		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].textThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin		GrooveGapTextFormat[%d].Item[%d]	
GrooveGapTextFormat[%d].Item[%d].underline	0x0008	String representing enumeration such that: "0"=over, "1"=under		GrooveGapTextFormat[%d].Item[%d]	

Q.7.8 GrooveGapTextFormat[%d].<property>

Property Key	Supported PMI_Type values	Value Values	Format/Expected	Perquisite Key	Additional Note
GrooveGapTextFormat[%d].bold	0x0008	"%d"		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].font	0x0008	"%s"		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].italic	0x0008	"%d"		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].italicAngle	0x0008	"%.16g"		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].language	0x0008	"%s"		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].lineFactor	0x0008	"%.16g"		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].spaceFactor	0x0008	"%.16g"		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].strikethrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].textAspect	0x0008	"%.16g"		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].textHeight	0x0008	"%.16g"		GrooveGapTextFormat[%d]	
GrooveGapTextFormat[%d].textLineWidth.measurementType	0x0008	"%.16g"		GrooveGapTextFormat[%d]	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
JTTK MULTICAD DRAW STYLE	0x0110	%d,%d first number is the type, second the width		<p>type values are as follows: 0=no marker, 1=point, 2=dot, 3=asterisk, 4=circle, 5=poundsign, 6=X, 7=gridpoint, 8=square, 9=triangle, 10=diamond, 11=centerline, 12=anchor, 13=filled circled, 14=filled square, 15=large filled square, 16=circle in circle, 17=circle in square, 18=square in square, 19=filled left triangle, 20=filled right triangle, 21=filled up triangle, 22=filled down triangle, 23=filled left triangle in circle, 24=filled right triangle in circle, 25=filled up triangle in circle, 26=filled down triangle in circle, 27=filled left triangle in square, 28=filled right triangle in square, 29=filled up triangle in square, 30=filled down triangle in square, 31=rounded cross, 32=filled diamond, 33=up down triangles, 34=left right triangles, 35=small wheel, 36=large wheel, 37=hollow circle, 38=arc end point, 39=big asterisk, 40=line in cricle, 41=plus in circle, 42=center of rotation, 43=invalid</p> <p>width values are as follows: 0=normal, 1=thick, 2=thin, 4=custom width</p>
JTTK MULTICAD LAYER	0x0104 0x0110 0x0111 0x0112 0x030A 0x030B	%d		
JTTK MULTICAD NAME	0x0104 0x0110 0x0111 0x0112 0x030A 0x030B	%s		
JTTK MULTICAD VISIBILITY	0x0104 0x0110 0x0111 0x0112 0x030A 0x030B	"FALSE" or "TRUE"		

Q.8.3 Keyword[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Keyword[%d]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		

Q.8.4 Layer

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LAYER	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"		

Q.8.5 LayText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LayText	0x0041	NULL		
LayText.Item[%d]	0x0041	NULL	LayText	
LayText.Item[%d].Outline	0x0041	NULL	LayText.Item[%d]	
LayText.Item[%d].Outline.Bottom	0x0041	NULL	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.Bottom.colour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Item[%d].Outline.Bottom	
LayText.Item[%d].Outline.Bottom.size	0x0041	String representing enumeration such that: "0"=unset,	LayText.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
LayText.Item[%d].Outline.Bottom.thickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText.Item[%d].Outline.Bottom	
LayText.Item[%d].Outline.Bottom.width.measurementType	0x0041	"%.16g"	LayText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
LayText.Item[%d].Outline.Bottom.width.name	0x0041	"%s"	LayText.Item[%d].Outline.Bottom	
LayText.Item[%d].Outline.Left	0x0041	NULL	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.Left.colour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Item[%d].Outline.Left	
LayText.Item[%d].Outline.Left.style	0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LayText.Item[%d].Outline.Left	
LayText.Item[%d].Outline.Left.thickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText.Item[%d].Outline.Left	
LayText.Item[%d].Outline.Left.width.measurementType	0x0041	"%.16g"	LayText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
LayText.Item[%d].Outline.Left.width.name	0x0041	"%s"	LayText.Item[%d].Outline.Left	
LayText.Item[%d].Outline.Right	0x0041	NULL	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.Right.colour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Item[%d].Outline.Right	
LayText.Item[%d].Outline.Right.style	0x0041	String representing enumeration such that: "0"=unset,	LayText.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
le		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
LayText.Item[%d].Outline.Right.thickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText.Item[%d].Outline.Right	
LayText.Item[%d].Outline.Right.width.measurementType	0x0041	"%.16g"	LayText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
LayText.Item[%d].Outline.Right.width.name	0x0041	"%s"	LayText.Item[%d].Outline.Right	
LayText.Item[%d].Outline.Top	0x0041	NULL	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.Top.colour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Item[%d].Outline.Top	
LayText.Item[%d].Outline.Top.style	0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LayText.Item[%d].Outline.Top	
LayText.Item[%d].Outline.Top.thickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText.Item[%d].Outline.Top	
LayText.Item[%d].Outline.Top.width.measurementType	0x0041	"%.16g"	LayText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
LayText.Item[%d].Outline.Top.width.name	0x0041	"%s"	LayText.Item[%d].Outline.Top	
LayText.Item[%d].Outline.direction	0x0041	"%.16g %.16g %.16g"	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.doubleOffset	0x0041	"%.16g"	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.fillColour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	LayText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
LayText.Item[%d].Outline.filled	0x0041	"%d"	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.origin	0x0041	"%.16g %.16g %.16g"	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.outlineHeight	0x0041	"%.16g"	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.outlineWidth	0x0041	"%.16g"	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.thickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText.Item[%d].Outline	
LayText.Item[%d].Outline.visible	0x0041	"%d"	LayText.Item[%d].Outline	
LayText.Item[%d].bold	0x0041	"%d"	LayText.Item[%d]	
LayText.Item[%d].font	0x0041	"%s"	LayText.Item[%d]	
LayText.Item[%d].format	0x0041	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	LayText.Item[%d]	
LayText.Item[%d].italic	0x0041	"%d"	LayText.Item[%d]	
LayText.Item[%d].italicAngle	0x0041	"%.16g"	LayText.Item[%d]	
LayText.Item[%d].justification	0x0041	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	LayText.Item[%d]	
LayText.Item[%d].language	0x0041	"%s"	LayText.Item[%d]	
LayText.Item[%d].lineFactor	0x0041	"%.16g"	LayText.Item[%d]	
LayText.Item[%d].lineWeldSupplementalSymbol	0x0041	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent,	LayText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
LayText.Item[%d].lineWeldSymbol	0x0041	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate,	LayText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
LayText.Item[%d].outlineColour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Item[%d]	For compatiblity reasons we suggest sticking with this form of key, but also suggest support reading LayText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite LayText.Item[%d].Outline
LayText.Item[%d].outlineStyle	0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LayText.Item[%d]	For compatiblity reasons we suggest sticking with this form of key, but also suggest support reading LayText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite LayText.Item[%d].Outline
LayText.Item[%d].outlineType	0x0041	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	LayText.Item[%d]	For compatiblity reasons we suggest sticking with this form of key, but also suggest support reading LayText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite LayText.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LayText.Item[%d].outlineWidth.measurementType	0x0041	%.16g"	LayText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LayText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite LayText.Item[%d].Outline
LayText.Item[%d].outlineWidth.name	0x0041	%"s"	LayText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LayText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite LayText.Item[%d].Outline
LayText.Item[%d].spaceFactor	0x0041	%.16g"	LayText.Item[%d]	
LayText.Item[%d].strikethrough	0x0041	String representing enumeration such that: "0"=none, "1"=single, "2"=double	LayText.Item[%d]	
LayText.Item[%d].string	0x0041	%"s"	LayText.Item[%d]	
LayText.Item[%d].subscript	0x0041	String representing enumeration such that: "0"=sub, "1"=super	LayText.Item[%d]	
LayText.Item[%d].symbol	0x0041	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout,	LayText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
LayText.Item[%d].textAspect	0x0041	"%.16g"	LayText.Item[%d]	
LayText.Item[%d].textColour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Item[%d]	
LayText.Item[%d].textHeight	0x0041	"%.16g"	LayText.Item[%d]	
LayText.Item[%d].textLineWidth.measurementType	0x0041	"%.16g"	LayText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
LayText.Item[%d].textLineWidth.name	0x0041	"%s"	LayText.Item[%d]	
LayText.Item[%d].textThickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LayText.Item[%d].underline	0x0041	String representing enumeration such that: "0"=over, "1"=under	LayText.Item[%d]	

Q.8.6 LayText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LayText.Outline	0x0041	NULL	LayText	
LayText.Outline.Bottom	0x0041	NULL	LayText.Outline	
LayText.Outline.Bottom.colour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Outline.Bottom	
LayText.Outline.Bottom.style	0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LayText.Outline.Bottom	
LayText.Outline.Bottom.thickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText.Outline.Bottom	
LayText.Outline.Bottom.width.measurementType	0x0041	%.16g"	LayText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
LayText.Outline.Bottom.width.name	0x0041	%"s"	LayText.Outline.Bottom	
LayText.Outline.Left	0x0041	NULL	LayText.Outline	
LayText.Outline.Left.colour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Outline.Left	
LayText.Outline.Left.style	0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LayText.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LayText.Outline.Left.thickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText.Outline.Left	
LayText.Outline.Left.width.measurementType	0x0041	%.16g"	LayText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
LayText.Outline.Left.width.name	0x0041	%"s"	LayText.Outline.Left	
LayText.Outline.Right	0x0041	NULL	LayText.Outline	
LayText.Outline.Right.colour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Outline.Right	
LayText.Outline.Right.style	0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LayText.Outline.Right	
LayText.Outline.Right.thickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText.Outline.Right	
LayText.Outline.Right.width.measurementType	0x0041	%.16g"	LayText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
LayText.Outline.Right.width.name	0x0041	%"s"	LayText.Outline.Right	
LayText.Outline.Top	0x0041	NULL	LayText.Outline	
LayText.Outline.Top.colour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Outline.Top	
LayText.Outline.Top.style	0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LayText.Outline.Top	
LayText.Outline.Top.thickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick,	LayText.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
LayText.Outline.Top.width.measurementType	0x0041	%.16g"	LayText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
LayText.Outline.Top.width.name	0x0041	%"s"	LayText.Outline.Top	
LayText.Outline.direction	0x0041	%.16g %.16g %.16g"	LayText.Outline	
LayText.Outline.doubleOffset	0x0041	%.16g"	LayText.Outline	
LayText.Outline.fillColour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText.Outline	
LayText.Outline.filled	0x0041	%"d"	LayText.Outline	
LayText.Outline.origin	0x0041	%.16g %.16g %.16g"	LayText.Outline	
LayText.Outline.outlineHeight	0x0041	%.16g"	LayText.Outline	
LayText.Outline.outlineWidth	0x0041	%.16g"	LayText.Outline	
LayText.Outline.thickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText.Outline	
LayText.Outline.visible	0x0041	%"d"	LayText.Outline	

Q.8.7 LayText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LayText.bold	0x0041	%"d"	LayText	
LayText.font	0x0041	%"s"	LayText	
LayText.italic	0x0041	%"d"	LayText	
LayText.italicAngle	0x0041	%.16g"	LayText	
LayText.justification	0x0041	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	LayText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LayText.language	0x0041	"%s"	LayText	
LayText.lineFactor	0x0041	"%.16g"	LayText	
LayText.maxExtend	0x0041	"%d"	LayText	
LayText.name	0x0041	"%s"	LayText	
LayText.outlineColour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LayText.Outline.colour which would match the more modern Outline syntax and require prerequisite LayText.Outline
LayText.outlineStyle	0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LayText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LayText.Outline.style which would match the more modern Outline syntax and require prerequisite LayText.Outline
LayText.outlineType	0x0041	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	LayText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LayText.Outline.type which would match the more modern Outline syntax and require prerequisite LayText.Outline
LayText.outlineWidth.measurementType	0x0041	"%.16g"	LayText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				LayText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite LayText.Outline
LayText.outlineWidth.name	0x0041	"%s"	LayText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LayText.Outline.width.name which would match the more modern Outline syntax and require prerequisite LayText.Outline
LayText.spaceFactor	0x0041	"%.16g"	LayText	
LayText.strikethrough	0x0041	String representing enumeration such that: "0"=none, "1"=single, "2"=double	LayText	
LayText.subscript	0x0041	String representing enumeration such that: "0"=sub, "1"=super	LayText	
LayText.textAspect	0x0041	"%.16g"	LayText	
LayText.textColour	0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LayText	
LayText.textHeight	0x0041	"%.16g"	LayText	
LayText.textLineWidth.measurementType	0x0041	"%.16g"	LayText	measurementType must be replaced with meterWidth or pixelWidth
LayText.textLineWidth.name	0x0041	"%s"	LayText	
LayText.textOrientation	0x0041	String representing enumeration such that: "0"=horizontal, "1"=vertical	LayText	
LayText.textThickness	0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LayText	
LayText.underline	0x0041	String representing enumeration such that: "0"=over, "1"=under	LayText	

Q.8.8 LeaderText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LeaderText[%d]	0x0008	NULL		LeaderText[%d] index expected to range from 0-1 inclusive. Each instance of this is expected to have a different position such that LeaderText[x].position != LeaderText[y].position for any combination of x and y
LeaderText[%d].Text	0x0008	NULL	LeaderText[%d]	
LeaderText[%d].Text.Item[%d]	0x0008	NULL	LeaderText[%d].Text	
LeaderText[%d].Text.Item[%d].Outline	0x0008	NULL	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].Outline.Bottom	0x0008	NULL	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Item[%d].Outline.Bottom	
LeaderText[%d].Text.Item[%d].Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LeaderText[%d].Text.Item[%d].Outline.Bottom	
LeaderText[%d].Text.Item[%d].Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text.Item[%d].Outline.Bottom	
LeaderText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0x0008	%.16g"	LeaderText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
LeaderText[%d].Text.Item[%d].Outline.Bottom.width.name	0x0008	%"s"	LeaderText[%d].Text.Item[%d].Outline.Bottom	
LeaderText[%d].Text.Item[%d].Outline.Left	0x0008	NULL	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	LeaderText[%d].Text.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
LeaderText[%d].Text.Item[%d].Outline.Left.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LeaderText[%d].Text.Item[%d].Outline.Left	
LeaderText[%d].Text.Item[%d].Outline.Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text.Item[%d].Outline.Left	
LeaderText[%d].Text.Item[%d].Outline.Left.width.measurementType	0x0008	"%.16g"	LeaderText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
LeaderText[%d].Text.Item[%d].Outline.Left.width.name	0x0008	"%s"	LeaderText[%d].Text.Item[%d].Outline.Left	
LeaderText[%d].Text.Item[%d].Outline.Right	0x0008	NULL	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].Outline.Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Item[%d].Outline.Right	
LeaderText[%d].Text.Item[%d].Outline.Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LeaderText[%d].Text.Item[%d].Outline.Right	
LeaderText[%d].Text.Item[%d].Outline.Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text.Item[%d].Outline.Right	
LeaderText[%d].Text.Item[%d].Outline.Right.width.measurementType	0x0008	"%.16g"	LeaderText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
LeaderText[%d].Text.Item[%d].Outline.Right.width.name	0x0008	"%s"	LeaderText[%d].Text.Item[%d].Outline.Right	
LeaderText[%d].Text.Item[%d].Outline.Top	0x0008	NULL	LeaderText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LeaderText[%d].Text.Item[%d].Outline.Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Item[%d].Outline.Top	
LeaderText[%d].Text.Item[%d].Outline.Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LeaderText[%d].Text.Item[%d].Outline.Top	
LeaderText[%d].Text.Item[%d].Outline.Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text.Item[%d].Outline.Top	
LeaderText[%d].Text.Item[%d].Outline.Top.width.measurementType	0x0008	%.16g"	LeaderText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
LeaderText[%d].Text.Item[%d].Outline.Top.width.name	0x0008	%"s"	LeaderText[%d].Text.Item[%d].Outline.Top	
LeaderText[%d].Text.Item[%d].Outline.direction	0x0008	%.16g %.16g %.16g"	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].Outline.doubleOffset	0x0008	%.16g"	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].Outline.fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].Outline.filled	0x0008	%"d"	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].Outline.origin	0x0008	%.16g %.16g %.16g"	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].Outline.outlineHeight	0x0008	%.16g"	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].Outline.outlineWidth	0x0008	%.16g"	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].Outline.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LeaderText[%d].Text.Item[%d].Outline.visible	0x0008	"%d"	LeaderText[%d].Text.Item[%d].Outline	
LeaderText[%d].Text.Item[%d].bold	0x0008	"%d"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].font	0x0008	"%s"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].format	0x0008	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].italic	0x0008	"%d"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].italicAngle	0x0008	"%.16g"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].language	0x0008	"%s"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].lineFactor	0x0008	"%.16g"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr,	LeaderText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
LeaderText[%d].Text.Item[%d].line WeldSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskdiameter,	LeaderText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"56"=eskdnumber, "57"=isoedge		
LeaderText[%d].Text.Item[%d].outlineColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LeaderText[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite LeaderText[%d].Text.Item[%d].Outline
LeaderText[%d].Text.Item[%d].outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LeaderText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LeaderText[%d].Text.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite LeaderText[%d].Text.Item[%d].Outline
LeaderText[%d].Text.Item[%d].outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	LeaderText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LeaderText[%d].Text.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite LeaderText[%d].Text.Item[%d].Outline
LeaderText[%d].Text.Item[%d].outlineWidth.measurementType	0x0008	%.16g"	LeaderText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				reading LeaderText[%d].Text.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite LeaderText[%d].Text.Item[%d].Outline
LeaderText[%d].Text.Item[%d].outlineWidth.name	0x0008	"%s"	LeaderText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LeaderText[%d].Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite LeaderText[%d].Text.Item[%d].Outline
LeaderText[%d].Text.Item[%d].spaceFactor	0x0008	"%.16g"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].strokeThrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].string	0x0008	"%s"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].symbol	0x0008	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout,	LeaderText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
LeaderText[%d].Text.Item[%d].text Aspect	0x0008	"%.16g"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].text Colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].text Height	0x0008	"%.16g"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].text LineWidth.measurementType	0x0008	"%.16g"	LeaderText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
LeaderText[%d].Text.Item[%d].text LineWidth.name	0x0008	"%s"	LeaderText[%d].Text.Item[%d]	
LeaderText[%d].Text.Item[%d].text Thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick,	LeaderText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
LeaderText[%d].Text.Item[%d].underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	LeaderText[%d].Text.Item[%d]	

Q.8.9 LeaderText[%d].Text.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LeaderText[%d].Text.Outline	0x0008	NULL	LeaderText[%d].Text	
LeaderText[%d].Text.Outline.Bottom	0x0008	NULL	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Outline.Bottom	
LeaderText[%d].Text.Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LeaderText[%d].Text.Outline.Bottom	
LeaderText[%d].Text.Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text.Outline.Bottom	
LeaderText[%d].Text.Outline.Bottom.width.measurementType	0x0008	"%.16g"	LeaderText[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
LeaderText[%d].Text.Outline.Bottom.width.name	0x0008	"%s"	LeaderText[%d].Text.Outline.Bottom	
LeaderText[%d].Text.Outline.Left	0x0008	NULL	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Outline.Left	
LeaderText[%d].Text.Outline.Left.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	LeaderText[%d].Text.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
LeaderText[%d].Text.Outline.Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text.Outline.Left	
LeaderText[%d].Text.Outline.Left.width.measurementType	0x0008	("%.16g"	LeaderText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
LeaderText[%d].Text.Outline.Left.width.name	0x0008	"%s"	LeaderText[%d].Text.Outline.Left	
LeaderText[%d].Text.Outline.Right	0x0008	NULL	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Outline.Right	
LeaderText[%d].Text.Outline.Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LeaderText[%d].Text.Outline.Right	
LeaderText[%d].Text.Outline.Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text.Outline.Right	
LeaderText[%d].Text.Outline.Right.width.measurementType	0x0008	("%.16g"	LeaderText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
LeaderText[%d].Text.Outline.Right.width.name	0x0008	"%s"	LeaderText[%d].Text.Outline.Right	
LeaderText[%d].Text.Outline.Top	0x0008	NULL	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Outline.Top	
LeaderText[%d].Text.Outline.Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	LeaderText[%d].Text.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
LeaderText[%d].Text.Outline.Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text.Outline.Top	
LeaderText[%d].Text.Outline.Top.width.measurementType	0x0008	"%.16g"	LeaderText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
LeaderText[%d].Text.Outline.Top.width.name	0x0008	"%s"	LeaderText[%d].Text.Outline.Top	
LeaderText[%d].Text.Outline.direction	0x0008	"%.16g %.16g %.16g"	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.doubleOffset	0x0008	"%.16g"	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.filled	0x0008	"%d"	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.origin	0x0008	"%.16g %.16g %.16g"	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.outlineHeight	0x0008	"%.16g"	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.outlineWidth	0x0008	"%.16g"	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.Outline.visible	0x0008	"%d"	LeaderText[%d].Text.Outline	
LeaderText[%d].Text.bold	0x0008	"%d"	LeaderText[%d].Text	
LeaderText[%d].Text.font	0x0008	"%s"	LeaderText[%d].Text	
LeaderText[%d].Text.italic	0x0008	"%d"	LeaderText[%d].Text	
LeaderText[%d].Text.italicAngle	0x0008	"%.16g"	LeaderText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
LeaderText[%d].Text.justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	LeaderText[%d].Text	
LeaderText[%d].Text.language	0x0008	"%s"	LeaderText[%d].Text	
LeaderText[%d].Text.lineFactor	0x0008	"%.16g"	LeaderText[%d].Text	
LeaderText[%d].Text.maxExtend	0x0008	"%d"	LeaderText[%d].Text	
LeaderText[%d].Text.name	0x0008	"%s"	LeaderText[%d].Text	
LeaderText[%d].Text.outlineColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LeaderText[%d].Text.Outline.colour which would match the more modern Outline syntax and require prerequisite LeaderText[%d].Text.Outline
LeaderText[%d].Text.outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	LeaderText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LeaderText[%d].Text.Outline.style which would match the more modern Outline syntax and require prerequisite LeaderText[%d].Text.Outline
LeaderText[%d].Text.outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright,	LeaderText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading LeaderText[%d].Text.Outline.type which would match the more modern Outline syntax and require prerequisite LeaderText[%d].Text.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"24"=squarecircle		
LeaderText[%d].Text.outlineWidth. measurementType	0x0008	%.16g"	LeaderText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
				For compatiblity reasons we suggest sticking with this form of key, but also suggest support reading LeaderText[%d].Text.Outline.width. .measurementType which would match the more modern Outline syntax and require prerequisite LeaderText[%d].Text.Outline
LeaderText[%d].Text.outlineWidth. name	0x0008	%"s"	LeaderText[%d].Text	For compatiblity reasons we suggest sticking with this form of key, but also suggest support reading LeaderText[%d].Text.Outline.width. .name which would match the more modern Outline syntax and require prerequisite LeaderText[%d].Text.Outline
LeaderText[%d].Text.spaceFactor	0x0008	%.16g"	LeaderText[%d].Text	
LeaderText[%d].Text.strikethrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	LeaderText[%d].Text	
LeaderText[%d].Text.subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	LeaderText[%d].Text	
LeaderText[%d].Text.textAspect	0x0008	%.16g"	LeaderText[%d].Text	
LeaderText[%d].Text.textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	LeaderText[%d].Text	
LeaderText[%d].Text.textHeight	0x0008	%.16g"	LeaderText[%d].Text	
LeaderText[%d].Text.textLineWidht. measurementType	0x0008	%.16g"	LeaderText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
LeaderText[%d].Text.textLineWidht	0x0008	%"s"	LeaderText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
h.name				
LeaderText[%d].Text.textOrientation	0x0008	String representing enumeration such that: "0"=horizontal, "1"=vertical	LeaderText[%d].Text	
LeaderText[%d].Text.textThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	LeaderText[%d].Text	
LeaderText[%d].Text.underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	LeaderText[%d].Text	
LeaderText[%d].position	0x0008	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	LeaderText[%d]	

Q.8.10 Leader[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Leader[%d]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL		
Leader[%d].Jog[%d]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"	Leader[%d]	
Leader[%d].Reference	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singlar semantic aspect with an entity.	Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
Leader[%d].Reference[1]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singlar semantic aspect with an entity.	Leader[%d].Reference	This extension is for use when the Leader is referencing the intersection of two targets. This property contains the second target with the Leader[%d].Reference property containing the first
Leader[%d].allAroundSymbolSize	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Leader[%d]	
Leader[%d].arrowAngle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Leader[%d]	
Leader[%d].arrowColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Leader[%d]	
Leader[%d].arrowLength	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Leader[%d]	
Leader[%d].arrowLineThickness	0x0004 0x0008 0x0041 0x0042	String representing enumeration	Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	such that: "0"=normal, "1"=thick, "2"=thin		
Leader[%d].arrowLineType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Leader[%d]	
Leader[%d].arrowOutSideLength	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	Leader[%d]	
Leader[%d].arrowPlacement	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=out, "1"=in	Leader[%d]	
Leader[%d].arrowType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=closed, "1"=open, "2"=filled, "3"=none, "4"=origin, "5"=cross, "6"=dot, "7"=filleddot, "8"=wedge, "9"=plus, "10"=x, "11"=closedsolid, "12"=closeddouble, "13"=closeddoublesolid, "14"=opendouble, "15"=filleddouble, "16"=integral, "17"=box, "18"=filledbox, "19"=datum, "20"=filleddatum, "21"=solidorigin, "22"=filledorigin,	Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"23"=xorigin, "24"=solidbox, "25"=roundbackdart, "26"=solidroundbackdart, "27"=filledroundbackdart		
Leader[%d].arrowWidth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
Leader[%d].arrowWidth.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%"s"	Leader[%d]	
Leader[%d].colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Leader[%d]	
Leader[%d].direction	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g %.16g %.16g"	Leader[%d]	
Leader[%d].dotDiameter	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	%.16g"	Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
Leader[%d].extensionJogAngle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	Leader[%d]	
Leader[%d].extensionJogDefintion	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=startend, "1"=startangle, "2"=endangle	Leader[%d]	
Leader[%d].extensionJogEnd	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	Leader[%d]	
Leader[%d].extensionJogOut	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%"d"	Leader[%d]	
Leader[%d].extensionJogStart	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	Leader[%d]	
Leader[%d].extensionJogging	0x0004 0x0008 0x0041 0x0042	String representing enumeration	Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	such that: "0"=on, "1"=off, "2"=application		
Leader[%d].extensionLineColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Leader[%d]	
Leader[%d].extensionLineExtension	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	Leader[%d]	
Leader[%d].extensionLineGap	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	Leader[%d]	
Leader[%d].extensionLineThickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Leader[%d]	
Leader[%d].extensionLineType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	"5"=dashed, "6"=solid, "7"=centreline		
Leader[%d].extensionWidth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	%.16g"	Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
Leader[%d].extensionWidth.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	%"s"	Leader[%d]	
Leader[%d].halfArrow	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	String representing enumeration such that: "0"=left, "1"=right, "2"=full	Leader[%d]	
Leader[%d].leaderAttachment	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	String representing enumeration such that: "0"=top, "1"=middle, "2"=bottom	Leader[%d]	
Leader[%d].lineTextGap	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D	%.16g"	Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
Leader[%d].lineType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Leader[%d]	
Leader[%d].offsetCentre	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	Leader[%d]	
Leader[%d].perpendicularToStub	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	Leader[%d]	
Leader[%d].perpendicularToTerminator	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	Leader[%d]	
Leader[%d].radiusToCentre	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	Leader[%d]	
Leader[%d].stubAttachment	0x0004 0x0008 0x0041 0x0042	String representing enumeration	Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	such that: "0"=side, "1"=underline		
Leader[%d].stubDirection	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=left, "1"=right, "2"=inferred	Leader[%d]	
Leader[%d].stubLength	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Leader[%d]	
Leader[%d].suppressed	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	Leader[%d]	
Leader[%d].tParm	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Leader[%d]	
Leader[%d].terminator	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	"%.16g %.16g %.16g"	Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
Leader[%d].textOverLeaderFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	Leader[%d]	
Leader[%d].textOverStubFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	Leader[%d]	
Leader[%d].thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Leader[%d]	
Leader[%d].uvParm.U	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	Leader[%d]	Expect to also have Leader[%d].uvParam.V.
Leader[%d].uvParm.V	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	%.16g"	Leader[%d]	Expect to also have Leader[%d].uvParam.U.

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
Leader[%d].width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
Leader[%d].width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	Leader[%d]	

Q.9 PMI Properties “N”

Q.9.1 Nomenclature.Item[%d].<properties>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Nomenclature	0x0231 0x0232	NULL		
Nomenclature.Item[%d]	0x0231 0x0232	NULL	Nomenclature	
Nomenclature.Item[%d].Outline	0x0231 0x0232	NULL	Nomenclature.Item[%d]	
Nomenclature.Item[%d].Outline.Bottom	0x0231 0x0232	NULL	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.Bottom.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Item[%d].Outline.Bottom	
Nomenclature.Item[%d].Outline.Bottom.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	Nomenclature.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
Nomenclature.Item[%d].Outline.Bottom.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Item[%d].Outline.Bottom	
Nomenclature.Item[%d].Outline.Bottom.width.measurementType	0x0231 0x0232	("%.16g"	Nomenclature.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Nomenclature.Item[%d].Outline.Bottom.width.name	0x0231 0x0232	"%s"	Nomenclature.Item[%d].Outline.Bottom	
Nomenclature.Item[%d].Outline.Left	0x0231 0x0232	NULL	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.Left.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Item[%d].Outline.Left	
Nomenclature.Item[%d].Outline.Left.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Nomenclature.Item[%d].Outline.Left	
Nomenclature.Item[%d].Outline.Left.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Item[%d].Outline.Left	
Nomenclature.Item[%d].Outline.Left.width.measurementType	0x0231 0x0232	("%.16g"	Nomenclature.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Nomenclature.Item[%d].Outline.Left.width.name	0x0231 0x0232	"%s"	Nomenclature.Item[%d].Outline.Left	
Nomenclature.Item[%d].Outline.Right	0x0231 0x0232	NULL	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.Right.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Item[%d].Outline.Right	
Nomenclature.Item[%d].Outline.Right.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	Nomenclature.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
Nomenclature.Item[%d].Outline.Right.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Item[%d].Outline.Right	
Nomenclature.Item[%d].Outline.Right.width.measurementType	0x0231 0x0232	"%.16g"	Nomenclature.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Nomenclature.Item[%d].Outline.Right.width.name	0x0231 0x0232	"%s"	Nomenclature.Item[%d].Outline.Right	
Nomenclature.Item[%d].Outline.Top	0x0231 0x0232	NULL	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.Top.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Item[%d].Outline.Top	
Nomenclature.Item[%d].Outline.Top.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Nomenclature.Item[%d].Outline.Top	
Nomenclature.Item[%d].Outline.Top.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Item[%d].Outline.Top	
Nomenclature.Item[%d].Outline.Top.width.measurementType	0x0231 0x0232	"%.16g"	Nomenclature.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Nomenclature.Item[%d].Outline.Top.width.name	0x0231 0x0232	"%s"	Nomenclature.Item[%d].Outline.Top	
Nomenclature.Item[%d].Outline.direction	0x0231 0x0232	"%.16g %.16g %.16g"	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.doubleOffset	0x0231 0x0232	"%.16g"	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.fillColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	Nomenclature.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
Nomenclature.Item[%d].Outline.filled	0x0231 0x0232	"%d"	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.origin	0x0231 0x0232	"%.16g %.16g %.16g"	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.outlineHeight	0x0231 0x0232	"%.16g"	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.outlineWidth	0x0231 0x0232	"%.16g"	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].Outline.visible	0x0231 0x0232	"%d"	Nomenclature.Item[%d].Outline	
Nomenclature.Item[%d].bold	0x0231 0x0232	"%d"	Nomenclature.Item[%d]	
Nomenclature.Item[%d].font	0x0231 0x0232	"%s"	Nomenclature.Item[%d]	
Nomenclature.Item[%d].format	0x0231 0x0232	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Nomenclature.Item[%d]	
Nomenclature.Item[%d].italic	0x0231 0x0232	"%d"	Nomenclature.Item[%d]	
Nomenclature.Item[%d].italicAngle	0x0231 0x0232	"%.16g"	Nomenclature.Item[%d]	
Nomenclature.Item[%d].justification	0x0231 0x0232	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Nomenclature.Item[%d]	
Nomenclature.Item[%d].language	0x0231 0x0232	"%s"	Nomenclature.Item[%d]	
Nomenclature.Item[%d].lineFactor	0x0231 0x0232	"%.16g"	Nomenclature.Item[%d]	
Nomenclature.Item[%d].lineWeldSupplementalSymbol	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush,	Nomenclature.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
Nomenclature.Item[%d].lineWeldSymbol	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2,	Nomenclature.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
Nomenclature.Item[%d].outlineColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Nomenclature.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Nomenclature.Item[%d].Outline
Nomenclature.Item[%d].outlineStyle	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Nomenclature.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Nomenclature.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite Nomenclature.Item[%d].Outline
Nomenclature.Item[%d].outlineType	0x0231 0x0232	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram,	Nomenclature.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Nomenclature.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite Nomenclature.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"22"=triangleleft, "23"=triangleright, "24"=squaredcircle		
Nomenclature.Item[%d].outlineWidth.measurementType	0x0231 0x0232	("%.16g"	Nomenclature.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Nomenclature.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Nomenclature.Item[%d].Outline
Nomenclature.Item[%d].outlineWidth.name	0x0231 0x0232	"%s"	Nomenclature.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Nomenclature.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite Nomenclature.Item[%d].Outline
Nomenclature.Item[%d].spaceFactor	0x0231 0x0232	("%.16g"	Nomenclature.Item[%d]	
Nomenclature.Item[%d].strikethrough	0x0231 0x0232	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Nomenclature.Item[%d]	
Nomenclature.Item[%d].string	0x0231 0x0232	"%s"	Nomenclature.Item[%d]	
Nomenclature.Item[%d].subscript	0x0231 0x0232	String representing enumeration such that: "0"=sub, "1"=super	Nomenclature.Item[%d]	
Nomenclature.Item[%d].symbol	0x0231 0x0232	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis,	Nomenclature.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
Nomenclature.Item[%d].textAspect	0x0231 0x0232	"%.16g"	Nomenclature.Item[%d]	
Nomenclature.Item[%d].textColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Item[%d]	
Nomenclature.Item[%d].textHeight	0x0231 0x0232	"%.16g"	Nomenclature.Item[%d]	
Nomenclature.Item[%d].textLineWidth.measurementType	0x0231 0x0232	"%.16g"	Nomenclature.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
Nomenclature.Item[%d].textLineWidth	0x0231 0x0232	"%s"	Nomenclature.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
dth.name				
Nomenclature.Item[%d].textThickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Item[%d]	
Nomenclature.Item[%d].underline	0x0231 0x0232	String representing enumeration such that: "0"=over, "1"=under	Nomenclature.Item[%d]	

Q.9.2 Nomenclature.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Nomenclature.Outline	0x0231 0x0232	NULL	Nomenclature	
Nomenclature.Outline.Bottom	0x0231 0x0232	NULL	Nomenclature.Outline	
Nomenclature.Outline.Bottom.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Outline.Bottom	
Nomenclature.Outline.Bottom.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Nomenclature.Outline.Bottom	
Nomenclature.Outline.Bottom.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Outline.Bottom	
Nomenclature.Outline.Bottom.width.measurementType	0x0231 0x0232	"%.16g"	Nomenclature.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Nomenclature.Outline.Bottom.width.name	0x0231 0x0232	"%s"	Nomenclature.Outline.Bottom	
Nomenclature.Outline.Left	0x0231 0x0232	NULL	Nomenclature.Outline	
Nomenclature.Outline.Left.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Nomenclature.Outline.Left.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Nomenclature.Outline.Left	
Nomenclature.Outline.Left.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Outline.Left	
Nomenclature.Outline.Left.width.measurementType	0x0231 0x0232	"%.16g"	Nomenclature.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Nomenclature.Outline.Left.width.name	0x0231 0x0232	"%s"	Nomenclature.Outline.Left	
Nomenclature.Outline.Right	0x0231 0x0232	NULL	Nomenclature.Outline	
Nomenclature.Outline.Right.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Outline.Right	
Nomenclature.Outline.Right.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Nomenclature.Outline.Right	
Nomenclature.Outline.Right.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Outline.Right	
Nomenclature.Outline.Right.width.measurementType	0x0231 0x0232	"%.16g"	Nomenclature.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Nomenclature.Outline.Right.width.name	0x0231 0x0232	"%s"	Nomenclature.Outline.Right	
Nomenclature.Outline.Top	0x0231 0x0232	NULL	Nomenclature.Outline	
Nomenclature.Outline.Top.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Nomenclature.Outline.Top.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Nomenclature.Outline.Top	
Nomenclature.Outline.Top.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Outline.Top	
Nomenclature.Outline.Top.width.measurementType	0x0231 0x0232	"%.16g"	Nomenclature.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Nomenclature.Outline.Top.width.name	0x0231 0x0232	"%s"	Nomenclature.Outline.Top	
Nomenclature.Outline.direction	0x0231 0x0232	"%.16g %.16g %.16g"	Nomenclature.Outline	
Nomenclature.Outline.doubleOffset	0x0231 0x0232	"%.16g"	Nomenclature.Outline	
Nomenclature.Outline.fillColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature.Outline	
Nomenclature.Outline.filled	0x0231 0x0232	"%d"	Nomenclature.Outline	
Nomenclature.Outline.origin	0x0231 0x0232	"%.16g %.16g %.16g"	Nomenclature.Outline	
Nomenclature.Outline.outlineHeight	0x0231 0x0232	"%.16g"	Nomenclature.Outline	
Nomenclature.Outline.outlineWidth	0x0231 0x0232	"%.16g"	Nomenclature.Outline	
Nomenclature.Outline.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature.Outline	
Nomenclature.Outline.visible	0x0231 0x0232	"%d"	Nomenclature.Outline	

Q.9.3 Nomenclature.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Nomenclature.bold	0x0231 0x0232	"%d"	Nomenclature	
Nomenclature.font	0x0231 0x0232	"%s"	Nomenclature	
Nomenclature.italic	0x0231 0x0232	"%d"	Nomenclature	
Nomenclature.italicAngle	0x0231 0x0232	"%.16g"	Nomenclature	
Nomenclature.justification	0x0231 0x0232	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Nomenclature	
Nomenclature.language	0x0231 0x0232	"%s"	Nomenclature	
Nomenclature.lineFactor	0x0231 0x0232	"%.16g"	Nomenclature	
Nomenclature.maxExtend	0x0231 0x0232	"%d"	Nomenclature	
Nomenclature.name	0x0231 0x0232	"%s"	Nomenclature	
Nomenclature.outlineColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Nomenclature.Outline.colour which would match the more modern Outline syntax and require prerequisite Nomenclature.Outline
Nomenclature.outlineStyle	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Nomenclature	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Nomenclature.Outline.style which would match the more modern Outline syntax and require prerequisite Nomenclature.Outline
Nomenclature.outlineType	0x0231 0x0232	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong,	Nomenclature	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Nomenclature.Outline.type which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		prerequist Nomenclature.Outline
Nomenclature.outlineWidth.measurementType	0x0231 0x0232	"%.16g"	Nomenclature	measurementType must be replaced with meterWidth or pixelWidth For compatiblty reasons we suggest sticking with this form of key, but also suggest support reading Nomenclature.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Nomenclature.Outline
Nomenclature.outlineWidth.name	0x0231 0x0232	"%s"	Nomenclature	For compatiblty reasons we suggest sticking with this form of key, but also suggest support reading Nomenclature.Outline.width.name which would match the more modern Outline syntax and require prerequisite Nomenclature.Outline
Nomenclature.spaceFactor	0x0231 0x0232	"%.16g"	Nomenclature	
Nomenclature.strikethrough	0x0231 0x0232	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Nomenclature	
Nomenclature.subscript	0x0231 0x0232	String representing enumeration such that: "0"=sub, "1"=super	Nomenclature	
Nomenclature.textAspect	0x0231 0x0232	"%.16g"	Nomenclature	
Nomenclature.textColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Nomenclature	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Nomenclature.textHeight	0x0231 0x0232	"%.16g"	Nomenclature	
Nomenclature.textLineWidth.measurementType	0x0231 0x0232	"%.16g"	Nomenclature	measurementType must be replaced with meterWidth or pixelWidth
Nomenclature.textLineWidth.name	0x0231 0x0232	"%s"	Nomenclature	
Nomenclature.textOrientation	0x0231 0x0232	String representing enumeration such that: "0"=horizontal, "1"=vertical	Nomenclature	
Nomenclature.textThickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Nomenclature	
Nomenclature.underline	0x0231 0x0232	String representing enumeration such that: "0"=over, "1"=under	Nomenclature	

Q.9.4 Note.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Note	0x0118	NULL		
Note.Item[%d]	0x0118	NULL	Note	
Note.Item[%d].Outline	0x0118	NULL	Note.Item[%d]	
Note.Item[%d].Outline.Bottom	0x0118	NULL	Note.Item[%d].Outline	
Note.Item[%d].Outline.Bottom.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note.Item[%d].Outline.Bottom	
Note.Item[%d].Outline.Bottom.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Note.Item[%d].Outline.Bottom	
Note.Item[%d].Outline.Bottom.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Note.Item[%d].Outline.Bottom.width.measurementType	0x0118	"%.16g"	Note.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Note.Item[%d].Outline.Bottom.width.name	0x0118	"%s"	Note.Item[%d].Outline.Bottom	
Note.Item[%d].Outline.Left	0x0118	NULL	Note.Item[%d].Outline	
Note.Item[%d].Outline.Left.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note.Item[%d].Outline.Left	
Note.Item[%d].Outline.Left.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Note.Item[%d].Outline.Left	
Note.Item[%d].Outline.Left.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Item[%d].Outline.Left	
Note.Item[%d].Outline.Left.width.measurementType	0x0118	"%.16g"	Note.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Note.Item[%d].Outline.Left.width.name	0x0118	"%s"	Note.Item[%d].Outline.Left	
Note.Item[%d].Outline.Right	0x0118	NULL	Note.Item[%d].Outline	
Note.Item[%d].Outline.Right.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note.Item[%d].Outline.Right	
Note.Item[%d].Outline.Right.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Note.Item[%d].Outline.Right	
Note.Item[%d].Outline.Right.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Note.Item[%d].Outline.Right.width.measurementType	0x0118	"%.16g"	Note.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Note.Item[%d].Outline.Right.width.name	0x0118	"%s"	Note.Item[%d].Outline.Right	
Note.Item[%d].Outline.Top	0x0118	NULL	Note.Item[%d].Outline	
Note.Item[%d].Outline.Top.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note.Item[%d].Outline.Top	
Note.Item[%d].Outline.Top.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Note.Item[%d].Outline.Top	
Note.Item[%d].Outline.Top.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Item[%d].Outline.Top	
Note.Item[%d].Outline.Top.width.measurementType	0x0118	"%.16g"	Note.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Note.Item[%d].Outline.Top.width.name	0x0118	"%s"	Note.Item[%d].Outline.Top	
Note.Item[%d].Outline.direction	0x0118	"%.16g %.16g %.16g"	Note.Item[%d].Outline	
Note.Item[%d].Outline.doubleOffset	0x0118	"%.16g"	Note.Item[%d].Outline	
Note.Item[%d].Outline.fillColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note.Item[%d].Outline	
Note.Item[%d].Outline.filled	0x0118	"%d"	Note.Item[%d].Outline	
Note.Item[%d].Outline.origin	0x0118	"%.16g %.16g %.16g"	Note.Item[%d].Outline	
Note.Item[%d].Outline.outlineHeight	0x0118	"%.16g"	Note.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Note.Item[%d].Outline.outlineWidth	0x0118	"%.16g"	Note.Item[%d].Outline	
Note.Item[%d].Outline.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Item[%d].Outline	
Note.Item[%d].Outline.visible	0x0118	"%d"	Note.Item[%d].Outline	
Note.Item[%d].bold	0x0118	"%d"	Note.Item[%d]	
Note.Item[%d].font	0x0118	"%s"	Note.Item[%d]	
Note.Item[%d].format	0x0118	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Note.Item[%d]	
Note.Item[%d].italic	0x0118	"%d"	Note.Item[%d]	
Note.Item[%d].italicAngle	0x0118	"%.16g"	Note.Item[%d]	
Note.Item[%d].justification	0x0118	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Note.Item[%d]	
Note.Item[%d].language	0x0118	"%s"	Note.Item[%d]	
Note.Item[%d].lineFactor	0x0118	"%.16g"	Note.Item[%d]	
Note.Item[%d].lineWeldSupplementalSymbol	0x0118	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete,	Note.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
Note.Item[%d].lineWeldSymbol	0x0118	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskds smooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround,	Note.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
Note.Item[%d].outlineColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Note.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Note.Item[%d].Outline
Note.Item[%d].outlineStyle	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Note.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Note.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite Note.Item[%d].Outline
Note.Item[%d].outlineType	0x0118	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Note.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Note.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite Note.Item[%d].Outline
Note.Item[%d].outlineWidth.measurementType	0x0118	"%.16g"	Note.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Note.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Note.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Note.Item[%d].outlineWidth.name	0x0118	"%s"	Note.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Note.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite Note.Item[%d].Outline
Note.Item[%d].spaceFactor	0x0118	"%.16g"	Note.Item[%d]	
Note.Item[%d].strikethrough	0x0118	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Note.Item[%d]	
Note.Item[%d].string	0x0118	"%s"	Note.Item[%d]	
Note.Item[%d].subscript	0x0118	String representing enumeration such that: "0"=sub, "1"=super	Note.Item[%d]	
Note.Item[%d].symbol	0x0118	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius,	Note.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
Note.Item[%d].textAspect	0x0118	"%.16g"	Note.Item[%d]	
Note.Item[%d].textColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note.Item[%d]	
Note.Item[%d].textHeight	0x0118	"%.16g"	Note.Item[%d]	
Note.Item[%d].textLineWidth.measurementType	0x0118	"%.16g"	Note.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
Note.Item[%d].textLineWidth.name	0x0118	"%s"	Note.Item[%d]	
Note.Item[%d].textThickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Item[%d]	
Note.Item[%d].underline	0x0118	String representing enumeration such that: "0"=over, "1"=under	Note.Item[%d]	

Q.9.5 Note.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Note.Outline	0x0118	NULL	Note	
Note.Outline.Bottom	0x0118	NULL	Note.Outline	
Note.Outline.Bottom.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red	Note.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		for the colour are encoded in the string		
Note.Outline.Bottom.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Note.Outline.Bottom	
Note.Outline.Bottom.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Outline.Bottom	
Note.Outline.Bottom.width.measurementType	0x0118	("%.16g"	Note.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Note.Outline.Bottom.width.name	0x0118	"%s"	Note.Outline.Bottom	
Note.Outline.Left	0x0118	NULL	Note.Outline	
Note.Outline.Left.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note.Outline.Left	
Note.Outline.Left.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Note.Outline.Left	
Note.Outline.Left.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Outline.Left	
Note.Outline.Left.width.measurementType	0x0118	("%.16g"	Note.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Note.Outline.Left.width.name	0x0118	"%s"	Note.Outline.Left	
Note.Outline.Right	0x0118	NULL	Note.Outline	
Note.Outline.Right.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	Note.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
Note.Outline.Right.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Note.Outline.Right	
Note.Outline.Right.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Outline.Right	
Note.Outline.Right.width.measurementType	0x0118	"%.16g"	Note.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Note.Outline.Right.width.name	0x0118	"%s"	Note.Outline.Right	
Note.Outline.Top	0x0118	NULL	Note.Outline	
Note.Outline.Top.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note.Outline.Top	
Note.Outline.Top.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Note.Outline.Top	
Note.Outline.Top.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Outline.Top	
Note.Outline.Top.width.measurementType	0x0118	"%.16g"	Note.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Note.Outline.Top.width.name	0x0118	"%s"	Note.Outline.Top	
Note.Outline.direction	0x0118	"%.16g %.16g %.16g"	Note.Outline	
Note.Outline.doubleOffset	0x0118	"%.16g"	Note.Outline	
Note.Outline.fillColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	Note.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
Note.Outline.filled	0x0118	"%d"	Note.Outline	
Note.Outline.origin	0x0118	"%.16g %.16g %.16g"	Note.Outline	
Note.Outline.outlineHeight	0x0118	"%.16g"	Note.Outline	
Note.Outline.outlineWidth	0x0118	"%.16g"	Note.Outline	
Note.Outline.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note.Outline	
Note.Outline.visible	0x0118	"%d"	Note.Outline	

Q.9.6 Note.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Note.bold	0x0118	"%d"	Note	
Note.font	0x0118	"%s"	Note	
Note.italic	0x0118	"%d"	Note	
Note.italicAngle	0x0118	"%.16g"	Note	
Note.justification	0x0118	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Note	
Note.language	0x0118	"%s"	Note	
Note.lineFactor	0x0118	"%.16g"	Note	
Note.maxExtend	0x0118	"%d"	Note	
Note.name	0x0118	"%s"	Note	
Note.outlineColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Note.Outline.colour which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite Note.Outline
Note.outlineStyle	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Note	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Note.Outline.style which would match the more modern Outline syntax and require prerequisite Note.Outline
Note.outlineType	0x0118	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Note	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Note.Outline.type which would match the more modern Outline syntax and require prerequisite Note.Outline
Note.outlineWidth.measurementType	0x0118	"%.16g"	Note	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Note.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Note.Outline
Note.outlineWidth.name	0x0118	"%s"	Note	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Note.Outline.width.name which would match the more modern Outline syntax and require prerequisite Note.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Note.spaceFactor	0x0118	"%.16g"	Note	
Note.strikethrough	0x0118	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Note	
Note.subscript	0x0118	String representing enumeration such that: "0"=sub, "1"=super	Note	
Note.textAspect	0x0118	"%.16g"	Note	
Note.textColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Note	
Note.textHeight	0x0118	"%.16g"	Note	
Note.textLineWidth.measurementType	0x0118	"%.16g"	Note	measurementType must be replaced with meterWidth or pixelWidth
Note.textLineWidth.name	0x0118	"%s"	Note	
Note.textOrientation	0x0118	String representing enumeration such that: "0"=horizontal, "1"=vertical	Note	
Note.textThickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Note	
Note.underline	0x0118	String representing enumeration such that: "0"=over, "1"=under	Note	

Q.9.7 NoteText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
NoteText[%d]	0x0100 0x0235 0x0244	NULL		
NoteText[%d].Text	0x0100 0x0235 0x0244	NULL	NoteText[%d]	
NoteText[%d].Text.Item[%d]	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text	
NoteText[%d].Text.Item[%d].Outline	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].Outline	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
e.Bottom			e	
NoteText[%d].Text.Item[%d].Outline.Bottom.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Item[%d].Outline.Bottom	
NoteText[%d].Text.Item[%d].Outline.Bottom.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	NoteText[%d].Text.Item[%d].Outline.Bottom	
NoteText[%d].Text.Item[%d].Outline.Bottom.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Item[%d].Outline.Bottom	
NoteText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
NoteText[%d].Text.Item[%d].Outline.Bottom.width.name	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Item[%d].Outline.Bottom	
NoteText[%d].Text.Item[%d].Outline.Left	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.Left.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Item[%d].Outline.Left	
NoteText[%d].Text.Item[%d].Outline.Left.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	NoteText[%d].Text.Item[%d].Outline.Left	
NoteText[%d].Text.Item[%d].Outline.Left.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Item[%d].Outline.Left	
NoteText[%d].Text.Item[%d].Outline.Left.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
NoteText[%d].Text.Item[%d].Outline	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
e.Left.width.name			e.Left	
NoteText[%d].Text.Item[%d].Outline.Right	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.Right.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Item[%d].Outline.Right	
NoteText[%d].Text.Item[%d].Outline.Right.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	NoteText[%d].Text.Item[%d].Outline.Right	
NoteText[%d].Text.Item[%d].Outline.Right.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Item[%d].Outline.Right	
NoteText[%d].Text.Item[%d].Outline.Right.width.measurementType	0x0100 0x0235 0x0244	("%.16g"	NoteText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
NoteText[%d].Text.Item[%d].Outline.Right.width.name	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Item[%d].Outline.Right	
NoteText[%d].Text.Item[%d].Outline.Top	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.Top.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Item[%d].Outline.Top	
NoteText[%d].Text.Item[%d].Outline.Top.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	NoteText[%d].Text.Item[%d].Outline.Top	
NoteText[%d].Text.Item[%d].Outline.Top.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Item[%d].Outline.Top	
NoteText[%d].Text.Item[%d].Outline.Top.width.measurementType	0x0100 0x0235 0x0244	("%.16g"	NoteText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				pixelWidth
NoteText[%d].Text.Item[%d].Outline.Top.width.name	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Item[%d].Outline.Top	
NoteText[%d].Text.Item[%d].Outline.direction	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.doubleOffset	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.fillColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.filled	0x0100 0x0235 0x0244	"%d"	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.origin	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.outlineHeight	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.outlineWidth	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].Outline.visible	0x0100 0x0235 0x0244	"%d"	NoteText[%d].Text.Item[%d].Outline	
NoteText[%d].Text.Item[%d].bold	0x0100 0x0235 0x0244	"%d"	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].font	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].format	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].italic	0x0100 0x0235 0x0244	"%d"	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].italicAngle	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
NoteText[%d].Text.Item[%d].justification	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].language	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].lineFactor	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].lineWeldSymbol	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange,	NoteText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=esksmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=esknumber, "57"=isoedge		
NoteText[%d].Text.Item[%d].outlineColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading NoteText[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite NoteText[%d].Text.Item[%d].Outline
NoteText[%d].Text.Item[%d].outlineStyle	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	NoteText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading NoteText[%d].Text.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				NoteText[%d].Text.Item[%d].Outline
NoteText[%d].Text.Item[%d].outlineType	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	NoteText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading NoteText[%d].Text.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite NoteText[%d].Text.Item[%d].Outline
NoteText[%d].Text.Item[%d].outlineWidth.measurementType	0x0100 0x0235 0x0244	%.16g"	NoteText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading NoteText[%d].Text.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite NoteText[%d].Text.Item[%d].Outline
NoteText[%d].Text.Item[%d].outlineWidth.name	0x0100 0x0235 0x0244	%"s"	NoteText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading NoteText[%d].Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite NoteText[%d].Text.Item[%d].Outline
NoteText[%d].Text.Item[%d].space	0x0100 0x0235 0x0244	%.16g"	NoteText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Factor				
NoteText[%d].Text.Item[%d].strike through	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=none, "1"=single, "2"=double	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].string	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].subsc ript	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=sub, "1"=super	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].symbo l	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension,	NoteText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
NoteText[%d].Text.Item[%d].textAspect	0x0100 0x0235 0x0244	%.16g"	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].textColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].textHeight	0x0100 0x0235 0x0244	%.16g"	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].textLineWidth.measurementType	0x0100 0x0235 0x0244	%.16g"	NoteText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
NoteText[%d].Text.Item[%d].textLineWidth.name	0x0100 0x0235 0x0244	%"s"	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].textThickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Item[%d]	
NoteText[%d].Text.Item[%d].underline	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=over, "1"=under	NoteText[%d].Text.Item[%d]	

Q.9.8 NoteText[%d].Text.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
NoteText[%d].Text.Outline	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text	
NoteText[%d].Text.Outline.Bottom	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.Bottom.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Outline.Bottom	
NoteText[%d].Text.Outline.Bottom.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	NoteText[%d].Text.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
NoteText[%d].Text.Outline.Bottom.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Outline.Bottom	
NoteText[%d].Text.Outline.Bottom.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
NoteText[%d].Text.Outline.Bottom.width.name	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Outline.Bottom	
NoteText[%d].Text.Outline.Left	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.Left.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Outline.Left	
NoteText[%d].Text.Outline.Left.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	NoteText[%d].Text.Outline.Left	
NoteText[%d].Text.Outline.Left.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Outline.Left	
NoteText[%d].Text.Outline.Left.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
NoteText[%d].Text.Outline.Left.width.name	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Outline.Left	
NoteText[%d].Text.Outline.Right	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.Right.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Outline.Right	
NoteText[%d].Text.Outline.Right.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	NoteText[%d].Text.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
NoteText[%d].Text.Outline.Right.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Outline.Right	
NoteText[%d].Text.Outline.Right.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
NoteText[%d].Text.Outline.Right.width.name	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Outline.Right	
NoteText[%d].Text.Outline.Top	0x0100 0x0235 0x0244	NULL	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.Top.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Outline.Top	
NoteText[%d].Text.Outline.Top.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	NoteText[%d].Text.Outline.Top	
NoteText[%d].Text.Outline.Top.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Outline.Top	
NoteText[%d].Text.Outline.Top.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
NoteText[%d].Text.Outline.Top.width.name	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text.Outline.Top	
NoteText[%d].Text.Outline.direction	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.doubleOffset	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.fillColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
NoteText[%d].Text.Outline.filled	0x0100 0x0235 0x0244	"%d"	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.origin	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.outline Height	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.outline Width	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text.Outline	
NoteText[%d].Text.Outline.visible	0x0100 0x0235 0x0244	"%d"	NoteText[%d].Text.Outline	

Q.9.9 NoteText[%d].Text.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
NoteText[%d].Text.bold	0x0100 0x0235 0x0244	"%d"	NoteText[%d].Text	
NoteText[%d].Text.font	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text	
NoteText[%d].Text.italic	0x0100 0x0235 0x0244	"%d"	NoteText[%d].Text	
NoteText[%d].Text.italicAngle	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text	
NoteText[%d].Text.justification	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	NoteText[%d].Text	
NoteText[%d].Text.language	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text	
NoteText[%d].Text.lineFactor	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text	
NoteText[%d].Text.maxExtend	0x0100 0x0235 0x0244	"%d"	NoteText[%d].Text	
NoteText[%d].Text.name	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text	
NoteText[%d].Text.outlineColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading NoteText[%d].Text.Outline.colour which would match the more

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				modern Outline syntax and require prerequisite NoteText[%d].Text.Outline
NoteText[%d].Text.outlineStyle	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	NoteText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading NoteText[%d].Text.Outline.style which would match the more modern Outline syntax and require prerequisite NoteText[%d].Text.Outline
NoteText[%d].Text.outlineType	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	NoteText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading NoteText[%d].Text.Outline.type which would match the more modern Outline syntax and require prerequisite NoteText[%d].Text.Outline
NoteText[%d].Text.outlineWidth.measurementType	0x0100 0x0235 0x0244	("%.16g"	NoteText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading NoteText[%d].Text.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite NoteText[%d].Text.Outline
NoteText[%d].Text.outlineWidth.name	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				reading NoteText[%d].Text.Outline.width.n ame which would match the more modern Outline syntax and require prerequisite NoteText[%d].Text.Outline
NoteText[%d].Text.spaceFactor	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text	
NoteText[%d].Text.strikethrough	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=none, "1"=single, "2"=double	NoteText[%d].Text	
NoteText[%d].Text.subscript	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=sub, "1"=super	NoteText[%d].Text	
NoteText[%d].Text.textAspect	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text	
NoteText[%d].Text.textColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	NoteText[%d].Text	
NoteText[%d].Text.textHeight	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text	
NoteText[%d].Text.textLineWidth. measurementType	0x0100 0x0235 0x0244	"%.16g"	NoteText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
NoteText[%d].Text.textLineWidth.n ame	0x0100 0x0235 0x0244	"%s"	NoteText[%d].Text	
NoteText[%d].Text.textOrientation	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=horizontal, "1"=vertical	NoteText[%d].Text	
NoteText[%d].Text.textThickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	NoteText[%d].Text	
NoteText[%d].Text.underline	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=over, "1"=under	NoteText[%d].Text	
NoteText[%d].textDirection	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	NoteText[%d]	
NoteText[%d].textOrigin	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	NoteText[%d]	

Q.10 PMI Properties “O”

Q.10.1 OpenField.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
OpenField	0x0231 0x0232	NULL		
OpenField.Item[%d]	0x0231 0x0232	NULL	OpenField	
OpenField.Item[%d].Outline	0x0231 0x0232	NULL	OpenField.Item[%d]	
OpenField.Item[%d].Outline.Bottom	0x0231 0x0232	NULL	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.Bottom.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Item[%d].Outline.Bottom	
OpenField.Item[%d].Outline.Bottom.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	OpenField.Item[%d].Outline.Bottom	
OpenField.Item[%d].Outline.Bottom.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	OpenField.Item[%d].Outline.Bottom	
OpenField.Item[%d].Outline.Bottom.width.measurementType	0x0231 0x0232	%.16g"	OpenField.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
OpenField.Item[%d].Outline.Bottom.width.name	0x0231 0x0232	%"s"	OpenField.Item[%d].Outline.Bottom	
OpenField.Item[%d].Outline.Left	0x0231 0x0232	NULL	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.Left.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Item[%d].Outline.Left	
OpenField.Item[%d].Outline.Left.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	OpenField.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
OpenField.Item[%d].Outline.Left.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	OpenField.Item[%d].Outline.Left	
OpenField.Item[%d].Outline.Left.width.measurementType	0x0231 0x0232	"%.16g"	OpenField.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
OpenField.Item[%d].Outline.Left.width.name	0x0231 0x0232	"%s"	OpenField.Item[%d].Outline.Left	
OpenField.Item[%d].Outline.Right	0x0231 0x0232	NULL	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.Right.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Item[%d].Outline.Right	
OpenField.Item[%d].Outline.Right.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	OpenField.Item[%d].Outline.Right	
OpenField.Item[%d].Outline.Right.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	OpenField.Item[%d].Outline.Right	
OpenField.Item[%d].Outline.Right.width.measurementType	0x0231 0x0232	"%.16g"	OpenField.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
OpenField.Item[%d].Outline.Right.width.name	0x0231 0x0232	"%s"	OpenField.Item[%d].Outline.Right	
OpenField.Item[%d].Outline.Top	0x0231 0x0232	NULL	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.Top.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Item[%d].Outline.Top	
OpenField.Item[%d].Outline.Top.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	OpenField.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
OpenField.Item[%d].Outline.Top.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	OpenField.Item[%d].Outline.Top	
OpenField.Item[%d].Outline.Top.width.measurementType	0x0231 0x0232	"%.16g"	OpenField.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
OpenField.Item[%d].Outline.Top.width.name	0x0231 0x0232	"%s"	OpenField.Item[%d].Outline.Top	
OpenField.Item[%d].Outline.direction	0x0231 0x0232	"%.16g %.16g %.16g"	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.doubleOffset	0x0231 0x0232	"%.16g"	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.fillColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.filled	0x0231 0x0232	"%d"	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.origin	0x0231 0x0232	"%.16g %.16g %.16g"	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.outlineHeight	0x0231 0x0232	"%.16g"	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.outlineWidth	0x0231 0x0232	"%.16g"	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	OpenField.Item[%d].Outline	
OpenField.Item[%d].Outline.visible	0x0231 0x0232	"%d"	OpenField.Item[%d].Outline	
OpenField.Item[%d].bold	0x0231 0x0232	"%d"	OpenField.Item[%d]	
OpenField.Item[%d].font	0x0231 0x0232	"%s"	OpenField.Item[%d]	
OpenField.Item[%d].format	0x0231 0x0232	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	OpenField.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
OpenField.Item[%d].italic	0x0231 0x0232	"%d"	OpenField.Item[%d]	
OpenField.Item[%d].italicAngle	0x0231 0x0232	"%.16g"	OpenField.Item[%d]	
OpenField.Item[%d].justification	0x0231 0x0232	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	OpenField.Item[%d]	
OpenField.Item[%d].language	0x0231 0x0232	"%s"	OpenField.Item[%d]	
OpenField.Item[%d].lineFactor	0x0231 0x0232	"%.16g"	OpenField.Item[%d]	
OpenField.Item[%d].lineWeldSupplementalSymbol	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	OpenField.Item[%d]	
OpenField.Item[%d].lineWeldSymbol	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay,	OpenField.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=melthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspottlatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallarround, "55"=eskdiameter, "56"=eskdnumber, "57"=isoedge		
OpenField.Item[%d].outlineColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading OpenField.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite OpenField.Item[%d].Outline
OpenField.Item[%d].outlineStyle	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	OpenField.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading OpenField.Item[%d].Outline.style which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite OpenField.Item[%d].Outline
OpenField.Item[%d].outlineType	0x0231 0x0232	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	OpenField.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading OpenField.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite OpenField.Item[%d].Outline
OpenField.Item[%d].outlineWidth. measurementType	0x0231 0x0232	("%.16g"	OpenField.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading OpenField.Item[%d].Outline.width. measurementType which would match the more modern Outline syntax and require prerequisite OpenField.Item[%d].Outline
OpenField.Item[%d].outlineWidth. name	0x0231 0x0232	"%s"	OpenField.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading OpenField.Item[%d].Outline.width. name which would match the more modern Outline syntax and require prerequisite OpenField.Item[%d].Outline
OpenField.Item[%d].spaceFactor	0x0231 0x0232	("%.16g"	OpenField.Item[%d]	
OpenField.Item[%d].striketrough	0x0231 0x0232	String representing enumeration such that: "0"=none, "1"=single,	OpenField.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=double		
OpenField.Item[%d].string	0x0231 0x0232	"%s"	OpenField.Item[%d]	
OpenField.Item[%d].subscript	0x0231 0x0232	String representing enumeration such that: "0"=sub, "1"=super	OpenField.Item[%d]	
OpenField.Item[%d].symbol	0x0231 0x0232	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint,	OpenField.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"63"=datumtranslation		
OpenField.Item[%d].textAspect	0x0231 0x0232	%.16g"	OpenField.Item[%d]	
OpenField.Item[%d].textColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Item[%d]	
OpenField.Item[%d].textHeight	0x0231 0x0232	%.16g"	OpenField.Item[%d]	
OpenField.Item[%d].textLineWidth.measurementType	0x0231 0x0232	%.16g"	OpenField.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
OpenField.Item[%d].textLineWidth.name	0x0231 0x0232	%"s"	OpenField.Item[%d]	
OpenField.Item[%d].textThickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	OpenField.Item[%d]	
OpenField.Item[%d].underline	0x0231 0x0232	String representing enumeration such that: "0"=over, "1"=under	OpenField.Item[%d]	

Q.10.2 OpenField.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
OpenField.Outline	0x0231 0x0232	NULL	OpenField	
OpenField.Outline.Bottom	0x0231 0x0232	NULL	OpenField.Outline	
OpenField.Outline.Bottom.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Outline.Bottom	
OpenField.Outline.Bottom.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	OpenField.Outline.Bottom	
OpenField.Outline.Bottom.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick,	OpenField.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
OpenField.Outline.Bottom.width.measurementType	0x0231 0x0232	"%.16g"	OpenField.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
OpenField.Outline.Bottom.width.name	0x0231 0x0232	"%s"	OpenField.Outline.Bottom	
OpenField.Outline.Left	0x0231 0x0232	NULL	OpenField.Outline	
OpenField.Outline.Left.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Outline.Left	
OpenField.Outline.Left.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	OpenField.Outline.Left	
OpenField.Outline.Left.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	OpenField.Outline.Left	
OpenField.Outline.Left.width.measurementType	0x0231 0x0232	"%.16g"	OpenField.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
OpenField.Outline.Left.width.name	0x0231 0x0232	"%s"	OpenField.Outline.Left	
OpenField.Outline.Right	0x0231 0x0232	NULL	OpenField.Outline	
OpenField.Outline.Right.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Outline.Right	
OpenField.Outline.Right.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	OpenField.Outline.Right	
OpenField.Outline.Right.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick,	OpenField.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
OpenField.Outline.Right.width.measurementType	0x0231 0x0232	"%.16g"	OpenField.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
OpenField.Outline.Right.width.name	0x0231 0x0232	"%s"	OpenField.Outline.Right	
OpenField.Outline.Top	0x0231 0x0232	NULL	OpenField.Outline	
OpenField.Outline.Top.colour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Outline.Top	
OpenField.Outline.Top.style	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	OpenField.Outline.Top	
OpenField.Outline.Top.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	OpenField.Outline.Top	
OpenField.Outline.Top.width.measurementType	0x0231 0x0232	"%.16g"	OpenField.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
OpenField.Outline.Top.width.name	0x0231 0x0232	"%s"	OpenField.Outline.Top	
OpenField.Outline.direction	0x0231 0x0232	"%.16g %.16g %.16g"	OpenField.Outline	
OpenField.Outline.doubleOffset	0x0231 0x0232	"%.16g"	OpenField.Outline	
OpenField.Outline.fillColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField.Outline	
OpenField.Outline.filled	0x0231 0x0232	"%d"	OpenField.Outline	
OpenField.Outline.origin	0x0231 0x0232	"%.16g %.16g %.16g"	OpenField.Outline	
OpenField.Outline.outlineHeight	0x0231 0x0232	"%.16g"	OpenField.Outline	
OpenField.Outline.outlineWidth	0x0231 0x0232	"%.16g"	OpenField.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
OpenField.Outline.thickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	OpenField.Outline	
OpenField.Outline.visible	0x0231 0x0232	"%d"	OpenField.Outline	

Q.10.3 OpenField.bold.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
OpenField.bold	0x0231 0x0232	"%d"	OpenField	
OpenField.font	0x0231 0x0232	"%s"	OpenField	
OpenField.italic	0x0231 0x0232	"%d"	OpenField	
OpenField.italicAngle	0x0231 0x0232	"%.16g"	OpenField	
OpenField.justification	0x0231 0x0232	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	OpenField	
OpenField.language	0x0231 0x0232	"%s"	OpenField	
OpenField.lineFactor	0x0231 0x0232	"%.16g"	OpenField	
OpenField.maxExtend	0x0231 0x0232	"%d"	OpenField	
OpenField.name	0x0231 0x0232	"%s"	OpenField	
OpenField.outlineColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading OpenField.Outline.colour which would match the more modern Outline syntax and require prerequisite OpenField.Outline
OpenField.outlineStyle	0x0231 0x0232	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	OpenField	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading OpenField.Outline.style which would match the more modern Outline syntax and require prerequisite OpenField.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
OpenField.outlineType	0x0231 0x0232	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	OpenField	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading OpenField.Outline.type which would match the more modern Outline syntax and require prerequisite OpenField.Outline
OpenField.outlineWidth.measurementType	0x0231 0x0232	"%.16g"	OpenField	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading OpenField.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite OpenField.Outline
OpenField.outlineWidth.name	0x0231 0x0232	"%s"	OpenField	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading OpenField.Outline.width.name which would match the more modern Outline syntax and require prerequisite OpenField.Outline
OpenField.spaceFactor	0x0231 0x0232	"%.16g"	OpenField	
OpenField.strikethrough	0x0231 0x0232	String representing enumeration such that: "0"=none, "1"=single, "2"=double	OpenField	
OpenField.subscript	0x0231 0x0232	String representing enumeration such that: "0"=sub, "1"=super	OpenField	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
OpenField.textAspect	0x0231 0x0232	"%.16g"	OpenField	
OpenField.textColour	0x0231 0x0232	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	OpenField	
OpenField.textHeight	0x0231 0x0232	"%.16g"	OpenField	
OpenField.textLineWidth.measurementType	0x0231 0x0232	"%.16g"	OpenField	measurementType must be replaced with meterWidth or pixelWidth
OpenField.textLineWidth.name	0x0231 0x0232	"%s"	OpenField	
OpenField.textOrientation	0x0231 0x0232	String representing enumeration such that: "0"=horizontal, "1"=vertical	OpenField	
OpenField.textThickness	0x0231 0x0232	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	OpenField	
OpenField.underline	0x0231 0x0232	String representing enumeration such that: "0"=over, "1"=under	OpenField	

Q.10.4 Organisation.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Organisation	0x0245	NULL		
Organisation.Address	0x0245	NULL	Organisation	
Organisation.Address.country	0x0245	"%s"	Organisation.Address	
Organisation.Address.emailAddresses	0x0245	"%s"	Organisation.Address	
Organisation.Address.internalLocation	0x0245	"%s"	Organisation.Address	
Organisation.Address.postalCode	0x0245	"%s"	Organisation.Address	
Organisation.Address.region	0x0245	"%s"	Organisation.Address	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Organisation.Address.street	0x0245	"%s"	Organisation.Address	
Organisation.Address.streetNumber	0x0245	"%s"	Organisation.Address	
Organisation.Address.telephone	0x0245	"%s"	Organisation.Address	
Organisation.Address.town	0x0245	"%s"	Organisation.Address	
Organisation.Address.web	0x0245	"%s"	Organisation.Address	
Organisation.cageCode	0x0245	"%s"	Organisation	
Organisation.name	0x0245	"%s"	Organisation	

Q.10.5 Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL		
Outline.Bottom	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	Outline	
Outline.Bottom.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Outline.Bottom	
Outline.Bottom.style	0x0004 0x0008 0x0041 0x0042	String representing enumeration	Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
Outline.Bottom.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Outline.Bottom	
Outline.Bottom.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Outline.Bottom.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	Outline.Bottom	
Outline.Left	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	Outline	
Outline.Left.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
Outline.Left.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Outline.Left	
Outline.Left.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Outline.Left	
Outline.Left.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Outline.Left.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	Outline.Left	
Outline.Right	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	NULL	Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
Outline.Right.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Outline.Right	
Outline.Right.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Outline.Right	
Outline.Right.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Outline.Right	
Outline.Right.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Outline.Right.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	Outline.Right	
Outline.Top	0x0004 0x0008 0x0041 0x0042	NULL	Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
Outline.Top.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Outline.Top	
Outline.Top.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Outline.Top	
Outline.Top.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Outline.Top	
Outline.Top.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Outline.Top.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	"%s"	Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
Outline.direction	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"	Outline	
Outline.doubleOffset	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	Outline	
Outline.fillColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Outline	
Outline.filled	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	Outline	
Outline.origin	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	"%.16g %.16g %.16g"	Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
Outline.outlineHeight	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	("%.16g"	Outline	
Outline.outlineWidth	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	("%.16g"	Outline	
Outline.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Outline	
Outline.visible	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	("%d"	Outline	

Q.11 PMI Properties “P”

Q.11.1 PMIGeometryColor

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PMIGeometryColor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x0308 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		

Q.11.2 PMITextBackgroundColor

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PMITextBackgroundColor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x0308 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		

Q.11.3 PMITextFlatToScreenOpacity

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PMITextFlatToScreenOpacity	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x0308 0X030D 0X030F 0x0311 0x0313	"%s"		

Q.11.4 PMITextForegroundColor

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PMITextForegroundColor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x0308 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string		

Q.11.5 PMITextInPlaneOpacity

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PMITextInPlaneOpacity	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x0308 0X030D 0X030F 0x0311 0x0313	"%s"		

Q.11.6 ParameterDimension[%d].DimensionText[%d] Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d]	0X030D	NULL		
ParameterDimension[%d].Description	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].DimensionText[%d]	0X030D	NULL	ParameterDimension[%d]	DimensionText[%d] index expected to range from 0-3 inclusive.
				Each instance of this is expected to have a different position such that DimensionText[x].position != DimensionText[y].position for any combination of x and y
ParameterDimension[%d].DimensionText[%d].Text	0X030D	NULL	ParameterDimension[%d].DimensionText[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Right	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline.outlineDash	0X030D	String representing enumeration	ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
onText[%d].Text.Item[%d].OutlineThickness		such that: "0"=normal, "1"=thick, "2"=thin	onText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].OutlineVisible	0X030D	"%d"	ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].bold	0X030D	"%d"	ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].font	0X030D	"%s"	ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].format	0X030D	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].italic	0X030D	"%d"	ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].language	0X030D	"%s"	ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing,	ParameterDimension[%d].DimensionOnText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].lineWeldSymbol	OX030D	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jjsstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jjsstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder,	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DimensionText[%d].Text.Item[%d].OutlineColour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DimensionText[%d].Text.Item[%d].OutlineStyle which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram,	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DimensionText[%d].Text.Item[%d].OutlineType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"22"=triangleleft, "23"=triangleright, "24"=squaredcircle		
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].outlineWidth.measurementType	0X030D	("%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DimensionText[%d].Text.Item[%d].OutlineWidth.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DimensionText[%d].Text.Item[%d].OutlineWidth.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DimensionText[%d].Text.Item[%d].Outline
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].spaceFactor	0X030D	("%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].string	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].text	0X030D	String representing enumeration such that: "0"=centreline,	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
onText[%d].Text.Item[%d].symbol		"1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	onText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].textAspect	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ur		string		
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].textHeight	0X030D	("%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].textLineWidth.measurementType	0X030D	("%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DimensionText[%d].Text.Item[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].DimensionText[%d].Text.Item[%d]	

Q.11.7 ParameterDimension[%d].DimensionText[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DimensionText[%d].Text.Outline	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Outline.Bottom	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Left	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text.Outline.Left	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DimensionText[%d].Text.Outline.Left	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text.Outline.Left	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DimensionText[%d].Text.Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Outline.Left	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Right	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text.Outline.Right	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DimensionText[%d].Text.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DimensionText[%d].Text.Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text.Outline.Right	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DimensionText[%d].Text.Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Outline.Right	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Top	0X030D	NULL	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text.Outline.Top	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DimensionText[%d].Text.Outline.Top	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text.Outline.Top	
ParameterDimension[%d].DimensionText[%d].Text.Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DimensionText[%d].Text.Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text.Outline.Top	
ParameterDimension[%d].DimensionText[%d].Text.Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ParameterDimension[%d].DimensionText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
ParameterDimension[%d].DimensionText[%d].Text.Outline.filled	0X030D	"%d"	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.Outline.visible	0X030D	"%d"	ParameterDimension[%d].DimensionText[%d].Text.Outline	
ParameterDimension[%d].DimensionText[%d].Text.bold	0X030D	"%d"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.font	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.italic	0X030D	"%d"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.italicAngle	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.language	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.lineFactor	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.maxExtend	0X030D	"%d"	ParameterDimension[%d].DimensionText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DimensionText[%d].Text.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DimensionText[%d].Text.Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DimensionText[%d].Text.Outline
ParameterDimension[%d].DimensionText[%d].Text.outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DimensionText[%d].Text.Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DimensionText[%d].Text.Outline
ParameterDimension[%d].DimensionText[%d].Text.outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterDimension[%d].DimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DimensionText[%d].Text.Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DimensionText[%d].Text.Outline
ParameterDimension[%d].DimensionText[%d].Text.outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DimensionText[%d].Text.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DimensionText[%d].Text.Outline
ParameterDimension[%d].DimensionText[%d].Text.outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DimensionText[%d].Text.Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DimensionText[%d].Text.Outline
ParameterDimension[%d].DimensionText[%d].Text.spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.textAspect	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.textHeight	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DimensionText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DimensionText[%d].Text.textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.textOrientation	0X030D	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].Text.underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].DimensionText[%d].Text	
ParameterDimension[%d].DimensionText[%d].position	0X030D	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterDimension[%d].DimensionText[%d]	

Q.11.8 ParameterDimension[%d].DisplayPlane.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DisplayPlane.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d]	This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.xaxis' and 'DisplayPlane.zaxis'
ParameterDimension[%d].DisplayPlane.xaxis	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d]	This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.origin' and 'DisplayPlane.zaxis'
ParameterDimension[%d].DisplayPlane.zaxis	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d]	This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.origin' and 'DisplayPlane.xaxis'

Q.11.9 ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
--------------	---------------------------	------------------------------	------------------	-----------------

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualDimensionText[%d]	0X030D	NULL	ParameterDimension[%d]	DualDimensionText[%d] index expected to range from 0-3 inclusive.
				Each instance of this is expected to have a different position such that DimensionText[x].position != DimensionText[y].position for any combination of x and y
ParameterDimension[%d].DualDimensionText[%d].Text	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline.outlineHeight			Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].bold	0X030D	"%d"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].font	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].format	0X030D	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].italic	0X030D	"%d"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].language	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].LineWeldSupplementalSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].LineWeldSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder,	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisplot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].Outline
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].string	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].symbol	0X030D	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength,	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].TextAspect	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].TextColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].TextHeight	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].TextLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	
ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].DualDimensionText[%d].Text.Item[%d]	

Q.11.10 ParameterDimension[%d].DualDimensionText[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualDimensionText[%d].Text.Outline	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Left	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
mensionText[%d].Text.Outline.Right.width.name			mensionText[%d].Text.Outline.Right	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top	0X030D	NULL	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline.Top	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.filled	0X030D	"%d"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.outlineHeight	0X030D	("%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.outlineWidth	0X030D	("%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.Outline.visible	0X030D	"%d"	ParameterDimension[%d].DualDimensionText[%d].Text.Outline	
ParameterDimension[%d].DualDimensionText[%d].Text.bold	0X030D	"%d"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.font	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.italic	0X030D	"%d"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.italicAngle	0X030D	("%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.language	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.lineFactor	0X030D	("%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.maxExtended	0X030D	"%d"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.outlineColor	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the	ParameterDimension[%d].DualDimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
our		colour are encoded in the string		reading ParameterDimension[%d].DualDimensionText[%d].Text.Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualDimensionText[%d].Text.Outline
ParameterDimension[%d].DualDimensionText[%d].Text.outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualDimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualDimensionText[%d].Text.Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualDimensionText[%d].Text.Outline
ParameterDimension[%d].DualDimensionText[%d].Text.outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ParameterDimension[%d].DualDimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualDimensionText[%d].Text.Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualDimensionText[%d].Text.Outline
ParameterDimension[%d].DualDimensionText[%d].Text.outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualDimensionText[%d].Text.Outline.width.measurementType which would match the more modern

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				Outline syntax and require prerequisite ParameterDimension[%d].DualDimensionText[%d].Text.Outline
ParameterDimension[%d].DualDimensionText[%d].Text.outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualDimensionText[%d].Text.Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualDimensionText[%d].Text.Outline
ParameterDimension[%d].DualDimensionText[%d].Text.spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.textAspect	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.textHeight	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualDimensionText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualDimensionText[%d].Text.textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.textOrient	0X030D	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterDimension[%d].DualDimensionText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ation				
ParameterDimension[%d].DualDimensionText[%d].Text.textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].Text.underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].DualDimensionText[%d].Text	
ParameterDimension[%d].DualDimensionText[%d].position	0X030D	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterDimension[%d].DualDimensionText[%d]	

Q.11.11 ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualUnitSymbol[%d]	0X030D	NULL	ParameterDimension[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	0X030D	NULL	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	0X030D	NULL	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom.unit	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom	measurementType must be

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
itSymbol[%d].Item[%d].Outline.Bottom.width.measurementType			Symbol[%d].Item[%d].Outline.Bottom	replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Left	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Right	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.Top	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.direction	0X030D	("%.16g %.16g %.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.dubleOffset	0X030D	("%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].bold	0X030D	"%d"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].font	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].format	0X030D	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].italic	0X030D	"%d"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre,	ParameterDimension[%d].DualUnit	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
n		"2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Symbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].language	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].lineWeldSupplementalSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].lineWeldSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected,	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ParameterDimension[%d].DualUnit Symbol[%d].Item[%d].Outline
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].outlineWidth.measurementType	0X030D	%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].outlineWidth.name	0X030D	%"s"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualUnit

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				Symbol[%d].Item[%d].Outline
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].string	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].symbol	0X030D	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature,	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].textAspect	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].textHeight	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Item[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].DualUnitSymbol[%d].Item[%d]	

Q.11.12 ParameterDimension[%d].DualUnitSymbol[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualUnitSymbol[%d].Outline	0X030D	NULL	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].Outline	0X030D	NULL	ParameterDimension[%d].DualUnitSymbol[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Symbol[%d].Outline.Bottom			Symbol[%d].Outline	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Bottom	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Bottom	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Bottom	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Bottom	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].DualUnit Symbol[%d].Outline	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].DualUnit Symbol[%d].Outline	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Right	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].DualUnit Symbol[%d].Outline	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top	
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].DualUnit Symbol[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualUnitSymbol[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnitSymbol[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].DualUnitSymbol[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnitSymbol[%d].Outline	
ParameterDimension[%d].DualUnitSymbol[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].DualUnitSymbol[%d].Outline	

Q.11.13 ParameterDimension[%d].DualUnitSymbol[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualUnitSymbol[%d].bold	0X030D	"%d"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].font	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].italic	0X030D	"%d"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright,	ParameterDimension[%d].DualUnitSymbol[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		
ParameterDimension[%d].DualUnitSymbol[%d].language	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].maxExtend	0X030D	"%d"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].name	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualUnitSymbol[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualUnitSymbol[%d].Outline
ParameterDimension[%d].DualUnitSymbol[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualUnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualUnitSymbol[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualUnitSymbol[%d].Outline
ParameterDimension[%d].DualUnitSymbol[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota,	ParameterDimension[%d].DualUnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualUnitSymbol[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualUn

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		itSymbol[%d].Outline
ParameterDimension[%d].DualUnitSymbol[%d].outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualUnitSymbol[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualUnitSymbol[%d].Outline
ParameterDimension[%d].DualUnitSymbol[%d].outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualUnitSymbol[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualUnitSymbol[%d].Outline
ParameterDimension[%d].DualUnitSymbol[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualU	0X030D	"%.16g"	ParameterDimension[%d].DualUnit	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
nitSymbol[%d].textAspect			Symbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].textHeight	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualUnitSymbol[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualUnitSymbol[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].textOrientation	0X030D	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualUnitSymbol[%d]	
ParameterDimension[%d].DualUnitSymbol[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].DualUnitSymbol[%d]	

Q.11.14 ParameterDimension[%d].DualValueText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualValueText	0X030D	NULL	ParameterDimension[%d]	
ParameterDimension[%d].DualValueText.Item[%d]	0X030D	NULL	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.Item[%d].Outline	0X030D	NULL	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom.	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
colour		string		
ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].DualValueText.Item[%d].Outline.Bottom	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Item[%d].Outline.Left	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText.Item[%d].Outline.Left	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Item[%d].Outline.Left	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualValueText.Item[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].DualValueText.Item[%d].Outline.Left	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].DualValueText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ueText.Item[%d].Outline.Right			ueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Item[%d].Outline.Right	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText.Item[%d].Outline.Right	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Item[%d].Outline.Right	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualValueText.Item[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].DualValueText.Item[%d].Outline.Right	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Item[%d].Outline.Top	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText.Item[%d].Outline.Top	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Item[%d].Outline.Top	
ParameterDimension[%d].DualValueText.Item[%d].Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualValueText.Item[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].DualValueText.Item[%d].Outline.Top	
ParameterDimension[%d].DualValueText.Item[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].DualValueText.Item[%d].Outline	
ParameterDimension[%d].DualValueText.Item[%d].bold	0X030D	"%d"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].font	0X030D	"%s"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].format	0X030D	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterDimension[%d].DualValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualValueText.Item[%d].italic	0X030D	"%d"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].language	0X030D	"%s"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].lineWeldSupplementalSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].lineWeldSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove,	ParameterDimension[%d].DualValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterDimension[%d].DualValueText.Item[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualValueText.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualValueText.Item[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualValueText.Item[%d].Outline
ParameterDimension[%d].DualValueText.Item[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterDimension[%d].DualValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualValueText.Item[%d].Outline
ParameterDimension[%d].DualValueText.Item[%d].outlineWidth.measurementType	0X030D	%.16g"	ParameterDimension[%d].DualValueText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualValueText.Item[%d].Outline
ParameterDimension[%d].DualValueText.Item[%d].outlineWidth	0X030D	%"s"	ParameterDimension[%d].DualValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.Item[%d].Outline.width

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualValueText.Item[%d].outlineWidth.name			ParameterDimension[%d].DualValueText.Item[%d]	suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualValueText.Item[%d].Outline
ParameterDimension[%d].DualValueText.Item[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].string	0X030D	"%s"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].symbol	0X030D	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane,	ParameterDimension[%d].DualValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterDimension[%d].DualValueText.Item[%d].textAspect	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].textHeight	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualValueText.Item[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Item[%d]	
ParameterDimension[%d].DualValueText.Item[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].DualValueText.Item[%d]	

Q.11.15 ParameterDimension[%d].DualValueText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualValueText.Outline	0X030D	NULL	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.Outline.Bottom	0X030D	NULL	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Outline.Bottom	
ParameterDimension[%d].DualValueText.Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText.Outline.Bottom	
ParameterDimension[%d].DualValueText.Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Outline.Bottom	
ParameterDimension[%d].DualValueText.Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualValueText.Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].DualValueText.Outline.Bottom	
ParameterDimension[%d].DualValueText.Outline.Left	0X030D	NULL	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Outline.Left	
ParameterDimension[%d].DualValueText.Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText.Outline.Left	
ParameterDimension[%d].DualValueText.Outline.Right	0X030D	NULL	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Outline.Right	
ParameterDimension[%d].DualValueText.Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText.Outline.Right	
ParameterDimension[%d].DualValueText.Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ueText.Outline.Left.thickness		"2"=thin	ueText.Outline.Left	
ParameterDimension[%d].DualValueText.Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualValueText.Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].DualValueText.Outline.Left	
ParameterDimension[%d].DualValueText.Outline.Right	0X030D	NULL	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Outline.Right	
ParameterDimension[%d].DualValueText.Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText.Outline.Right	
ParameterDimension[%d].DualValueText.Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Outline.Right	
ParameterDimension[%d].DualValueText.Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualValueText.Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].DualValueText.Outline.Right	
ParameterDimension[%d].DualValueText.Outline.Top	0X030D	NULL	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Outline.Top	
ParameterDimension[%d].DualValueText.Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualValueText.Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Outline.Top	
ParameterDimension[%d].DualValueText.Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualValueText.Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].DualValueText.Outline.Top	
ParameterDimension[%d].DualValueText.Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.filled	0X030D	"%d"	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText.Outline	
ParameterDimension[%d].DualValueText.Outline.visible	0X030D	"%d"	ParameterDimension[%d].DualValueText.Outline	

Q.11.16 ParameterDimension[%d].DualValueText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualValueText.bold	0X030D	"%d"	ParameterDimension[%d].DualValueText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualValueText.font	0X030D	"%s"	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.italic	0X030D	"%d"	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.italicAngle	0X030D	"%.16g"	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.language	0X030D	"%s"	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.lineFactor	0X030D	"%.16g"	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.maxExtend	0X030D	"%d"	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.name	0X030D	"%s"	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualValueText.Outline
ParameterDimension[%d].DualValueText.outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].DualValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualValueText.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].DualValueText.outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterDimension[%d].DualValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualValueText.outline
ParameterDimension[%d].DualValueText.outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].DualValueText	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualValueText.outline
ParameterDimension[%d].DualValueText.outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].DualValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].DualValueText.outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].DualValueText.outline
ParameterDimension[%d].DualValueText	0X030D	"%.16g"	ParameterDimension[%d].DualValueText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ueText.spaceFactor			ueText	
ParameterDimension[%d].DualValueText.strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.textAspect	0X030D	("%.16g"	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.textHeight	0X030D	("%.16g"	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.textLineWidth.measurementType	0X030D	("%.16g"	ParameterDimension[%d].DualValueText	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].DualValueText.textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.textOrientation	0X030D	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].DualValueText	
ParameterDimension[%d].DualValueText.underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].DualValueText	

Q.11.17 ParameterDimension[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].FeatureIdentification	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].FreeState	0X030D	NULL	ParameterDimension[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].GeneralAttribute[%d]	0X030D	%d;%d;%s;%d;%s;%d;%d;%d;%d;%d;%s;%d;%s; Such that the formatted value encodes a general attribute by: 1;<lengthofname>;<name>;<length of value>;<value>;<DataType>;<MeasureEnum>;<editable?>;<lengthofunit>;<unit>;<lengthofcategory>;<category>; Where name, value, unit and category are strings editable indicates if the attribute is editable DataType is on of the following values: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime and MeasureEnum is on of the following values: "-1"=none, "0"=length, "1"=area, "2"=volume, "3"=mass, "4"=massdensity, "5"=fatiguestrengthcoefficient, "6"=time, "7"=angle, "8"=velocity, "9"=acceleration, "10"=force, "11"=forceperunitlength, "12"=pressure, "13"=moment, "14"=stress, "15"=strain, "16"=strainenergy, "17"=strainenergydensity, "18"=temperature, "19"=heatflux, "20"=convectioncoefficient, "21"=thermalconductivity, "22"=thermalexpansioncoefficient, "23"=specificheat, "24"=angularvelocity, "25"=angularacceleration, "26"=fatiguelife, "27"=heatflowrate, "28"=thermalenergy, "29"=massmomentofinertia, "30"=dynamicviscosity, "31"=heatgeneration, "32"=thermalconductance, "33"=conductanceperunitlength, "34"=thermalresistance, "35"=massflowrate, "36"=volumefflowrate,	ParameterDimension[%d]	It is expected that you will also have an additional property: key = <name> and value = <value> which is not hidden to go with this property which should be hidden.

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"37"=temperature difference, "38"=frequency, "39"=coefficient per unit length, "40"=moment of inertia area, "41"=viscous damping, "42"=energy, "43"=power, "44"=momentum, "45"=temperature gradient, "46"=energy per unit mass, "47"=dissipation rate of energy per unit mass, "48"=mass flux, "49"=mass per unit length, "50"=mass per unit area, "51"=electric current, "52"=electrical resistance, "53"=electrical resistivity, "54"=electrical conductance, "55"=voltage, "56"=voltage per temperature, "57"=diffusivity, "58"=latent heat per mass, "59"=thermal energy per area, "60"=thermal pid gain, "61"=thermal pid integral term constant, "62"=thermal pid derivative term constant, "63"=head loss coefficient, "64"=tsaiwu coefficient, "65"=mass length, "66"=per volume, "67"=warping constant, "68"=stress compliance, "69"=length per unit pressure, "70"=pressure per unit length, "71"=pressure per unit velocity, "72"=moment per angle, "73"=coefficient per unit time, "74"=angular momentum per unit angle, "75"=thermal capacitance, "76"=inductance, "77"=voltage per angular velocity, "78"=per area, "79"=temperature change rate, "80"=jerk, "81"=angular jerk, "82"=magnetic field strength, "83"=magnetic flux density		
ParameterDimension[%d].General	0X030D	"%s"	ParameterDimension[%d].Gener	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Attribute[%d].ListValue[%d]			alAttribute[%d]	
ParameterDimension[%d].GeneralToleranceISO	0X030D	NULL	ParameterDimension[%d]	
ParameterDimension[%d].GeneralToleranceISO.toleranceClass	0X030D	String representing enumeration such that: "0"=fine, "1"=medium, "2"=coarse, "3"=verycoarse,	ParameterDimension[%d].GeneralToleranceISO	
ParameterDimension[%d].Keyword[%d]	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].LAYER	0X030D	"%d"	ParameterDimension[%d]	

Q.11.18 ParameterDimension[%d].Leader[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].Leader[%d]	0X030D	NULL	ParameterDimension[%d]	
ParameterDimension[%d].Leader[%d].Jog[%d]	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].Reference	0X030D	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singlar semantic aspect with an entity.	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].Reference[1]	0X030D	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singlar semantic aspect with an entity.	ParameterDimension[%d].Leader[%d].Reference	This extension is for use when the Leader is referencing the intersection of two targets. This property contains the second target with the Leader[%d].Reference property containing the first
ParameterDimension[%d].Leader[%d].allAroundSymbolSize	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].arrowAngle	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d]	0X030D	"0x00%02x%02x%02x" such that	ParameterDimension[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
%d].arrowColour		the values of blue, green and red for the colour are encoded in the string	%d]	
ParameterDimension[%d].Leader[%d].arrowLength	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].arrowLineThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].arrowLineType	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].arrowOutSideLength	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].arrowPlacement	0X030D	String representing enumeration such that: "0"=out, "1"=in	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].arrowType	0X030D	String representing enumeration such that: "0"=closed, "1"=open, "2"=filled, "3"=none, "4"=origin, "5"=cross, "6"=dot, "7"=filleddot, "8"=wedge, "9"=plus, "10"=x, "11"=closedsolid, "12"=closeddouble, "13"=closeddoublesolid, "14"=opendouble, "15"=filleddouble, "16"=integral, "17"=box, "18"=filledbox, "19"=datum, "20"=filleddatum, "21"=solidorigin, "22"=filledorigin, "23"=xorigin, "24"=solidbox, "25"=roundbackdart, "26"=solidroundbackdart, "27"=filledroundbackdart	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].arrowWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].Leader[%d].arrowWidth.name	0X030D	"%s"	ParameterDimension[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].Leader[%d].colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].dotDiameter	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionJogAngle	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionJogDefintion	0X030D	String representing enumeration such that: "0"=startend, "1"=startangle, "2"=endangle	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionJogEnd	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionJogOut	0X030D	"%d"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionJogStart	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionJogging	0X030D	String representing enumeration such that: "0"=on, "1"=off, "2"=application	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionLineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionLineExtension	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionLineGap	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionLineThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].extensionLineType	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	ParameterDimension[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "7"=centreline	"6"=solid,	
ParameterDimension[%d].Leader[%d].extensionWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].Leader[%d].extensionWidth.name	0X030D	"%s"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].halfArrow	0X030D	String representing enumeration such that: "0"=left, "1"=right, "2"=full	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].leaderAttachment	0X030D	String representing enumeration such that: "0"=top, "1"=middle, "2"=bottom	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].lineTextGap	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].lineType	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].offsetCentre	0X030D	"%d"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].perpendicularToStub	0X030D	"%d"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].perpendicularToTerminator	0X030D	"%d"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].radiusToCentre	0X030D	"%d"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].stubAttachment	0X030D	String representing enumeration such that: "0"=side, "1"=underline	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].stubDirection	0X030D	String representing enumeration such that: "0"=left, "1"=right, "2"=inferred	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].stubLength	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].Leader[%d].suppressed	0X030D	"%d"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].tParm	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].terminator	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].textOverLeaderFactor	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].textOverStubFactor	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].Leader[%d]	
ParameterDimension[%d].Leader[%d].uvParm.U	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	Expect to also have Leader[%d].uvParm.V.
ParameterDimension[%d].Leader[%d].uvParm.V	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	Expect to also have Leader[%d].uvParm.U.
ParameterDimension[%d].Leader[%d].width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].Leader[%d].width.name	0X030D	"%s"	ParameterDimension[%d].Leader[%d]	

Q.11.19 ParameterDimension[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].Outline	0X030D	NULL	ParameterDimension[%d]	
ParameterDimension[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].Outline.Bottom	
ParameterDimension[%d].Outline	0X030D	String representing enumeration such that: "0"=unset,	ParameterDimension[%d].Outline.	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.Bottom.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Bottom	
ParameterDimension[%d].Outline. .Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].Outline. Bottom	
ParameterDimension[%d].Outline. .Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].Outline. Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].Outline. .Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].Outline. Bottom	
ParameterDimension[%d].Outline. .Left	0X030D	NULL	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline. .Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].Outline.L left	
ParameterDimension[%d].Outline. .Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].Outline.L left	
ParameterDimension[%d].Outline. .Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].Outline.L left	
ParameterDimension[%d].Outline. .Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].Outline.L left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].Outline. .Left.width.name	0X030D	"%s"	ParameterDimension[%d].Outline.L left	
ParameterDimension[%d].Outline. .Right	0X030D	NULL	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline. .Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].Outline. Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].Outline.Right	
ParameterDimension[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].Outline.Right	
ParameterDimension[%d].Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].Outline.Right	
ParameterDimension[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].Outline.Top	
ParameterDimension[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].Outline.Top	
ParameterDimension[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].Outline.Top	
ParameterDimension[%d].Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].Outline.Top	
ParameterDimension[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].Outline	
ParameterDimension[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].Outline	

Q.11.20 ParameterDimension[%d]. PMIGeometryColor

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].PMIGeometryColor	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d]	
ParameterDimension[%d].PMIText.BackgroundColor	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d]	
ParameterDimension[%d].PMIText.FlatToScreenOpacity	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].PMIText.ForegroundColor	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d]	
ParameterDimension[%d].PMIText	0X030D	"%s"	ParameterDimension[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
InPlaneOpacity				
Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note

Q.11.21 ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ReferenceText[%d]	0X030D	NULL	ParameterDimension[%d]	ReferenceText[%d] index expected to range from 0-1 inclusive. Each instance of this is expected to have a different position such that ReferenceText[x].position != ReferenceText[y].position for any combination of x and y
ParameterDimension[%d].ReferenceText[%d].Text	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Bottom	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Left	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Right	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.Top	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.direction	0X030D	("%.16g %.16g %.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.	0X030D	("%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
doubleOffset				
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.origin	0X030D	("%.16g %.16g %.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.outlineHeight	0X030D	("%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.outlineWidth	0X030D	("%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].bold	0X030D	"%d"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].font	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].format	0X030D	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].italic	0X030D	"%d"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].italicAn	0X030D	("%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
gle				
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].language	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].lineFactor	0X030D	("%.16g")	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flushesk, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].lineWeldSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove,	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jjsstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jjsstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=esksmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=esknumber, "57"=isoedge		
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].outlineS	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
style		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		reading ParameterDimension[%d].Referen ceText[%d].Text.Item[%d].Outline. style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].Referen ceText[%d].Text.Item[%d].Outline
ParameterDimension[%d].Referen ceText[%d].Text.Item[%d].outlineT ype	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterDimension[%d].Referen ceText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].Referen ceText[%d].Text.Item[%d].Outline.t ype which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].Referen ceText[%d].Text.Item[%d].Outline
ParameterDimension[%d].Referen ceText[%d].Text.Item[%d].outline Width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].Referen ceText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].Referen ceText[%d].Text.Item[%d].Outline. width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].Referen ceText[%d].Text.Item[%d].Outline
ParameterDimension[%d].Referen ceText[%d].Text.Item[%d].outline Width.name	0X030D	"%s"	ParameterDimension[%d].Referen ceText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].Outline
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].string	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].symbol	0X030D	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal,	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].textAspect	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].textHeight	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	
ParameterDimension[%d].ReferenceText[%d].Text.Item[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].ReferenceText[%d].Text.Item[%d]	

Q.11.22 ParameterDimension[%d].ReferenceText[%d].Text.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ReferenceText[%d].Text.Outline	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Bottom	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Left	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Left	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Left	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Left.thick	0X030D	String representing enumeration such that: "0"=normal, "1"=thick,	ParameterDimension[%d].ReferenceText[%d].ReferenceText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ness		"2"=thin	ceText[%d].Text.Outline.Left	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Left	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Right	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top	0X030D	NULL	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text.Outline.Top	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.filled	0X030D	"%d"	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text.Outline	
ParameterDimension[%d].ReferenceText[%d].Text.Outline.visible	0X030D	"%d"	ParameterDimension[%d].ReferenceText[%d].Text.Outline	

Q.11.23 ParameterDimension[%d].ReferenceText[%d].Text.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ReferenceText[%d].Text.bold	0X030D	"%d"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.font	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.italic	0X030D	"%d"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.italicAngle	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.language	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.lineFactor	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.maxExtend	0X030D	"%d"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ReferenceText[%d].Text.Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ReferenceText[%d].Text.Outline
ParameterDimension[%d].ReferenceText[%d].Text.outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	ParameterDimension[%d].ReferenceText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].Referen

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		ceText[%d].Text.Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ReferenceText[%d].Text.Outline
ParameterDimension[%d].ReferenceText[%d].Text.outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterDimension[%d].ReferenceText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ReferenceText[%d].Text.Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ReferenceText[%d].Text.Outline
ParameterDimension[%d].ReferenceText[%d].Text.outlineWidth.measurementType	0X030D	%.16g"	ParameterDimension[%d].ReferenceText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ReferenceText[%d].Text.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ReferenceText[%d].Text.Outline
ParameterDimension[%d].ReferenceText[%d].Text.outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ReferenceText[%d].Text.Outline.width.name which would match the more

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				modern Outline syntax and require prerequisite ParameterDimension[%d].ReferenceText[%d].Text.Outline
ParameterDimension[%d].ReferenceText[%d].Text.spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.textAspect	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.textHeight	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ReferenceText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ReferenceText[%d].Text.textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.textOrientation	0X030D	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].Text.underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].ReferenceText[%d].Text	
ParameterDimension[%d].ReferenceText[%d].position	0X030D	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterDimension[%d].ReferenceText[%d]	Only the before and after values are expected.

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].RevisionModifier	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].SafetyClassification	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].Statistical	0X030D	NULL	ParameterDimension[%d]	

Q.11.24 ParameterDimension[%d].StyleText.Item[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText	0X030D	NULL	ParameterDimension[%d]	
ParameterDimension[%d].StyleText.Item[%d]	0X030D	NULL	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.Item[%d].Outline	0X030D	NULL	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom	
ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom	
ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom	
ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].StyleText.Item[%d].Outline.Bottom	
ParameterDimension[%d].StyleText.Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Item[%d].Outline.Left	
ParameterDimension[%d].StyleText.Item[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].StyleText.Item[%d].Outline.Left	
ParameterDimension[%d].StyleText.Item[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Item[%d].Outline.Left	
ParameterDimension[%d].StyleText.Item[%d].Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].StyleText.Item[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].StyleText.Item[%d].Outline.Left	
ParameterDimension[%d].StyleText.Item[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Item[%d].Outline.Right	
ParameterDimension[%d].StyleText.Item[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].StyleText.Item[%d].Outline.Right	
ParameterDimension[%d].StyleText.Item[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText.Item[%d].Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].StyleText.Item[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].StyleText.Item[%d].Outline.Right	
ParameterDimension[%d].StyleText.Item[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Item[%d].Outline.Top	
ParameterDimension[%d].StyleText.Item[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].StyleText.Item[%d].Outline.Top	
ParameterDimension[%d].StyleText.Item[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Item[%d].Outline.Top	
ParameterDimension[%d].StyleText.Item[%d].Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].StyleText.Item[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].StyleText.Item[%d].Outline.Top	
ParameterDimension[%d].StyleText.Item[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].StyleText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText.Item[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Item[%d].Outline	
ParameterDimension[%d].StyleText.Item[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].StyleText.Item[%d].Outline	

Q.11.25 ParameterDimension[%d].StyleText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText.Item[%d].bold	0X030D	"%d"	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].font	0X030D	"%s"	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].format	0X030D	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].italic	0X030D	"%d"	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].language	0X030D	"%s"	ParameterDimension[%d].StyleText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText.Item[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].lineWeldSupplementalSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp, "20"=surfacefinishmrrpcomplete, "21"=meltthrough	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].lineWeldSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jjsstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface,	ParameterDimension[%d].StyleText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"30"=steepflankedsingle, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge		
ParameterDimension[%d].StyleText.Item[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].StyleText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].StyleText.Item[%d].Outline
ParameterDimension[%d].StyleText.Item[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].StyleText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].StyleText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].StyleText.Item[%d].Outline
ParameterDimension[%d].StyleText.Item[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square,	ParameterDimension[%d].StyleText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle		ParameterDimension[%d].StyleText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].StyleText.Item[%d].Outline
ParameterDimension[%d].StyleText.Item[%d].outlineWidth.measurementType	0X030D	%.16g"	ParameterDimension[%d].StyleText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].StyleText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].StyleText.Item[%d].Outline
ParameterDimension[%d].StyleText.Item[%d].outlineWidth.name	0X030D	%"s"	ParameterDimension[%d].StyleText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].StyleText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].StyleText.Item[%d].Outline
ParameterDimension[%d].StyleText.Item[%d].spaceFactor	0X030D	%.16g"	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].name	0X030D	String representing enumeration	ParameterDimension[%d].StyleText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Item[%d].strikethrough		such that: "0"=none, "1"=single, "2"=double	xt.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].string	0X030D	"%s"	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].symbol	0X030D	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular,	ParameterDimension[%d].StyleText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterDimension[%d].StyleText.Item[%d].textAspect	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].textHeight	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].StyleText.Item[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Item[%d]	
ParameterDimension[%d].StyleText.Item[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].StyleText.Item[%d]	

Q.11.26 ParameterDimension[%d].StyleText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText.Outline	0X030D	NULL	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.Outline.Bottom	0X030D	NULL	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText.Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].StyleText.Outline.Bottom	
ParameterDimension[%d].StyleText.Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Outline.Bottom	
ParameterDimension[%d].StyleText.Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].StyleText.Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].StyleText.Outline.Bottom	
ParameterDimension[%d].StyleText.Outline.Left	0X030D	NULL	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Outline.Left	
ParameterDimension[%d].StyleText.Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].StyleText.Outline.Left	
ParameterDimension[%d].StyleText.Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Outline.Left	
ParameterDimension[%d].StyleText.Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].StyleText.Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].StyleText.Outline.Left	
ParameterDimension[%d].StyleText.Outline.Right	0X030D	NULL	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red	ParameterDimension[%d].StyleText.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		for the colour are encoded in the string		
ParameterDimension[%d].StyleText.Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].StyleText.Outline.Right	
ParameterDimension[%d].StyleText.Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Outline.Right	
ParameterDimension[%d].StyleText.Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].StyleText.Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].StyleText.Outline.Right	
ParameterDimension[%d].StyleText.Outline.Top	0X030D	NULL	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Outline.Top	
ParameterDimension[%d].StyleText.Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].StyleText.Outline.Top	
ParameterDimension[%d].StyleText.Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Outline.Top	
ParameterDimension[%d].StyleText.Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].StyleText.Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].StyleText.Outline.Top	
ParameterDimension[%d].StyleText.Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].StyleText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText.Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.filled	0X030D	"%d"	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.Outline.visible	0X030D	"%d"	ParameterDimension[%d].StyleText.Outline	
ParameterDimension[%d].StyleText.bold	0X030D	"%d"	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.font	0X030D	"%s"	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.italic	0X030D	"%d"	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.italicAngle	0X030D	"%.16g"	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.language	0X030D	"%s"	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText	0X030D	"%.16g"	ParameterDimension[%d].StyleText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.lineFactor			xt	
ParameterDimension[%d].StyleText.maxExtend	0X030D	"%d"	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.name	0X030D	"%s"	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].StyleText.Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].StyleText.Outline
ParameterDimension[%d].StyleText.outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].StyleText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].StyleText.Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].StyleText.Outline
ParameterDimension[%d].StyleText.outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ParameterDimension[%d].StyleText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].StyleText.Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].StyleText.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText.outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].StyleText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].StyleText.Outline
ParameterDimension[%d].StyleText.outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].StyleText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].StyleText.Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].StyleText.Outline
ParameterDimension[%d].StyleText.spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.textAspect	0X030D	"%.16g"	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.textHeight	0X030D	"%.16g"	ParameterDimension[%d].StyleText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].StyleText.textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].StyleText	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].StyleText.textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.textOrientation	0X030D	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].StyleText	
ParameterDimension[%d].StyleText.underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].StyleText	

Q.11.27 ParameterDimension[%d].TextFormat[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].TextFormat[%d]	0X030D	NULL	ParameterDimension[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d]	0X030D	NULL	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	0X030D	NULL	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom.colour	0X030D	String representing enumeration	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
mat[%d].Item[%d].Outline.Bottom.thickness		such that: "0"=normal, "1"=thick, "2"=thin	mat[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Left	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Right	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.Top	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].TextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].TextFormat[%d].Item[%d].bold	0X030D	"%d"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].font	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].format	0X030D	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].italic	0X030D	"%d"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft,	ParameterDimension[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=bottomright, "8"=bottomcentre		
ParameterDimension[%d].TextFormat[%d].Item[%d].language	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].lineWeldSupplementalSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flushesk, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].lineWeldSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface,	ParameterDimension[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrooface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterDimension[%d].TextFormat[%d].Item[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].TextFormat[%d].Item[%d].Outline
ParameterDimension[%d].TextFormat[%d].Item[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].TextFormat

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				mat[%d].Item[%d].Outline
ParameterDimension[%d].TextFormat[%d].Item[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterDimension[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].TextFormat[%d].Item[%d].Outline
ParameterDimension[%d].TextFormat[%d].Item[%d].outlineWidth.measurementType	0X030D	%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].TextFormat[%d].Item[%d].Outline
ParameterDimension[%d].TextFormat[%d].Item[%d].outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].TextFormat[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].TextFormat

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				mat[%d].Item[%d].Outline
ParameterDimension[%d].TextFormat[%d].Item[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].striketrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].string	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].symbol	0X030D	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi,	ParameterDimension[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterDimension[%d].TextFormat[%d].Item[%d].textAspect	0X030D	".16g"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].textHeight	0X030D	".16g"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].textLineWidth.measurementType	0X030D	".16g"	ParameterDimension[%d].TextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].TextFormat[%d].Item[%d].textLineWidth.name	0X030D	".s"	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].TextFormat[%d].Item[%d]	
ParameterDimension[%d].TextFormat[%d].Item[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].TextFormat[%d].Item[%d]	

Q.11.28 ParameterDimension[%d].TextFormat[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].TextFormat[%d].bold	0X030D	".d"	ParameterDimension[%d].TextFormat[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].TextFormat[%d].font	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].italic	0X030D	"%d"	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].language	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].textAspect	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].textHeight	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].TextFormat[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].TextFormat[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].TextFormat[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].TextFormat[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].TextFormat[%d]	
ParameterDimension[%d].TextFormat[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].TextFormat[%d]	

Q.11.29 ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ToleranceTextFormat[%d]	0X030D	NULL	ParameterDimension[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	0X030D	NULL	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	0X030D	NULL	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	0X030D	"%s"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
e.Bottom.width.name			e.Bottom	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left.width.measurementType	0X030D	%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left.width.name	0X030D	%"s"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].bold	0X030D	"%d"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].font	0X030D	"%s"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].format	0X030D	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].italic	0X030D	"%d"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].language	0X030D	"%s"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].lineWeldSupplementalSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].lineWeldSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface,	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].OutlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].OutlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].Tolerance

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ceTextFormat[%d].Item[%d].Outline
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].Outline
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].string	0X030D	"%s"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].symbol	0X030D	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction,	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].textAspect	0X030D	("%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].textHeight	0X030D	("%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].textLineWidth.measurementType	0X030D	("%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].textLineWidth.name	0X030D	("%s"	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d].underLine	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].ToleranceTextFormat[%d].Item[%d]	

Q.11.30 ParameterDimension[%d].ToleranceTextFormat[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ToleranceTextFormat[%d].bold	0X030D	"%d"	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].font	0X030D	"%s"	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].italic	0X030D	"%d"	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].language	0X030D	"%s"	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].textAspect	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].textHeight	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].textLineWidth.	0X030D	"%.16g"	ParameterDimension[%d].ToleranceTextFormat[%d]	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
measurementType				pixelWidth
ParameterDimension[%d].ToleranceTextFormat[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ToleranceTextFormat[%d]	
ParameterDimension[%d].ToleranceTextFormat[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].ToleranceTextFormat[%d]	

Q.11.31 ParameterDimension[%d].UnitSymbol[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].UnitSymbol[%d]	0X030D	NULL	ParameterDimension[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d]	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
width.measurementType				pixelWidth
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Left	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
bol[%d].Item[%d].Outline.Right.thickness		such that: "0"=normal, "1"=thick, "2"=thin	mbol[%d].Item[%d].Outline.Right	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Right	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.Top	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].bold	0X030D	"%d"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].font	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].format	0X030D	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].italic	0X030D	"%d"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].language	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].UnitSymbol[%d].Item[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].lineWeldSupplementalSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].lineWeldSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jjsstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface,	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"30"=steepflankedsingle, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterDimension[%d].UnitSymbol[%d].Item[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline
ParameterDimension[%d].UnitSymbol[%d].Item[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline
ParameterDimension[%d].UnitSymbol[%d].Item[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square,	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle		ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline
ParameterDimension[%d].UnitSymbol[%d].Item[%d].outlineWidth.measurementType	0X030D	%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline
ParameterDimension[%d].UnitSymbol[%d].Item[%d].outlineWidth.name	0X030D	%"s"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].UnitSymbol[%d].Item[%d].Outline
ParameterDimension[%d].UnitSymbol[%d].Item[%d].spaceFactor	0X030D	%.16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].UnitSymbol[%d].Item[%d].string	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].symbol	0X030D	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint,	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"63"=datumtranslation		
ParameterDimension[%d].UnitSymbol[%d].Item[%d].textAspect	0X030D	".16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].textHeight	0X030D	".16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].textLineWidth.measurementType	0X030D	".16g"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].UnitSymbol[%d].Item[%d].textLineWidth.name	0X030D	".s"	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	
ParameterDimension[%d].UnitSymbol[%d].Item[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].UnitSymbol[%d].Item[%d]	

Q.11.32 ParameterDimension[%d].UnitSymbol[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].UnitSymbol[%d].Outline	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom	
ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom	
ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Outline.Bottom	
ParameterDimension[%d].UnitSymbol[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Outline.Left	
ParameterDimension[%d].UnitSymbol[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].UnitSymbol[%d].Outline.Left	
ParameterDimension[%d].UnitSymbol[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Outline.Left	
ParameterDimension[%d].UnitSymbol[%d].Outline.Left.width.measurementType	0X030D	("%.16g"	ParameterDimension[%d].UnitSymbol[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].UnitSymbol[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Outline.Left	
ParameterDimension[%d].UnitSymbol[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].UnitSymbol[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].UnitSymbol[%d].Outline.Right	
ParameterDimension[%d].UnitSymbol[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Outline.Right	
ParameterDimension[%d].UnitSymbol[%d].Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].UnitSymbol[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Outline.Right	
ParameterDimension[%d].UnitSymbol[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Outline.Top	
ParameterDimension[%d].UnitSymbol[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].UnitSymbol[%d].Outline.Top	
ParameterDimension[%d].UnitSymbol[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Outline.Top	
ParameterDimension[%d].UnitSymbol[%d].Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].UnitSymbol[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d].Outline.Top	
ParameterDimension[%d].UnitSymbol[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].UnitSymbol[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d].Outline	
ParameterDimension[%d].UnitSymbol[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].UnitSymbol[%d].Outline	

Q.11.33 ParameterDimension[%d].UnitSymbol[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].UnitSymbol[%d].bold	0X030D	"%d"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].font	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].italic	0X030D	"%d"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].UnitSymbol[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].UnitSymbol[%d].language	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].maxExtend	0X030D	"%d"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].UnitSymbol[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].UnitSymbol[%d].Outline
ParameterDimension[%d].UnitSymbol[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].UnitSymbol[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].UnitSymbol[%d].Outline
ParameterDimension[%d].UnitSymbol[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle,	ParameterDimension[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].UnitSymbol[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].UnitSymbol[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle		
ParameterDimension[%d].UnitSymbol[%d].outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].UnitSymbol[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].UnitSymbol[%d].Outline
ParameterDimension[%d].UnitSymbol[%d].outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].UnitSymbol[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].UnitSymbol[%d].Outline
ParameterDimension[%d].UnitSymbol[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].textAspect	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ParameterDimension[%d].UnitSymbol[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
ParameterDimension[%d].UnitSymbol[%d].textHeight	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].UnitSymbol[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].UnitSymbol[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].textOrientation	0X030D	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].UnitSymbol[%d]	
ParameterDimension[%d].UnitSymbol[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].UnitSymbol[%d]	

Q.11.34 ParameterDimension[%d].ValueText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ValueText	0X030D	NULL	ParameterDimension[%d]	
ParameterDimension[%d].ValueText.Item[%d]	0X030D	NULL	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.Item[%d].Outline	0X030D	NULL	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom	0X030D	NULL	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom	
ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom	
ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].ValueText.Item[%d].Outline.Bottom	
ParameterDimension[%d].ValueText.Item[%d].Outline.Left	0X030D	NULL	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText.Item[%d].Outline.Left	
ParameterDimension[%d].ValueText.Item[%d].Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ValueText.Item[%d].Outline.Left	
ParameterDimension[%d].ValueText.Item[%d].Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText.Item[%d].Outline.Left	
ParameterDimension[%d].ValueText.Item[%d].Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ValueText.Item[%d].Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].ValueText.Item[%d].Outline.Left	
ParameterDimension[%d].ValueText.Item[%d].Outline.Right	0X030D	NULL	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ValueText.Item[%d].Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ValueText.Item[%d].Outline.Right	
ParameterDimension[%d].ValueText.Item[%d].Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText.Item[%d].Outline.Right	
ParameterDimension[%d].ValueText.Item[%d].Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ValueText.Item[%d].Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].ValueText.Item[%d].Outline.Right	
ParameterDimension[%d].ValueText.Item[%d].Outline.Top	0X030D	NULL	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText.Item[%d].Outline.Top	
ParameterDimension[%d].ValueText.Item[%d].Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ValueText.Item[%d].Outline.Top	
ParameterDimension[%d].ValueText.Item[%d].Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText.Item[%d].Outline.Top	
ParameterDimension[%d].ValueText.Item[%d].Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ValueText.Item[%d].Outline.Top.width.name	0X030D	"%s"	ParameterDimension[%d].ValueText.Item[%d].Outline.Top	
ParameterDimension[%d].ValueText.Item[%d].Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].ValueText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ValueText.Item[%d].Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.filled	0X030D	"%d"	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].Outline.visible	0X030D	"%d"	ParameterDimension[%d].ValueText.Item[%d].Outline	
ParameterDimension[%d].ValueText.Item[%d].bold	0X030D	"%d"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].font	0X030D	"%s"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].format	0X030D	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].italic	0X030D	"%d"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft,	ParameterDimension[%d].ValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=bottomright, "8"=bottomcentre		
ParameterDimension[%d].ValueText.Item[%d].language	0X030D	"%s"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].lineWeldSupplementalSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].lineWeldSymbol	0X030D	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface,	ParameterDimension[%d].ValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrooface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterDimension[%d].ValueText.Item[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ValueText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ValueText.Item[%d].Outline
ParameterDimension[%d].ValueText.Item[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ValueText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ValueText.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				xt.Item[%d].Outline
ParameterDimension[%d].ValueText.Item[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ParameterDimension[%d].ValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ValueText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ValueText.Item[%d].Outline
ParameterDimension[%d].ValueText.Item[%d].outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ValueText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ValueText.Item[%d].Outline
ParameterDimension[%d].ValueText.Item[%d].outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].ValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ValueText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ValueText.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ValueText.Item[%d].spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].string	0X030D	"%s"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].symbol	0X030D	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch,	ParameterDimension[%d].ValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterDimension[%d].ValueText.Item[%d].textAspect	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].textHeight	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ValueText.Item[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText.Item[%d]	
ParameterDimension[%d].ValueText.Item[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].ValueText.Item[%d]	

Q.11.35 ParameterDimension[%d].ValueText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ValueText.Outline	0X030D	NULL	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.Outline.Bottom	0X030D	NULL	ParameterDimension[%d].ValueText.Outline	
ParameterDimension[%d].ValueText	0X030D	"0x00%02x%02x%02x" such that	ParameterDimension[%d].ValueText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Outline.Bottom.colour		the values of blue, green and red for the colour are encoded in the string	xt.Outline.Bottom	
ParameterDimension[%d].ValueText xt.Outline.Bottom.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ValueText xt.Outline.Bottom	
ParameterDimension[%d].ValueText xt.Outline.Bottom.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText xt.Outline.Bottom	
ParameterDimension[%d].ValueText xt.Outline.Bottom.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText xt.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ValueText xt.Outline.Bottom.width.name	0X030D	"%s"	ParameterDimension[%d].ValueText xt.Outline.Bottom	
ParameterDimension[%d].ValueText xt.Outline.Left	0X030D	NULL	ParameterDimension[%d].ValueText xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.Left.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText xt.Outline.Left	
ParameterDimension[%d].ValueText xt.Outline.Left.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ValueText xt.Outline.Left	
ParameterDimension[%d].ValueText xt.Outline.Left.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText xt.Outline.Left	
ParameterDimension[%d].ValueText xt.Outline.Left.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText xt.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ValueText xt.Outline.Left.width.name	0X030D	"%s"	ParameterDimension[%d].ValueText xt.Outline.Left	
ParameterDimension[%d].ValueText	0X030D	NULL	ParameterDimension[%d].ValueText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Outline.Right			xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.Right.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText xt.Outline.Right	
ParameterDimension[%d].ValueText xt.Outline.Right.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ValueText xt.Outline.Right	
ParameterDimension[%d].ValueText xt.Outline.Right.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText xt.Outline.Right	
ParameterDimension[%d].ValueText xt.Outline.Right.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText xt.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ValueText xt.Outline.Right.width.name	0X030D	"%s"	ParameterDimension[%d].ValueText xt.Outline.Right	
ParameterDimension[%d].ValueText xt.Outline.Top	0X030D	NULL	ParameterDimension[%d].ValueText xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.Top.colour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText xt.Outline.Top	
ParameterDimension[%d].ValueText xt.Outline.Top.style	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ValueText xt.Outline.Top	
ParameterDimension[%d].ValueText xt.Outline.Top.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText xt.Outline.Top	
ParameterDimension[%d].ValueText xt.Outline.Top.width.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText xt.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ValueText	0X030D	"%s"	ParameterDimension[%d].ValueText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Outline.Top.width.name			xt.Outline.Top	
ParameterDimension[%d].ValueText xt.Outline.direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].ValueText xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.doubleOffset	0X030D	"%.16g"	ParameterDimension[%d].ValueText xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.fillColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.filled	0X030D	"%d"	ParameterDimension[%d].ValueText xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.origin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d].ValueText xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.outlineHeight	0X030D	"%.16g"	ParameterDimension[%d].ValueText xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.outlineWidth	0X030D	"%.16g"	ParameterDimension[%d].ValueText xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.thickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText xt.Outline	
ParameterDimension[%d].ValueText xt.Outline.visible	0X030D	"%d"	ParameterDimension[%d].ValueText xt.Outline	

Q.11.36 ParameterDimension[%d].ValueText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ValueText xt.bold	0X030D	"%d"	ParameterDimension[%d].ValueText xt	
ParameterDimension[%d].ValueText xt.font	0X030D	"%s"	ParameterDimension[%d].ValueText xt	
ParameterDimension[%d].ValueText xt.italic	0X030D	"%d"	ParameterDimension[%d].ValueText xt	
ParameterDimension[%d].ValueText xt.italicAngle	0X030D	"%.16g"	ParameterDimension[%d].ValueText xt	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ValueText.justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.language	0X030D	"%s"	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.lineFactor	0X030D	"%.16g"	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.maxExtend	0X030D	"%d"	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.name	0X030D	"%s"	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ValueText.outline.colour which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ValueText.outline
ParameterDimension[%d].ValueText.outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d].ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ValueText.outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ValueText.outline
ParameterDimension[%d].ValueText.outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set,	ParameterDimension[%d].ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ValueText.outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ValueText

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle		xt.Outline
ParameterDimension[%d].ValueText.outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ValueText.outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ValueText.outline
ParameterDimension[%d].ValueText.outlineWidth.name	0X030D	"%s"	ParameterDimension[%d].ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].ValueText.outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].ValueText.outline
ParameterDimension[%d].ValueText.spaceFactor	0X030D	"%.16g"	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.textAspect	0X030D	"%.16g"	ParameterDimension[%d].ValueText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ValueText.textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.textHeight	0X030D	"%.16g"	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d].ValueText	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].ValueText.textLineWidth.name	0X030D	"%s"	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.textOrientation	0X030D	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d].ValueText	
ParameterDimension[%d].ValueText.underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d].ValueText	

Q.11.37 ParameterDimension[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].ValueToCustomer	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].____JtTklIntersectionReference__reference0	0X030D	ORIGINreference1	ParameterDimension[%d].____JtTklIntersectionReference__reference1	ORIGIN is optional and should only be added if the Intersection reference is also an Origin reference reference0 and reference1 should be in the format "%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path. Should exist in pairs, with the opposite ordering of values also

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				persited, to identify both way which references are tied together as an intersection reference
ParameterDimension[%d].____JtTkIntersectionReference__reference1	0X030D	ORIGINreference0	ParameterDimension[%d].____JtTkIntersectionReference__reference0	<p>ORIGIN is optional and should only be added if the Intersection reference is also an Origin reference</p> <p>reference0 and reference1 should be in the format "%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path.</p> <p>Should exist in pairs, with the opposite ordering of values also persited, to identify both way which references are tied together as an intersection reference</p>
ParameterDimension[%d].____JtTkOriginReference__reference	0X030D	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path.	ParameterDimension[%d]	reference is the property value encoded also into the key identifying which reference is an origin reference.
ParameterDimension[%d].accountabilityId	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].alignment	0X030D	String representing enumeration such that: "0"=middle, "1"=bottom	ParameterDimension[%d]	
ParameterDimension[%d].allAround	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].allOver	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].angleFormat	0X030D	String representing enumeration such that: "0"=degrees, "1"=seconds, "2"=minutes, "3"=wholedegrees	ParameterDimension[%d]	
ParameterDimension[%d].angleNumerator	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].appendedTextSpaceFactor	0X030D	"%.16g"	ParameterDimension[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].attachmentType	0X030D	String representing enumeration such that: "0"=angulardimension, "1"=ongeometry, "2"=lineardimension, "3"=leader, "4"=stacked, "5"=ordinatedimension, "6"=radialdimension, "7"=diametraldimension, "8"=noleader, "9"=stackedleft, "10"=stackedright, "11"=stackedabove	ParameterDimension[%d]	
ParameterDimension[%d].basic	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].blanked	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].bold	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].causality	0X030D	String representing enumeration such that: "0"=key, "1"=functional, "2"=reference, "3"=associated, "4"=pmi	ParameterDimension[%d]	
ParameterDimension[%d].commaAsDecimal	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].deviation	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].diameterPlacement	0X030D	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterDimension[%d]	
ParameterDimension[%d].dimensionLeadingZero	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].dimensionLineBetweenArrows	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].dimensionLineTrim	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].dimensionTrailingZero	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].direction	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d]	
ParameterDimension[%d].document	0X030D	"%d"	ParameterDimension[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ntation				
ParameterDimension[%d].dualDimensionLineCenter	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].dualLowerDeltaDenominator	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].dualPlacement	0X030D	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterDimension[%d]	
ParameterDimension[%d].dualPrecision	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].dualTolerancePrecision	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].dualType	0X030D	String representing enumeration such that: "0"=positional, "1"=bracket, "2"=lineseparated	ParameterDimension[%d]	
ParameterDimension[%d].dualUnit	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].dualUnitText	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].dualUpperDeltaDenominator	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].dualValueDenominator	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].featureOfSize	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].fitGrade	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].flag	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].foldLocation	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d]	
ParameterDimension[%d].font	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].fraction	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].fractionSize	0X030D	String representing enumeration such that: "0"=full, "1"=twothirds, "2"=threequarters	ParameterDimension[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].grade	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].group	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].inFront	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].inspection	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].inspectionDisplay	0X030D	String representing enumeration such that: "0"=unset, "1"=none, "2"=before, "3"=after, "4"=beforeafter, "5"=all	ParameterDimension[%d]	
ParameterDimension[%d].isReference	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].italic	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].italicAngle	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].justification	0X030D	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterDimension[%d]	
ParameterDimension[%d].language	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].limitDisplay	0X030D	String representing enumeration such that: "0"=none, "1"=limitfit	ParameterDimension[%d]	
ParameterDimension[%d].limitFitOrder	0X030D	String representing enumeration such that: "0"=valuelimitfittolerance, "1"=tolerancevaluelimitfit, "2"=valuetolerancelimitfit	ParameterDimension[%d]	
ParameterDimension[%d].limitFitParenthesis	0X030D	String representing enumeration such that: "0"=none, "1"=valuelimitfit, "2"=limitfit, "3"=tolerance, "4"=value, "5"=valuetolerance	ParameterDimension[%d]	
ParameterDimension[%d].lineFactor	0X030D	"%.16g"	ParameterDimension[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].linearPlacement	0X030D	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterDimension[%d]	
ParameterDimension[%d].lowerDelta	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].lowerDeltaDenominator	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].majorAngle	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].manual	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].nameComponents.displayName	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].nameComponents.name	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].narrowLeaderAngle	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].narrowOffset	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].notToScale	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].ordinateBaselineZero	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].origin	0X030D	String representing enumeration such that: "0"=first, "1"=second	ParameterDimension[%d]	
ParameterDimension[%d].originAnchor	0X030D	String representing enumeration such that: "0"=topleft, "1"=topcentre, "2"=topright, "3"=middleleft, "4"=middlecentre, "5"=middleright, "6"=bottomleft, "7"=bottomcentre, "8"=bottomright	ParameterDimension[%d]	
ParameterDimension[%d].outlineColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].Outline.colour which would match the more modern Outline syntax and

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				require prerequisite ParameterDimension[%d].Outline
ParameterDimension[%d].outlineStyle	0X030D	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterDimension[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].Outline
ParameterDimension[%d].outlineType	0X030D	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterDimension[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].Outline
ParameterDimension[%d].outlineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterDimension[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].Outline
ParameterDimension[%d].outlineWidth.name	0X030D	"%s"	ParameterDimension[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				key, but also suggest support reading ParameterDimension[%d].Outline. width.name which would match the more modern Outline syntax and require prerequisite ParameterDimension[%d].Outline
ParameterDimension[%d].panZoom	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].parallelToScreenAnchor	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].parallelToScreenRotationPoint	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d]	
ParameterDimension[%d].parallelToScreenScale	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].parameter	0X030D	String representing enumeration such that: "0"=diameter, "1"=depth, "2"=counterborediameter, "3"=counterboredepth, "4"=countersinkdiameter, "5"=countersinkangle, "6"=taperangle, "7"=fit, "8"=screwtype, "9"=screwsize, "10"=threadsize, "11"=threaddepth, "12"=startchamferdiameter, "13"=startchamferangle, "14"=endchamferdiameter, "15"=endchamferangle, "16"=pitch, "17"=angle, "18"=minordiameter, "19"=majordiameter, "20"=tapdrilldiameter, "21"=length, "22"=tapdrillsize, "23"=symbolicthreadcallout, "24"=shaftsize, "25"=threadpitch, "26"=form, "27"=internalexternalsymbol, "28"=drillsize, "29"=neckchamferdiameter, "30"=neckchamferangle, "31"=reliefchamferdiameter,	ParameterDimension[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"32"=reliefchamferangle, "33"=reliefdiameter, "34"=reliefdepth, "35"=threadhandedness		
ParameterDimension[%d].pattern Count	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].pitchDia Deviation	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].pitchDia Grade	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].precision	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].projected	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].radialPI acement	0X030D	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterDimension[%d]	
ParameterDimension[%d].reference Content	0X030D	String representing enumeration such that: "0"=value, "1"=prefix, "2"=tolerance	ParameterDimension[%d]	
ParameterDimension[%d].reference Display	0X030D	String representing enumeration such that: "0"=parenthesis, "1"=reference, "2"=matched	ParameterDimension[%d]	
ParameterDimension[%d].singleSi deFirst	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].singleSi deLength	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].singleSi ded	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].spaceF actor	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].stackFa ctor	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].standar d	0X030D	String representing enumeration such that: "0"=asme_y145m_1994, "1"=jis,	ParameterDimension[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=iso, "3"=bs, "4"=ansi_y145m_1982, "5"=asme_y1441m_2003, "6"=din, "7"=gm_addendum_1994, "8"=asme_y145_2009, "9"=gb		
ParameterDimension[%d].statisticalPlacement	0X030D	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterDimension[%d]	
ParameterDimension[%d].strikethrough	0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterDimension[%d]	
ParameterDimension[%d].style	0X030D	String representing enumeration such that: "0"=lineardiametral, "1"=radial, "2"=controlledradial, "3"=diametral, "4"=limits, "5"=ordinate, "6"=sphericalradial, "7"=sphericaldiametral, "8"=narrow, "9"=none	ParameterDimension[%d]	
ParameterDimension[%d].subscript	0X030D	String representing enumeration such that: "0"=sub, "1"=super	ParameterDimension[%d]	
ParameterDimension[%d].symbolColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d]	
ParameterDimension[%d].textAspect	0X030D	%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].textColour	0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterDimension[%d]	
ParameterDimension[%d].textDirection	0X030D	%.16g %.16g %.16g"	ParameterDimension[%d]	
ParameterDimension[%d].textHeight	0X030D	%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].textLeaderPosition	0X030D	String representing enumeration such that: "0"=none, "1"=aboveleader, "2"=afterleader, "3"=abovestub, "4"=afterstub	ParameterDimension[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].textLineWidth.measurementType	0X030D	"%.16g"	ParameterDimension[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterDimension[%d].textLineWidth.name	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].textOrientation	0X030D	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterDimension[%d]	
ParameterDimension[%d].textOrigin	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d]	
ParameterDimension[%d].textRotationPoint	0X030D	"%.16g %.16g %.16g"	ParameterDimension[%d]	
ParameterDimension[%d].textThickness	0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterDimension[%d]	
ParameterDimension[%d].threadClass	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].toleranceAngleFormat	0X030D	String representing enumeration such that: "0"=degrees, "1"=seconds, "2"=minutes, "3"=wholedegrees	ParameterDimension[%d]	
ParameterDimension[%d].toleranceDisplay	0X030D	String representing enumeration such that: "0"=minuslimit1, "1"=bilateral, "2"=pluslimit1, "3"=pluslimit2, "4"=equalbilateral, "5"=minuslimit2, "6"=upperunilateral, "7"=lowerunilateral	ParameterDimension[%d]	
ParameterDimension[%d].toleranceLeadingZero	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].toleranceTrailingZero	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].type	0X030D	String representing enumeration such that: "0"=curvelength, "1"=linear, "2"=angular, "3"=radial	ParameterDimension[%d]	
ParameterDimension[%d].underline	0X030D	String representing enumeration such that: "0"=over, "1"=under	ParameterDimension[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterDimension[%d].unit	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].unitText	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].upperDelta	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].upperDeltaDenominator	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].uriRefs[%d]	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].usage	0X030D	"%s"	ParameterDimension[%d]	
ParameterDimension[%d].valid	0X030D	String representing enumeration such that: "0"=true, "1"=false, "2"=unknown	ParameterDimension[%d]	
ParameterDimension[%d].value	0X030D	"%.16g"	ParameterDimension[%d]	
ParameterDimension[%d].valueDenominator	0X030D	"%d"	ParameterDimension[%d]	
ParameterDimension[%d].zeroToleranceDisplay	0X030D	String representing enumeration such that: "0"=displayzero, "1"=blank, "2"=suppresstrailingzero, "3"=omit	ParameterDimension[%d]	
ParameterDimension[%d].zeroToleranceSign	0X030D	String representing enumeration such that: "0"=none, "1"=plus, "2"=minus	ParameterDimension[%d]	
ParameterDimension[%d].tolerancePrecision	0X030D	"%d"	ParameterDimension[%d]	

Q.11.38 ParameterFitDesignation[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d]	0x0313	NULL		
ParameterFitDesignation[%d].Description	0x0313	"%s"	ParameterFitDesignation[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].DisplayPlane.origin	0x0313	%.16g %.16g %.16g"	ParameterFitDesignation[%d]	This is property records the original defintion of the PMI display plane Should also have 'DisplayPlane.xaxis' and 'DisplayPlane.zaxis'
ParameterFitDesignation[%d].DisplayPlane.xaxis	0x0313	%.16g %.16g %.16g"	ParameterFitDesignation[%d]	This is property records the original defintion of the PMI display plane Should also have 'DisplayPlane.origin' and 'DisplayPlane.zaxis'
ParameterFitDesignation[%d].DisplayPlane.zaxis	0x0313	%.16g %.16g %.16g"	ParameterFitDesignation[%d]	This is property records the original defintion of the PMI display plane Should also have 'DisplayPlane.origin' and 'DisplayPlane.xaxis'
ParameterFitDesignation[%d].FeatureIdentification	0x0313	"%s"	ParameterFitDesignation[%d]	

Q.11.39 ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].FitDesignationText[%d]	0x0313	NULL	ParameterFitDesignation[%d]	FitDesignationText[%d] index expected to range from 0-3 inclusive Each instance of this is expected to have a different position such that FitDesignationText[x].position != FitDesignationText[y].position for any combination of x and y.
ParameterFitDesignation[%d].FitDesignationText[%d].Text	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom.width.name	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left.width.name	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Left	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right.width.name	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Right	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top.colour	0x0313	String representing enumeration such that: "0"=unset,	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline.Top.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Outline.Top	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top.width.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top.width.name	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.Top	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.direction	0x0313	%.16g %.16g %.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.doubleOffset	0x0313	%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.fillColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.filled	0x0313	"%d"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.origin	0x0313	%.16g %.16g %.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.outlineHeight	0x0313	%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.outlineWidth	0x0313	%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].	0x0313	String representing enumeration such that: "0"=normal, "1"=thick,	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline.thickness		"2"=thin	Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.visible	0x0313	"%d"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].bold	0x0313	"%d"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].font	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].format	0x0313	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].italic	0x0313	"%d"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].italicAngle	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].language	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].lineFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0313	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip,	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].LineWeldSymbol	0x0313	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jjsstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jjsfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jjsstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent,	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].outlineColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].outlineStyle	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].outlineType	0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota,	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].FitD

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=symmetricalpart, "19"=symmetricalset, "20"=scorerectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		esignationText[%d].Text.Item[%d]. Outline
ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]. outlineWidth.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]. Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]. Outline
ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]. outlineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]. Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]. Outline
ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]. spaceFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]. strikethrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d].	0x0313	"%s"	ParameterFitDesignation[%d].FitD esignationText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
string				
Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].symbol	0x0313	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].TextAspect	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].TextColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].TextHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].TextLineWidth.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].TextLineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].TextThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	

Q.11.40 ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom.dashed	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ottom.style		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ottom	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom.width.name	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Bottom	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left.width.name	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Left	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
esignationText[%d].Text.Outline.Right.colour		the values of blue, green and red for the colour are encoded in the string	esignationText[%d].Text.Outline.Right	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right.width.name	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Right	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top	0x0313	NULL	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
op.width.name			op	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.direction	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.doubleOffset	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.fillColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.filled	0x0313	"%d"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.origin	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.outlineHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.outlineWidth	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.visible	0x0313	"%d"	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline	

Q.11.41 ParameterFitDesignation[%d].FitDesignationText[%d].Text.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].FitDesignationText[%d].Text.bold	0x0313	"%d"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.italic	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
esignationText[%d].Text.font			esignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.italic	0x0313	"%d"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.italicAngle	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.language	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.lineFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.maxExtended	0x0313	"%d"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.name	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.outlineColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline
ParameterFitDesignation[%d].FitDesignationText[%d].Text.outlineStyle	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].FitDesignationText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.style which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline
ParameterFitDesignation[%d].FitDesignationText[%d].Text.outlineType	0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterFitDesignation[%d].FitDesignationText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.type which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline
ParameterFitDesignation[%d].FitDesignationText[%d].Text.outlineWidth.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline
ParameterFitDesignation[%d].FitDesignationText[%d].Text.outlineWidth.name	0x0313	%"s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].FitDesignationText[%d].Text.Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].FitD

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				esignationText[%d].Text.Outline
ParameterFitDesignation[%d].FitDesignationText[%d].Text.spaceFactor	0x0313	("%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.strikethrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.textAspect	0x0313	("%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.textColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.textHeight	0x0313	("%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.textLineWidth.measurementType	0x0313	("%.16g"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].FitDesignationText[%d].Text.textLineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.textOrientation	0x0313	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.textThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].FitDesignationText[%d].Text	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d].FitDesignationText[%d].Text	

Q.11.42 ParameterFitDesignation[%d].FitDesignationText[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].FitDesignationText[%d].position	0x0313	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterFitDesignation[%d].FitDesignationText[%d]	
ParameterFitDesignation[%d].FreeState	0x0313	NULL	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].GeneralAttribute[%d]	0x0313	%d;%d;%s;%d;%s;%d;%d;%d;%d;%s;%d;%s; Such that the formatted value encodes a general attribute by: 1;<lengthofname>;<name>;<lengthofname>;<value>;<DataType>;<MeasureEnum>;<editable?>;<lengthofunit>;<unit>;<lengthofcategory>;<category>; Where name, value, unit and category are strings editable indicates if the attribute is editable DataType is on of the following values: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime and MeasureEnum is on of the following values: "1"=none, "0"=length, "1"=area, "2"=volume, "3"=mass, "4"=massdensity, "5"=fatiguestrengthcoefficient, "6"=time, "7"=angle, "8"=velocity, "9"=acceleration, "10"=force, "11"=forceperunitlength, "12"=pressure, "13"=moment, "14"=stress, "15"=strain, "16"=strainenergy, "17"=strainenergydensity, "18"=temperature, "19"=heatflux, "20"=convectioncoefficient, "21"=thermalconductivity, "22"=thermalexpansioncoefficient, "23"=specificheat, "24"=angularvelocity, "25"=angularacceleration, "26"=fatiguelife, "27"=heatflowrate.	ParameterFitDesignation[%d]	It is expected that you will also have an additional property: key = <name> and value = <value> which is not hidden to go with this property which should be hidden.

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"28"=thermalenergy, "29"=massmomentofinertia, "30"=dynamicviscosity, "31"=heatgeneration, "32"=thermalconductance, "33"=conductanceperunitlength, "34"=thermalresistance, "35"=massflowrate, "36"=volumefflowrate, "37"=temperaturedifference, "38"=frequency, "39"=coefficientperunitlength, "40"=momentofinertiaarea, "41"=viscousdamping, "42"=energy, "43"=power, "44"=momentum, "45"=temperaturegradient, "46"=energyperunitmass, "47"=dissipationrateofenergyperunitmass, "48"=massflux, "49"=massperunitlength, "50"=massperunitarea, "51"=electriccurrent, "52"=electricalresistance, "53"=electricalresistivity, "54"=electricalconductance, "55"=voltage, "56"=voltagepertemperature, "57"=diffusivity, "58"=latentheatpermass, "59"=thermalenergyperarea, "60"=thermalpidgain, "61"=thermalpidintegraltermconstant, "62"=thermalpidderivativetermconstant, "63"=headlosscoefficient, "64"=tsaiwucoefficient, "65"=masslength, "66"=pervolume, "67"=warpingconstant, "68"=stresscompliance, "69"=lengthperunitpressure, "70"=pressureperunitlength, "71"=pressureperunitvelocity, "72"=momentperangle, "73"=coefficientperunittime, "74"=angularmomentumperunitangle, "75"=thermalcapacitance,		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"76"=inductance, "77"=voltageperangularvelocity, "78"=perarea, "79"=temperaturechangerate, "80"=jerk, "81"=angularjerk, "82"=magneticfieldstrength, "83"=magneticfluxdensity		
ParameterFitDesignation[%d].GeneralAttribute[%d].ListValue[%d]	0x0313	"%s"	ParameterFitDesignation[%d].GeneralAttribute[%d]	
ParameterFitDesignation[%d].Keyword[%d]	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].LAYER	0x0313	"%d"	ParameterFitDesignation[%d]	

Q.11.43 ParameterFitDesignation[%d].Leader[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Leader[%d]	0x0313	NULL	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].Leader[%d].Jog[%d]	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].Reference	0x0313	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path. This property formating is used to semantically tie a singlar semantic aspect with an entity.	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].Reference[1]	0x0313	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path. This property formating is used to semantically tie a singlar semantic aspect with an entity.	ParameterFitDesignation[%d].Leader[%d].Reference	This extension is for use when the Leader is referencing the intersection of two targets. This property contains the second target with the Leader[%d].Reference property containing the first
ParameterFitDesignation[%d].Leader[%d].allAroundSymbolSize	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Leader[%d].arrowAngle	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].arrowColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].arrowLength	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].arrowLineThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].arrowLineType	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].arrowOutSideLength	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].arrowPlacement	0x0313	String representing enumeration such that: "0"=out, "1"=in	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].arrowType	0x0313	String representing enumeration such that: "0"=closed, "1"=open, "2"=filled, "3"=none, "4"=origin, "5"=cross, "6"=dot, "7"=filleddot, "8"=wedge, "9"=plus, "10"=x, "11"=closedsolid, "12"=closeddouble, "13"=closeddoublesolid, "14"=opendouble, "15"=filleddouble, "16"=integral, "17"=box, "18"=filledbox, "19"=datum, "20"=filleddatum, "21"=solidorigin, "22"=filledorigin, "23"=xorigin, "24"=solidbox, "25"=roundbackdart, "26"=solidroundbackdart, "27"=filledroundbackdart	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].arrowWidth.measurement	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Type				pixelWidth
ParameterFitDesignation[%d].Leader[%d].arrowWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].direction	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].dotDiameter	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionJogAngle	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionJogDefintion	0x0313	String representing enumeration such that: "0"=startend, "1"=startangle, "2"=endangle	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionJogEnd	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionJogOut	0x0313	"%d"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionJogStart	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionJogging	0x0313	String representing enumeration such that: "0"=on, "1"=off, "2"=application	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionLineColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionLineExtension	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionLineGap	0x0313	"%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionLineThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick,	ParameterFitDesignation[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
ParameterFitDesignation[%d].Leader[%d].extensionLineType	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].extensionWidth.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Leader[%d].extensionWidth.name	0x0313	%"s"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].halfArrow	0x0313	String representing enumeration such that: "0"=left, "1"=right, "2"=full	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].leaderAttachment	0x0313	String representing enumeration such that: "0"=top, "1"=middle, "2"=bottom	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].lineTextGap	0x0313	%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].lineType	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].offsetCentre	0x0313	%"d"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].perpendicularToStub	0x0313	%"d"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].perpendicularToTerminator	0x0313	%"d"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].radiusToCentre	0x0313	%"d"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].stubAttachment	0x0313	String representing enumeration such that: "0"=side, "1"=underline	ParameterFitDesignation[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Leader[%d].stubDirection	0x0313	String representing enumeration such that: "0"=left, "1"=right, "2"=inferred	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].stubLength	0x0313	("%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].suppressed	0x0313	"%d"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].tParm	0x0313	("%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].terminator	0x0313	("%.16g %.16g %.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].textOverLeaderFactor	0x0313	("%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].textOverStubFactor	0x0313	("%.16g"	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Leader[%d]	
ParameterFitDesignation[%d].Leader[%d].uvParam.U	0x0313	("%.16g"	ParameterFitDesignation[%d].Leader[%d]	Expect to also have Leader[%d].uvParam.V.
ParameterFitDesignation[%d].Leader[%d].uvParam.V	0x0313	("%.16g"	ParameterFitDesignation[%d].Leader[%d]	Expect to also have Leader[%d].uvParam.U.
ParameterFitDesignation[%d].Leader[%d].width.measurementType	0x0313	("%.16g"	ParameterFitDesignation[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Leader[%d].width.name	0x0313	"%s"	ParameterFitDesignation[%d].Leader[%d]	

Q.11.44 ParameterFitDesignation[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Outline	0x0313	NULL	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].Outline	0x0313	NULL	ParameterFitDesignation[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ne.Bottom			ne	
ParameterFitDesignation[%d].Outline.Bottom.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Outline.Bottom	
ParameterFitDesignation[%d].Outline.Bottom.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Outline.Bottom	
ParameterFitDesignation[%d].Outline.Bottom.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Outline.Bottom	
ParameterFitDesignation[%d].Outline.Bottom.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Outline.Bottom.width.name	0x0313	"%s"	ParameterFitDesignation[%d].Outline.Bottom	
ParameterFitDesignation[%d].Outline.Left	0x0313	NULL	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.Left.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Outline.Left	
ParameterFitDesignation[%d].Outline.Left.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Outline.Left	
ParameterFitDesignation[%d].Outline.Left.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Outline.Left	
ParameterFitDesignation[%d].Outline.Left.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Outline	0x0313	"%s"	ParameterFitDesignation[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ne.Left.width.name			ne.Left	
ParameterFitDesignation[%d].Outline.Right	0x0313	NULL	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.Right.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Outline.Right	
ParameterFitDesignation[%d].Outline.Right.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Outline.Right	
ParameterFitDesignation[%d].Outline.Right.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Outline.Right	
ParameterFitDesignation[%d].Outline.Right.width.measurementType	0x0313	("%.16g"	ParameterFitDesignation[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Outline.Right.width.name	0x0313	"%s"	ParameterFitDesignation[%d].Outline.Right	
ParameterFitDesignation[%d].Outline.Top	0x0313	NULL	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.Top.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Outline.Top	
ParameterFitDesignation[%d].Outline.Top.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Outline.Top	
ParameterFitDesignation[%d].Outline.Top.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Outline.Top	
ParameterFitDesignation[%d].Outline.Top.width.measurementType	0x0313	("%.16g"	ParameterFitDesignation[%d].Outline.Top	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				pixelWidth
ParameterFitDesignation[%d].Outline.Top.width.name	0x0313	"%s"	ParameterFitDesignation[%d].Outline.Top	
ParameterFitDesignation[%d].Outline.direction	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.doubleOffset	0x0313	"%.16g"	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.fillColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.filled	0x0313	"%d"	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.origin	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.outlineHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.outlineWidth	0x0313	"%.16g"	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Outline	
ParameterFitDesignation[%d].Outline.visible	0x0313	"%d"	ParameterFitDesignation[%d].Outline	

Q.11.45 ParameterFitDesignation[%d].PMI<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].PMI.GeometryColor	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].PMI.TextBackgroundColor	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ParameterFitDesignation[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
ParameterFitDesignation[%d].PMI TextFlatToScreenOpacity	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].PMI TextForegroundColor	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].PMI TextInPlaneOpacity	0x0313	"%s"	ParameterFitDesignation[%d]	

Q.11.46 ParameterFitDesignation[%d].TextFormat[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Revi sionModifier	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].Safe tyClassification	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].Stati stical	0x0313	NULL	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].Text Format[%d]	0x0313	NULL	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d]	0x0313	NULL	ParameterFitDesignation[%d].Text Format[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline	0x0313	NULL	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline.Botto m	0x0313	NULL	ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline.Botto m.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline.Botto m	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline.Botto	0x0313	String representing enumeration such that: "0"=unset,	ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline.Botto	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
m.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	m	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Bottom.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Bottom.width.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Bottom.width.name	0x0313	"%s"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left	0x0313	NULL	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left.width.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left.width.name	0x0313	"%s"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right	0x0313	NULL	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.colour		for the colour are encoded in the string		
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right.width.name	0x0313	"%s"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Right	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top	0x0313	NULL	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top.width.name	0x0313	"%s"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.direction	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.doubleOffset	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.fillColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.filled	0x0313	"%d"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.origin	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.outlineHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.outlineWidth	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline.visible	0x0313	"%d"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].bold	0x0313	"%d"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].font	0x0313	"%s"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].format	0x0313	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterFitDesignation[%d].TextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].Text	0x0313	"%d"	ParameterFitDesignation[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Format[%d].Item[%d].italic			Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].italicAngle	0x0313	%.16g"	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].language	0x0313	%"s"	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].lineFactor	0x0313	%.16g"	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].lineWeldSupplementalSymbol	0x0313	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].lineWeldSymbol	0x0313	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug,	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterFitDesignation[%d].Text Format[%d].Item[%d].outlineColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline
ParameterFitDesignation[%d].Text	0x0313	String representing enumeration such that: "0"=unset,	ParameterFitDesignation[%d].Text	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Format[%d].Item[%d].outlineStyle		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Format[%d].Item[%d]	key, but also suggest support reading ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline
ParameterFitDesignation[%d].Text Format[%d].Item[%d].outlineType	0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline
ParameterFitDesignation[%d].Text Format[%d].Item[%d].outlineWidth. measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline.width .measurementType which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline
ParameterFitDesignation[%d].Text Format[%d].Item[%d].outlineWidth. name	0x0313	%"s"	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				reading ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline.width .name which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Text Format[%d].Item[%d].Outline
ParameterFitDesignation[%d].Text Format[%d].Item[%d].spaceFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].strikethrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].string	0x0313	"%s"	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	
ParameterFitDesignation[%d].Text Format[%d].Item[%d].symbol	0x0313	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal,	ParameterFitDesignation[%d].Text Format[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].textAspect	0x0313	("%.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].textColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].TextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].textHeight	0x0313	("%.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].textLineWidth.measurementType	0x0313	("%.16g"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].textLineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].TextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].textThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].TextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].TextFormat[%d].Item[%d].underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d].TextFormat[%d].Item[%d]	

Q.11.47 ParameterFitDesignation[%d].TextFormat[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
--------------	---------------------------	------------------------------	------------------	-----------------

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].TextFormat[%d].bold	0x0313	"%d"	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].font	0x0313	"%s"	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].italic	0x0313	"%d"	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].italicAngle	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].language	0x0313	"%s"	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].lineFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].spaceFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].strikethrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].textAspect	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].textColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].textHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].textLineWidth.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].TextFormat[%d]	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].TextFormat[%d].textLineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].textThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].TextFormat[%d]	
ParameterFitDesignation[%d].TextFormat[%d].underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d].TextFormat[%d]	

Q.11.48 ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ToleranceTextFormat[%d]	0x0313	NULL	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	0x0313	NULL	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	0x0313	NULL	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	0x0313	NULL	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
pe				
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	0x0313	NULL	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	0x0313	NULL	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Right	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	0x0313	NULL	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.Top	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.direction	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.doubleOffset	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.fillColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.filled	0x0313	"%d"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.origin	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.outlineHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.outlineWidth	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.visible	0x0313	"%d"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].bold	0x0313	"%d"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].font	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].format	0x0313	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].italic	0x0313	"%d"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].font	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].italicAngle			ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].language	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].lineFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].lineWeldSupplementalSymbol	0x0313	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].lineWeldSymbol	0x0313	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug,	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].outlineColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].outlineStyle	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].outlineType	0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].outlineWidth.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].outlineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].OutlineWidth.name which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].Outline
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].spaceFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].strikethrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].string	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].symbol	0x0313	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness,	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].textAspect	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].textColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].textHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].textLineWidth.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].textLineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].textLineWidth.name	0x0313	String representing enumeration	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ranceTextFormat[%d].Item[%d].textThickness		such that: "0"=normal, "1"=thick, "2"=thin	ranceTextFormat[%d].Item[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d].underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d].ToleranceTextFormat[%d].Item[%d]	

Q.11.49 ParameterFitDesignation[%d].ToleranceTextFormat[%d].-<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ToleranceTextFormat[%d].bold	0x0313	"%d"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].font	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].italic	0x0313	"%d"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].italicAngle	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].language	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].lineFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].spaceFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].strikethrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].textAspect	0x0313	"%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ToleranceTextFormat[%d].textColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].textHeight	0x0313	("%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].textLineWidth.measurementType	0x0313	("%.16g"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ToleranceTextFormat[%d].textLineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].textThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	
ParameterFitDesignation[%d].ToleranceTextFormat[%d].underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d].ToleranceTextFormat[%d]	

Q.11.50 ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].UnitSymbol[%d]	0x0313	NULL	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d]	0x0313	NULL	ParameterFitDesignation[%d].UnitSymbol[%d]	
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].Outline	0x0313	NULL	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d]	
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	0x0313	NULL	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	0x0313	String representing enumeration such that: "0"=unset,	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
om.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	om	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Bottom.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Bottom.width.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Bottom.width.name	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left	0x0313	NULL	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left.width.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left.width.name	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Left	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Right	0x0313	NULL	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit	0x0313	"0x00%02x%02x%02x" such that	ParameterFitDesignation[%d].Unit	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Symbol[%d].Item[%d].Outline.Right.colour		the values of blue, green and red for the colour are encoded in the string	Symbol[%d].Item[%d].Outline.Right	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Right.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Right	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Right.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Right	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Right.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Right.width.name	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Right	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top	0x0313	NULL	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top.width.name	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.direction	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.doubleOffset	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.fillColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.filled	0x0313	"%d"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.origin	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.outlineHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.outlineWidth	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.visible	0x0313	"%d"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].bold	0x0313	"%d"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].font	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].format	0x0313	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].italic	0x0313	"%d"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].italicAngle	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].language	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].lineFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].lineWeldSup plementalSymbol	0x0313	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].lineWeldSy mbol	0x0313	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove,	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].outlineColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].outlineStyle	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].outlineType	0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].outlineWidth .measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.wid h.measurementType which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].outlineWidth	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.name				reading ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline.wid h.name which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].Outline
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].spaceFactor	0x0313	("%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].strikethrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].string	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d].symbol	0x0313	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal,	ParameterFitDesignation[%d].Unit Symbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].textAspect	0x0313	%.16g"	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d]	
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].textColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d]	
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].textHeight	0x0313	%.16g"	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d]	
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].textLineWidth.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].textLineWidth.name	0x0313	%"s"	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d]	
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].textThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d]	
ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d].underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d].UnitSymbol[%d].Item[%d]	

Q.11.51 ParameterFitDesignation[%d].UnitSymbol[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
--------------	---------------------------	------------------------------	------------------	-----------------

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Unit Symbol[%d].Outline	0x0313	NULL	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom	0x0313	NULL	ParameterFitDesignation[%d].Unit Symbol[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom.thickn ess	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom.width. measurementType	0x0313	("%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom.width. name	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Bottom	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left	0x0313	NULL	ParameterFitDesignation[%d].Unit Symbol[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left.width.me asurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left.width.na me	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Left	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right	0x0313	NULL	ParameterFitDesignation[%d].Unit Symbol[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right.thicknes s	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right.width.m easurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right.width.na me	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Right	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Top	0x0313	NULL	ParameterFitDesignation[%d].Unit Symbol[%d].Outline	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Top.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Top	
ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Top.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Unit Symbol[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.Top.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].UnitSymbol[%d].Outline.Top	
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.Top.width.measurementType	0x0313	("%.16g"	ParameterFitDesignation[%d].UnitSymbol[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.Top.width.name	0x0313	"%s"	ParameterFitDesignation[%d].UnitSymbol[%d].Outline.Top	
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.direction	0x0313	("%.16g %.16g %.16g"	ParameterFitDesignation[%d].UnitSymbol[%d].Outline	
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.doubleOffset	0x0313	("%.16g"	ParameterFitDesignation[%d].UnitSymbol[%d].Outline	
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.fillColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].UnitSymbol[%d].Outline	
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.filled	0x0313	"%d"	ParameterFitDesignation[%d].UnitSymbol[%d].Outline	
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.origin	0x0313	("%.16g %.16g %.16g"	ParameterFitDesignation[%d].UnitSymbol[%d].Outline	
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.outlineHeight	0x0313	("%.16g"	ParameterFitDesignation[%d].UnitSymbol[%d].Outline	
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.outlineWidth	0x0313	("%.16g"	ParameterFitDesignation[%d].UnitSymbol[%d].Outline	
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].UnitSymbol[%d].Outline	
ParameterFitDesignation[%d].UnitSymbol[%d].Outline.visible	0x0313	"%d"	ParameterFitDesignation[%d].UnitSymbol[%d].Outline	

Q.11.52 ParameterFitDesignation[%d].UnitSymbol[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].Unit	0x0313	"%d"	ParameterFitDesignation[%d].Unit	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Symbol[%d].bold			Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].font	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].italic	0x0313	"%d"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].italicAngle	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].language	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].lineFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].maxExtend	0x0313	"%d"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].name	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].outlineColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Unit Symbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Unit Symbol[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Unit Symbol[%d].Outline
ParameterFitDesignation[%d].Unit Symbol[%d].outlineStyle	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].Unit Symbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Unit Symbol[%d].Outline.style which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite ParameterFitDesignation[%d].Unit Symbol[%d].Outline
ParameterFitDesignation[%d].Unit Symbol[%d].outlineType	0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterFitDesignation[%d].Unit Symbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Unit Symbol[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Unit Symbol[%d].Outline
ParameterFitDesignation[%d].Unit Symbol[%d].outlineWidth.measure mentType	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Unit Symbol[%d].Outline.width.measure mentType which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Unit Symbol[%d].Outline
ParameterFitDesignation[%d].Unit Symbol[%d].outlineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Unit Symbol[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ParameterFitDesignation[%d].Unit Symbol[%d].Outline
ParameterFitDesignation[%d].Unit Symbol[%d].spaceFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].strikethrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].textAspect	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].textColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].textHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].textLineWidth.measur ementType	0x0313	"%.16g"	ParameterFitDesignation[%d].Unit Symbol[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].Unit Symbol[%d].textLineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].textOrientation	0x0313	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].textThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].Unit Symbol[%d]	
ParameterFitDesignation[%d].Unit Symbol[%d].underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d].Unit Symbol[%d]	

Q.11.53 ParameterFitDesignation[%d].ValueText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
--------------	---------------------------	------------------------------	------------------	-----------------

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ValueText	0x0313	NULL	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d]	0x0313	NULL	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline	0x0313	NULL	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom	0x0313	NULL	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom.width.measurementType	0x0313	("%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Bottom	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left	0x0313	NULL	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Left	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right	0x0313	NULL	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Right	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top	0x0313	NULL	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline.Top	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.direction	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.doubleOffset	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.fillColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.filled	0x0313	"%d"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.origin	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.outlineHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.outlineWidth	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ValueText.Item[%d].Outline.visible	0x0313	"%d"	ParameterFitDesignation[%d].ValueText.Item[%d].Outline	
ParameterFitDesignation[%d].ValueText.Item[%d].bold	0x0313	"%d"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].font	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].format	0x0313	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].italic	0x0313	"%d"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].italicAngle	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].language	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].lineFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].lineWeldSupplementalSymbol	0x0313	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete,	ParameterFitDesignation[%d].ValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
ParameterFitDesignation[%d].ValueText.Item[%d].lineWeldSymbol	0x0313	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jjsstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jjsfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jjsstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskds smooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround,	ParameterFitDesignation[%d].ValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ParameterFitDesignation[%d].ValueText.Item[%d].outlineColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ValueText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ValueText.Item[%d].Outline
ParameterFitDesignation[%d].ValueText.Item[%d].outlineStyle	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ValueText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ValueText.Item[%d].Outline
ParameterFitDesignation[%d].ValueText.Item[%d].outlineType	0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=scoredcircle	ParameterFitDesignation[%d].ValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ValueText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ValueText.Item[%d].Outline
ParameterFitDesignation[%d].ValueText.Item[%d].outlineWidth.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ValueText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ValueText.Item[%d].Outline
ParameterFitDesignation[%d].ValueText.Item[%d].outlineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ValueText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ValueText.Item[%d].Outline
ParameterFitDesignation[%d].ValueText.Item[%d].spaceFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].strikethrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].string	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].symbol	0x0313	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis,	ParameterFitDesignation[%d].ValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ParameterFitDesignation[%d].ValueText.Item[%d].textAspect	0x0313	%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].textColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].textHeight	0x0313	%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].textLineWidth.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].ValueText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ValueText.Item[%d].textLineWidth	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].textThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Item[%d]	
ParameterFitDesignation[%d].ValueText.Item[%d].underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d].ValueText.Item[%d]	

Q.11.54 ParameterFitDesignation[%d].ValueText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ValueText.Outline	0x0313	NULL	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.Outline.Bottom	0x0313	NULL	ParameterFitDesignation[%d].ValueText.Outline	
ParameterFitDesignation[%d].ValueText.Outline.Bottom.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Outline.Bottom	
ParameterFitDesignation[%d].ValueText.Outline.Bottom.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ValueText.Outline.Bottom	
ParameterFitDesignation[%d].ValueText.Outline.Bottom.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Outline.Bottom	
ParameterFitDesignation[%d].ValueText.Outline.Bottom.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ValueText.Outline.Bottom.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Outline.Bottom	
ParameterFitDesignation[%d].ValueText.Outline.Left	0x0313	NULL	ParameterFitDesignation[%d].ValueText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ValueText.Outline.Left.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Outline.Left	
ParameterFitDesignation[%d].ValueText.Outline.Left.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ValueText.Outline.Left	
ParameterFitDesignation[%d].ValueText.Outline.Left.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Outline.Left	
ParameterFitDesignation[%d].ValueText.Outline.Left.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ValueText.Outline.Left.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Outline.Left	
ParameterFitDesignation[%d].ValueText.Outline.Right	0x0313	NULL	ParameterFitDesignation[%d].ValueText.Outline	
ParameterFitDesignation[%d].ValueText.Outline.Right.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Outline.Right	
ParameterFitDesignation[%d].ValueText.Outline.Right.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ValueText.Outline.Right	
ParameterFitDesignation[%d].ValueText.Outline.Right.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Outline.Right	
ParameterFitDesignation[%d].ValueText.Outline.Right.width.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ValueText.Outline.Right.width.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ValueText.Outline.Top	0x0313	NULL	ParameterFitDesignation[%d].ValueText.Outline	
ParameterFitDesignation[%d].ValueText.Outline.Top.colour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Outline.Top	
ParameterFitDesignation[%d].ValueText.Outline.Top.style	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ValueText.Outline.Top	
ParameterFitDesignation[%d].ValueText.Outline.Top.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Outline.Top	
ParameterFitDesignation[%d].ValueText.Outline.Top.width.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].ValueText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ValueText.Outline.Top.width.name	0x0313	%"s"	ParameterFitDesignation[%d].ValueText.Outline.Top	
ParameterFitDesignation[%d].ValueText.Outline.direction	0x0313	%.16g %.16g %.16g"	ParameterFitDesignation[%d].ValueText.Outline	
ParameterFitDesignation[%d].ValueText.Outline.doubleOffset	0x0313	%.16g"	ParameterFitDesignation[%d].ValueText.Outline	
ParameterFitDesignation[%d].ValueText.Outline.fillColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText.Outline	
ParameterFitDesignation[%d].ValueText.Outline.filled	0x0313	%"d"	ParameterFitDesignation[%d].ValueText.Outline	
ParameterFitDesignation[%d].ValueText.Outline.origin	0x0313	%.16g %.16g %.16g"	ParameterFitDesignation[%d].ValueText.Outline	
ParameterFitDesignation[%d].ValueText.Outline.outlineHeight	0x0313	%.16g"	ParameterFitDesignation[%d].ValueText.Outline	
ParameterFitDesignation[%d].ValueText.Outline.outlineWidth	0x0313	%.16g"	ParameterFitDesignation[%d].ValueText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ValueText.Outline.thickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d].ValueText.Outline	
ParameterFitDesignation[%d].ValueText.Outline.visible	0x0313	"%d"	ParameterFitDesignation[%d].ValueText.Outline	

Q.11.55 ParameterFitDesignation[%d].ValueText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ValueText.bold	0x0313	"%d"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.font	0x0313	"%s"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.italic	0x0313	"%d"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.italicAngle	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.language	0x0313	"%s"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.lineFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.maxExtend	0x0313	"%d"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.outlineColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ValueText.Outline.colour which would

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ValueText.Outline
ParameterFitDesignation[%d].ValueText.outlineStyle	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d].ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ValueText.Outline.style which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ValueText.Outline
ParameterFitDesignation[%d].ValueText.outlineType	0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ParameterFitDesignation[%d].ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ValueText.Outline.type which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ValueText.Outline
ParameterFitDesignation[%d].ValueText.outlineWidth.measurementType	0x0313	%.16g"	ParameterFitDesignation[%d].ValueText	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ValueText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ValueText.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				eText.Outline
ParameterFitDesignation[%d].ValueText.outlineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].ValueText.Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].ValueText.Outline
ParameterFitDesignation[%d].ValueText.spaceFactor	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.strikethrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.textAspect	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.textColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.textHeight	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.textLineWidth.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d].ValueText	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].ValueText.textLineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText.textOrientation	0x0313	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterFitDesignation[%d].ValueText	
ParameterFitDesignation[%d].ValueText	0x0313	String representing enumeration such that: "0"=normal, "1"=thick,	ParameterFitDesignation[%d].ValueText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
eText.textThickness		"2"=thin	eText	
ParameterFitDesignation[%d].ValueText.underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d].ValueText	

Q.11.56 ParameterFitDesignation[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].ValueToCustomer	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].____JtTkIntersectionReference__reference0	0x0313	ORIGINreference1	ParameterFitDesignation[%d].____JtTkIntersectionReference__reference1	<p>ORIGIN is optional and should only be added if the Intersection reference is also an Origin reference</p> <p>reference0 and reference1 should be in the format "%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path.</p> <p>Should exist in pairs, with the opposite ordering of values also persited, to identify both way which references are tied together as an intersection reference</p>
ParameterFitDesignation[%d].____JtTkIntersectionReference__reference1	0x0313	ORIGINreference0	ParameterFitDesignation[%d].____JtTkIntersectionReference__reference0	<p>ORIGIN is optional and should only be added if the Intersection reference is also an Origin reference</p> <p>reference0 and reference1 should be in the format "%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path.</p> <p>Should exist in pairs, with the opposite ordering of values also persited, to identify both way which references are tied together as an intersection reference</p>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].____ _JtTkOriginReference__referenc e	0x0313	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path.	ParameterFitDesignation[%d]	reference is the property value encoded also into the key identifying which reference is an origin reference.
ParameterFitDesignation[%d].acco untabilityId	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].align ment	0x0313	String representing enumeration such that: "0"=middle, "1"=bottom	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].allAr ound	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].allO ver	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].attac hmentType	0x0313	String representing enumeration such that: "0"=angulardimension, "1"=ongeometry, "2"=lineardimension, "3"=leader, "4"=stacked, "5"=ordinatedimension, "6"=radialdimension, "7"=diametraldimension, "8"=noleader, "9"=stackedleft, "10"=stackedright, "11"=stackedabove	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].blan ked	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].bold	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].com maAsDecimal	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].diam eterPlacement	0x0313	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].dime nsionLineBetweenArrows	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].dime nsionLineSplit	0x0313	String representing enumeration such that: "0"=none, "1"=limitfit, "2"=valuelimitfit	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].dime	0x0313	"%d"	ParameterFitDesignation[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ensionLineTrim				
ParameterFitDesignation[%d].direction	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].displayClearance	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].displayTolerance	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].featureOfSize	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].flag	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].foldLocation	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].font	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].group	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].holeDeviation	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].holeGrade	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].holeLowerDelta	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].holeUpperDelta	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].horizontalLine	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].inFront	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].inspection	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].inspectionDisplay	0x0313	String representing enumeration such that: "0"=unset, "1"=none, "2"=before, "3"=after, "4"=beforeafter, "5"=all	ParameterFitDesignation[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].isReference	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].italic	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].italicAngle	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].justification	0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].language	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].limitDisplay	0x0313	String representing enumeration such that: "0"=none, "1"=limitfit	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].limitFitAlignment	0x0313	String representing enumeration such that: "0"=middle, "1"=bottom	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].limitFitOrder	0x0313	String representing enumeration such that: "0"=valuelimitfittolerance, "1"=tolerancevaluelimitfit, "2"=valuetolerancelimitfit	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].limitFitParenthesis	0x0313	String representing enumeration such that: "0"=none, "1"=valuelimitfit, "2"=limitfit, "3"=tolerance, "4"=value, "5"=valuetolerance	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].lineFactor	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].linePlacement	0x0313	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].manual	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].nameComponents.displayName	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].name	0x0313	"%s"	ParameterFitDesignation[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
eComponents.name				
ParameterFitDesignation[%d].narrowLeaderAngle	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].narrowOffset	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].notToScale	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].origin	0x0313	String representing enumeration such that: "0"=first, "1"=second	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].originAnchor	0x0313	String representing enumeration such that: "0"=topleft, "1"=topcentre, "2"=topright, "3"=middleleft, "4"=middlecentre, "5"=middleright, "6"=bottomleft, "7"=bottomcentre, "8"=bottomright	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].outlineColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Outline
ParameterFitDesignation[%d].outlineStyle	0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ParameterFitDesignation[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Outline
ParameterFitDesignation[%d].outlineType	0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft,	ParameterFitDesignation[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Outline.type which would match the

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scorerectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Outline
ParameterFitDesignation[%d].outlineWidth.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Outline
ParameterFitDesignation[%d].outlineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ParameterFitDesignation[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ParameterFitDesignation[%d].Outline
ParameterFitDesignation[%d].panZoom	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].parallelToScreenAnchor	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].parallelToScreenRotationPoint	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].parallelToScreenRotationPoint	0x0313	"%.16g"	ParameterFitDesignation[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
l1elToScreenScale				
ParameterFitDesignation[%d].parameter	0x0313	String representing enumeration such that: "0"=diameter, "1"=depth, "2"=counterborediameter, "3"=counterboredepth, "4"=countersinkdiameter, "5"=countersinkangle, "6"=taperangle, "7"=fit, "8"=screwtype, "9"=screwsize, "10"=threadsize, "11"=threaddepth, "12"=startchamferdiameter, "13"=startchamferangle, "14"=endchamferdiameter, "15"=endchamferangle, "16"=pitch, "17"=angle, "18"=minordiameter, "19"=majordiameter, "20"=tapdrilldiameter, "21"=length, "22"=tapdrillsize, "23"=symbolicthreadcallout, "24"=shaftsize, "25"=threadpitch, "26"=form, "27"=internalexternalsymbol, "28"=drillsize, "29"=neckchamferdiameter, "30"=neckchamferangle, "31"=reliefchamferdiameter, "32"=reliefchamferangle, "33"=reliefdiameter, "34"=reliefdepth, "35"=threadhandedness	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].patternCount	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].pitchDiaDeviation	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].pitchDiaGrade	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].pitchDiameterLowerDelta	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].pitchDiameterUpperDelta	0x0313	"%.16g"	ParameterFitDesignation[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].precision	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].radialPlacement	0x0313	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].referenceDisplay	0x0313	String representing enumeration such that: "0"=parenthesis, "1"=reference, "2"=matched	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].shaftDeviation	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].shaftGrade	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].shaftLowerDelta	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].shaftUpperDelta	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].singleLine	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].singleSideFirst	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].singleSideLength	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].singleSided	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].spaceFactor	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].stackFactor	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].standard	0x0313	String representing enumeration such that: "0"=asme_y145m_1994, "1"=jis, "2"=iso, "3"=bs, "4"=ansi_y145m_1982, "5"=asme_y1441m_2003, "6"=din, "7"=gm_addendum_1994, "8"=asme_y145_2009, "9"=gb	ParameterFitDesignation[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].strikeThrough	0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].style	0x0313	String representing enumeration such that: "0"=lineardiametral, "1"=radial, "2"=controlledradial, "3"=diametral, "4"=limits, "5"=ordinate, "6"=sphericalradial, "7"=sphericaldiametral, "8"=narrow, "9"=none	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].symbolColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].textAspect	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].textColour	0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].textDirection	0x0313	"%.16g %.16g %.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].textHeight	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].textLeaderPosition	0x0313	String representing enumeration such that: "0"=none, "1"=aboveleader, "2"=afterleader, "3"=abovestub, "4"=afterstub	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].textLineWidth.measurementType	0x0313	"%.16g"	ParameterFitDesignation[%d]	measurementType must be replaced with meterWidth or pixelWidth
ParameterFitDesignation[%d].textLineWidth.name	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].textOrientation	0x0313	String representing enumeration such that: "0"=horizontal, "1"=vertical	ParameterFitDesignation[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].textOrigin	0x0313	%.16g %.16g %.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].textRotationPoint	0x0313	%.16g %.16g %.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].textThickness	0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].toleranceDisplay	0x0313	String representing enumeration such that: "0"=minuslimit1, "1"=bilateral, "2"=pluslimit1, "3"=pluslimit2, "4"=equalbilateral, "5"=minuslimit2, "6"=upperunilateral, "7"=lowerunilateral	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].toleranceLeadingZero	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].tolerancePrecision	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].toleranceTrailingZero	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].type	0x0313	String representing enumeration such that: "0"=curvelength, "1"=linear, "2"=angular, "3"=radial	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].underline	0x0313	String representing enumeration such that: "0"=over, "1"=under	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].unit	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].unitText	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].urisRefs[%d]	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].usage	0x0313	"%s"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].valid	0x0313	String representing enumeration such that: "0"=true, "1"=false, "2"=unknown	ParameterFitDesignation[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ParameterFitDesignation[%d].value	0x0313	"%.16g"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].valueLeadingZero	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].valueTrailingZero	0x0313	"%d"	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].zeroToleranceDisplay	0x0313	String representing enumeration such that: "0"=displayzero, "1"=blank, "2"=suppresstrailingzero, "3"=omit	ParameterFitDesignation[%d]	
ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d].subscript	0x0313	String representing enumeration such that: "0"=sub, "1"=super	ParameterFitDesignation[%d].FitDesignationText[%d].Text.Item[%d]	

Q.11.57 PartNumber.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PartNumber	0x0118	NULL		
PartNumber.Item[%d]	0x0118	NULL	PartNumber	
PartNumber.Item[%d].Outline	0x0118	NULL	PartNumber.Item[%d]	
PartNumber.Item[%d].Outline.Bottom	0x0118	NULL	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.Bottom.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Item[%d].Outline.Bottom	
PartNumber.Item[%d].Outline.Bottom.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	PartNumber.Item[%d].Outline.Bottom	
PartNumber.Item[%d].Outline.Bottom.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PartNumber.Item[%d].Outline.Bottom.width.measurementType	0x0118	"%.16g"	PartNumber.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
PartNumber.Item[%d].Outline.Bottom.width.name	0x0118	"%s"	PartNumber.Item[%d].Outline.Bottom	
PartNumber.Item[%d].Outline.Left	0x0118	NULL	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.Left.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Item[%d].Outline.Left	
PartNumber.Item[%d].Outline.Left.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	PartNumber.Item[%d].Outline.Left	
PartNumber.Item[%d].Outline.Left.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Item[%d].Outline.Left	
PartNumber.Item[%d].Outline.Left.width.measurementType	0x0118	"%.16g"	PartNumber.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
PartNumber.Item[%d].Outline.Left.width.name	0x0118	"%s"	PartNumber.Item[%d].Outline.Left	
PartNumber.Item[%d].Outline.Right	0x0118	NULL	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.Right.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Item[%d].Outline.Right	
PartNumber.Item[%d].Outline.Right.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	PartNumber.Item[%d].Outline.Right	
PartNumber.Item[%d].Outline.Right.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
PartNumber.Item[%d].Outline.Right.width.measurementType	0x0118	%.16g"	PartNumber.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
PartNumber.Item[%d].Outline.Right.width.name	0x0118	%"s"	PartNumber.Item[%d].Outline.Right	
PartNumber.Item[%d].Outline.Top	0x0118	NULL	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.Top.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Item[%d].Outline.Top	
PartNumber.Item[%d].Outline.Top.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	PartNumber.Item[%d].Outline.Top	
PartNumber.Item[%d].Outline.Top.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Item[%d].Outline.Top	
PartNumber.Item[%d].Outline.Top.width.measurementType	0x0118	%.16g"	PartNumber.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
PartNumber.Item[%d].Outline.Top.width.name	0x0118	%"s"	PartNumber.Item[%d].Outline.Top	
PartNumber.Item[%d].Outline.direction	0x0118	%.16g %.16g %.16g"	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.doubleOffset	0x0118	%.16g"	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.fillColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.filled	0x0118	%"d"	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.origin	0x0118	%.16g %.16g %.16g"	PartNumber.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PartNumber.Item[%d].Outline.outlineHeight	0x0118	"%.16g"	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.outlineWidth	0x0118	"%.16g"	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].Outline.visible	0x0118	"%d"	PartNumber.Item[%d].Outline	
PartNumber.Item[%d].bold	0x0118	"%d"	PartNumber.Item[%d]	
PartNumber.Item[%d].font	0x0118	"%s"	PartNumber.Item[%d]	
PartNumber.Item[%d].format	0x0118	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	PartNumber.Item[%d]	
PartNumber.Item[%d].italic	0x0118	"%d"	PartNumber.Item[%d]	
PartNumber.Item[%d].italicAngle	0x0118	"%.16g"	PartNumber.Item[%d]	
PartNumber.Item[%d].justification	0x0118	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	PartNumber.Item[%d]	
PartNumber.Item[%d].language	0x0118	"%s"	PartNumber.Item[%d]	
PartNumber.Item[%d].lineFactor	0x0118	"%.16g"	PartNumber.Item[%d]	
PartNumber.Item[%d].lineWeldSupplementalSymbol	0x0118	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd,	PartNumber.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
PartNumber.Item[%d].lineWeldSymbol	0x0118	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatedelectrode, "50"=eskdheat, "51"=eskdsMOOTH,	PartNumber.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
PartNumber.Item[%d].outlineColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading PartNumber.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite PartNumber.Item[%d].Outline
PartNumber.Item[%d].outlineStyle	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	PartNumber.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading PartNumber.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite PartNumber.Item[%d].Outline
PartNumber.Item[%d].outlineType	0x0118	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	PartNumber.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading PartNumber.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite PartNumber.Item[%d].Outline
PartNumber.Item[%d].outlineWidth .measurementType	0x0118	%.16g"	PartNumber.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				suggest sticking with this form of key, but also suggest support reading PartNumber.Item[%d].Outline.wid h.measurementType which would match the more modern Outline syntax and require prerequisite PartNumber.Item[%d].Outline
PartNumber.Item[%d].outlineWidth .name	0x0118	"%s"	PartNumber.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading PartNumber.Item[%d].Outline.wid h.name which would match the more modern Outline syntax and require prerequisite PartNumber.Item[%d].Outline
PartNumber.Item[%d].spaceFactor	0x0118	"%.16g"	PartNumber.Item[%d]	
PartNumber.Item[%d].strikethrough	0x0118	String representing enumeration such that: "0"=none, "1"=single, "2"=double	PartNumber.Item[%d]	
PartNumber.Item[%d].string	0x0118	"%s"	PartNumber.Item[%d]	
PartNumber.Item[%d].subscript	0x0118	String representing enumeration such that: "0"=sub, "1"=super	PartNumber.Item[%d]	
PartNumber.Item[%d].symbol	0x0118	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness,	PartNumber.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
PartNumber.Item[%d].textAspect	0x0118	%.16g"	PartNumber.Item[%d]	
PartNumber.Item[%d].textColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Item[%d]	
PartNumber.Item[%d].textHeight	0x0118	%.16g"	PartNumber.Item[%d]	
PartNumber.Item[%d].textLineWidth. measurementType	0x0118	%.16g"	PartNumber.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
PartNumber.Item[%d].textLineWidth. h.name	0x0118	%"s"	PartNumber.Item[%d]	
PartNumber.Item[%d].underline	0x0118	String representing enumeration such that: "0"=over, "1"=under	PartNumber.Item[%d]	
PartNumber.Item[%d].textThickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Item[%d]	

Q.11.58 PartNumber.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PartNumber.Outline	0x0118	NULL	PartNumber	
PartNumber.Outline.Bottom	0x0118	NULL	PartNumber.Outline	
PartNumber.Outline.Bottom.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Outline.Bottom	
PartNumber.Outline.Bottom.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	PartNumber.Outline.Bottom	
PartNumber.Outline.Bottom.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Outline.Bottom	
PartNumber.Outline.Bottom.width.measurementType	0x0118	"%.16g"	PartNumber.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
PartNumber.Outline.Bottom.width.name	0x0118	"%s"	PartNumber.Outline.Bottom	
PartNumber.Outline.Left	0x0118	NULL	PartNumber.Outline	
PartNumber.Outline.Left.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Outline.Left	
PartNumber.Outline.Left.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	PartNumber.Outline.Left	
PartNumber.Outline.Left.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PartNumber.Outline.Left.width.measurementType	0x0118	"%.16g"	PartNumber.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
PartNumber.Outline.Left.width.name	0x0118	"%s"	PartNumber.Outline.Left	
PartNumber.Outline.Right	0x0118	NULL	PartNumber.Outline	
PartNumber.Outline.Right.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Outline.Right	
PartNumber.Outline.Right.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	PartNumber.Outline.Right	
PartNumber.Outline.Right.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Outline.Right	
PartNumber.Outline.Right.width.measurementType	0x0118	"%.16g"	PartNumber.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
PartNumber.Outline.Right.width.name	0x0118	"%s"	PartNumber.Outline.Right	
PartNumber.Outline.Top	0x0118	NULL	PartNumber.Outline	
PartNumber.Outline.Top.colour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Outline.Top	
PartNumber.Outline.Top.style	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	PartNumber.Outline.Top	
PartNumber.Outline.Top.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PartNumber.Outline.Top.width.measurementType	0x0118	"%.16g"	PartNumber.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
PartNumber.Outline.Top.width.name	0x0118	"%s"	PartNumber.Outline.Top	
PartNumber.Outline.direction	0x0118	"%.16g %.16g %.16g"	PartNumber.Outline	
PartNumber.Outline.doubleOffset	0x0118	"%.16g"	PartNumber.Outline	
PartNumber.Outline.fillColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber.Outline	
PartNumber.Outline.filled	0x0118	"%d"	PartNumber.Outline	
PartNumber.Outline.origin	0x0118	"%.16g %.16g %.16g"	PartNumber.Outline	
PartNumber.Outline.outlineHeight	0x0118	"%.16g"	PartNumber.Outline	
PartNumber.Outline.outlineWidth	0x0118	"%.16g"	PartNumber.Outline	
PartNumber.Outline.thickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber.Outline	
PartNumber.Outline.visible	0x0118	"%d"	PartNumber.Outline	
PartNumber.bold	0x0118	"%d"	PartNumber	
PartNumber.font	0x0118	"%s"	PartNumber	
PartNumber.italic	0x0118	"%d"	PartNumber	
PartNumber.italicAngle	0x0118	"%.16g"	PartNumber	
PartNumber.justification	0x0118	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	PartNumber	
PartNumber.language	0x0118	"%s"	PartNumber	
PartNumber.lineFactor	0x0118	"%.16g"	PartNumber	
PartNumber.maxExtend	0x0118	"%d"	PartNumber	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PartNumber.name	0x0118	"%s"	PartNumber	
PartNumber.outlineColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading PartNumber.Outline.colour which would match the more modern Outline syntax and require prerequisite PartNumber.Outline
PartNumber.outlineStyle	0x0118	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	PartNumber	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading PartNumber.Outline.style which would match the more modern Outline syntax and require prerequisite PartNumber.Outline
PartNumber.outlineType	0x0118	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	PartNumber	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading PartNumber.Outline.type which would match the more modern Outline syntax and require prerequisite PartNumber.Outline
PartNumber.outlineWidth.measurementType	0x0118	"%.16g"	PartNumber	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading PartNumber.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite PartNumber.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
PartNumber.outlineWidth.name	0x0118	"%s"	PartNumber	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading PartNumber.Outline.width.name which would match the more modern Outline syntax and require prerequisite PartNumber.Outline
PartNumber.spaceFactor	0x0118	"%.16g"	PartNumber	
PartNumber.strikethrough	0x0118	String representing enumeration such that: "0"=none, "1"=single, "2"=double	PartNumber	
PartNumber.subscript	0x0118	String representing enumeration such that: "0"=sub, "1"=super	PartNumber	
PartNumber.textAspect	0x0118	"%.16g"	PartNumber	
PartNumber.textColour	0x0118	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	PartNumber	
PartNumber.textHeight	0x0118	"%.16g"	PartNumber	
PartNumber.textLineWidth.measurementType	0x0118	"%.16g"	PartNumber	measurementType must be replaced with meterWidth or pixelWidth
PartNumber.textLineWidth.name	0x0118	"%s"	PartNumber	
PartNumber.textOrientation	0x0118	String representing enumeration such that: "0"=horizontal, "1"=vertical	PartNumber	
PartNumber.textThickness	0x0118	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	PartNumber	
PartNumber.underline	0x0118	String representing enumeration such that: "0"=over, "1"=under	PartNumber	

Q.11.59 Position[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
--------------	---------------------------	------------------------------	------------------	-----------------

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Position[%d]	0x0306	"%.16g %.16g %.16g"		

Q.11.60 Primary.Datum[%d].TextLabel.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary	0x0081	NULL		
Primary.Datum[%d]	0x0081	NULL	Primary	
Primary.Datum[%d].FreeState	0x0081	NULL	Primary.Datum[%d]	
Primary.Datum[%d].TextLabel	0x0081	NULL	Primary.Datum[%d]	
Primary.Datum[%d].TextLabel.Item[%d]	0x0081	NULL	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.Item[%d].Outline	0x0081	NULL	Primary.Datum[%d].TextLabel.Item[%d]	
Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0081	NULL	Primary.Datum[%d].TextLabel.Item[%d].Outline	
Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	Primary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Primary.Datum[%d].TextLabel.Item	0x0081	NULL	Primary.Datum[%d].TextLabel.Item	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
[%d].Outline.Left			[%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Item [%d].Outline.Left	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.Datum[%d].TextLabel.Item [%d].Outline.Left	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Item [%d].Outline.Left	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Left.width.measurementType	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item [%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Primary.Datum[%d].TextLabel.Item [%d].Outline.Left.width.name	0x0081	"%s"	Primary.Datum[%d].TextLabel.Item [%d].Outline.Left	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Right	0x0081	NULL	Primary.Datum[%d].TextLabel.Item [%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Item [%d].Outline.Right	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.Datum[%d].TextLabel.Item [%d].Outline.Right	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Item [%d].Outline.Right	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Right.width.measurementType	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item [%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Primary.Datum[%d].TextLabel.Item	0x0081	"%s"	Primary.Datum[%d].TextLabel.Item	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
[%d].Outline.Right.width.name			[%d].Outline.Right	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Top	0x0081	NULL	Primary.Datum[%d].TextLabel.Item [%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Item [%d].Outline.Top	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.Datum[%d].TextLabel.Item [%d].Outline.Top	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Item [%d].Outline.Top	
Primary.Datum[%d].TextLabel.Item [%d].Outline.Top.width.measurementType	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item [%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Primary.Datum[%d].TextLabel.Item [%d].Outline.Top.width.name	0x0081	"%s"	Primary.Datum[%d].TextLabel.Item [%d].Outline.Top	
Primary.Datum[%d].TextLabel.Item [%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	Primary.Datum[%d].TextLabel.Item [%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].Outline.doubleOffset	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item [%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Item [%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].Outline.filled	0x0081	"%d"	Primary.Datum[%d].TextLabel.Item [%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	Primary.Datum[%d].TextLabel.Item [%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].Outline.outlineHeight	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item [%d].Outline	
Primary.Datum[%d].TextLabel.Item	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
[%d].Outline.outlineWidth			[%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Item [%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].Outline.visible	0x0081	"%d"	Primary.Datum[%d].TextLabel.Item [%d].Outline	
Primary.Datum[%d].TextLabel.Item [%d].bold	0x0081	"%d"	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].font	0x0081	"%s"	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].italic	0x0081	"%d"	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].italicAngle	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].language	0x0081	"%s"	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].lineFactor	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld,	Primary.Datum[%d].TextLabel.Item [%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
Primary.Datum[%d].TextLabel.Item [%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake,	Primary.Datum[%d].TextLabel.Item [%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
Primary.Datum[%d].TextLabel.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.Datum[%d].TextLabel.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Primary.Datum[%d].TextLabel.Item[%d].Outline
Primary.Datum[%d].TextLabel.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.Datum[%d].TextLabel.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite Primary.Datum[%d].TextLabel.Item[%d].Outline
Primary.Datum[%d].TextLabel.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	Primary.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.Datum[%d].TextLabel.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite Primary.Datum[%d].TextLabel.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.Datum[%d].TextLabel.Item[%d].outlineWidth.measurementType	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.Datum[%d].TextLabel.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Primary.Datum[%d].TextLabel.Item[%d].Outline
Primary.Datum[%d].TextLabel.Item[%d].outlineWidth.name	0x0081	"%s"	Primary.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.Datum[%d].TextLabel.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite Primary.Datum[%d].TextLabel.Item[%d].Outline
Primary.Datum[%d].TextLabel.Item[%d].spaceFactor	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Item[%d]	
Primary.Datum[%d].TextLabel.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Primary.Datum[%d].TextLabel.Item[%d]	
Primary.Datum[%d].TextLabel.Item[%d].string	0x0081	"%s"	Primary.Datum[%d].TextLabel.Item[%d]	
Primary.Datum[%d].TextLabel.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Primary.Datum[%d].TextLabel.Item[%d]	
Primary.Datum[%d].TextLabel.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength,	Primary.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
Primary.Datum[%d].TextLabel.Item [%d].textAspect	0x0081	%.16g"	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].textHeight	0x0081	%.16g"	Primary.Datum[%d].TextLabel.Item [%d]	
Primary.Datum[%d].TextLabel.Item [%d].textLineWidth.measurementT	0x0081	%.16g"	Primary.Datum[%d].TextLabel.Item	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ype			[%d]	pixelWidth
Primary.Datum[%d].TextLabel.Item[%d].textLineWidth.name	0x0081	"%s"	Primary.Datum[%d].TextLabel.Item[%d]	
Primary.Datum[%d].TextLabel.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Item[%d]	
Primary.Datum[%d].TextLabel.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Primary.Datum[%d].TextLabel.Item[%d]	

Q.11.61 Primary.Datum[%d].TextLabel.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.Datum[%d].TextLabel.Outline	0x0081	NULL	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.Outline.Bottom	0x0081	NULL	Primary.Datum[%d].TextLabel.Outline	
Primary.Datum[%d].TextLabel.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Outline.Bottom	
Primary.Datum[%d].TextLabel.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.Datum[%d].TextLabel.Outline.Bottom	
Primary.Datum[%d].TextLabel.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Outline.Bottom	
Primary.Datum[%d].TextLabel.Outline.Bottom.width.measurementType	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Primary.Datum[%d].TextLabel.Outline.Bottom.width.name	0x0081	"%s"	Primary.Datum[%d].TextLabel.Outline.Bottom	
Primary.Datum[%d].TextLabel.Outline.Left	0x0081	NULL	Primary.Datum[%d].TextLabel.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.Datum[%d].TextLabel.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Outline.Left	
Primary.Datum[%d].TextLabel.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.Datum[%d].TextLabel.Outline.Left	
Primary.Datum[%d].TextLabel.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Outline.Left	
Primary.Datum[%d].TextLabel.Outline.Left.width.measurementType	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Primary.Datum[%d].TextLabel.Outline.Left.width.name	0x0081	"%s"	Primary.Datum[%d].TextLabel.Outline.Left	
Primary.Datum[%d].TextLabel.Outline.Right	0x0081	NULL	Primary.Datum[%d].TextLabel.Outline	
Primary.Datum[%d].TextLabel.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Outline.Right	
Primary.Datum[%d].TextLabel.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.Datum[%d].TextLabel.Outline.Right	
Primary.Datum[%d].TextLabel.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Outline.Right	
Primary.Datum[%d].TextLabel.Outline.Right.width.measurementType	0x0081	"%.16g"	Primary.Datum[%d].TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Primary.Datum[%d].TextLabel.Outline.Right.width.name	0x0081	"%s"	Primary.Datum[%d].TextLabel.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.Datum[%d].TextLabel.Outline.Top	0x0081	NULL	Primary.Datum[%d].TextLabel.Outline	
Primary.Datum[%d].TextLabel.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Outline.Top	
Primary.Datum[%d].TextLabel.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.Datum[%d].TextLabel.Outline.Top	
Primary.Datum[%d].TextLabel.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Outline.Top	
Primary.Datum[%d].TextLabel.Outline.Top.width.measurementType	0x0081	%.16g"	Primary.Datum[%d].TextLabel.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Primary.Datum[%d].TextLabel.Outline.Top.width.name	0x0081	%"s"	Primary.Datum[%d].TextLabel.Outline.Top	
Primary.Datum[%d].TextLabel.Outline.direction	0x0081	%.16g %.16g %.16g"	Primary.Datum[%d].TextLabel.Outline	
Primary.Datum[%d].TextLabel.Outline.doubleOffset	0x0081	%.16g"	Primary.Datum[%d].TextLabel.Outline	
Primary.Datum[%d].TextLabel.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel.Outline	
Primary.Datum[%d].TextLabel.Outline.filled	0x0081	%"d"	Primary.Datum[%d].TextLabel.Outline	
Primary.Datum[%d].TextLabel.Outline.origin	0x0081	%.16g %.16g %.16g"	Primary.Datum[%d].TextLabel.Outline	
Primary.Datum[%d].TextLabel.Outline.outlineHeight	0x0081	%.16g"	Primary.Datum[%d].TextLabel.Outline	
Primary.Datum[%d].TextLabel.Outline.outlineWidth	0x0081	%.16g"	Primary.Datum[%d].TextLabel.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.Datum[%d].TextLabel.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel.Outline	
Primary.Datum[%d].TextLabel.Outline.visible	0x0081	"%d"	Primary.Datum[%d].TextLabel.Outline	

Q.11.62 Primary.Datum[%d].TextLabel.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.Datum[%d].TextLabel.bold	0x0081	"%d"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.font	0x0081	"%s"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.italic	0x0081	"%d"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.italicAngle	0x0081	"%.16g"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.language	0x0081	"%s"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.lineFactor	0x0081	"%.16g"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.maxExtend	0x0081	"%d"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.name	0x0081	"%s"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.Datum[%d].TextLabel.Outline.colour which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				Primary.Datum[%d].TextLabel.Outline
Primary.Datum[%d].TextLabel.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.Datum[%d].TextLabel.Outline.style which would match the more modern Outline syntax and require prerequisite Primary.Datum[%d].TextLabel.Outline
Primary.Datum[%d].TextLabel.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Primary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.Datum[%d].TextLabel.Outline.type which would match the more modern Outline syntax and require prerequisite Primary.Datum[%d].TextLabel.Outline
Primary.Datum[%d].TextLabel.outlineWidth.measurementType	0x0081	"%.16g"	Primary.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.Datum[%d].TextLabel.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Primary.Datum[%d].TextLabel.Outline
Primary.Datum[%d].TextLabel.outline	0x0081	"%s"	Primary.Datum[%d].TextLabel	For compatibility reasons we

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
neWidth.name				suggest sticking with this form of key, but also suggest support reading Primary.Datum[%d].TextLabel.Outline.width.name which would match the more modern Outline syntax and require prerequisite Primary.Datum[%d].TextLabel.Outline
Primary.Datum[%d].TextLabel.spaceFactor	0x0081	"%.16g"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.striethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.textAspect	0x0081	"%.16g"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.textHeight	0x0081	"%.16g"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.textLineWidth.measurementType	0x0081	"%.16g"	Primary.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
Primary.Datum[%d].TextLabel.textLineWidth.name	0x0081	"%s"	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.Datum[%d].TextLabel	
Primary.Datum[%d].TextLabel.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Primary.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.Datum[%d].datumRef	0x0081	"%s"	Primary.Datum[%d]	
Primary.Datum[%d].label	0x0081	"%s"	Primary.Datum[%d]	
Primary.Datum[%d].modifier	0x0081	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	Primary.Datum[%d]	
Primary.Datum[%d].projected	0x0081	"%d"	Primary.Datum[%d]	

Q.11.63 Primary.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.ExtendedText	0x0081	NULL	Primary	
Primary.ExtendedText.Item[%d]	0x0081	NULL	Primary.ExtendedText	
Primary.ExtendedText.Item[%d].Outline	0x0081	NULL	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].Outline.Bottom	0x0081	NULL	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Item[%d].Outline.Bottom	
Primary.ExtendedText.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.ExtendedText.Item[%d].Outline.Bottom	
Primary.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText.Item[%d].Outline.Bottom	
Primary.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	Primary.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Primary.ExtendedText.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	Primary.ExtendedText.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.ExtendedText.Item[%d].Outline.Left	0x0081	NULL	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Item[%d].Outline.Left	
Primary.ExtendedText.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.ExtendedText.Item[%d].Outline.Left	
Primary.ExtendedText.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText.Item[%d].Outline.Left	
Primary.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	Primary.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Primary.ExtendedText.Item[%d].Outline.Left.width.name	0x0081	"%s"	Primary.ExtendedText.Item[%d].Outline.Left	
Primary.ExtendedText.Item[%d].Outline.Right	0x0081	NULL	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Item[%d].Outline.Right	
Primary.ExtendedText.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.ExtendedText.Item[%d].Outline.Right	
Primary.ExtendedText.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText.Item[%d].Outline.Right	
Primary.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	Primary.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.ExtendedText.Item[%d].Outline.Right.width.name	0x0081	"%s"	Primary.ExtendedText.Item[%d].Outline.Right	
Primary.ExtendedText.Item[%d].Outline.Top	0x0081	NULL	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Item[%d].Outline.Top	
Primary.ExtendedText.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.ExtendedText.Item[%d].Outline.Top	
Primary.ExtendedText.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText.Item[%d].Outline.Top	
Primary.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0081	"%.16g"	Primary.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Primary.ExtendedText.Item[%d].Outline.Top.width.name	0x0081	"%s"	Primary.ExtendedText.Item[%d].Outline.Top	
Primary.ExtendedText.Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.doubleOffset	0x0081	"%.16g"	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.filled	0x0081	"%d"	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.outlineHeight	0x0081	"%.16g"	Primary.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.ExtendedText.Item[%d].Outline.outlineWidth	0x0081	"%.16g"	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].Outline.visible	0x0081	"%d"	Primary.ExtendedText.Item[%d].Outline	
Primary.ExtendedText.Item[%d].bold	0x0081	"%d"	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].font	0x0081	"%s"	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].italic	0x0081	"%d"	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].italicAngle	0x0081	"%.16g"	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].language	0x0081	"%s"	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].lineFactor	0x0081	"%.16g"	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing,	Primary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
Primary.ExtendedText.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jjsstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jjsstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder,	Primary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskdiameter, "56"=eskdnumber, "57"=isoedge		
Primary.ExtendedText.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Primary.ExtendedText.Item[%d].Outline
Primary.ExtendedText.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.ExtendedText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite Primary.ExtendedText.Item[%d].Outline
Primary.ExtendedText.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright,	Primary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.ExtendedText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite Primary.ExtendedText.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"24"=squaredcircle		
Primary.ExtendedText.Item[%d].outlineWidth.measurementType	0x0081	".16g"	Primary.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.ExtendedText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Primary.ExtendedText.Item[%d].Outline
Primary.ExtendedText.Item[%d].outlineWidth.name	0x0081	"%s"	Primary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.ExtendedText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite Primary.ExtendedText.Item[%d].Outline
Primary.ExtendedText.Item[%d].spaceFactor	0x0081	".16g"	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].strokeThrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].string	0x0081	"%s"	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees,	Primary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
Primary.ExtendedText.Item[%d].textAspect	0x0081	"%.16g"	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].textHeight	0x0081	"%.16g"	Primary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.ExtendedText.Item[%d].textLineWidth.measurementType	0x0081	"%.16g"	Primary.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
Primary.ExtendedText.Item[%d].textLineWidth.name	0x0081	"%s"	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText.Item[%d]	
Primary.ExtendedText.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Primary.ExtendedText.Item[%d]	

Q.11.64 Primary.ExtendedText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.ExtendedText.Outline	0x0081	NULL	Primary.ExtendedText	
Primary.ExtendedText.Outline.Bottom	0x0081	NULL	Primary.ExtendedText.Outline	
Primary.ExtendedText.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Outline.Bottom	
Primary.ExtendedText.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.ExtendedText.Outline.Bottom	
Primary.ExtendedText.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText.Outline.Bottom	
Primary.ExtendedText.Outline.Bottom.width.measurementType	0x0081	"%.16g"	Primary.ExtendedText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Primary.ExtendedText.Outline.Bottom.width.name	0x0081	"%s"	Primary.ExtendedText.Outline.Bottom	
Primary.ExtendedText.Outline.Left	0x0081	NULL	Primary.ExtendedText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.ExtendedText.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Outline.Left	
Primary.ExtendedText.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.ExtendedText.Outline.Left	
Primary.ExtendedText.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText.Outline.Left	
Primary.ExtendedText.Outline.Left.width.measurementType	0x0081	"%.16g"	Primary.ExtendedText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Primary.ExtendedText.Outline.Left.width.name	0x0081	"%s"	Primary.ExtendedText.Outline.Left	
Primary.ExtendedText.Outline.Right	0x0081	NULL	Primary.ExtendedText.Outline	
Primary.ExtendedText.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Outline.Right	
Primary.ExtendedText.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.ExtendedText.Outline.Right	
Primary.ExtendedText.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText.Outline.Right	
Primary.ExtendedText.Outline.Right.width.measurementType	0x0081	"%.16g"	Primary.ExtendedText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Primary.ExtendedText.Outline.Right.width.name	0x0081	"%s"	Primary.ExtendedText.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.ExtendedText.Outline.Top	0x0081	NULL	Primary.ExtendedText.Outline	
Primary.ExtendedText.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Outline.Top	
Primary.ExtendedText.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Primary.ExtendedText.Outline.Top	
Primary.ExtendedText.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText.Outline.Top	
Primary.ExtendedText.Outline.Top.width.measurementType	0x0081	"%.16g"	Primary.ExtendedText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Primary.ExtendedText.Outline.Top.width.name	0x0081	"%s"	Primary.ExtendedText.Outline.Top	
Primary.ExtendedText.Outline.direction	0x0081	"%.16g %.16g %.16g"	Primary.ExtendedText.Outline	
Primary.ExtendedText.Outline.doubleOffset	0x0081	"%.16g"	Primary.ExtendedText.Outline	
Primary.ExtendedText.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText.Outline	
Primary.ExtendedText.Outline.filled	0x0081	"%d"	Primary.ExtendedText.Outline	
Primary.ExtendedText.Outline.origin	0x0081	"%.16g %.16g %.16g"	Primary.ExtendedText.Outline	
Primary.ExtendedText.Outline.outlineHeight	0x0081	"%.16g"	Primary.ExtendedText.Outline	
Primary.ExtendedText.Outline.outlineWidth	0x0081	"%.16g"	Primary.ExtendedText.Outline	
Primary.ExtendedText.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick,	Primary.ExtendedText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
kness		"2"=thin		
Primary.ExtendedText.Outline.visible	0x0081	"%d"	Primary.ExtendedText.Outline	

Q.11.65 Primary.ExtendedText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.ExtendedText.bold	0x0081	"%d"	Primary.ExtendedText	
Primary.ExtendedText.font	0x0081	"%s"	Primary.ExtendedText	
Primary.ExtendedText.italic	0x0081	"%d"	Primary.ExtendedText	
Primary.ExtendedText.italicAngle	0x0081	"%.16g"	Primary.ExtendedText	
Primary.ExtendedText.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Primary.ExtendedText	
Primary.ExtendedText.language	0x0081	"%s"	Primary.ExtendedText	
Primary.ExtendedText.lineFactor	0x0081	"%.16g"	Primary.ExtendedText	
Primary.ExtendedText.maxExtend	0x0081	"%d"	Primary.ExtendedText	
Primary.ExtendedText.name	0x0081	"%s"	Primary.ExtendedText	
Primary.ExtendedText.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite Primary.ExtendedText.Outline
Primary.ExtendedText.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	Primary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.ExtendedText.Outline.styl

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		e which would match the more modern Outline syntax and require prerequisite Primary.ExtendedText.Outline
Primary.ExtendedText.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Primary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.ExtendedText.Outline.type which would match the more modern Outline syntax and require prerequisite Primary.ExtendedText.Outline
Primary.ExtendedText.outlineWidth.measurementType	0x0081	%.16g"	Primary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.ExtendedText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Primary.ExtendedText.Outline
Primary.ExtendedText.outlineWidth.name	0x0081	%"s"	Primary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Primary.ExtendedText.Outline.width.name which would match the more modern Outline syntax and require prerequisite Primary.ExtendedText.Outline
Primary.ExtendedText.spaceFactor	0x0081	%.16g"	Primary.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Primary.ExtendedText.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Primary.ExtendedText	
Primary.ExtendedText.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Primary.ExtendedText	
Primary.ExtendedText.textAspect	0x0081	"%.16g"	Primary.ExtendedText	
Primary.ExtendedText.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Primary.ExtendedText	
Primary.ExtendedText.textHeight	0x0081	"%.16g"	Primary.ExtendedText	
Primary.ExtendedText.textLineWidth.measurementType	0x0081	"%.16g"	Primary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
Primary.ExtendedText.textLineWidth.name	0x0081	"%s"	Primary.ExtendedText	
Primary.ExtendedText.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	Primary.ExtendedText	
Primary.ExtendedText.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Primary.ExtendedText	
Primary.ExtendedText.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Primary.ExtendedText	

Q.11.66 ProcessText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ProcessText	0x0004 0x0008 0x0041	NULL		
ProcessText.Item[%d]	0x0004 0x0008 0x0041	NULL	ProcessText	
ProcessText.Item[%d].Outline	0x0004 0x0008 0x0041	NULL	ProcessText.Item[%d]	
ProcessText.Item[%d].Outline.Bottom	0x0004 0x0008 0x0041	NULL	ProcessText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ProcessText.Item[%d].Outline.Bottom.colour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Item[%d].Outline.Bottom	
ProcessText.Item[%d].Outline.Bottom.style	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ProcessText.Item[%d].Outline.Bottom	
ProcessText.Item[%d].Outline.Bottom.thickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Item[%d].Outline.Bottom	
ProcessText.Item[%d].Outline.Bottom.width.measurementType	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ProcessText.Item[%d].Outline.Bottom.width.name	0x0004 0x0008 0x0041	"%s"	ProcessText.Item[%d].Outline.Bottom	
ProcessText.Item[%d].Outline.Left	0x0004 0x0008 0x0041	NULL	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].Outline.Left.colour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Item[%d].Outline.Left	
ProcessText.Item[%d].Outline.Left.style	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ProcessText.Item[%d].Outline.Left	
ProcessText.Item[%d].Outline.Left.thickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Item[%d].Outline.Left	
ProcessText.Item[%d].Outline.Left.width.measurementType	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ProcessText.Item[%d].Outline.Left.width.name	0x0004 0x0008 0x0041	"%s"	ProcessText.Item[%d].Outline.Left	
ProcessText.Item[%d].Outline.Right	0x0004 0x0008 0x0041	NULL	ProcessText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
t				
ProcessText.Item[%d].Outline.Right.colour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Item[%d].Outline.Right	
ProcessText.Item[%d].Outline.Right.style	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ProcessText.Item[%d].Outline.Right	
ProcessText.Item[%d].Outline.Right.thickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Item[%d].Outline.Right	
ProcessText.Item[%d].Outline.Right.width.measurementType	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ProcessText.Item[%d].Outline.Right.width.name	0x0004 0x0008 0x0041	"%s"	ProcessText.Item[%d].Outline.Right	
ProcessText.Item[%d].Outline.Top	0x0004 0x0008 0x0041	NULL	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].Outline.Top.colour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Item[%d].Outline.Top	
ProcessText.Item[%d].Outline.Top.style	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ProcessText.Item[%d].Outline.Top	
ProcessText.Item[%d].Outline.Top.thickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Item[%d].Outline.Top	
ProcessText.Item[%d].Outline.Top.width.measurementType	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ProcessText.Item[%d].Outline.Top.width.name	0x0004 0x0008 0x0041	"%s"	ProcessText.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ProcessText.Item[%d].Outline.direction	0x0004 0x0008 0x0041	"%.16g %.16g %.16g"	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].Outline.doubleOffset	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].Outline.fillColour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].Outline.filled	0x0004 0x0008 0x0041	"%d"	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].Outline.origin	0x0004 0x0008 0x0041	"%.16g %.16g %.16g"	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].Outline.outlineHeight	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].Outline.outlineWidth	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].Outline.thickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].Outline.visible	0x0004 0x0008 0x0041	"%d"	ProcessText.Item[%d].Outline	
ProcessText.Item[%d].bold	0x0004 0x0008 0x0041	"%d"	ProcessText.Item[%d]	
ProcessText.Item[%d].font	0x0004 0x0008 0x0041	"%s"	ProcessText.Item[%d]	
ProcessText.Item[%d].format	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ProcessText.Item[%d]	
ProcessText.Item[%d].italic	0x0004 0x0008 0x0041	"%d"	ProcessText.Item[%d]	
ProcessText.Item[%d].italicAngle	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d]	
ProcessText.Item[%d].justification	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ProcessText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ProcessText.Item[%d].language	0x0004 0x0008 0x0041	"%s"	ProcessText.Item[%d]	
ProcessText.Item[%d].lineFactor	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d]	
ProcessText.Item[%d].lineWeldSupplementalSymbol	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp, "20"=surfacefinishmrrpcomplete, "21"=meltthrough	ProcessText.Item[%d]	
ProcessText.Item[%d].lineWeldSymbol	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove,	ProcessText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ProcessText.Item[%d].outlineColour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ProcessText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ProcessText.Item[%d].Outline
ProcessText.Item[%d].outlineStyle	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ProcessText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ProcessText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ProcessText.Item[%d].Outline
ProcessText.Item[%d].outlineType	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong,	ProcessText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ProcessText.Item[%d].Outline.type which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		prerequisite ProcessText.Item[%d].Outline
ProcessText.Item[%d].outlineWidth .measurementType	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ProcessText.Item[%d].Outline.wid h.measurementType which would match the more modern Outline syntax and require prerequisite ProcessText.Item[%d].Outline
ProcessText.Item[%d].outlineWidth .name	0x0004 0x0008 0x0041	"%s"	ProcessText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ProcessText.Item[%d].Outline.wid h.name which would match the more modern Outline syntax and require prerequisite ProcessText.Item[%d].Outline
ProcessText.Item[%d].spaceFactor	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d]	
ProcessText.Item[%d].strikethrough	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ProcessText.Item[%d]	
ProcessText.Item[%d].string	0x0004 0x0008 0x0041	"%s"	ProcessText.Item[%d]	
ProcessText.Item[%d].subscript	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=sub, "1"=super	ProcessText.Item[%d]	
ProcessText.Item[%d].symbol	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper,	ProcessText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ProcessText.Item[%d].textAspect	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d]	
ProcessText.Item[%d].textColour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Item[%d]	
ProcessText.Item[%d].textHeight	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ProcessText.Item[%d].textLineWidth.measurementType	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ProcessText.Item[%d].textLineWidth.name	0x0004 0x0008 0x0041	"%s"	ProcessText.Item[%d]	
ProcessText.Item[%d].textThickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Item[%d]	
ProcessText.Item[%d].underline	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=over, "1"=under	ProcessText.Item[%d]	

Q.11.67 ProcessText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ProcessText.Outline	0x0004 0x0008 0x0041	NULL	ProcessText	
ProcessText.Outline.Bottom	0x0004 0x0008 0x0041	NULL	ProcessText.Outline	
ProcessText.Outline.Bottom.colour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Outline.Bottom	
ProcessText.Outline.Bottom.style	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ProcessText.Outline.Bottom	
ProcessText.Outline.Bottom.thickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Outline.Bottom	
ProcessText.Outline.Bottom.width.measurementType	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ProcessText.Outline.Bottom.width.name	0x0004 0x0008 0x0041	"%s"	ProcessText.Outline.Bottom	
ProcessText.Outline.Left	0x0004 0x0008 0x0041	NULL	ProcessText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ProcessText.Outline.Left.colour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Outline.Left	
ProcessText.Outline.Left.style	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ProcessText.Outline.Left	
ProcessText.Outline.Left.thickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Outline.Left	
ProcessText.Outline.Left.width.measurementType	0x0004 0x0008 0x0041	("%.16g"	ProcessText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ProcessText.Outline.Left.width.name	0x0004 0x0008 0x0041	"%s"	ProcessText.Outline.Left	
ProcessText.Outline.Right	0x0004 0x0008 0x0041	NULL	ProcessText.Outline	
ProcessText.Outline.Right.colour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Outline.Right	
ProcessText.Outline.Right.style	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ProcessText.Outline.Right	
ProcessText.Outline.Right.thickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Outline.Right	
ProcessText.Outline.Right.width.measurementType	0x0004 0x0008 0x0041	("%.16g"	ProcessText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ProcessText.Outline.Right.width.name	0x0004 0x0008 0x0041	"%s"	ProcessText.Outline.Right	
ProcessText.Outline.Top	0x0004 0x0008 0x0041	NULL	ProcessText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ProcessText.Outline.Top.colour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Outline.Top	
ProcessText.Outline.Top.style	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ProcessText.Outline.Top	
ProcessText.Outline.Top.thickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Outline.Top	
ProcessText.Outline.Top.width.measurementType	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ProcessText.Outline.Top.width.name	0x0004 0x0008 0x0041	"%s"	ProcessText.Outline.Top	
ProcessText.Outline.direction	0x0004 0x0008 0x0041	"%.16g %.16g %.16g"	ProcessText.Outline	
ProcessText.Outline.doubleOffset	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Outline	
ProcessText.Outline.fillColour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText.Outline	
ProcessText.Outline.filled	0x0004 0x0008 0x0041	"%d"	ProcessText.Outline	
ProcessText.Outline.origin	0x0004 0x0008 0x0041	"%.16g %.16g %.16g"	ProcessText.Outline	
ProcessText.Outline.outlineHeight	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Outline	
ProcessText.Outline.outlineWidth	0x0004 0x0008 0x0041	"%.16g"	ProcessText.Outline	
ProcessText.Outline.thickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText.Outline	
ProcessText.Outline.visible	0x0004 0x0008 0x0041	"%d"	ProcessText.Outline	

Q.11.68 ProcessText.<property>

Property Key	Supported PML_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ProcessText.bold	0x0004 0x0008 0x0041	"%d"	ProcessText	
ProcessText.font	0x0004 0x0008 0x0041	"%s"	ProcessText	
ProcessText.italic	0x0004 0x0008 0x0041	"%d"	ProcessText	
ProcessText.italicAngle	0x0004 0x0008 0x0041	"%.16g"	ProcessText	
ProcessText.justification	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ProcessText	
ProcessText.language	0x0004 0x0008 0x0041	"%s"	ProcessText	
ProcessText.lineFactor	0x0004 0x0008 0x0041	"%.16g"	ProcessText	
ProcessText.maxExtend	0x0004 0x0008 0x0041	"%d"	ProcessText	
ProcessText.name	0x0004 0x0008 0x0041	"%s"	ProcessText	
ProcessText.outlineColour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ProcessText.Outline.colour which would match the more modern Outline syntax and require prerequisite ProcessText.Outline
ProcessText.outlineStyle	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centrelines	ProcessText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ProcessText.Outline.style which would match the more modern Outline syntax and require prerequisite ProcessText.Outline
ProcessText.outlineType	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft,	ProcessText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ProcessText.Outline.type which would match the more modern Outline syntax and require prerequisite ProcessText.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		
ProcessText.outlineWidth.measurementType	0x0004 0x0008 0x0041	"%.16g"	ProcessText	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ProcessText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ProcessText.Outline
ProcessText.outlineWidth.name	0x0004 0x0008 0x0041	"%s"	ProcessText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ProcessText.Outline.width.name which would match the more modern Outline syntax and require prerequisite ProcessText.Outline
ProcessText.spaceFactor	0x0004 0x0008 0x0041	"%.16g"	ProcessText	
ProcessText.strikethrough	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ProcessText	
ProcessText.subscript	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=sub, "1"=super	ProcessText	
ProcessText.textAspect	0x0004 0x0008 0x0041	"%.16g"	ProcessText	
ProcessText.textColour	0x0004 0x0008 0x0041	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ProcessText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ProcessText.textHeight	0x0004 0x0008 0x0041	"%.16g"	ProcessText	
ProcessText.textLineWidth.measurementType	0x0004 0x0008 0x0041	"%.16g"	ProcessText	measurementType must be replaced with meterWidth or pixelWidth
ProcessText.textLineWidth.name	0x0004 0x0008 0x0041	"%s"	ProcessText	
ProcessText.textOrientation	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=horizontal, "1"=vertical	ProcessText	
ProcessText.textThickness	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ProcessText	
ProcessText.underline	0x0004 0x0008 0x0041	String representing enumeration such that: "0"=over, "1"=under	ProcessText	

Q.12 PMI Properties "R"

Q.12.1 ReferenceText[%d].Text.Item[%d].<property

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ReferenceText[%d]	0x0082 0X030D 0X030F	NULL		ReferenceText[%d] index expected to range from 0-1 inclusive. Each instance of this is expected to have a different position such that ReferenceText[x].position != ReferenceText[y].position for any combination of x and y
ReferenceText[%d].Text	0x0082 0X030D 0X030F	NULL	ReferenceText[%d]	
ReferenceText[%d].Text.Item[%d]	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text	
ReferenceText[%d].Text.Item[%d].Outline	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].Outline.Bottom	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text.Item[%d].Outline	
ReferenceText[%d].Text.Item[%d].	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red	ReferenceText[%d].Text.Item[%d].	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline.Bottom.colour		for the colour are encoded in the string	Outline.Bottom	
ReferenceText[%d].Text.Item[%d]. Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ReferenceText[%d].Text.Item[%d]. Outline.Bottom	
ReferenceText[%d].Text.Item[%d]. Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Item[%d]. Outline.Bottom	
ReferenceText[%d].Text.Item[%d]. Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d]. Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ReferenceText[%d].Text.Item[%d]. Outline.Bottom.width.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Item[%d]. Outline.Bottom	
ReferenceText[%d].Text.Item[%d]. Outline.Left	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text.Item[%d]. Outline	
ReferenceText[%d].Text.Item[%d]. Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text.Item[%d]. Outline.Left	
ReferenceText[%d].Text.Item[%d]. Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ReferenceText[%d].Text.Item[%d]. Outline.Left	
ReferenceText[%d].Text.Item[%d]. Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Item[%d]. Outline.Left	
ReferenceText[%d].Text.Item[%d]. Outline.Left.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d]. Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ReferenceText[%d].Text.Item[%d]. Outline.Left.width.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Item[%d]. Outline.Left	
ReferenceText[%d].Text.Item[%d]. Outline.Right	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text.Item[%d]. Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ReferenceText[%d].Text.Item[%d]. Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text.Item[%d]. Outline.Right	
ReferenceText[%d].Text.Item[%d]. Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ReferenceText[%d].Text.Item[%d]. Outline.Right	
ReferenceText[%d].Text.Item[%d]. Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Item[%d]. Outline.Right	
ReferenceText[%d].Text.Item[%d]. Outline.Right.width.measurementType	0x0082 0X030D 0X030F	%.16g"	ReferenceText[%d].Text.Item[%d]. Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ReferenceText[%d].Text.Item[%d]. Outline.Right.width.name	0x0082 0X030D 0X030F	%"s"	ReferenceText[%d].Text.Item[%d]. Outline.Right	
ReferenceText[%d].Text.Item[%d]. Outline.Top	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text.Item[%d]. Outline	
ReferenceText[%d].Text.Item[%d]. Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text.Item[%d]. Outline.Top	
ReferenceText[%d].Text.Item[%d]. Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ReferenceText[%d].Text.Item[%d]. Outline.Top	
ReferenceText[%d].Text.Item[%d]. Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Item[%d]. Outline.Top	
ReferenceText[%d].Text.Item[%d]. Outline.Top.width.measurementType	0x0082 0X030D 0X030F	%.16g"	ReferenceText[%d].Text.Item[%d]. Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ReferenceText[%d].Text.Item[%d]. Outline.Top.width.name	0x0082 0X030D 0X030F	%"s"	ReferenceText[%d].Text.Item[%d]. Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ReferenceText[%d].Text.Item[%d].Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	ReferenceText[%d].Text.Item[%d].Outline	
ReferenceText[%d].Text.Item[%d].Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d].Outline	
ReferenceText[%d].Text.Item[%d].Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text.Item[%d].Outline	
ReferenceText[%d].Text.Item[%d].Outline.filled	0x0082 0X030D 0X030F	"%d"	ReferenceText[%d].Text.Item[%d].Outline	
ReferenceText[%d].Text.Item[%d].Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	ReferenceText[%d].Text.Item[%d].Outline	
ReferenceText[%d].Text.Item[%d].Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d].Outline	
ReferenceText[%d].Text.Item[%d].Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d].Outline	
ReferenceText[%d].Text.Item[%d].Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Item[%d].Outline	
ReferenceText[%d].Text.Item[%d].Outline.visible	0x0082 0X030D 0X030F	"%d"	ReferenceText[%d].Text.Item[%d].Outline	
ReferenceText[%d].Text.Item[%d].bold	0x0082 0X030D 0X030F	"%d"	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].font	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].format	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].italic	0x0082 0X030D 0X030F	"%d"	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].italicAngle	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ReferenceText[%d].Text.Item[%d].Justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].Language	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].LineFactor	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].LineWeldSupplementalSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].LineWeldSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange,	ReferenceText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ReferenceText[%d].Text.Item[%d].outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ReferenceText[%d].Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ReferenceText[%d].Text.Item[%d].Outline
ReferenceText[%d].Text.Item[%d].outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ReferenceText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ReferenceText[%d].Text.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ReferenceText[%d].Text.Item[%d]. Outline
ReferenceText[%d].Text.Item[%d]. outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ReferenceText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ReferenceText[%d].Text.Item[%d]. Outline.type which would match the more modern Outline syntax and require prerequisite ReferenceText[%d].Text.Item[%d]. Outline
ReferenceText[%d].Text.Item[%d]. outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ReferenceText[%d].Text.Item[%d]. Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ReferenceText[%d].Text.Item[%d]. Outline
ReferenceText[%d].Text.Item[%d]. outlineWidth.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ReferenceText[%d].Text.Item[%d]. Outline.width.name which would match the more modern Outline syntax and require prerequisite ReferenceText[%d].Text.Item[%d]. Outline
ReferenceText[%d].Text.Item[%d].	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
spaceFactor				
ReferenceText[%d].Text.Item[%d]. strikethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d]. string	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d]. subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d]. symbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch,	ReferenceText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ReferenceText[%d].Text.Item[%d].textAspect	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].textHeight	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].textLineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ReferenceText[%d].Text.Item[%d].textLineWidth.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Item[%d]	
ReferenceText[%d].Text.Item[%d].underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	ReferenceText[%d].Text.Item[%d]	

Q.12.2 ReferenceText[%d].Text.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ReferenceText[%d].Text.Outline	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text	
ReferenceText[%d].Text.Outline.Bottom	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text.Outline.Bottom	
ReferenceText[%d].Text.Outline.Bottom	0x0082 0X030D 0X030F	String representing enumeration	ReferenceText[%d].Text.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ottom.style		such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ottom	
ReferenceText[%d].Text.Outline.B ottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Outline.B ottom	
ReferenceText[%d].Text.Outline.B ottom.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Outline.B ottom	measurementType must be replaced with meterWidth or pixelWidth
ReferenceText[%d].Text.Outline.B ottom.width.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Outline.B ottom	
ReferenceText[%d].Text.Outline.L eft	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.L eft.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text.Outline.L eft	
ReferenceText[%d].Text.Outline.L eft.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ReferenceText[%d].Text.Outline.L eft	
ReferenceText[%d].Text.Outline.L eft.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Outline.L eft	
ReferenceText[%d].Text.Outline.L eft.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Outline.L eft	measurementType must be replaced with meterWidth or pixelWidth
ReferenceText[%d].Text.Outline.L eft.width.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Outline.L eft	
ReferenceText[%d].Text.Outline.Ri ght	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.Ri ght.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ReferenceText[%d].Text.Outline.Ri ght	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
ReferenceText[%d].Text.Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ReferenceText[%d].Text.Outline.Right	
ReferenceText[%d].Text.Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Outline.Right	
ReferenceText[%d].Text.Outline.Right.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ReferenceText[%d].Text.Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Outline.Right	
ReferenceText[%d].Text.Outline.Top	0x0082 0X030D 0X030F	NULL	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text.Outline.Top	
ReferenceText[%d].Text.Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ReferenceText[%d].Text.Outline.Top	
ReferenceText[%d].Text.Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Outline.Top	
ReferenceText[%d].Text.Outline.Top.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ReferenceText[%d].Text.Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text.Outline.Top	
ReferenceText[%d].Text.Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	ReferenceText[%d].Text.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ReferenceText[%d].Text.Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.filled	0x0082 0X030D 0X030F	"%d"	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text.Outline	
ReferenceText[%d].Text.Outline.visible	0x0082 0X030D 0X030F	"%d"	ReferenceText[%d].Text.Outline	

Q.12.3 ReferenceText[%d].Text.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ReferenceText[%d].Text.bold	0x0082 0X030D 0X030F	"%d"	ReferenceText[%d].Text	
ReferenceText[%d].Text.font	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text	
ReferenceText[%d].Text.italic	0x0082 0X030D 0X030F	"%d"	ReferenceText[%d].Text	
ReferenceText[%d].Text.italicAngle	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text	
ReferenceText[%d].Text.justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ReferenceText[%d].Text	
ReferenceText[%d].Text.language	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text	
ReferenceText[%d].Text.lineFactor	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text	
ReferenceText[%d].Text.maxExtended	0x0082 0X030D 0X030F	"%d"	ReferenceText[%d].Text	
ReferenceText[%d].Text.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text	
ReferenceText[%d].Text.outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ReferenceText[%d].Text.Outline.colour which would match the more modern Outline syntax and require prerequisite ReferenceText[%d].Text.Outline
ReferenceText[%d].Text.outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ReferenceText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ReferenceText[%d].Text.Outline.style which would match the more modern Outline syntax and require prerequisite ReferenceText[%d].Text.Outline
ReferenceText[%d].Text.outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse,	ReferenceText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		reading ReferenceText[%d].Text.Outline.type which would match the more modern Outline syntax and require prerequisite ReferenceText[%d].Text.Outline
ReferenceText[%d].Text.outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ReferenceText[%d].Text.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ReferenceText[%d].Text.Outline
ReferenceText[%d].Text.outlineWidth.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ReferenceText[%d].Text.Outline.width.name which would match the more modern Outline syntax and require prerequisite ReferenceText[%d].Text.Outline
ReferenceText[%d].Text.spaceFactor	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text	
ReferenceText[%d].Text.strikethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ReferenceText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ReferenceText[%d].Text.subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	ReferenceText[%d].Text	
ReferenceText[%d].Text.textAspect	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text	
ReferenceText[%d].Text.textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ReferenceText[%d].Text	
ReferenceText[%d].Text.textHeight	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text	
ReferenceText[%d].Text.textLineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	ReferenceText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
ReferenceText[%d].Text.textLineWidth.name	0x0082 0X030D 0X030F	"%s"	ReferenceText[%d].Text	
ReferenceText[%d].Text.textOrientation	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=horizontal, "1"=vertical	ReferenceText[%d].Text	
ReferenceText[%d].Text.textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ReferenceText[%d].Text	
ReferenceText[%d].Text.underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	ReferenceText[%d].Text	
ReferenceText[%d].position	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=before, "1"=above, "2"=below, "3"=after	ReferenceText[%d]	Only the before and after values are expected.

Q.12.4 RevisionModifier

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
RevisionModifier	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		

Q.12.5 Row[%d].Cell[%d].CellValue[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d]	0x0311	NULL		%d index cannot exceed/equal rowCount.
Row[%d].Cell[%d]	0x0311	NULL	Row[%d]	
Row[%d].Cell[%d].CellValue[%d]	0x0311	NULL	Row[%d].Cell[%d]	
Row[%d].Cell[%d].CellValue[%d].List.Value[%d]	0x0311	NULL	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].List.Value[%d].description	0x0311	"%s"	Row[%d].Cell[%d].CellValue[%d].List.Value[%d]	
Row[%d].Cell[%d].CellValue[%d].List.Value[%d].value	0x0311	"%s"	Row[%d].Cell[%d].CellValue[%d].List.Value[%d]	
Row[%d].Cell[%d].CellValue[%d].List.type	0x0311	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].editable	0x0311	"%d"	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].format	0x0311	"%s"	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].maxExclusive	0x0311	"%.16g"	Row[%d].Cell[%d].CellValue[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].Cell[%d].CellValue[%d].maxInclusive	0x0311	("%.16g"	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].maxLength	0x0311	"%d"	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].minExclusive	0x0311	("%.16g"	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].minInclusive	0x0311	("%.16g"	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].minLength	0x0311	"%d"	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].referenceRef	0x0311	"%s"	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].stepValue	0x0311	("%.16g"	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].title	0x0311	"%s"	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].type	0x0311	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Row[%d].Cell[%d].CellValue[%d]	
Row[%d].Cell[%d].CellValue[%d].value	0x0311	"%s"	Row[%d].Cell[%d].CellValue[%d]	

Q.12.6 Row[%d].Cell[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].Cell[%d].Outline	0x0311	NULL	Row[%d].Cell[%d]	
Row[%d].Cell[%d].Outline.Bottom	0x0311	NULL	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.Bottom.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Cell[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].Cell[%d].Outline.Bottom.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Row[%d].Cell[%d].Outline.Bottom	
Row[%d].Cell[%d].Outline.Bottom.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Cell[%d].Outline.Bottom	
Row[%d].Cell[%d].Outline.Bottom.width.measurementType	0x0311	"%.16g"	Row[%d].Cell[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].Cell[%d].Outline.Bottom.width.name	0x0311	"%s"	Row[%d].Cell[%d].Outline.Bottom	
Row[%d].Cell[%d].Outline.Left	0x0311	NULL	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.Left.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Cell[%d].Outline.Left	
Row[%d].Cell[%d].Outline.Left.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Row[%d].Cell[%d].Outline.Left	
Row[%d].Cell[%d].Outline.Left.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Cell[%d].Outline.Left	
Row[%d].Cell[%d].Outline.Left.width.measurementType	0x0311	"%.16g"	Row[%d].Cell[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].Cell[%d].Outline.Left.width.name	0x0311	"%s"	Row[%d].Cell[%d].Outline.Left	
Row[%d].Cell[%d].Outline.Right	0x0311	NULL	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.Right.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Cell[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].Cell[%d].Outline.Right.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Row[%d].Cell[%d].Outline.Right	
Row[%d].Cell[%d].Outline.Right.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Cell[%d].Outline.Right	
Row[%d].Cell[%d].Outline.Right.width.measurementType	0x0311	"%.16g"	Row[%d].Cell[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].Cell[%d].Outline.Right.width.name	0x0311	"%s"	Row[%d].Cell[%d].Outline.Right	
Row[%d].Cell[%d].Outline.Top	0x0311	NULL	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.Top.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Cell[%d].Outline.Top	
Row[%d].Cell[%d].Outline.Top.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Row[%d].Cell[%d].Outline.Top	
Row[%d].Cell[%d].Outline.Top.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Cell[%d].Outline.Top	
Row[%d].Cell[%d].Outline.Top.width.measurementType	0x0311	"%.16g"	Row[%d].Cell[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].Cell[%d].Outline.Top.width.name	0x0311	"%s"	Row[%d].Cell[%d].Outline.Top	
Row[%d].Cell[%d].Outline.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.direction	0x0311	"%.16g %.16g %.16g"	Row[%d].Cell[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].Cell[%d].Outline.doubleOffset	0x0311	"%.16g"	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.fillColor	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.filled	0x0311	"%d"	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.origin	0x0311	"%.16g %.16g %.16g"	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.outlineHeight	0x0311	"%.16g"	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.outlineWidth	0x0311	"%.16g"	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.type	0x0311	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.visible	0x0311	"%d"	Row[%d].Cell[%d].Outline	
Row[%d].Cell[%d].Outline.width.m	0x0311	"%.16g"	Row[%d].Cell[%d].Outline	measurementType must be

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
MeasurementType				replaced with meterWidth or pixelWidth
Row[%d].Cell[%d].Outline.width.name	0x0311	"%s"	Row[%d].Cell[%d].Outline	

Q.12.7 Row[%d].Cell[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].Cell[%d].blanked	0x0311	"%d"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].bold	0x0311	"%d"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].commaAsDecimal	0x0311	"%d"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].font	0x0311	"%s"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].italic	0x0311	"%d"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].italicAngle	0x0311	"%.16g"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].justification	0x0311	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Row[%d].Cell[%d]	
Row[%d].Cell[%d].language	0x0311	"%s"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].lineFactor	0x0311	"%.16g"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].mergeAcross	0x0311	"%d"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].mergeDown	0x0311	"%d"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].number	0x0311	"%d"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].spaceFactor	0x0311	"%.16g"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].strikethrough	0x0311	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Row[%d].Cell[%d]	
Row[%d].Cell[%d].subscript	0x0311	String representing enumeration such that: "0"=sub, "1"=super	Row[%d].Cell[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].Cell[%d].symbolColour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Cell[%d]	
Row[%d].Cell[%d].textAspect	0x0311	%.16g"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].textColour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Cell[%d]	
Row[%d].Cell[%d].textDirection	0x0311	%.16g %.16g %.16g"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].textHeight	0x0311	%.16g"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].textLineWidth.measurementType	0x0311	%.16g"	Row[%d].Cell[%d]	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].Cell[%d].textLineWidth.name	0x0311	%"s"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].textOrigin	0x0311	%.16g %.16g %.16g"	Row[%d].Cell[%d]	
Row[%d].Cell[%d].textThickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Cell[%d]	
Row[%d].Cell[%d].underline	0x0311	String representing enumeration such that: "0"=over, "1"=under	Row[%d].Cell[%d]	

Q.12.8 Row[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].Outline	0x0311	NULL	Row[%d]	
Row[%d].Outline.Bottom	0x0311	NULL	Row[%d].Outline	
Row[%d].Outline.Bottom.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Outline.Bottom	
Row[%d].Outline.Bottom.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	Row[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
Row[%d].Outline.Bottom.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Outline.Bottom	
Row[%d].Outline.Bottom.width.measurementType	0x0311	"%.16g"	Row[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].Outline.Bottom.width.name	0x0311	"%s"	Row[%d].Outline.Bottom	
Row[%d].Outline.Left	0x0311	NULL	Row[%d].Outline	
Row[%d].Outline.Left.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Outline.Left	
Row[%d].Outline.Left.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Row[%d].Outline.Left	
Row[%d].Outline.Left.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Outline.Left	
Row[%d].Outline.Left.width.measurementType	0x0311	"%.16g"	Row[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].Outline.Left.width.name	0x0311	"%s"	Row[%d].Outline.Left	
Row[%d].Outline.Right	0x0311	NULL	Row[%d].Outline	
Row[%d].Outline.Right.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Outline.Right	
Row[%d].Outline.Right.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	Row[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
Row[%d].Outline.Right.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Outline.Right	
Row[%d].Outline.Right.width.measurementType	0x0311	"%.16g"	Row[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].Outline.Right.width.name	0x0311	"%s"	Row[%d].Outline.Right	
Row[%d].Outline.Top	0x0311	NULL	Row[%d].Outline	
Row[%d].Outline.Top.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Outline.Top	
Row[%d].Outline.Top.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Row[%d].Outline.Top	
Row[%d].Outline.Top.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Outline.Top	
Row[%d].Outline.Top.width.measurementType	0x0311	"%.16g"	Row[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].Outline.Top.width.name	0x0311	"%s"	Row[%d].Outline.Top	
Row[%d].Outline.colour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d].Outline	
Row[%d].Outline.direction	0x0311	"%.16g %.16g %.16g"	Row[%d].Outline	
Row[%d].Outline.doubleOffset	0x0311	"%.16g"	Row[%d].Outline	
Row[%d].Outline.fillColour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	Row[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
Row[%d].Outline.filled	0x0311	"%d"	Row[%d].Outline	
Row[%d].Outline.origin	0x0311	"%.16g %.16g %.16g"	Row[%d].Outline	
Row[%d].Outline.outlineHeight	0x0311	"%.16g"	Row[%d].Outline	
Row[%d].Outline.outlineWidth	0x0311	"%.16g"	Row[%d].Outline	
Row[%d].Outline.style	0x0311	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Row[%d].Outline	
Row[%d].Outline.thickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d].Outline	
Row[%d].Outline.type	0x0311	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Row[%d].Outline	
Row[%d].Outline.visible	0x0311	"%d"	Row[%d].Outline	
Row[%d].Outline.width.measurementType	0x0311	"%.16g"	Row[%d].Outline	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].Outline.width.name	0x0311	"%s"	Row[%d].Outline	

Q.12.9 Row[%d].RowValue[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].RowValue[%d]	0x0311	NULL	Row[%d]	
Row[%d].RowValue[%d].List.Value[%d]	0x0311	NULL	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].List.Value[%d].description	0x0311	"%s"	Row[%d].RowValue[%d].List.Value[%d]	
Row[%d].RowValue[%d].List.Value[%d].value	0x0311	"%s"	Row[%d].RowValue[%d].List.Value[%d]	
Row[%d].RowValue[%d].List.type	0x0311	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].editable	0x0311	"%d"	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].format	0x0311	"%s"	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].maxExclusive	0x0311	"%.16g"	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].maxInclusive	0x0311	"%.16g"	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].maxLength	0x0311	"%d"	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].minExclusive	0x0311	"%.16g"	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].minInclusive	0x0311	"%.16g"	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].minLength	0x0311	"%d"	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].referenceRef	0x0311	"%s"	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].stepValue	0x0311	"%.16g"	Row[%d].RowValue[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].RowValue[%d].title	0x0311	"%s"	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].type	0x0311	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Row[%d].RowValue[%d]	
Row[%d].RowValue[%d].value	0x0311	"%s"	Row[%d].RowValue[%d]	

Q.12.10 Row[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Row[%d].blanked	0x0311	"%d"	Row[%d]	
Row[%d].bold	0x0311	"%d"	Row[%d]	
Row[%d].commaAsDecimal	0x0311	"%d"	Row[%d]	
Row[%d].font	0x0311	"%s"	Row[%d]	
Row[%d].header	0x0311	"%d"	Row[%d]	
Row[%d].height	0x0311	"%.16g"	Row[%d]	
Row[%d].italic	0x0311	"%d"	Row[%d]	
Row[%d].italicAngle	0x0311	"%.16g"	Row[%d]	
Row[%d].justification	0x0311	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Row[%d]	
Row[%d].language	0x0311	"%s"	Row[%d]	
Row[%d].lineFactor	0x0311	"%.16g"	Row[%d]	
Row[%d].number	0x0311	"%d"	Row[%d]	
Row[%d].spaceFactor	0x0311	"%.16g"	Row[%d]	
Row[%d].strikethrough	0x0311	String representing enumeration such that: "0"=none, "1"=single,	Row[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=double		
Row[%d].subscript	0x0311	String representing enumeration such that: "0"=sub, "1"=super	Row[%d]	
Row[%d].symbolColour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d]	
Row[%d].textAspect	0x0311	"%.16g"	Row[%d]	
Row[%d].textColour	0x0311	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Row[%d]	
Row[%d].textDirection	0x0311	"%.16g %.16g %.16g"	Row[%d]	
Row[%d].textHeight	0x0311	"%.16g"	Row[%d]	
Row[%d].textLineWidth.measurementType	0x0311	"%.16g"	Row[%d]	measurementType must be replaced with meterWidth or pixelWidth
Row[%d].textLineWidth.name	0x0311	"%s"	Row[%d]	
Row[%d].textOrigin	0x0311	"%.16g %.16g %.16g"	Row[%d]	
Row[%d].textThickness	0x0311	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Row[%d]	
Row[%d].underline	0x0311	String representing enumeration such that: "0"=over, "1"=under	Row[%d]	

Q.13 PMI Properties “S”

Q.13.1 Safety Classification

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SafetyClassification	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"		

Q.13.2 Secondary.Datum[%d].TextLabel.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary	0x0081	NULL		
Secondary.Datum[%d]	0x0081	NULL	Secondary	
Secondary.Datum[%d].FreeState	0x0081	NULL	Secondary.Datum[%d]	
Secondary.Datum[%d].TextLabel	0x0081	NULL	Secondary.Datum[%d]	
Secondary.Datum[%d].TextLabel.Item[%d]	0x0081	NULL	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.Item[%d].Outline	0x0081	NULL	Secondary.Datum[%d].TextLabel.Item[%d]	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0081	NULL	Secondary.Datum[%d].TextLabel.Item[%d].Outline	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	0x0081	NULL	Secondary.Datum[%d].TextLabel.Item[%d].Outline	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left.width.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Left	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right	0x0081	NULL	Secondary.Datum[%d].TextLabel.Item[%d].Outline	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right	
Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=unset,	Secondary.Datum[%d].TextLabel.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
em[%d].Outline.Right.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	em[%d].Outline.Right	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel.It em[%d].Outline.Right	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.Right.width.measu rementType	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel.It em[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Secondary.Datum[%d].TextLabel.It em[%d].Outline.Right.width.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel.It em[%d].Outline.Right	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top	0x0081	NULL	Secondary.Datum[%d].TextLabel.It em[%d].Outline	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top.width.measur ementType	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top.width.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel.It em[%d].Outline.Top	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	Secondary.Datum[%d].TextLabel.It em[%d].Outline	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.doubleOffset	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel.It em[%d].Outline	
Secondary.Datum[%d].TextLabel.It	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red	Secondary.Datum[%d].TextLabel.It	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
em[%d].Outline.fillColour		for the colour are encoded in the string	em[%d].Outline	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.filled	0x0081	"%d"	Secondary.Datum[%d].TextLabel.It em[%d].Outline	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	Secondary.Datum[%d].TextLabel.It em[%d].Outline	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.outlineHeight	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel.It em[%d].Outline	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.outlineWidth	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel.It em[%d].Outline	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel.It em[%d].Outline	
Secondary.Datum[%d].TextLabel.It em[%d].Outline.visible	0x0081	"%d"	Secondary.Datum[%d].TextLabel.It em[%d].Outline	
Secondary.Datum[%d].TextLabel.It em[%d].bold	0x0081	"%d"	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].font	0x0081	"%s"	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].italic	0x0081	"%d"	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].italicAngle	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].language	0x0081	"%s"	Secondary.Datum[%d].TextLabel.It em[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.Datum[%d].TextLabel.Item[%d].lineFactor	0x0081	("%.16g"	Secondary.Datum[%d].TextLabel.Item[%d]	
Secondary.Datum[%d].TextLabel.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=melthrough	Secondary.Datum[%d].TextLabel.Item[%d]	
Secondary.Datum[%d].TextLabel.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface,	Secondary.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"30"=steepflankedsingle, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge		
Secondary.Datum[%d].TextLabel.It em[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel.It em[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.Datum[%d].TextLabel.It em[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Secondary.Datum[%d].TextLabel.It em[%d].Outline
Secondary.Datum[%d].TextLabel.It em[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.Datum[%d].TextLabel.It em[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.Datum[%d].TextLabel.It em[%d].Outline.style which would match the more modern Outline syntax and require prerequisite Secondary.Datum[%d].TextLabel.It em[%d].Outline
Secondary.Datum[%d].TextLabel.It em[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond,	Secondary.Datum[%d].TextLabel.It em[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.Datum[%d].TextLabel.It

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		em[%d].Outline.type which would match the more modern Outline syntax and require prerequisite Secondary.Datum[%d].TextLabel.It em[%d].Outline
Secondary.Datum[%d].TextLabel.It em[%d].outlineWidth.measurementType	0x0081	("%.16g"	Secondary.Datum[%d].TextLabel.It em[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.Datum[%d].TextLabel.It em[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Secondary.Datum[%d].TextLabel.It em[%d].Outline
Secondary.Datum[%d].TextLabel.It em[%d].outlineWidth.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel.It em[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.Datum[%d].TextLabel.It em[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite Secondary.Datum[%d].TextLabel.It em[%d].Outline
Secondary.Datum[%d].TextLabel.It em[%d].spaceFactor	0x0081	("%.16g"	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It	0x0081	"%s"	Secondary.Datum[%d].TextLabel.It	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
em[%d].string			em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	Secondary.Datum[%d].TextLabel.It em[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.Datum[%d].TextLabel.It em[%d].textAspect	0x0081	("%.16g"	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].textHeight	0x0081	("%.16g"	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].textLineWidth.measureme ntType	0x0081	("%.16g"	Secondary.Datum[%d].TextLabel.It em[%d]	measurementType must be replaced with meterWidth or pixelWidth
Secondary.Datum[%d].TextLabel.It em[%d].textLineWidth.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel.It em[%d]	
Secondary.Datum[%d].TextLabel.It em[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Secondary.Datum[%d].TextLabel.It em[%d]	

Q.13.3 Secondary.Datum[%d].TextLabel.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.Datum[%d].TextLabel. Outline	0x0081	NULL	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel. Outline.Bottom	0x0081	NULL	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel. Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel. Outline.Bottom	
Secondary.Datum[%d].TextLabel. Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.Datum[%d].TextLabel. Outline.Bottom	
Secondary.Datum[%d].TextLabel.	0x0081	String representing enumeration such that: "0"=normal, "1"=thick,	Secondary.Datum[%d].TextLabel.	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline.Bottom.thickness		"2"=thin	Outline.Bottom	
Secondary.Datum[%d].TextLabel. Outline.Bottom.width.measurementType	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel. Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Secondary.Datum[%d].TextLabel. Outline.Bottom.width.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel. Outline.Bottom	
Secondary.Datum[%d].TextLabel. Outline.Left	0x0081	NULL	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel. Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel. Outline.Left	
Secondary.Datum[%d].TextLabel. Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.Datum[%d].TextLabel. Outline.Left	
Secondary.Datum[%d].TextLabel. Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel. Outline.Left	
Secondary.Datum[%d].TextLabel. Outline.Left.width.measurementType	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel. Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Secondary.Datum[%d].TextLabel. Outline.Left.width.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel. Outline.Left	
Secondary.Datum[%d].TextLabel. Outline.Right	0x0081	NULL	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel. Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel. Outline.Right	
Secondary.Datum[%d].TextLabel. Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.Datum[%d].TextLabel. Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.Datum[%d].TextLabel. Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel. Outline.Right	
Secondary.Datum[%d].TextLabel. Outline.Right.width.measurementT ype	0x0081	("%.16g"	Secondary.Datum[%d].TextLabel. Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Secondary.Datum[%d].TextLabel. Outline.Right.width.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel. Outline.Right	
Secondary.Datum[%d].TextLabel. Outline.Top	0x0081	NULL	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel. Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel. Outline.Top	
Secondary.Datum[%d].TextLabel. Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.Datum[%d].TextLabel. Outline.Top	
Secondary.Datum[%d].TextLabel. Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel. Outline.Top	
Secondary.Datum[%d].TextLabel. Outline.Top.width.measurementTy pe	0x0081	("%.16g"	Secondary.Datum[%d].TextLabel. Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Secondary.Datum[%d].TextLabel. Outline.Top.width.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel. Outline.Top	
Secondary.Datum[%d].TextLabel. Outline.direction	0x0081	("%.16g %.16g %.16g"	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel. Outline.doubleOffset	0x0081	("%.16g"	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel. Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel.	0x0081	"%d"	Secondary.Datum[%d].TextLabel.	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline.filled			Outline	
Secondary.Datum[%d].TextLabel. Outline.origin	0x0081	"%.16g %.16g %.16g"	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel. Outline.outlineHeight	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel. Outline.outlineWidth	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel. Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel. Outline	
Secondary.Datum[%d].TextLabel. Outline.visible	0x0081	"%d"	Secondary.Datum[%d].TextLabel. Outline	

Q.13.4 Secondary.Datum[%d].TextLabel.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.Datum[%d].TextLabel.b old	0x0081	"%d"	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.f ont	0x0081	"%s"	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.it alic	0x0081	"%d"	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.it alicAngle	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.j ustification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.l anguage	0x0081	"%s"	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.li neFactor	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.	0x0081	"%d"	Secondary.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
maxExtend				
Secondary.Datum[%d].TextLabel.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.Datum[%d].TextLabel.Outline.colour which would match the more modern Outline syntax and require prerequisite Secondary.Datum[%d].TextLabel.Outline
Secondary.Datum[%d].TextLabel.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.Datum[%d].TextLabel.Outline.style which would match the more modern Outline syntax and require prerequisite Secondary.Datum[%d].TextLabel.Outline
Secondary.Datum[%d].TextLabel.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Secondary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.Datum[%d].TextLabel.Outline.type which would match the more modern Outline syntax and require prerequisite Secondary.Datum[%d].TextLabel.Outline
Secondary.Datum[%d].TextLabel.outlineWidth.measurementType	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				suggest sticking with this form of key, but also suggest support reading Secondary.Datum[%d].TextLabel. Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Secondary.Datum[%d].TextLabel. Outline
Secondary.Datum[%d].TextLabel.outlineWidth.name	0x0081	"%s"	Secondary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.Datum[%d].TextLabel. Outline.width.name which would match the more modern Outline syntax and require prerequisite Secondary.Datum[%d].TextLabel. Outline
Secondary.Datum[%d].TextLabel.spaceFactor	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.trikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.textAspect	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.textHeight	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.textLineWidth.measurementType	0x0081	"%.16g"	Secondary.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
Secondary.Datum[%d].TextLabel.t	0x0081	"%s"	Secondary.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
extLineWidth.name				
Secondary.Datum[%d].TextLabel.t extOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.t extThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.Datum[%d].TextLabel	
Secondary.Datum[%d].TextLabel.u nderline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Secondary.Datum[%d].TextLabel	

Q.13.5 Secondary.Datum[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.Datum[%d].datumRef	0x0081	"%s"	Secondary.Datum[%d]	
Secondary.Datum[%d].label	0x0081	"%s"	Secondary.Datum[%d]	
Secondary.Datum[%d].modifier	0x0081	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	Secondary.Datum[%d]	
Secondary.Datum[%d].projected	0x0081	"%d"	Secondary.Datum[%d]	

Q.13.6 Secondary.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.ExtendedText	0x0081	NULL	Secondary	
Secondary.ExtendedText.Item[%d]	0x0081	NULL	Secondary.ExtendedText	
Secondary.ExtendedText.Item[%d] .Outline	0x0081	NULL	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d] .Outline.Bottom	0x0081	NULL	Secondary.ExtendedText.Item[%d] .Outline	
Secondary.ExtendedText.Item[%d] .Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Item[%d] .Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.ExtendedText.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.ExtendedText.Item[%d].Outline.Bottom	
Secondary.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Item[%d].Outline.Bottom	
Secondary.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0081	".16g"	Secondary.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Secondary.ExtendedText.Item[%d].Outline.Bottom.width.name	0x0081	".s"	Secondary.ExtendedText.Item[%d].Outline.Bottom	
Secondary.ExtendedText.Item[%d].Outline.Left	0x0081	NULL	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Item[%d].Outline.Left	
Secondary.ExtendedText.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.ExtendedText.Item[%d].Outline.Left	
Secondary.ExtendedText.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Item[%d].Outline.Left	
Secondary.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0081	".16g"	Secondary.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Secondary.ExtendedText.Item[%d].Outline.Left.width.name	0x0081	".s"	Secondary.ExtendedText.Item[%d].Outline.Left	
Secondary.ExtendedText.Item[%d].Outline.Right	0x0081	NULL	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red	Secondary.ExtendedText.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		for the colour are encoded in the string		
Secondary.ExtendedText.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.ExtendedText.Item[%d].Outline.Right	
Secondary.ExtendedText.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Item[%d].Outline.Right	
Secondary.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0081	("%.16g"	Secondary.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Secondary.ExtendedText.Item[%d].Outline.Right.width.name	0x0081	"%s"	Secondary.ExtendedText.Item[%d].Outline.Right	
Secondary.ExtendedText.Item[%d].Outline.Top	0x0081	NULL	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Item[%d].Outline.Top	
Secondary.ExtendedText.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.ExtendedText.Item[%d].Outline.Top	
Secondary.ExtendedText.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Item[%d].Outline.Top	
Secondary.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0081	("%.16g"	Secondary.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Secondary.ExtendedText.Item[%d].Outline.Top.width.name	0x0081	"%s"	Secondary.ExtendedText.Item[%d].Outline.Top	
Secondary.ExtendedText.Item[%d].Outline.direction	0x0081	("%.16g %.16g %.16g"	Secondary.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.ExtendedText.Item[%d].Outline.doubleOffset	0x0081	"%.16g"	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].Outline.filled	0x0081	"%d"	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].Outline.outlineHeight	0x0081	"%.16g"	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].Outline.outlineWidth	0x0081	"%.16g"	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].Outline.visible	0x0081	"%d"	Secondary.ExtendedText.Item[%d].Outline	
Secondary.ExtendedText.Item[%d].bold	0x0081	"%d"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].font	0x0081	"%s"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].italic	0x0081	"%d"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].italicAngle	0x0081	"%.16g"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft,	Secondary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=bottomright, "8"=bottomcentre		
Secondary.ExtendedText.Item[%d].language	0x0081	"%s"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].lineFactor	0x0081	"%.16g"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp, "20"=surfacefinishmrrpcomplete, "21"=meltthrough	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface,	Secondary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
Secondary.ExtendedText.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Secondary.ExtendedText.Item[%d].Outline
Secondary.ExtendedText.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.ExtendedText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite Secondary.ExtendedText.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.ExtendedText.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Secondary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.ExtendedText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite Secondary.ExtendedText.Item[%d].Outline
Secondary.ExtendedText.Item[%d].outlineWidth.measurementType	0x0081	%.16g"	Secondary.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.ExtendedText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Secondary.ExtendedText.Item[%d].Outline
Secondary.ExtendedText.Item[%d].outlineWidth.name	0x0081	%"s"	Secondary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.ExtendedText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite Secondary.ExtendedText.Item[%d].Outline
Secondary.ExtendedText.Item[%d].spaceFactor	0x0081	%.16g"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d]	0x0081	String representing enumeration	Secondary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.strikethrough		such that: "0"=none, "1"=single, "2"=double		
Secondary.ExtendedText.Item[%d].string	0x0081	"%s"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular,	Secondary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
Secondary.ExtendedText.Item[%d].textAspect	0x0081	%.16g"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].textHeight	0x0081	%.16g"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].textLineWidth.measurementType	0x0081	%.16g"	Secondary.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
Secondary.ExtendedText.Item[%d].textLineWidth.name	0x0081	%"s"	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Item[%d]	
Secondary.ExtendedText.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Secondary.ExtendedText.Item[%d]	

Q.13.7 Secondary.ExtendedText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.ExtendedText.Outline	0x0081	NULL	Secondary.ExtendedText	
Secondary.ExtendedText.Outline.Bottom	0x0081	NULL	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Outline.Bottom	
Secondary.ExtendedText.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	Secondary.ExtendedText.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
Secondary.ExtendedText.Outline. Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Outline. Bottom	
Secondary.ExtendedText.Outline. Bottom.width.measurementType	0x0081	"%.16g"	Secondary.ExtendedText.Outline. Bottom	measurementType must be replaced with meterWidth or pixelWidth
Secondary.ExtendedText.Outline. Bottom.width.name	0x0081	"%s"	Secondary.ExtendedText.Outline. Bottom	
Secondary.ExtendedText.Outline.L eft	0x0081	NULL	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline.L eft.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Outline.L eft	
Secondary.ExtendedText.Outline.L eft.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.ExtendedText.Outline.L eft	
Secondary.ExtendedText.Outline.L eft.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Outline.L eft	
Secondary.ExtendedText.Outline.L eft.width.measurementType	0x0081	"%.16g"	Secondary.ExtendedText.Outline.L eft	measurementType must be replaced with meterWidth or pixelWidth
Secondary.ExtendedText.Outline.L eft.width.name	0x0081	"%s"	Secondary.ExtendedText.Outline.L eft	
Secondary.ExtendedText.Outline. Right	0x0081	NULL	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline. Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Outline. Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.ExtendedText.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.ExtendedText.Outline.Right	
Secondary.ExtendedText.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Outline.Right	
Secondary.ExtendedText.Outline.Right.width.measurementType	0x0081	"%.16g"	Secondary.ExtendedText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Secondary.ExtendedText.Outline.Right.width.name	0x0081	"%s"	Secondary.ExtendedText.Outline.Right	
Secondary.ExtendedText.Outline.Top	0x0081	NULL	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Outline.Top	
Secondary.ExtendedText.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.ExtendedText.Outline.Top	
Secondary.ExtendedText.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Outline.Top	
Secondary.ExtendedText.Outline.Top.width.measurementType	0x0081	"%.16g"	Secondary.ExtendedText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Secondary.ExtendedText.Outline.Top.width.name	0x0081	"%s"	Secondary.ExtendedText.Outline.Top	
Secondary.ExtendedText.Outline.direction	0x0081	"%.16g %.16g %.16g"	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline.doubleOffset	0x0081	"%.16g"	Secondary.ExtendedText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.ExtendedText.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline.filled	0x0081	"%d"	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline.origin	0x0081	"%.16g %.16g %.16g"	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline.outlineHeight	0x0081	"%.16g"	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline.outlineWidth	0x0081	"%.16g"	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText.Outline	
Secondary.ExtendedText.Outline.visible	0x0081	"%d"	Secondary.ExtendedText.Outline	

Q.13.8 Secondary.ExtendedText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Secondary.ExtendedText.bold	0x0081	"%d"	Secondary.ExtendedText	
Secondary.ExtendedText.font	0x0081	"%s"	Secondary.ExtendedText	
Secondary.ExtendedText.italic	0x0081	"%d"	Secondary.ExtendedText	
Secondary.ExtendedText.italicAngle	0x0081	"%.16g"	Secondary.ExtendedText	
Secondary.ExtendedText.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Secondary.ExtendedText	
Secondary.ExtendedText.language	0x0081	"%s"	Secondary.ExtendedText	
Secondary.ExtendedText.lineFact	0x0081	"%.16g"	Secondary.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
or				
Secondary.ExtendedText.maxExtended	0x0081	"%d"	Secondary.ExtendedText	
Secondary.ExtendedText.name	0x0081	"%s"	Secondary.ExtendedText	
Secondary.ExtendedText.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite Secondary.ExtendedText.Outline
Secondary.ExtendedText.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Secondary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.ExtendedText.Outline.style which would match the more modern Outline syntax and require prerequisite Secondary.ExtendedText.Outline
Secondary.ExtendedText.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Secondary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.ExtendedText.Outline.type which would match the more modern Outline syntax and require prerequisite Secondary.ExtendedText.Outline
Secondary.ExtendedText.outlineWidth.measurementType	0x0081	"%.16g"	Secondary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				suggest sticking with this form of key, but also suggest support reading Secondary.ExtendedText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Secondary.ExtendedText.Outline
Secondary.ExtendedText.outlineWidth.name	0x0081	"%s"	Secondary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Secondary.ExtendedText.Outline.width.name which would match the more modern Outline syntax and require prerequisite Secondary.ExtendedText.Outline
Secondary.ExtendedText.spaceFactor	0x0081	"%.16g"	Secondary.ExtendedText	
Secondary.ExtendedText.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Secondary.ExtendedText	
Secondary.ExtendedText.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Secondary.ExtendedText	
Secondary.ExtendedText.textAspect	0x0081	"%.16g"	Secondary.ExtendedText	
Secondary.ExtendedText.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Secondary.ExtendedText	
Secondary.ExtendedText.textHeight	0x0081	"%.16g"	Secondary.ExtendedText	
Secondary.ExtendedText.textLineWidth.measurementType	0x0081	"%.16g"	Secondary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
Secondary.ExtendedText.textLineWidth.name	0x0081	"%s"	Secondary.ExtendedText	
Secondary.ExtendedText.textOrientation	0x0081	String representing enumeration	Secondary.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ntation		such that: "0"=horizontal, "1"=vertical		
Secondary.ExtendedText.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Secondary.ExtendedText	
Secondary.ExtendedText.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Secondary.ExtendedText	

Q.13.9 Site.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Site	0x0245	NULL		
Site.Address	0x0245	NULL	Site	
Site.Address.country	0x0245	"%s"	Site.Address	
Site.Address.emailAddress	0x0245	"%s"	Site.Address	
Site.Address.internalLocation	0x0245	"%s"	Site.Address	
Site.Address.postalCode	0x0245	"%s"	Site.Address	
Site.Address.region	0x0245	"%s"	Site.Address	
Site.Address.street	0x0245	"%s"	Site.Address	
Site.Address.streetNumber	0x0245	"%s"	Site.Address	
Site.Address.telephone	0x0245	"%s"	Site.Address	
Site.Address.town	0x0245	"%s"	Site.Address	
Site.Address.web	0x0245	"%s"	Site.Address	
Site.name	0x0245	"%s"	Site	
Site.siteId	0x0245	"%s"	Site	

Q.13.10 Statistical

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Statistical	0x0082 0x0307 0X030D 0X030F 0x0313	NULL		

Q.13.11 StyleText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
StyleText	0x0082 0X030D 0X030F	NULL		
StyleText.Item[%d]	0x0082 0X030D 0X030F	NULL	StyleText	
StyleText.Item[%d].Outline	0x0082 0X030D 0X030F	NULL	StyleText.Item[%d]	
StyleText.Item[%d].Outline.Bottom	0x0082 0X030D 0X030F	NULL	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Item[%d].Outline.Bottom	
StyleText.Item[%d].Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	StyleText.Item[%d].Outline.Bottom	
StyleText.Item[%d].Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Item[%d].Outline.Bottom	
StyleText.Item[%d].Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
StyleText.Item[%d].Outline.Bottom.width.name	0x0082 0X030D 0X030F	"%s"	StyleText.Item[%d].Outline.Bottom	
StyleText.Item[%d].Outline.Left	0x0082 0X030D 0X030F	NULL	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Item[%d].Outline.Left	
StyleText.Item[%d].Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	StyleText.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
StyleText.Item[%d].Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Item[%d].Outline.Left	
StyleText.Item[%d].Outline.Left.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	StyleText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
StyleText.Item[%d].Outline.Left.width.name	0x0082 0X030D 0X030F	"%s"	StyleText.Item[%d].Outline.Left	
StyleText.Item[%d].Outline.Right	0x0082 0X030D 0X030F	NULL	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Item[%d].Outline.Right	
StyleText.Item[%d].Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	StyleText.Item[%d].Outline.Right	
StyleText.Item[%d].Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Item[%d].Outline.Right	
StyleText.Item[%d].Outline.Right.width.measurementType	0x0082 0X030D 0X030F	("%.16g"	StyleText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
StyleText.Item[%d].Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	StyleText.Item[%d].Outline.Right	
StyleText.Item[%d].Outline.Top	0x0082 0X030D 0X030F	NULL	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Item[%d].Outline.Top	
StyleText.Item[%d].Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	StyleText.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
StyleText.Item[%d].Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Item[%d].Outline.Top	
StyleText.Item[%d].Outline.Top.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
StyleText.Item[%d].Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	StyleText.Item[%d].Outline.Top	
StyleText.Item[%d].Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.filled	0x0082 0X030D 0X030F	"%d"	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Item[%d].Outline	
StyleText.Item[%d].Outline.visible	0x0082 0X030D 0X030F	"%d"	StyleText.Item[%d].Outline	
StyleText.Item[%d].bold	0x0082 0X030D 0X030F	"%d"	StyleText.Item[%d]	
StyleText.Item[%d].font	0x0082 0X030D 0X030F	"%s"	StyleText.Item[%d]	
StyleText.Item[%d].format	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	StyleText.Item[%d]	
StyleText.Item[%d].italic	0x0082 0X030D 0X030F	"%d"	StyleText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
StyleText.Item[%d].italicAngle	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d]	
StyleText.Item[%d].justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	StyleText.Item[%d]	
StyleText.Item[%d].language	0x0082 0X030D 0X030F	"%s"	StyleText.Item[%d]	
StyleText.Item[%d].lineFactor	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d]	
StyleText.Item[%d].lineWeldSupplementalSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=melthrough	StyleText.Item[%d]	
StyleText.Item[%d].lineWeldSymbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange,	StyleText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskdiameter, "56"=eskdnumber, "57"=isoedge		
StyleText.Item[%d].outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading StyleText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite StyleText.Item[%d].Outline
StyleText.Item[%d].outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	StyleText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading StyleText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				StyleText.Item[%d].Outline
StyleText.Item[%d].outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	StyleText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading StyleText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite StyleText.Item[%d].Outline
StyleText.Item[%d].outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading StyleText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite StyleText.Item[%d].Outline
StyleText.Item[%d].outlineWidth.name	0x0082 0X030D 0X030F	"%s"	StyleText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading StyleText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite StyleText.Item[%d].Outline
StyleText.Item[%d].spaceFactor	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d]	
StyleText.Item[%d].strikethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	StyleText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
StyleText.Item[%d].string	0x0082 0X030D 0X030F	"%s"	StyleText.Item[%d]	
StyleText.Item[%d].subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	StyleText.Item[%d]	
StyleText.Item[%d].symbol	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	StyleText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
StyleText.Item[%d].textAspect	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d]	
StyleText.Item[%d].textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Item[%d]	
StyleText.Item[%d].textHeight	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d]	
StyleText.Item[%d].textLineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	StyleText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
StyleText.Item[%d].textLineWidth.name	0x0082 0X030D 0X030F	"%s"	StyleText.Item[%d]	
StyleText.Item[%d].textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Item[%d]	
StyleText.Item[%d].underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	StyleText.Item[%d]	

Q.13.12 StyleText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
StyleText.Outline	0x0082 0X030D 0X030F	NULL	StyleText	
StyleText.Outline.Bottom	0x0082 0X030D 0X030F	NULL	StyleText.Outline	
StyleText.Outline.Bottom.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Outline.Bottom	
StyleText.Outline.Bottom.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	StyleText.Outline.Bottom	
StyleText.Outline.Bottom.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Outline.Bottom	

StyleText.Outline.Bottom.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	StyleText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
StyleText.Outline.Bottom.width.name	0x0082 0X030D 0X030F	"%s"	StyleText.Outline.Bottom	
StyleText.Outline.Left	0x0082 0X030D 0X030F	NULL	StyleText.Outline	
StyleText.Outline.Left.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Outline.Left	
StyleText.Outline.Left.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	StyleText.Outline.Left	
StyleText.Outline.Left.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Outline.Left	
StyleText.Outline.Left.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	StyleText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
StyleText.Outline.Left.width.name	0x0082 0X030D 0X030F	"%s"	StyleText.Outline.Left	
StyleText.Outline.Right	0x0082 0X030D 0X030F	NULL	StyleText.Outline	
StyleText.Outline.Right.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Outline.Right	
StyleText.Outline.Right.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	StyleText.Outline.Right	
StyleText.Outline.Right.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Outline.Right	
StyleText.Outline.Right.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	StyleText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth

				pixelWidth
StyleText.Outline.Right.width.name	0x0082 0X030D 0X030F	"%s"	StyleText.Outline.Right	
StyleText.Outline.Top	0x0082 0X030D 0X030F	NULL	StyleText.Outline	
StyleText.Outline.Top.colour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Outline.Top	
StyleText.Outline.Top.style	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	StyleText.Outline.Top	
StyleText.Outline.Top.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Outline.Top	
StyleText.Outline.Top.width.measurementType	0x0082 0X030D 0X030F	"%.16g"	StyleText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
StyleText.Outline.Top.width.name	0x0082 0X030D 0X030F	"%s"	StyleText.Outline.Top	
StyleText.Outline.direction	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	StyleText.Outline	
StyleText.Outline.doubleOffset	0x0082 0X030D 0X030F	"%.16g"	StyleText.Outline	
StyleText.Outline.fillColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText.Outline	
StyleText.Outline.filled	0x0082 0X030D 0X030F	"%d"	StyleText.Outline	
StyleText.Outline.origin	0x0082 0X030D 0X030F	"%.16g %.16g %.16g"	StyleText.Outline	
StyleText.Outline.outlineHeight	0x0082 0X030D 0X030F	"%.16g"	StyleText.Outline	
StyleText.Outline.outlineWidth	0x0082 0X030D 0X030F	"%.16g"	StyleText.Outline	
StyleText.Outline.thickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText.Outline	
StyleText.Outline.visible	0x0082 0X030D 0X030F	"%d"	StyleText.Outline	

Q.13.13 StyleText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
StyleText.bold	0x0082 0X030D 0X030F	"%d"	StyleText	
StyleText.font	0x0082 0X030D 0X030F	"%s"	StyleText	
StyleText.italic	0x0082 0X030D 0X030F	"%d"	StyleText	
StyleText.italicAngle	0x0082 0X030D 0X030F	"%.16g"	StyleText	
StyleText.justification	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	StyleText	
StyleText.language	0x0082 0X030D 0X030F	"%s"	StyleText	
StyleText.lineFactor	0x0082 0X030D 0X030F	"%.16g"	StyleText	
StyleText.maxExtend	0x0082 0X030D 0X030F	"%d"	StyleText	
StyleText.name	0x0082 0X030D 0X030F	"%s"	StyleText	
StyleText.outlineColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading StyleText.Outline.colour which would match the more modern Outline syntax and require prerequisite StyleText.Outline
StyleText.outlineStyle	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	StyleText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading StyleText.Outline.style which would match the more modern Outline syntax and require prerequisite StyleText.Outline
StyleText.outlineType	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set,	StyleText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading StyleText.Outline.type which would match the more modern Outline syntax and require prerequisite StyleText.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		
StyleText.outlineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	StyleText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading StyleText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite StyleText.Outline
StyleText.outlineWidth.name	0x0082 0X030D 0X030F	"%s"	StyleText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading StyleText.Outline.width.name which would match the more modern Outline syntax and require prerequisite StyleText.Outline
StyleText.spaceFactor	0x0082 0X030D 0X030F	"%.16g"	StyleText	
StyleText.strikethrough	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=none, "1"=single, "2"=double	StyleText	
StyleText.subscript	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=sub, "1"=super	StyleText	
StyleText.textAspect	0x0082 0X030D 0X030F	"%.16g"	StyleText	
StyleText.textColour	0x0082 0X030D 0X030F	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	StyleText	
StyleText.textHeight	0x0082 0X030D 0X030F	"%.16g"	StyleText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
StyleText.textLineWidth.measurementType	0x0082 0X030D 0X030F	"%.16g"	StyleText	measurementType must be replaced with meterWidth or pixelWidth
StyleText.textLineWidth.name	0x0082 0X030D 0X030F	"%s"	StyleText	
StyleText.textOrientation	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=horizontal, "1"=vertical	StyleText	
StyleText.textThickness	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	StyleText	
StyleText.underline	0x0082 0X030D 0X030F	String representing enumeration such that: "0"=over, "1"=under	StyleText	

Q.13.14 SurfaceFinish[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d]	0x0008	NULL		
SurfaceFinish[%d].Description	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].DisplayPlane.origin	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d]	This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.xaxis' and 'DisplayPlane.zaxis'
SurfaceFinish[%d].DisplayPlane.xaxis	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d]	This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.origin' and 'DisplayPlane.zaxis'
SurfaceFinish[%d].DisplayPlane.zaxis	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d]	This is property records the original definition of the PMI display plane Should also have 'DisplayPlane.origin' and 'DisplayPlane.xaxis'
SurfaceFinish[%d].FeatureIdentification	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].GeneralAttribut	0x0008	%d;%d;%s;%d;%s;%d;%d;%d;%d;	SurfaceFinish[%d]	It is expected that you will also

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
e[%d]		%s;%d;%s; Such that the formatted value encodes a general attribute by: 1;<lengthofname>;<name>;<length of value>;<value>;<DataType>;<MeasureEnum>;<editable?>;<lengthof unit>;<unit>;<lengthofcategory>;<category>; Where name, value, unit and category are strings editable indicates if the attribute is editable. DataType is on of the following values: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime and MeasureEnum is on of the following values: "-1"=none, "0"=length, "1"=area, "2"=volume, "3"=mass, "4"=massdensity, "5"=fatiguestrengthcoefficient, "6"=time, "7"=angle, "8"=velocity, "9"=acceleration, "10"=force, "11"=forceperunitlength, "12"=pressure, "13"=moment, "14"=stress, "15"=strain, "16"=strainenergy, "17"=strainenergydensity, "18"=temperature, "19"=heatflux, "20"=convectioncoefficient, "21"=thermalconductivity, "22"=thermalexpansioncoefficient, "23"=specifichheat, "24"=angularvelocity, "25"=angularacceleration, "26"=fatiguelife, "27"=heatflowrate, "28"=thermalenergy, "29"=massmomentofinertia, "30"=dynamicviscosity, "31"=heatgeneration, "32"=thermalconductance, "33"=conductanceperunitlength, "34"=thermalresistance, "35"=massflowrate, "36"=volumeflowrate, "37"=temperaturedifference,		have an additional property: key = <name> and value = <value> which is not hidden to go with this property which should be hidden.

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"38"=frequency, "39"=coefficientperunitlength, "40"=momentofinertiaarea, "41"=viscousdamping, "42"=energy, "43"=power, "44"=momentum, "45"=temperaturegradient, "46"=energyperunitmass, "47"=dissipationrateofenergyperunitmass, "48"=massflux, "49"=massperunitlength, "50"=massperunitarea, "51"=electriccurrent, "52"=electricalresistance, "53"=electricalresistivity, "54"=electricalconductance, "55"=voltage, "56"=voltagepertemperature, "57"=diffusivity, "58"=latentheatpermass, "59"=thermalenergyperarea, "60"=thermalpidgain, "61"=thermalpidintegraltermconstant, "62"=thermalpidderivativetermconstant, "63"=headlosscoefficient, "64"=tsaiwucoefficient, "65"=masslength, "66"=pervolume, "67"=warpingconstant, "68"=stresscompliance, "69"=lengthperunitpressure, "70"=pressureperunitlength, "71"=pressureperunitvelocity, "72"=momentperangle, "73"=coefficientperunittime, "74"=angularmomentumperunitangle, "75"=thermalcapacitance, "76"=inductance, "77"=voltageperangularvelocity, "78"=perarea, "79"=temperaturechangerate, "80"=jerk, "81"=angularjerk, "82"=magneticfieldstrength, "83"=magneticfluxdensity		
SurfaceFinish[%d].GeneralAttribute[%d].ListValue[%d]	0x0008	"%s"	SurfaceFinish[%d].GeneralAttribute[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].Keyword[%d]	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].LAYER	0x0008	"%d"	SurfaceFinish[%d]	

Q.13.15 SurfaceFinish[%d].LayText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].LayText	0x0008	NULL	SurfaceFinish[%d]	
SurfaceFinish[%d].LayText.Item[%d]	0x0008	NULL	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.Item[%d].Outline	0x0008	NULL	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom	0x0008	NULL	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom	
SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom	
SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom	
SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom.width.name	0x0008	"%s"	SurfaceFinish[%d].LayText.Item[%d].Outline.Bottom	
SurfaceFinish[%d].LayText.Item[%d].Outline.Left	0x0008	NULL	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	SurfaceFinish[%d].LayText.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
SurfaceFinish[%d].LayText.Item[%d].Outline.Left.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].LayText.Item[%d].Outline.Left	
SurfaceFinish[%d].LayText.Item[%d].Outline.Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText.Item[%d].Outline.Left	
SurfaceFinish[%d].LayText.Item[%d].Outline.Left.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].LayText.Item[%d].Outline.Left.width.name	0x0008	"%s"	SurfaceFinish[%d].LayText.Item[%d].Outline.Left	
SurfaceFinish[%d].LayText.Item[%d].Outline.Right	0x0008	NULL	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].Outline.Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText.Item[%d].Outline.Right	
SurfaceFinish[%d].LayText.Item[%d].Outline.Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].LayText.Item[%d].Outline.Right	
SurfaceFinish[%d].LayText.Item[%d].Outline.Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText.Item[%d].Outline.Right	
SurfaceFinish[%d].LayText.Item[%d].Outline.Right.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].LayText.Item[%d].Outline.Right.width.name	0x0008	"%s"	SurfaceFinish[%d].LayText.Item[%d].Outline.Right	
SurfaceFinish[%d].LayText.Item[%d].Outline.Top	0x0008	NULL	SurfaceFinish[%d].LayText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].LayText.Item[%d].Outline.Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText.Item[%d].Outline.Top	
SurfaceFinish[%d].LayText.Item[%d].Outline.Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].LayText.Item[%d].Outline.Top	
SurfaceFinish[%d].LayText.Item[%d].Outline.Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText.Item[%d].Outline.Top	
SurfaceFinish[%d].LayText.Item[%d].Outline.Top.width.measurementType	0x0008	%.16g"	SurfaceFinish[%d].LayText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].LayText.Item[%d].Outline.Top.width.name	0x0008	%"s"	SurfaceFinish[%d].LayText.Item[%d].Outline.Top	
SurfaceFinish[%d].LayText.Item[%d].Outline.direction	0x0008	%.16g %.16g %.16g"	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].Outline.doubleOffset	0x0008	%.16g"	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].Outline.fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].Outline.filled	0x0008	%"d"	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].Outline.origin	0x0008	%.16g %.16g %.16g"	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].Outline.outlineHeight	0x0008	%.16g"	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].Outline.outlineWidth	0x0008	%.16g"	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].Outline.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].LayText.Item[%d].Outline.visible	0x0008	"%d"	SurfaceFinish[%d].LayText.Item[%d].Outline	
SurfaceFinish[%d].LayText.Item[%d].bold	0x0008	"%d"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].font	0x0008	"%s"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].format	0x0008	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].italic	0x0008	"%d"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].italicAngle	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].language	0x0008	"%s"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].lineFactor	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].lineWeldSupplementalSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete,	SurfaceFinish[%d].LayText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
SurfaceFinish[%d].LayText.Item[%d].lineWeldSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jis spot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskds smooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround,	SurfaceFinish[%d].LayText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
SurfaceFinish[%d].LayText.Item[%d].outlineColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].LayText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].LayText.Item[%d].Outline
SurfaceFinish[%d].LayText.Item[%d].outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].LayText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].LayText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].LayText.Item[%d].Outline
SurfaceFinish[%d].LayText.Item[%d].outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	SurfaceFinish[%d].LayText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].LayText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].LayText.Item[%d].Outline
SurfaceFinish[%d].LayText.Item[%d].outlineWidth.measurementType	0x0008	%.16g"	SurfaceFinish[%d].LayText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				key, but also suggest support reading SurfaceFinish[%d].LayText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].LayText.Item[%d].Outline
SurfaceFinish[%d].LayText.Item[%d].outlineWidth.name	0x0008	"%s"	SurfaceFinish[%d].LayText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].LayText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].LayText.Item[%d].Outline
SurfaceFinish[%d].LayText.Item[%d].spaceFactor	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].strikethrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].string	0x0008	"%s"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].symbol	0x0008	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout,	SurfaceFinish[%d].LayText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
SurfaceFinish[%d].LayText.Item[%d].textAspect	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].textHeight	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d].textLineWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].LayText.Item[%d].textLineWidth.name	0x0008	"%s"	SurfaceFinish[%d].LayText.Item[%d]	
SurfaceFinish[%d].LayText.Item[%d]	0x0008	String representing enumeration	SurfaceFinish[%d].LayText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
d].textThickness		such that: "0"=normal, "1"=thick, "2"=thin	d]	
SurfaceFinish[%d].LayText.Item[%d].underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	SurfaceFinish[%d].LayText.Item[%d]	

Q.13.16 SurfaceFinish[%d].LayText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].LayText.Outline	0x0008	NULL	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.Outline.Bottom	0x0008	NULL	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText.Outline.Bottom	
SurfaceFinish[%d].LayText.Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].LayText.Outline.Bottom	
SurfaceFinish[%d].LayText.Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText.Outline.Bottom	
SurfaceFinish[%d].LayText.Outline.Bottom.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].LayText.Outline.Bottom.width.name	0x0008	"%s"	SurfaceFinish[%d].LayText.Outline.Bottom	
SurfaceFinish[%d].LayText.Outline.Left	0x0008	NULL	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText.Outline.Left	
SurfaceFinish[%d].LayText.Outline	0x0008	String representing enumeration	SurfaceFinish[%d].LayText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.Left.style		such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	.Left	
SurfaceFinish[%d].LayText.Outline .Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText.Outline .Left	
SurfaceFinish[%d].LayText.Outline .Left.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Outline .Left	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].LayText.Outline .Left.width.name	0x0008	"%s"	SurfaceFinish[%d].LayText.Outline .Left	
SurfaceFinish[%d].LayText.Outline .Right	0x0008	NULL	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline .Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText.Outline .Right	
SurfaceFinish[%d].LayText.Outline .Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].LayText.Outline .Right	
SurfaceFinish[%d].LayText.Outline .Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText.Outline .Right	
SurfaceFinish[%d].LayText.Outline .Right.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Outline .Right	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].LayText.Outline .Right.width.name	0x0008	"%s"	SurfaceFinish[%d].LayText.Outline .Right	
SurfaceFinish[%d].LayText.Outline .Top	0x0008	NULL	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline .Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	SurfaceFinish[%d].LayText.Outline .Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
SurfaceFinish[%d].LayText.Outline .Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].LayText.Outline .Top	
SurfaceFinish[%d].LayText.Outline .Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText.Outline .Top	
SurfaceFinish[%d].LayText.Outline .Top.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Outline .Top	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].LayText.Outline .Top.width.name	0x0008	"%s"	SurfaceFinish[%d].LayText.Outline .Top	
SurfaceFinish[%d].LayText.Outline .direction	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline .doubleOffset	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline .fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline .filled	0x0008	"%d"	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline .origin	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline .outlineHeight	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline .outlineWidth	0x0008	"%.16g"	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline .thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText.Outline	
SurfaceFinish[%d].LayText.Outline .visible	0x0008	"%d"	SurfaceFinish[%d].LayText.Outline	

Q.13.17 SurfaceFinish[%d].LayText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].LayText.bold	0x0008	"%d"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.font	0x0008	"%s"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.italic	0x0008	"%d"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.italicAngle	0x0008	"%.16g"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.language	0x0008	"%s"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.lineFactor	0x0008	"%.16g"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.maxExtent	0x0008	"%d"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.name	0x0008	"%s"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.outlineColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].LayText.Outline.colour which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].LayText.Outline
SurfaceFinish[%d].LayText.outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].LayText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].LayText.Outline.style which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].LayText.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].LayText.outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	SurfaceFinish[%d].LayText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].LayText.Outline.type which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].LayText.Outline
SurfaceFinish[%d].LayText.outlineWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].LayText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].LayText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].LayText.Outline
SurfaceFinish[%d].LayText.outlineWidth.name	0x0008	"%s"	SurfaceFinish[%d].LayText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].LayText.Outline.width.name which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].LayText.Outline
SurfaceFinish[%d].LayText.spaceFactor	0x0008	"%.16g"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.strikerough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	SurfaceFinish[%d].LayText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].LayText.subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.textAspect	0x0008	"%.16g"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.textHeight	0x0008	"%.16g"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.textLineWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].LayText	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].LayText.textLineWidth.name	0x0008	"%s"	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.textOrientation	0x0008	String representing enumeration such that: "0"=horizontal, "1"=vertical	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.textThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].LayText	
SurfaceFinish[%d].LayText.underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	SurfaceFinish[%d].LayText	

Q.13.18 SurfaceFinish[%d].Leader[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].Leader[%d]	0x0008	NULL	SurfaceFinish[%d]	
SurfaceFinish[%d].Leader[%d].Jog[%d]	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].Reference	0x0008	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singlar semantic aspect with	SurfaceFinish[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		an entity.		
SurfaceFinish[%d].Leader[%d].Reference[1]	0x0008	"%d %d %d %s" such that first is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singular semantic aspect with an entity.	SurfaceFinish[%d].Leader[%d].Reference	This extension is for use when the Leader is referencing the intersection of two targets. This property contains the second target with the Leader[%d].Reference property containing the first
SurfaceFinish[%d].Leader[%d].allAroundSymbolSize	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].arrowAngle	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].arrowColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].arrowLength	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].arrowLineThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].arrowLineType	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].arrowOutSideLength	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].arrowPlacement	0x0008	String representing enumeration such that: "0"=out, "1"=in	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].arrowType	0x0008	String representing enumeration such that: "0"=closed, "1"=open, "2"=filled, "3"=none, "4"=origin, "5"=cross, "6"=dot, "7"=filleddot, "8"=wedge, "9"=plus, "10"=x, "11"=closedsolid, "12"=closeddouble, "13"=closeddoublesolid,	SurfaceFinish[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"14"=openddouble, "15"=filleddouble, "16"=integral, "17"=box, "18"=filledbox, "19"=datum, "20"=filleddatum, "21"=solidorigin, "22"=filledorigin, "23"=xorigin, "24"=solidbox, "25"=roundbackdart, "26"=solidroundbackdart, "27"=filledroundbackdart		
SurfaceFinish[%d].Leader[%d].arrowWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].Leader[%d].arrowWidth.name	0x0008	"%s"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].direction	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].dotDiameter	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionJogAngle	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionJogDefintion	0x0008	String representing enumeration such that: "0"=startend, "1"=startangle, "2"=endangle	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionJogEnd	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionJogOut	0x0008	"%d"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionJogStart	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionJogging	0x0008	String representing enumeration such that: "0"=on, "1"=off, "2"=application	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionJogging	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red	SurfaceFinish[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ensionLineColour		for the colour are encoded in the string		
SurfaceFinish[%d].Leader[%d].extensionLineExtension	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionLineGap	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionLineThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionLineType	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].extensionWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].Leader[%d].extensionWidth.name	0x0008	"%s"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].halfArrow	0x0008	String representing enumeration such that: "0"=left, "1"=right, "2"=full	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].leaderAttachment	0x0008	String representing enumeration such that: "0"=top, "1"=middle, "2"=bottom	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].lineTextGap	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].lineType	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].offsetCentre	0x0008	"%d"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].per	0x0008	"%d"	SurfaceFinish[%d].Leader[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
pendicularToStub				
SurfaceFinish[%d].Leader[%d].pendicularToTerminator	0x0008	"%d"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].radiusToCentre	0x0008	"%d"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].stubAttachment	0x0008	String representing enumeration such that: "0"=side, "1"=underline	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].stubDirection	0x0008	String representing enumeration such that: "0"=left, "1"=right, "2"=inferred	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].stubLength	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].suppressed	0x0008	"%d"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].tParam	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].terminator	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].textOverLeaderFactor	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].textOverStubFactor	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].Leader[%d]	
SurfaceFinish[%d].Leader[%d].uvParam.U	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	Expect to also have Leader[%d].uvParam.V.
SurfaceFinish[%d].Leader[%d].uvParam.V	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	Expect to also have Leader[%d].uvParam.U.
SurfaceFinish[%d].Leader[%d].width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].Leader[%d]	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].Leader[%d].width.name	0x0008	"%s"	SurfaceFinish[%d].Leader[%d]	

Q.13.19 SurfaceFinish[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].Outline	0x0008	NULL	SurfaceFinish[%d]	
SurfaceFinish[%d].Outline.Bottom	0x0008	NULL	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].Outline.Bottom	
SurfaceFinish[%d].Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].Outline.Bottom	
SurfaceFinish[%d].Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].Outline.Bottom	
SurfaceFinish[%d].Outline.Bottom.width.measurementType	0x0008	%.16g"	SurfaceFinish[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].Outline.Bottom.width.name	0x0008	%"s"	SurfaceFinish[%d].Outline.Bottom	
SurfaceFinish[%d].Outline.Left	0x0008	NULL	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].Outline.Left	
SurfaceFinish[%d].Outline.Left.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].Outline.Left	
SurfaceFinish[%d].Outline.Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].Outline.Left	
SurfaceFinish[%d].Outline.Left.width	0x0008	%.16g"	SurfaceFinish[%d].Outline.Left	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
th.measurementType				pixelWidth
SurfaceFinish[%d].Outline.Left.width.name	0x0008	"%s"	SurfaceFinish[%d].Outline.Left	
SurfaceFinish[%d].Outline.Right	0x0008	NULL	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].Outline.Right	
SurfaceFinish[%d].Outline.Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].Outline.Right	
SurfaceFinish[%d].Outline.Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].Outline.Right	
SurfaceFinish[%d].Outline.Right.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].Outline.Right.width.name	0x0008	"%s"	SurfaceFinish[%d].Outline.Right	
SurfaceFinish[%d].Outline.Top	0x0008	NULL	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].Outline.Top	
SurfaceFinish[%d].Outline.Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].Outline.Top	
SurfaceFinish[%d].Outline.Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].Outline.Top	
SurfaceFinish[%d].Outline.Top.width	0x0008	"%.16g"	SurfaceFinish[%d].Outline.Top	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
th.measurementType				pixelWidth
SurfaceFinish[%d].Outline.Top.width th.name	0x0008	"%s"	SurfaceFinish[%d].Outline.Top	
SurfaceFinish[%d].Outline.direction	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.doubleOffset	0x0008	"%.16g"	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.filled	0x0008	"%d"	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.origin	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.outlineHeight	0x0008	"%.16g"	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.outlineWidth	0x0008	"%.16g"	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].Outline	
SurfaceFinish[%d].Outline.visible	0x0008	"%d"	SurfaceFinish[%d].Outline	

Q.13.20 SurfaceFinish[%d].PMI<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].PMIGeometryColor	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d]	
SurfaceFinish[%d].PMITextBackgroundColor	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d]	

SurfaceFinish[%d].PMITextFlatToScreenOpacity	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].PMITextForegroundColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d]	
SurfaceFinish[%d].PMITextInPlaneOpacity	0x0008	"%s"	SurfaceFinish[%d]	

Q.13.21 SurfaceFinish[%d].ProcessText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText	0x0008	NULL	SurfaceFinish[%d]	
SurfaceFinish[%d].ProcessText.Item[%d]	0x0008	NULL	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.Item[%d].Outline	0x0008	NULL	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom	0x0008	NULL	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom.width.measurementType	0x0008	("%.16g"	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom.width.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left	0x0008	NULL	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left.width.measurementType	0x0008	%.16g"	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left.width.name	0x0008	%"s"	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Left	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right	0x0008	NULL	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right.width.measurementType	0x0008	%.16g"	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right.width.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Right	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top	0x0008	NULL	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top.width.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Item[%d].Outline.Top	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.direction	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.doubleOffset	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.filled	0x0008	"%d"	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.origin	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.outlineHeight	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText.Item[%d].Outline.outlineWidth	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].Outline.visible	0x0008	"%d"	SurfaceFinish[%d].ProcessText.Item[%d].Outline	
SurfaceFinish[%d].ProcessText.Item[%d].bold	0x0008	"%d"	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].font	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].format	0x0008	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].italic	0x0008	"%d"	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].italicAngle	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].language	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].lineFactor	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].lineWeldSupplementalSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing,	SurfaceFinish[%d].ProcessText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp, "20"=surfacefinishmrrpcomplete, "21"=meltthrough		
SurfaceFinish[%d].ProcessText.Item[%d].lineWeldSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder,	SurfaceFinish[%d].ProcessText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"45"=kgroove, "46"=stake, "47"=keyhole, "48"=jspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
SurfaceFinish[%d].ProcessText.Item[%d].outlineColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].ProcessText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].ProcessText.Item[%d].Outline
SurfaceFinish[%d].ProcessText.Item[%d].outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].ProcessText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].ProcessText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].ProcessText.Item[%d].Outline
SurfaceFinish[%d].ProcessText.Item[%d].outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright,	SurfaceFinish[%d].ProcessText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].ProcessText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].ProcessText.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"24"=squarecircle		
SurfaceFinish[%d].ProcessText.Item[%d].outlineWidth.measurementType	0x0008	%.16g"	SurfaceFinish[%d].ProcessText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].ProcessText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].ProcessText.Item[%d].Outline
SurfaceFinish[%d].ProcessText.Item[%d].outlineWidth.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].ProcessText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].ProcessText.Item[%d].Outline
SurfaceFinish[%d].ProcessText.Item[%d].spaceFactor	0x0008	%.16g"	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].striketrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].string	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].symbol	0x0008	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi,	SurfaceFinish[%d].ProcessText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
SurfaceFinish[%d].ProcessText.Item[%d].textAspect	0x0008	("%.16g")	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].textHeight	0x0008	("%.16g")	SurfaceFinish[%d].ProcessText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText.Item[%d].textLineWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].ProcessText.Item[%d].textLineWidth.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].textThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Item[%d]	
SurfaceFinish[%d].ProcessText.Item[%d].underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	SurfaceFinish[%d].ProcessText.Item[%d]	

Q.13.22 SurfaceFinish[%d].ProcessText.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText.Outline	0x0008	NULL	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.Outline.Bottom	0x0008	NULL	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Outline.Bottom	
SurfaceFinish[%d].ProcessText.Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].ProcessText.Outline.Bottom	
SurfaceFinish[%d].ProcessText.Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Outline.Bottom	
SurfaceFinish[%d].ProcessText.Outline.Bottom.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].ProcessText.Outline.Bottom.width.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText.Outline.Left	0x0008	NULL	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Outline.Left	
SurfaceFinish[%d].ProcessText.Outline.Left.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].ProcessText.Outline.Left	
SurfaceFinish[%d].ProcessText.Outline.Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Outline.Left	
SurfaceFinish[%d].ProcessText.Outline.Left.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].ProcessText.Outline.Left.width.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Outline.Left	
SurfaceFinish[%d].ProcessText.Outline.Right	0x0008	NULL	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Outline.Right	
SurfaceFinish[%d].ProcessText.Outline.Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].ProcessText.Outline.Right	
SurfaceFinish[%d].ProcessText.Outline.Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Outline.Right	
SurfaceFinish[%d].ProcessText.Outline.Right.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText.Outline.Right.width.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Outline.Right	
SurfaceFinish[%d].ProcessText.Outline.Top	0x0008	NULL	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Outline.Top	
SurfaceFinish[%d].ProcessText.Outline.Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].ProcessText.Outline.Top	
SurfaceFinish[%d].ProcessText.Outline.Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Outline.Top	
SurfaceFinish[%d].ProcessText.Outline.Top.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].ProcessText.Outline.Top.width.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText.Outline.Top	
SurfaceFinish[%d].ProcessText.Outline.direction	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.doubleOffset	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.filled	0x0008	"%d"	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.origin	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.outlineHeight	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText.Outline.outlineWidth	0x0008	("%.16g"	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText.Outline	
SurfaceFinish[%d].ProcessText.Outline.visible	0x0008	"%d"	SurfaceFinish[%d].ProcessText.Outline	

Q.13.23 SurfaceFinish[%d].ProcessText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText.boldd	0x0008	"%d"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.font	0x0008	"%s"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.italic	0x0008	"%d"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.italicAngle	0x0008	("%.16g"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.language	0x0008	"%s"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.lineFactor	0x0008	("%.16g"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.maxExtend	0x0008	"%d"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.outlineColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	SurfaceFinish[%d].ProcessText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		SurfaceFinish[%d].ProcessText.Outline.colour which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].ProcessText.Outline
SurfaceFinish[%d].ProcessText.outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].ProcessText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].ProcessText.Outline.style which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].ProcessText.Outline
SurfaceFinish[%d].ProcessText.outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	SurfaceFinish[%d].ProcessText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].ProcessText.Outline.type which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].ProcessText.Outline
SurfaceFinish[%d].ProcessText.outlineWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].ProcessText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				SurfaceFinish[%d].ProcessText.Outline
SurfaceFinish[%d].ProcessText.outlineWidth.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].ProcessText.Outline.width.name which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].ProcessText.Outline
SurfaceFinish[%d].ProcessText.spaceFactor	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.striekthrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.textAspect	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.textHeight	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.textLineWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].ProcessText	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].ProcessText.textLineWidth.name	0x0008	"%s"	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.textOrientation	0x0008	String representing enumeration such that: "0"=horizontal, "1"=vertical	SurfaceFinish[%d].ProcessText	
SurfaceFinish[%d].ProcessText.textThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].ProcessText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ProcessText.underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	SurfaceFinish[%d].ProcessText	

Q.13.24 SurfaceFinish[%d].RevisionModifier

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].RevisionModifier	0x0008	"%s"	SurfaceFinish[%d]	

Q.13.25 SurfaceFinish[%d].SafetyClassification

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].SafetyClassification	0x0008	"%s"	SurfaceFinish[%d]	

Q.13.26 SurfaceFinish[%d].TextFormat[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].TextFormat[%d]	0x0008	NULL	SurfaceFinish[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d]	0x0008	NULL	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	0x0008	NULL	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom	0x0008	NULL	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom.measurementType	0x0008	("%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom.width.name	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Bottom	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left	0x0008	NULL	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left.width.measurementType	0x0008	("%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left.width.name	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Left	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right	0x0008	NULL	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right.width.name	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Right	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top	0x0008	NULL	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top.width.name	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.Top	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.direction	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.Item[%d].Outline.doubleOffset			.Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.filled	0x0008	"%d"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.origin	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.outlineHeight	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.outlineWidth	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.visible	0x0008	"%d"	SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline	
SurfaceFinish[%d].TextFormat[%d].Item[%d].bold	0x0008	"%d"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].font	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].format	0x0008	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].italic	0x0008	"%d"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].italicAngle	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft,	SurfaceFinish[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=bottomright, "8"=bottomcentre		
SurfaceFinish[%d].TextFormat[%d].Item[%d].language	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].lineFactor	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].lineWeldSupplementalSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp, "20"=surfacefinishmrrpcomplete, "21"=meltthrough	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].lineWeldSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface,	SurfaceFinish[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
SurfaceFinish[%d].TextFormat[%d].Item[%d].outlineColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline
SurfaceFinish[%d].TextFormat[%d].Item[%d].outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				.Item[%d].Outline
SurfaceFinish[%d].TextFormat[%d].Item[%d].outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	SurfaceFinish[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline
SurfaceFinish[%d].TextFormat[%d].Item[%d].outlineWidth.measurementType	0x0008	%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline
SurfaceFinish[%d].TextFormat[%d].Item[%d].outlineWidth.name	0x0008	%"s"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].TextFormat[%d].Item[%d].Outline
SurfaceFinish[%d].TextFormat[%d].Item[%d].outlineWidth.name	0x0008	%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.Item[%d].spaceFactor			.Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].strikethrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].string	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].symbol	0x0008	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch,	SurfaceFinish[%d].TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
SurfaceFinish[%d].TextFormat[%d].Item[%d].textAspect	0x0008	("%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].textHeight	0x0008	("%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].textLineWidth.measurementType	0x0008	("%.16g"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].TextFormat[%d].Item[%d].textLineWidth.name	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].textThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].TextFormat[%d].Item[%d]	
SurfaceFinish[%d].TextFormat[%d].Item[%d].underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	SurfaceFinish[%d].TextFormat[%d].Item[%d]	

Q.13.27 SurfaceFinish[%d].TextFormat[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].TextFormat[%d].bold	0x0008	"%d"	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].font	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].italic	0x0008	"%d"	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].italicAngle	0x0008	("%.16g"	SurfaceFinish[%d].TextFormat[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].TextFormat[%d].justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].language	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].lineFactor	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].spaceFactor	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].strikethrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].textAspect	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].textHeight	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].textLineWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].TextFormat[%d]	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].TextFormat[%d].textLineWidth.name	0x0008	"%s"	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].textThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].TextFormat[%d]	
SurfaceFinish[%d].TextFormat[%d].underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	SurfaceFinish[%d].TextFormat[%d]	

Q.13.28 SurfaceFinish[%d].UnitSymbol[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].UnitSymbol[%d]	0x0008	NULL	SurfaceFinish[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.width.measurementType	0x0008	%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom.width.name	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Bottom	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left.width.measurementType	0x0008	("%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left.width.name	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Left	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right.width.measurementType	0x0008	("%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right.width.name	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Right	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top.width.name	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.Top	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.direction	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.doubleOffset	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.filled	0x0008	"%d"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.origin	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.outlineHeight	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.outlineWidth	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.visible	0x0008	"%d"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	0x0008	"%d"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.Item[%d].bold			.Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].font	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].format	0x0008	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].italic	0x0008	"%d"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].italicAngle	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].language	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].lineFactor	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].lineWeldSupplementalSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp, "20"=surfacefinishmrrpcomplete,	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=meltthrough		
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].lineWeldSymbol	0x0008	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskdiameter, "56"=eskdnumber, "57"=isoedge	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].lineWeldSymbol	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.Item[%d].outlineColour		for the colour are encoded in the string	.Item[%d]	key, but also suggest support reading SurfaceFinish[%d].UnitSymbol[%d] .Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].UnitSymbol[%d] .Item[%d].Outline
SurfaceFinish[%d].UnitSymbol[%d] .Item[%d].outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].UnitSymbol[%d] .Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].UnitSymbol[%d] .Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].UnitSymbol[%d] .Item[%d].Outline
SurfaceFinish[%d].UnitSymbol[%d] .Item[%d].outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	SurfaceFinish[%d].UnitSymbol[%d] .Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].UnitSymbol[%d] .Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].UnitSymbol[%d] .Item[%d].Outline
SurfaceFinish[%d].UnitSymbol[%d] .Item[%d].outlineWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d] .Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].UnitSymbol[%d]

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].outlineWidth.name	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].UnitSymbol[%d].Item[%d].Outline
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].spaceFactor	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].strikethrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].string	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].symbol	0x0008	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface,	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].textAspect	0x0008	("%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].textHeight	0x0008	("%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].textLineWidth.measurementType	0x0008	("%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].textLineWidth.name	0x0008	("%s"	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].textThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].UnitSymbol[%d].Item[%d].underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	SurfaceFinish[%d].UnitSymbol[%d].Item[%d]	

Q.13.29 SurfaceFinish[%d].UnitSymbol[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].UnitSymbol[%d].Outline	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom.width.measurementType	0x0008	%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom.width.name	0x0008	%"s"	SurfaceFinish[%d].UnitSymbol[%d].Outline.Bottom	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Left	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Left.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Outline.Left	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Left.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	SurfaceFinish[%d].UnitSymbol[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
SurfaceFinish[%d].UnitSymbol[%d].Outline.Left.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Outline.Left	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Left.width.measurementType	0x0008	%.16g	SurfaceFinish[%d].UnitSymbol[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].UnitSymbol[%d].Outline.Left.width.name	0x0008	%"s"	SurfaceFinish[%d].UnitSymbol[%d].Outline.Left	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Right	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Right.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Outline.Right	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Right.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].UnitSymbol[%d].Outline.Right	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Right.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Outline.Right	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Right.width.measurementType	0x0008	%.16g	SurfaceFinish[%d].UnitSymbol[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].UnitSymbol[%d].Outline.Right.width.name	0x0008	%"s"	SurfaceFinish[%d].UnitSymbol[%d].Outline.Right	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Top	0x0008	NULL	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Top.colour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].UnitSymbol[%d].Outline.Top.style	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d].UnitSymbol[%d].Outline.Top	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Top.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Outline.Top	
SurfaceFinish[%d].UnitSymbol[%d].Outline.Top.width.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].UnitSymbol[%d].Outline.Top.width.name	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d].Outline.Top	
SurfaceFinish[%d].UnitSymbol[%d].Outline.direction	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.doubleOffset	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.fillColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.filled	0x0008	"%d"	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.origin	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.outlineHeight	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.outlineWidth	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.thickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d].Outline	
SurfaceFinish[%d].UnitSymbol[%d].Outline.visible	0x0008	"%d"	SurfaceFinish[%d].UnitSymbol[%d].Outline	

Q.13.30 SurfaceFinish[%d].UnitSymbol[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].UnitSymbol[%d].bold	0x0008	"%d"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].font	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].italic	0x0008	"%d"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].italicAngle	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].language	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].lineFactor	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].maxExtend	0x0008	"%d"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].name	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].outlineColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].UnitSymbol[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].UnitSymbol[%d].Outline
SurfaceFinish[%d].UnitSymbol[%d].outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	SurfaceFinish[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].UnitSymbol[%d].Outline.style which would match

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		the more modern Outline syntax and require prerequisite SurfaceFinish[%d].UnitSymbol[%d].Outline
SurfaceFinish[%d].UnitSymbol[%d].outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	SurfaceFinish[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].UnitSymbol[%d].Outline.type which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].UnitSymbol[%d].Outline
SurfaceFinish[%d].UnitSymbol[%d].outlineWidth.measurementType	0x0008	"%.16g"	SurfaceFinish[%d].UnitSymbol[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].UnitSymbol[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].UnitSymbol[%d].Outline
SurfaceFinish[%d].UnitSymbol[%d].outlineWidth.name	0x0008	"%s"	SurfaceFinish[%d].UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].UnitSymbol[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				SurfaceFinish[%d].UnitSymbol[%d].Outline
SurfaceFinish[%d].UnitSymbol[%d].spaceFactor	0x0008	("%.16g"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].strikethrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].textAspect	0x0008	("%.16g"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].textHeight	0x0008	("%.16g"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].textLineWidth.measurementType	0x0008	("%.16g"	SurfaceFinish[%d].UnitSymbol[%d]	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].UnitSymbol[%d].textLineWidth.name	0x0008	("%s"	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].textOrientation	0x0008	String representing enumeration such that: "0"=horizontal, "1"=vertical	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].textThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d].UnitSymbol[%d]	
SurfaceFinish[%d].UnitSymbol[%d].underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	SurfaceFinish[%d].UnitSymbol[%d]	

Q.13.31 SurfaceFinish[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].ValueToCustom	0x0008	("%s"	SurfaceFinish[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
er				
SurfaceFinish[%d].____JtTkIntersectionReference__reference0	0x0008	ORIGINreference1	SurfaceFinish[%d].____JtTkIntersectionReference__reference1	<p>ORIGIN is optional and should only be added if the Intersection reference is also an Origin reference</p> <p>reference0 and reference1 should be in the format "%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path.</p> <p>Should exist in pairs, with the opposite ordering of values also persited, to identify both way which references are tied together as an intersection reference</p>
SurfaceFinish[%d].____JtTkIntersectionReference__reference1	0x0008	ORIGINreference0	SurfaceFinish[%d].____JtTkIntersectionReference__reference0	<p>ORIGIN is optional and should only be added if the Intersection reference is also an Origin reference</p> <p>reference0 and reference1 should be in the format "%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path.</p> <p>Should exist in pairs, with the opposite ordering of values also persited, to identify both way which references are tied together as an intersection reference</p>
SurfaceFinish[%d].____JtTkOriginReference__reference	0x0008	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path.	SurfaceFinish[%d]	reference is the property value encoded also into the key identifying which reference is an origin reference.
SurfaceFinish[%d].accountabilityId	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].allAround	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].allAroundLeader	0x0008	"%d"	SurfaceFinish[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].attachmentType	0x0008	String representing enumeration such that: "0"=angulardimension, "1"=ongeometry, "2"=lineardimension, "3"=leader, "4"=stacked, "5"=ordinatedimension, "6"=radialdimension, "7"=diametraldimension, "8"=noleader, "9"=stackedleft, "10"=stackedright, "11"=stackedabove	SurfaceFinish[%d]	
SurfaceFinish[%d].blanked	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].bold	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].bottomExtensionLine	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].commaAsDecimal	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].direction	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].flag	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].font	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].group	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].inFront	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].invertSymbol	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].invertText	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].italic	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].italicAngle	0x0008	"%.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].jisSurfaceTexture	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].justification	0x0008	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	SurfaceFinish[%d]	
SurfaceFinish[%d].language	0x0008	"%s"	SurfaceFinish[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].lay	0x0008	String representing enumeration such that: "0"=parallel, "1"=multidirectional, "2"=perpendicular, "3"=circular, "4"=particulate, "5"=angularboth, "6"=radial, "7"=userdefined	SurfaceFinish[%d]	
SurfaceFinish[%d].lineFactor	0x0008	"%.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].lowerDelta	0x0008	"%.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].machiningAllowance	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].maxRoughness	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].maxRoughness2	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].minRoughness	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].minRoughness2	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].modifier	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].nameComponents.displayName	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].nameComponents.name	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].originAnchor	0x0008	String representing enumeration such that: "0"=topleft, "1"=topcentre, "2"=topright, "3"=middleleft, "4"=middlecentre, "5"=middleright, "6"=bottomleft, "7"=bottomcentre, "8"=bottomright	SurfaceFinish[%d]	
SurfaceFinish[%d].outlineColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].outlineStyle	0x0008	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	SurfaceFinish[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].Outline.style which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].Outline
SurfaceFinish[%d].outlineType	0x0008	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	SurfaceFinish[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].Outline.type which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].Outline
SurfaceFinish[%d].outlineWidth.measurementType	0x0008	("%.16g"	SurfaceFinish[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite SurfaceFinish[%d].Outline
SurfaceFinish[%d].outlineWidth.name	0x0008	"%s"	SurfaceFinish[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading SurfaceFinish[%d].Outline.width.name which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite SurfaceFinish[%d].Outline
SurfaceFinish[%d].panZoom	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].parallelToScreenAnchor	0x0008	"%.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].parallelToScreenRotationPoint	0x0008	"%.16g %.16g %.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].parallelToScreenScale	0x0008	"%.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].parenthesis	0x0008	String representing enumeration such that: "0"=none, "1"=left, "2"=right, "3"=both	SurfaceFinish[%d]	
SurfaceFinish[%d].precision	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].roughness	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].roughness2	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].roughness3	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].roughnessCutoff	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].roughnessSpacing	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].singleLine	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].spaceFactor	0x0008	"%.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].stackFactor	0x0008	"%.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].standard	0x0008	String representing enumeration such that: "0"=jis, "1"=ansi_y1436_1993, "2"=iso, "3"=asme_y1436m_1996, "4"=din, "5"=gb, "6"=iso_1302_2002, "7"=eskd, "8"=din_en_iso_1302_2002, "9"=jis_1982	SurfaceFinish[%d]	
SurfaceFinish[%d].strikethrough	0x0008	String representing enumeration such that: "0"=none, "1"=single, "2"=double	SurfaceFinish[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].subscript	0x0008	String representing enumeration such that: "0"=sub, "1"=super	SurfaceFinish[%d]	
SurfaceFinish[%d].symbolColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d]	
SurfaceFinish[%d].textAspect	0x0008	("%.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].textColour	0x0008	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	SurfaceFinish[%d]	
SurfaceFinish[%d].textDirection	0x0008	("%.16g %.16g %.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].textHeight	0x0008	("%.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].textLineWidth.measurementType	0x0008	("%.16g"	SurfaceFinish[%d]	measurementType must be replaced with meterWidth or pixelWidth
SurfaceFinish[%d].textLineWidth.name	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].textOrigin	0x0008	("%.16g %.16g %.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].textRotationPoint	0x0008	("%.16g %.16g %.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].textThickness	0x0008	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	SurfaceFinish[%d]	
SurfaceFinish[%d].toleranceDisplay	0x0008	String representing enumeration such that: "0"=minuslimit1, "1"=bilateral, "2"=pluslimit1, "3"=pluslimit2, "4"=equalbilateral, "5"=minuslimit2, "6"=upperunilateral, "7"=lowerunilateral	SurfaceFinish[%d]	
SurfaceFinish[%d].toleranceLeadingZero	0x0008	"%d"	SurfaceFinish[%d]	
SurfaceFinish[%d].toleranceTrailingZero	0x0008	"%d"	SurfaceFinish[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
SurfaceFinish[%d].type	0x0008	String representing enumeration such that: "0"=basic, "1"=mrr, "2"=mrrp	SurfaceFinish[%d]	
SurfaceFinish[%d].underline	0x0008	String representing enumeration such that: "0"=over, "1"=under	SurfaceFinish[%d]	
SurfaceFinish[%d].unit	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].upperDelta	0x0008	"%.16g"	SurfaceFinish[%d]	
SurfaceFinish[%d].uriRefs[%d]	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].usage	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].valid	0x0008	String representing enumeration such that: "0"=true, "1"=false, "2"=unknown	SurfaceFinish[%d]	
SurfaceFinish[%d].wavinessHeight	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].wavinessSpacing	0x0008	"%s"	SurfaceFinish[%d]	
SurfaceFinish[%d].zeroToleranceDisplay	0x0008	String representing enumeration such that: "0"=displayzero, "1"=blank, "2"=suppresstrailingzero, "3"=omit	SurfaceFinish[%d]	

Q.13.32 PMI Properties "T"

Q.13.33 Tertiary.Datum[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary	0x0081	NULL		
Tertiary.Datum[%d]	0x0081	NULL	Tertiary	
Tertiary.Datum[%d].FreeState	0x0081	NULL	Tertiary.Datum[%d]	

Q.13.34 Tertiary.Datum[%d].TextLabel.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.Datum[%d].TextLabel	0x0081	NULL	Tertiary.Datum[%d]	
Tertiary.Datum[%d].TextLabel.Item[%d]	0x0081	NULL	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.Item[%d].Outline	0x0081	NULL	Tertiary.Datum[%d].TextLabel.Item[%d]	
Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0081	NULL	Tertiary.Datum[%d].TextLabel.Item[%d].Outline	
Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.measurementType	0x0081	%.16g"	Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Left	0x0081	NULL	Tertiary.Datum[%d].TextLabel.Item[%d].Outline	
Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Left	
Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	Tertiary.Datum[%d].TextLabel.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Left	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Left.width.measurementType	0x0081	("%.16g"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Left.width.name	0x0081	"%s"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Left	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right	0x0081	NULL	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right.width.measurementType	0x0081	("%.16g"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right.width.name	0x0081	"%s"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Right	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top	0x0081	NULL	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top.width.measurem entType	0x0081	("%.16g"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top.width.name	0x0081	"%s"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline.Top	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.direction	0x0081	("%.16g %.16g %.16g"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.doubleOffset	0x0081	("%.16g"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.filled	0x0081	"%d"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.origin	0x0081	("%.16g %.16g %.16g"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.outlineHeight	0x0081	("%.16g"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.outlineWidth	0x0081	("%.16g"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].Outline.visible	0x0081	"%d"	Tertiary.Datum[%d].TextLabel.Item [%d].Outline	
Tertiary.Datum[%d].TextLabel.Item [%d].bold	0x0081	"%d"	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item	0x0081	"%s"	Tertiary.Datum[%d].TextLabel.Item	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
[%d].font			[%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].italic	0x0081	"%d"	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].italicAngle	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].language	0x0081	"%s"	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].lineFactor	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	Tertiary.Datum[%d].TextLabel.Item [%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.Datum[%d].TextLabel.Item [%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskds smooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	Tertiary.Datum[%d].TextLabel.Item [%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		reading Tertiary.Datum[%d].TextLabel.Item [%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Tertiary.Datum[%d].TextLabel.Item [%d].Outline
Tertiary.Datum[%d].TextLabel.Item [%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.Datum[%d].TextLabel.Item [%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.Datum[%d].TextLabel.Item [%d].Outline.style which would match the more modern Outline syntax and require prerequisite Tertiary.Datum[%d].TextLabel.Item [%d].Outline
Tertiary.Datum[%d].TextLabel.Item [%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Tertiary.Datum[%d].TextLabel.Item [%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.Datum[%d].TextLabel.Item [%d].Outline.type which would match the more modern Outline syntax and require prerequisite Tertiary.Datum[%d].TextLabel.Item [%d].Outline
Tertiary.Datum[%d].TextLabel.Item [%d].outlineWidth.measurementType	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel.Item [%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.Datum[%d].TextLabel.Item [%d].Outline.width.measurementType which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite Tertiary.Datum[%d].TextLabel.Item [%d].Outline
Tertiary.Datum[%d].TextLabel.Item [%d].outlineWidth.name	0x0081	"%s"	Tertiary.Datum[%d].TextLabel.Item [%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.Datum[%d].TextLabel.Item [%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite Tertiary.Datum[%d].TextLabel.Item [%d].Outline
Tertiary.Datum[%d].TextLabel.Item [%d].spaceFactor	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].string	0x0081	"%s"	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity,	Tertiary.Datum[%d].TextLabel.Item [%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
Tertiary.Datum[%d].TextLabel.Item [%d].textAspect	0x0081	("%.16g")	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].textHeight	0x0081	("%.16g")	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].textLineWidth.measurementType	0x0081	("%.16g")	Tertiary.Datum[%d].TextLabel.Item [%d]	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.Datum[%d].TextLabel.Item [%d].textLineWidth.name	0x0081	("%s")	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Item [%d]	
Tertiary.Datum[%d].TextLabel.Item [%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Tertiary.Datum[%d].TextLabel.Item [%d]	

Q.13.35 Tertiary.Datum[%d].TextLabel.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.Datum[%d].TextLabel.Outline	0x0081	NULL	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.Outline.Bottom	0x0081	NULL	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Outline.Bottom	
Tertiary.Datum[%d].TextLabel.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.Datum[%d].TextLabel.Outline.Bottom	
Tertiary.Datum[%d].TextLabel.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Outline.Bottom	
Tertiary.Datum[%d].TextLabel.Outline.Bottom.width.measurementType	0x0081	%.16g"	Tertiary.Datum[%d].TextLabel.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.Datum[%d].TextLabel.Outline.Bottom.width.name	0x0081	%"s"	Tertiary.Datum[%d].TextLabel.Outline.Bottom	
Tertiary.Datum[%d].TextLabel.Outline.Left	0x0081	NULL	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Outline.Left	
Tertiary.Datum[%d].TextLabel.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.Datum[%d].TextLabel.Outline.Left	
Tertiary.Datum[%d].TextLabel.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
Tertiary.Datum[%d].TextLabel.Outline.Left.width.measurementType	0x0081	%.16g"	Tertiary.Datum[%d].TextLabel.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.Datum[%d].TextLabel.Outline.Left.width.name	0x0081	%"s"	Tertiary.Datum[%d].TextLabel.Outline.Left	
Tertiary.Datum[%d].TextLabel.Outline.Right	0x0081	NULL	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Outline.Right	
Tertiary.Datum[%d].TextLabel.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.Datum[%d].TextLabel.Outline.Right	
Tertiary.Datum[%d].TextLabel.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Outline.Right	
Tertiary.Datum[%d].TextLabel.Outline.Right.width.measurementType	0x0081	%.16g"	Tertiary.Datum[%d].TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.Datum[%d].TextLabel.Outline.Right.width.name	0x0081	%"s"	Tertiary.Datum[%d].TextLabel.Outline.Right	
Tertiary.Datum[%d].TextLabel.Outline.Top	0x0081	NULL	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Outline.Top	
Tertiary.Datum[%d].TextLabel.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.Datum[%d].TextLabel.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.Datum[%d].TextLabel.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Outline.Top	
Tertiary.Datum[%d].TextLabel.Outline.Top.width.measurementType	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.Datum[%d].TextLabel.Outline.Top.width.name	0x0081	"%s"	Tertiary.Datum[%d].TextLabel.Outline.Top	
Tertiary.Datum[%d].TextLabel.Outline.direction	0x0081	"%.16g %.16g %.16g"	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.doubleOffset	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.filled	0x0081	"%d"	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.origin	0x0081	"%.16g %.16g %.16g"	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.outlineHeight	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.outlineWidth	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.Outline.visible	0x0081	"%d"	Tertiary.Datum[%d].TextLabel.Outline	
Tertiary.Datum[%d].TextLabel.bold	0x0081	"%d"	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.font	0x0081	"%s"	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.italic	0x0081	"%d"	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.italicAngle	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.Datum[%d].TextLabel.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.language	0x0081	"%s"	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.lineFactor	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.maxExtend	0x0081	"%d"	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.name	0x0081	"%s"	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.Datum[%d].TextLabel.Outline.colour which would match the more modern Outline syntax and require prerequisite Tertiary.Datum[%d].TextLabel.Outline
Tertiary.Datum[%d].TextLabel.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.Datum[%d].TextLabel.Outline.style which would match the more modern Outline syntax and require prerequisite Tertiary.Datum[%d].TextLabel.Outline
Tertiary.Datum[%d].TextLabel.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set,	Tertiary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.Datum[%d].TextLabel.Outline.type which would match the more modern Outline syntax and require prerequisite Tertiary.Datum[%d].TextLabel.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		ine
Tertiary.Datum[%d].TextLabel.outlineWidth.measurementType	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.Datum[%d].TextLabel.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Tertiary.Datum[%d].TextLabel.Outline
Tertiary.Datum[%d].TextLabel.outlineWidth.name	0x0081	"%s"	Tertiary.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.Datum[%d].TextLabel.Outline.width.name which would match the more modern Outline syntax and require prerequisite Tertiary.Datum[%d].TextLabel.Outline
Tertiary.Datum[%d].TextLabel.spaceFactor	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.striethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.textAspect	0x0081	"%.16g"	Tertiary.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.Datum[%d].TextLabel.text Colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.text Height	0x0081	("%.16g"	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.text LineWidth.measurementType	0x0081	("%.16g"	Tertiary.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.Datum[%d].TextLabel.text LineWidth.name	0x0081	"%s"	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.text Orientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.text Thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].TextLabel.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Tertiary.Datum[%d].TextLabel	
Tertiary.Datum[%d].datumRef	0x0081	"%s"	Tertiary.Datum[%d]	
Tertiary.Datum[%d].label	0x0081	"%s"	Tertiary.Datum[%d]	
Tertiary.Datum[%d].modifier	0x0081	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	Tertiary.Datum[%d]	
Tertiary.Datum[%d].projected	0x0081	"%d"	Tertiary.Datum[%d]	

Q.13.36 Tertiary.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.ExtendedText	0x0081	NULL	Tertiary	
Tertiary.ExtendedText.Item[%d]	0x0081	NULL	Tertiary.ExtendedText	
Tertiary.ExtendedText.Item[%d].Outline	0x0081	NULL	Tertiary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.ExtendedText.Item[%d].Outline.Bottom	0x0081	NULL	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Item[%d].Outline.Bottom	
Tertiary.ExtendedText.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.ExtendedText.Item[%d].Outline.Bottom	
Tertiary.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Item[%d].Outline.Bottom	
Tertiary.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0081	%.16g"	Tertiary.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.ExtendedText.Item[%d].Outline.Bottom.width.name	0x0081	%"s"	Tertiary.ExtendedText.Item[%d].Outline.Bottom	
Tertiary.ExtendedText.Item[%d].Outline.Left	0x0081	NULL	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Item[%d].Outline.Left	
Tertiary.ExtendedText.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.ExtendedText.Item[%d].Outline.Left	
Tertiary.ExtendedText.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Item[%d].Outline.Left	
Tertiary.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0081	%.16g"	Tertiary.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.ExtendedText.Item[%d].Outline.Left.width.name	0x0081	"%s"	Tertiary.ExtendedText.Item[%d].Outline.Left	
Tertiary.ExtendedText.Item[%d].Outline.Right	0x0081	NULL	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Item[%d].Outline.Right	
Tertiary.ExtendedText.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.ExtendedText.Item[%d].Outline.Right	
Tertiary.ExtendedText.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Item[%d].Outline.Right	
Tertiary.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	Tertiary.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.ExtendedText.Item[%d].Outline.Right.width.name	0x0081	"%s"	Tertiary.ExtendedText.Item[%d].Outline.Right	
Tertiary.ExtendedText.Item[%d].Outline.Top	0x0081	NULL	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Item[%d].Outline.Top	
Tertiary.ExtendedText.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.ExtendedText.Item[%d].Outline.Top	
Tertiary.ExtendedText.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Item[%d].Outline.Top	
Tertiary.ExtendedText.Item[%d].Outline	0x0081	"%.16g"	Tertiary.ExtendedText.Item[%d].Outline	measurementType must be

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
outline.Top.width.measurementType			outline.Top	replaced with meterWidth or pixelWidth
Tertiary.ExtendedText.Item[%d].Outline.Top.width.name	0x0081	"%s"	Tertiary.ExtendedText.Item[%d].Outline.Top	
Tertiary.ExtendedText.Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.doubleOffset	0x0081	"%.16g"	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.filled	0x0081	"%d"	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.outlineHeight	0x0081	"%.16g"	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.outlineWidth	0x0081	"%.16g"	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].Outline.visible	0x0081	"%d"	Tertiary.ExtendedText.Item[%d].Outline	
Tertiary.ExtendedText.Item[%d].bold	0x0081	"%d"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].font	0x0081	"%s"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Tertiary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.ExtendedText.Item[%d].italic	0x0081	"%d"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].italicAngle	0x0081	"%.16g"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].language	0x0081	"%s"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].lineFactor	0x0081	"%.16g"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove,	Tertiary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
Tertiary.ExtendedText.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Tertiary.ExtendedText.Item[%d].Outline
Tertiary.ExtendedText.Item[%d].outline	0x0081	String representing enumeration such that: "0"=unset,	Tertiary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
outlineStyle		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		key, but also suggest support reading Tertiary.ExtendedText.Item[%d].O outline.style which would match the more modern Outline syntax and require prerequisite Tertiary.ExtendedText.Item[%d].O outline
Tertiary.ExtendedText.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Tertiary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.ExtendedText.Item[%d].O outline.type which would match the more modern Outline syntax and require prerequisite Tertiary.ExtendedText.Item[%d].O outline
Tertiary.ExtendedText.Item[%d].outlineWidth.measurementType	0x0081	"%.16g"	Tertiary.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.ExtendedText.Item[%d].O outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Tertiary.ExtendedText.Item[%d].O outline
Tertiary.ExtendedText.Item[%d].outlineWidth.name	0x0081	"%s"	Tertiary.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.ExtendedText.Item[%d].O outline.width.name which would

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				match the more modern Outline syntax and require prerequisite Tertiary.ExtendedText.Item[%d].Outline
Tertiary.ExtendedText.Item[%d].spaceFactor	0x0081	"%.16g"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].string	0x0081	"%s"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance,	Tertiary.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
Tertiary.ExtendedText.Item[%d].textAspect	0x0081	%.16g"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].textHeight	0x0081	%.16g"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].textLineWidth.measurementType	0x0081	%.16g"	Tertiary.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.ExtendedText.Item[%d].textLineWidth.name	0x0081	%"s"	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Item[%d]	
Tertiary.ExtendedText.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Tertiary.ExtendedText.Item[%d]	

Q.13.37 Tertiary.ExtendedText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.ExtendedText.Outline	0x0081	NULL	Tertiary.ExtendedText	
Tertiary.ExtendedText.Outline.Bottom	0x0081	NULL	Tertiary.ExtendedText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.ExtendedText.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Outline.Bottom	
Tertiary.ExtendedText.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.ExtendedText.Outline.Bottom	
Tertiary.ExtendedText.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Outline.Bottom	
Tertiary.ExtendedText.Outline.Bottom.width.measurementType	0x0081	%.16g"	Tertiary.ExtendedText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.ExtendedText.Outline.Bottom.width.name	0x0081	%"s"	Tertiary.ExtendedText.Outline.Bottom	
Tertiary.ExtendedText.Outline.Left	0x0081	NULL	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Outline.Left	
Tertiary.ExtendedText.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.ExtendedText.Outline.Left	
Tertiary.ExtendedText.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Outline.Left	
Tertiary.ExtendedText.Outline.Left.width.measurementType	0x0081	%.16g"	Tertiary.ExtendedText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.ExtendedText.Outline.Left.width.name	0x0081	%"s"	Tertiary.ExtendedText.Outline.Left	
Tertiary.ExtendedText.Outline.Right	0x0081	NULL	Tertiary.ExtendedText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ht				
Tertiary.ExtendedText.Outline.Rig ht.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Outline.Rig ht	
Tertiary.ExtendedText.Outline.Rig ht.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.ExtendedText.Outline.Rig ht	
Tertiary.ExtendedText.Outline.Rig ht.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Outline.Rig ht	
Tertiary.ExtendedText.Outline.Rig ht.width.measurementType	0x0081	"%.16g"	Tertiary.ExtendedText.Outline.Rig ht	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.ExtendedText.Outline.Rig ht.width.name	0x0081	"%s"	Tertiary.ExtendedText.Outline.Rig ht	
Tertiary.ExtendedText.Outline.Top	0x0081	NULL	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.Outline.Top colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Outline.Top	
Tertiary.ExtendedText.Outline.Top style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.ExtendedText.Outline.Top	
Tertiary.ExtendedText.Outline.Top thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Outline.Top	
Tertiary.ExtendedText.Outline.Top width.measurementType	0x0081	"%.16g"	Tertiary.ExtendedText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.ExtendedText.Outline.Top width.name	0x0081	"%s"	Tertiary.ExtendedText.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.ExtendedText.Outline.direction	0x0081	"%.16g %.16g %.16g"	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.Outline.doubleOffset	0x0081	"%.16g"	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.Outline.filled	0x0081	"%d"	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.Outline.origin	0x0081	"%.16g %.16g %.16g"	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.Outline.outlineHeight	0x0081	"%.16g"	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.Outline.outlineWidth	0x0081	"%.16g"	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.Outline.visible	0x0081	"%d"	Tertiary.ExtendedText.Outline	
Tertiary.ExtendedText.bold	0x0081	"%d"	Tertiary.ExtendedText	
Tertiary.ExtendedText.font	0x0081	"%s"	Tertiary.ExtendedText	
Tertiary.ExtendedText.italic	0x0081	"%d"	Tertiary.ExtendedText	
Tertiary.ExtendedText.italicAngle	0x0081	"%.16g"	Tertiary.ExtendedText	
Tertiary.ExtendedText.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Tertiary.ExtendedText	
Tertiary.ExtendedText.language	0x0081	"%s"	Tertiary.ExtendedText	
Tertiary.ExtendedText.lineFactor	0x0081	"%.16g"	Tertiary.ExtendedText	
Tertiary.ExtendedText.maxExtend	0x0081	"%d"	Tertiary.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.ExtendedText.name	0x0081	"%s"	Tertiary.ExtendedText	
Tertiary.ExtendedText.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite Tertiary.ExtendedText.Outline
Tertiary.ExtendedText.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Tertiary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.ExtendedText.Outline.style which would match the more modern Outline syntax and require prerequisite Tertiary.ExtendedText.Outline
Tertiary.ExtendedText.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Tertiary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.ExtendedText.Outline.type which would match the more modern Outline syntax and require prerequisite Tertiary.ExtendedText.Outline
Tertiary.ExtendedText.outlineWidth.measurementType	0x0081	"%.16g"	Tertiary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.ExtendedText.Outline.wid

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				h.measurementType which would match the more modern Outline syntax and require prerequisite Tertiary.ExtendedText.Outline
Tertiary.ExtendedText.outlineWidth.h.name	0x0081	"%s"	Tertiary.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Tertiary.ExtendedText.Outline.width.h.name which would match the more modern Outline syntax and require prerequisite Tertiary.ExtendedText.Outline
Tertiary.ExtendedText.spaceFactor	0x0081	"%.16g"	Tertiary.ExtendedText	
Tertiary.ExtendedText.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Tertiary.ExtendedText	
Tertiary.ExtendedText.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Tertiary.ExtendedText	
Tertiary.ExtendedText.textAspect	0x0081	"%.16g"	Tertiary.ExtendedText	
Tertiary.ExtendedText.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Tertiary.ExtendedText	
Tertiary.ExtendedText.textHeight	0x0081	"%.16g"	Tertiary.ExtendedText	
Tertiary.ExtendedText.textLineWidth.measurementType	0x0081	"%.16g"	Tertiary.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
Tertiary.ExtendedText.textLineWidth.h.name	0x0081	"%s"	Tertiary.ExtendedText	
Tertiary.ExtendedText.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	Tertiary.ExtendedText	
Tertiary.ExtendedText.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Tertiary.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Tertiary.ExtendedText.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Tertiary.ExtendedText	

Q.13.38 Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text	0x0081	NULL		
Text.Item[%d]	0x0081	NULL	Text	
Text.Item[%d].Outline	0x0081	NULL	Text.Item[%d]	
Text.Item[%d].Outline.Bottom	0x0081	NULL	Text.Item[%d].Outline	
Text.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Item[%d].Outline.Bottom	
Text.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text.Item[%d].Outline.Bottom	
Text.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Item[%d].Outline.Bottom	
Text.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	Text.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Text.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	Text.Item[%d].Outline.Bottom	
Text.Item[%d].Outline.Left	0x0081	NULL	Text.Item[%d].Outline	
Text.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Item[%d].Outline.Left	
Text.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	Text.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
Text.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Item[%d].Outline.Left	
Text.Item[%d].Outline.Left.width.measurementType	0x0081	%.16g	Text.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Text.Item[%d].Outline.Left.width.name	0x0081	%s	Text.Item[%d].Outline.Left	
Text.Item[%d].Outline.Right	0x0081	NULL	Text.Item[%d].Outline	
Text.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Item[%d].Outline.Right	
Text.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text.Item[%d].Outline.Right	
Text.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Item[%d].Outline.Right	
Text.Item[%d].Outline.Right.width.measurementType	0x0081	%.16g	Text.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Text.Item[%d].Outline.Right.width.name	0x0081	%s	Text.Item[%d].Outline.Right	
Text.Item[%d].Outline.Top	0x0081	NULL	Text.Item[%d].Outline	
Text.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Item[%d].Outline.Top	
Text.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	Text.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
Text.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Item[%d].Outline.Top	
Text.Item[%d].Outline.Top.width.measurementType	0x0081	"%.16g"	Text.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Text.Item[%d].Outline.Top.width.name	0x0081	"%s"	Text.Item[%d].Outline.Top	
Text.Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	Text.Item[%d].Outline	
Text.Item[%d].Outline.doubleOffset	0x0081	"%.16g"	Text.Item[%d].Outline	
Text.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Item[%d].Outline	
Text.Item[%d].Outline.filled	0x0081	"%d"	Text.Item[%d].Outline	
Text.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	Text.Item[%d].Outline	
Text.Item[%d].Outline.outlineHeight	0x0081	"%.16g"	Text.Item[%d].Outline	
Text.Item[%d].Outline.outlineWidth	0x0081	"%.16g"	Text.Item[%d].Outline	
Text.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Item[%d].Outline	
Text.Item[%d].Outline.visible	0x0081	"%d"	Text.Item[%d].Outline	
Text.Item[%d].bold	0x0081	"%d"	Text.Item[%d]	
Text.Item[%d].font	0x0081	"%s"	Text.Item[%d]	
Text.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text.Item[%d].italic	0x0081	"%d"	Text.Item[%d]	
Text.Item[%d].italicAngle	0x0081	"%.16g"	Text.Item[%d]	
Text.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Text.Item[%d]	
Text.Item[%d].language	0x0081	"%s"	Text.Item[%d]	
Text.Item[%d].lineFactor	0x0081	"%.16g"	Text.Item[%d]	
Text.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	Text.Item[%d]	
Text.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay,	Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=melthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatedelectrode, "50"=eskdheat, "51"=eskds smooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalldaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
Text.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Text.Item[%d].Outline
Text.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite Text.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite Text.Item[%d].Outline
Text.Item[%d].outlineWidth.measurementType	0x0081	%.16g"	Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Text.Item[%d].Outline
Text.Item[%d].outlineWidth.name	0x0081	%"s"	Text.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite Text.Item[%d].Outline
Text.Item[%d].spaceFactor	0x0081	%.16g"	Text.Item[%d]	
Text.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Text.Item[%d]	
Text.Item[%d].string	0x0081	%"s"	Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Text.Item[%d]	
Text.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	Text.Item[%d]	
Text.Item[%d].textAspect	0x0081	%.16g"	Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Item[%d]	
Text.Item[%d].textHeight	0x0081	"%.16g"	Text.Item[%d]	
Text.Item[%d].textLineWidth.measurementType	0x0081	"%.16g"	Text.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
Text.Item[%d].textLineWidth.name	0x0081	"%s"	Text.Item[%d]	
Text.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Item[%d]	
Text.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Text.Item[%d]	

Q.13.39 Text.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text.Outline	0x0081	NULL	Text	
Text.Outline.Bottom	0x0081	NULL	Text.Outline	
Text.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Outline.Bottom	
Text.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text.Outline.Bottom	
Text.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Outline.Bottom	
Text.Outline.Bottom.width.measurementType	0x0081	"%.16g"	Text.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text.Outline.Bottom.width.name	0x0081	"%s"	Text.Outline.Bottom	
Text.Outline.Left	0x0081	NULL	Text.Outline	
Text.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Outline.Left	
Text.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text.Outline.Left	
Text.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Outline.Left	
Text.Outline.Left.width.measurementType	0x0081	"%.16g"	Text.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Text.Outline.Left.width.name	0x0081	"%s"	Text.Outline.Left	
Text.Outline.Right	0x0081	NULL	Text.Outline	
Text.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Outline.Right	
Text.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text.Outline.Right	
Text.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Outline.Right	
Text.Outline.Right.width.measurementType	0x0081	"%.16g"	Text.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Text.Outline.Right.width.name	0x0081	"%s"	Text.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text.Outline.Top	0x0081	NULL	Text.Outline	
Text.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Outline.Top	
Text.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text.Outline.Top	
Text.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Outline.Top	
Text.Outline.Top.width.measurementType	0x0081	"%.16g"	Text.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Text.Outline.Top.width.name	0x0081	"%s"	Text.Outline.Top	
Text.Outline.direction	0x0081	"%.16g %.16g %.16g"	Text.Outline	
Text.Outline.doubleOffset	0x0081	"%.16g"	Text.Outline	
Text.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text.Outline	
Text.Outline.filled	0x0081	"%d"	Text.Outline	
Text.Outline.origin	0x0081	"%.16g %.16g %.16g"	Text.Outline	
Text.Outline.outlineHeight	0x0081	"%.16g"	Text.Outline	
Text.Outline.outlineWidth	0x0081	"%.16g"	Text.Outline	
Text.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text.Outline	
Text.Outline.visible	0x0081	"%d"	Text.Outline	
Text.bold	0x0081	"%d"	Text	
Text.font	0x0081	"%s"	Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text.italic	0x0081	"%d"	Text	
Text.italicAngle	0x0081	"%.16g"	Text	
Text.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Text	
Text.language	0x0081	"%s"	Text	
Text.lineFactor	0x0081	"%.16g"	Text	
Text.maxExtend	0x0081	"%d"	Text	
Text.name	0x0081	"%s"	Text	
Text.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text.Outline.colour which would match the more modern Outline syntax and require prerequisite Text.Outline
Text.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text.Outline.style which would match the more modern Outline syntax and require prerequisite Text.Outline
Text.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright,	Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text.Outline.type which would match the more modern Outline syntax and require prerequisite Text.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"24"=squarecircle		
Text.outlineWidth.measurementType	0x0081	"%.16g"	Text	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Text.Outline
Text.outlineWidth.name	0x0081	"%s"	Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text.Outline.width.name which would match the more modern Outline syntax and require prerequisite Text.Outline
Text.spaceFactor	0x0081	"%.16g"	Text	
Text.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Text	
Text.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	Text	
Text.textAspect	0x0081	"%.16g"	Text	
Text.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text	
Text.textHeight	0x0081	"%.16g"	Text	
Text.textLineWidth.measurementType	0x0081	"%.16g"	Text	measurementType must be replaced with meterWidth or pixelWidth
Text.textLineWidth.name	0x0081	"%s"	Text	
Text.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal,	Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"1"=vertical		
Text.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text	
Text.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	Text	

Q.13.40 TextFormat[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
TextFormat[%d]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL		
TextFormat[%d].Item[%d]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	TextFormat[%d]	
TextFormat[%d].Item[%d].Outline	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].Outline. Bottom	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245	NULL	TextFormat[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
TextFormat[%d].Item[%d].Outline. Bottom.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	TextFormat[%d].Item[%d].Outline. Bottom	
TextFormat[%d].Item[%d].Outline. Bottom.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	TextFormat[%d].Item[%d].Outline. Bottom	
TextFormat[%d].Item[%d].Outline. Bottom.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	TextFormat[%d].Item[%d].Outline. Bottom	
TextFormat[%d].Item[%d].Outline. Bottom.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	TextFormat[%d].Item[%d].Outline. Bottom	measurementType must be replaced with meterWidth or pixelWidth
TextFormat[%d].Item[%d].Outline. Bottom.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	TextFormat[%d].Item[%d].Outline. Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
TextFormat[%d].Item[%d].Outline. Left	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	TextFormat[%d].Item[%d].Outline	
TextFormat[%d].Item[%d].Outline. Left.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	TextFormat[%d].Item[%d].Outline. Left	
TextFormat[%d].Item[%d].Outline. Left.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	TextFormat[%d].Item[%d].Outline. Left	
TextFormat[%d].Item[%d].Outline. Left.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	TextFormat[%d].Item[%d].Outline. Left	
TextFormat[%d].Item[%d].Outline. Left.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	TextFormat[%d].Item[%d].Outline. Left	measurementType must be replaced with meterWidth or pixelWidth
TextFormat[%d].Item[%d].Outline. Left.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230	"%s"	TextFormat[%d].Item[%d].Outline. Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
TextFormat[%d].Item[%d].Outline. Right	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	TextFormat[%d].Item[%d].Outline	
TextFormat[%d].Item[%d].Outline. Right.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	TextFormat[%d].Item[%d].Outline. Right	
TextFormat[%d].Item[%d].Outline. Right.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	TextFormat[%d].Item[%d].Outline. Right	
TextFormat[%d].Item[%d].Outline. Right.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	TextFormat[%d].Item[%d].Outline. Right	
TextFormat[%d].Item[%d].Outline. Right.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245	"%.16g"	TextFormat[%d].Item[%d].Outline. Right	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
TextFormat[%d].Item[%d].Outline. Right.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	TextFormat[%d].Item[%d].Outline. Right	
TextFormat[%d].Item[%d].Outline. Top	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	TextFormat[%d].Item[%d].Outline	
TextFormat[%d].Item[%d].Outline. Top.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	TextFormat[%d].Item[%d].Outline. Top	
TextFormat[%d].Item[%d].Outline. Top.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	TextFormat[%d].Item[%d].Outline. Top	
TextFormat[%d].Item[%d].Outline. Top.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	TextFormat[%d].Item[%d].Outline. Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
TextFormat[%d].Item[%d].Outline.Top.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	TextFormat[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
TextFormat[%d].Item[%d].Outline.Top.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	TextFormat[%d].Item[%d].Outline.Top	
TextFormat[%d].Item[%d].Outline.direction	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"	TextFormat[%d].Item[%d].Outline	
TextFormat[%d].Item[%d].Outline.doubleOffset	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	TextFormat[%d].Item[%d].Outline	
TextFormat[%d].Item[%d].Outline.fillColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	TextFormat[%d].Item[%d].Outline	
TextFormat[%d].Item[%d].Outline.filled	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230	"%d"	TextFormat[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
TextFormat[%d].Item[%d].Outline. origin	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"	TextFormat[%d].Item[%d].Outline	
TextFormat[%d].Item[%d].Outline. outlineHeight	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	TextFormat[%d].Item[%d].Outline	
TextFormat[%d].Item[%d].Outline. outlineWidth	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	TextFormat[%d].Item[%d].Outline	
TextFormat[%d].Item[%d].Outline.t hickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	TextFormat[%d].Item[%d].Outline	
TextFormat[%d].Item[%d].Outline.v isible	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245	"%d"	TextFormat[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
TextFormat[%d].Item[%d].bold	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].font	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].format	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].italic	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].italicAngle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
TextFormat[%d].Item[%d].justification	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].language	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%s"	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].lineFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].lineWeldSupplementalSymbol	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
TextFormat[%d].Item[%d].lineWeldSymbol	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=melthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jis spot, "49"=jis spot flatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskd staggerchain, "53"=eskd staggercheck, "54"=eskdnotallaround, "55"=eskd diameter, "56"=eskd number, "57"=isoedge	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].outlineColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	string		reading TextFormat[%d].Item[%d].Outline.c olour which would match the more modern Outline syntax and require prerequisite TextFormat[%d].Item[%d].Outline
TextFormat[%d].Item[%d].outlineSt yle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading TextFormat[%d].Item[%d].Outline.s tyle which would match the more modern Outline syntax and require prerequisite TextFormat[%d].Item[%d].Outline
TextFormat[%d].Item[%d].outlineT ype	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading TextFormat[%d].Item[%d].Outline.t ype which would match the more modern Outline syntax and require prerequisite TextFormat[%d].Item[%d].Outline
TextFormat[%d].Item[%d].outlineW idth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	TextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading TextFormat[%d].Item[%d].Outline. width.measurementType which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				TextFormat[%d].Item[%d].Outline
TextFormat[%d].Item[%d].outlineWidth.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	TextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading TextFormat[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite TextFormat[%d].Item[%d].Outline
TextFormat[%d].Item[%d].spaceFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].strikethrough	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].string	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].subscript	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=sub, "1"=super	TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
TextFormat[%d].Item[%d].symbol	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].textAspect	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	%.16g"	TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
TextFormat[%d].Item[%d].textColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].textHeight	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].textLineWidth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	TextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
TextFormat[%d].Item[%d].textLineWidth.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%"s"	TextFormat[%d].Item[%d]	
TextFormat[%d].Item[%d].textThickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	TextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
TextFormat[%d].Item[%d].underline	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=over, "1"=under	TextFormat[%d].Item[%d]	

Q.13.41 TextFormat[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
TextFormat[%d].bold	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	TextFormat[%d]	
TextFormat[%d].font	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	TextFormat[%d]	
TextFormat[%d].italic	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	TextFormat[%d]	
TextFormat[%d].italicAngle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	"%.16g"	TextFormat[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
TextFormat[%d].justification	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	TextFormat[%d]	
TextFormat[%d].language	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	TextFormat[%d]	
TextFormat[%d].lineFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	TextFormat[%d]	
TextFormat[%d].spaceFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	TextFormat[%d]	
TextFormat[%d].strikethrough	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	String representing enumeration such that: "0"=none, "1"=single, "2"=double	TextFormat[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
TextFormat[%d].subscript	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=sub, "1"=super	TextFormat[%d]	
TextFormat[%d].textAspect	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	TextFormat[%d]	
TextFormat[%d].textColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	TextFormat[%d]	
TextFormat[%d].textHeight	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	TextFormat[%d]	
TextFormat[%d].textLineWidth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	TextFormat[%d]	measurementType must be replaced with meterWidth or pixelWidth
TextFormat[%d].textLineWidth.na	0x0004 0x0008 0x0041 0x0042	%"s"	TextFormat[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
me	0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
TextFormat[%d].textThickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	TextFormat[%d]	
TextFormat[%d].underline	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=over, "1"=under	TextFormat[%d]	

Q.13.42 Text[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text[%d]	0x0100 0x0235 0x0244	NULL		
Text[%d].Item[%d]	0x0100 0x0235 0x0244	NULL	Text[%d]	
Text[%d].Item[%d].Outline	0x0100 0x0235 0x0244	NULL	Text[%d].Item[%d]	
Text[%d].Item[%d].Outline.Bottom	0x0100 0x0235 0x0244	NULL	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.Bottom.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Item[%d].Outline.Bottom	
Text[%d].Item[%d].Outline.Bottom.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	Text[%d].Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
Text[%d].Item[%d].Outline.Bottom.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d].Item[%d].Outline.Bottom	
Text[%d].Item[%d].Outline.Bottom.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Text[%d].Item[%d].Outline.Bottom.width.name	0x0100 0x0235 0x0244	"%s"	Text[%d].Item[%d].Outline.Bottom	
Text[%d].Item[%d].Outline.Left	0x0100 0x0235 0x0244	NULL	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.Left.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Item[%d].Outline.Left	
Text[%d].Item[%d].Outline.Left.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text[%d].Item[%d].Outline.Left	
Text[%d].Item[%d].Outline.Left.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d].Item[%d].Outline.Left	
Text[%d].Item[%d].Outline.Left.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Text[%d].Item[%d].Outline.Left.width.name	0x0100 0x0235 0x0244	"%s"	Text[%d].Item[%d].Outline.Left	
Text[%d].Item[%d].Outline.Right	0x0100 0x0235 0x0244	NULL	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.Right.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Item[%d].Outline.Right	
Text[%d].Item[%d].Outline.Right.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	Text[%d].Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
Text[%d].Item[%d].Outline.Right.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d].Item[%d].Outline.Right	
Text[%d].Item[%d].Outline.Right.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Text[%d].Item[%d].Outline.Right.width.name	0x0100 0x0235 0x0244	"%s"	Text[%d].Item[%d].Outline.Right	
Text[%d].Item[%d].Outline.Top	0x0100 0x0235 0x0244	NULL	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.Top.color	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Item[%d].Outline.Top	
Text[%d].Item[%d].Outline.Top.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text[%d].Item[%d].Outline.Top	
Text[%d].Item[%d].Outline.Top.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d].Item[%d].Outline.Top	
Text[%d].Item[%d].Outline.Top.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Text[%d].Item[%d].Outline.Top.width.name	0x0100 0x0235 0x0244	"%s"	Text[%d].Item[%d].Outline.Top	
Text[%d].Item[%d].Outline.direction	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.doubleOffset	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.fillColor	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text[%d].Item[%d].Outline.filled	0x0100 0x0235 0x0244	"%d"	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.origin	0x0100 0x0235 0x0244	"%.16g %.16g %.16g"	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.outlineHeight	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.outlineWidth	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].Outline.visible	0x0100 0x0235 0x0244	"%d"	Text[%d].Item[%d].Outline	
Text[%d].Item[%d].bold	0x0100 0x0235 0x0244	"%d"	Text[%d].Item[%d]	
Text[%d].Item[%d].font	0x0100 0x0235 0x0244	"%s"	Text[%d].Item[%d]	
Text[%d].Item[%d].format	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	Text[%d].Item[%d]	
Text[%d].Item[%d].italic	0x0100 0x0235 0x0244	"%d"	Text[%d].Item[%d]	
Text[%d].Item[%d].italicAngle	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d]	
Text[%d].Item[%d].justification	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Text[%d].Item[%d]	
Text[%d].Item[%d].language	0x0100 0x0235 0x0244	"%s"	Text[%d].Item[%d]	
Text[%d].Item[%d].lineFactor	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d]	
Text[%d].Item[%d].lineWeldSupplementalSymbol	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld,	Text[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
Text[%d].Item[%d].lineWeldSymbo	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake,	Text[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"47"=keyhole, "48"=jisspot, "49"=jisspotflatoelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
Text[%d].Item[%d].outlineColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Text[%d].Item[%d].Outline
Text[%d].Item[%d].outlineStyle	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite Text[%d].Item[%d].Outline
Text[%d].Item[%d].outlineType	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Text[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite Text[%d].Item[%d].Outline
Text[%d].Item[%d].outlineWidth.m	0x0100 0x0235 0x0244	%.16g"	Text[%d].Item[%d]	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
MeasurementType				pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite Text[%d].Item[%d].Outline
Text[%d].Item[%d].outlineWidth.name	0x0100 0x0235 0x0244	"%s"	Text[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite Text[%d].Item[%d].Outline
Text[%d].Item[%d].spaceFactor	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d]	
Text[%d].Item[%d].strikethrough	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Text[%d].Item[%d]	
Text[%d].Item[%d].string	0x0100 0x0235 0x0244	"%s"	Text[%d].Item[%d]	
Text[%d].Item[%d].subscript	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=sub, "1"=super	Text[%d].Item[%d]	
Text[%d].Item[%d].symbol	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface,	Text[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
Text[%d].Item[%d].textAspect	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d]	
Text[%d].Item[%d].textColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Item[%d]	
Text[%d].Item[%d].textHeight	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d]	
Text[%d].Item[%d].textLineWidth. measurementType	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
Text[%d].Item[%d].textLineWidth.n ame	0x0100 0x0235 0x0244	"%s"	Text[%d].Item[%d]	
Text[%d].Item[%d].textThickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d].Item[%d]	
Text[%d].Item[%d].underline	0x0100 0x0235 0x0244	String representing enumeration	Text[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		such that: "0"=over, "1"=under		

Q.13.43 Text[%d].Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text[%d].Outline	0x0100 0x0235 0x0244	NULL	Text[%d]	
Text[%d].Outline.Bottom	0x0100 0x0235 0x0244	NULL	Text[%d].Outline	
Text[%d].Outline.Bottom.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Outline.Bottom	
Text[%d].Outline.Bottom.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text[%d].Outline.Bottom	
Text[%d].Outline.Bottom.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d].Outline.Bottom	
Text[%d].Outline.Bottom.width.measurementType	0x0100 0x0235 0x0244	"%.16g"	Text[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
Text[%d].Outline.Bottom.width.name	0x0100 0x0235 0x0244	"%s"	Text[%d].Outline.Bottom	
Text[%d].Outline.Left	0x0100 0x0235 0x0244	NULL	Text[%d].Outline	
Text[%d].Outline.Left.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Outline.Left	
Text[%d].Outline.Left.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text[%d].Outline.Left.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d].Outline.Left	
Text[%d].Outline.Left.width.measurementType	0x0100 0x0235 0x0244	%.16g"	Text[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
Text[%d].Outline.Left.width.name	0x0100 0x0235 0x0244	"%s"	Text[%d].Outline.Left	
Text[%d].Outline.Right	0x0100 0x0235 0x0244	NULL	Text[%d].Outline	
Text[%d].Outline.Right.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Outline.Right	
Text[%d].Outline.Right.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text[%d].Outline.Right	
Text[%d].Outline.Right.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d].Outline.Right	
Text[%d].Outline.Right.width.measurementType	0x0100 0x0235 0x0244	%.16g"	Text[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
Text[%d].Outline.Right.width.name	0x0100 0x0235 0x0244	"%s"	Text[%d].Outline.Right	
Text[%d].Outline.Top	0x0100 0x0235 0x0244	NULL	Text[%d].Outline	
Text[%d].Outline.Top.colour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Outline.Top	
Text[%d].Outline.Top.style	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text[%d].Outline.Top	
Text[%d].Outline.Top.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick,	Text[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=thin		
Text[%d].Outline.Top.width.measurementType	0x0100 0x0235 0x0244	%.16g"	Text[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
Text[%d].Outline.Top.width.name	0x0100 0x0235 0x0244	%"s"	Text[%d].Outline.Top	
Text[%d].Outline.direction	0x0100 0x0235 0x0244	%.16g %.16g %.16g"	Text[%d].Outline	
Text[%d].Outline.doubleOffset	0x0100 0x0235 0x0244	%.16g"	Text[%d].Outline	
Text[%d].Outline.fillColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d].Outline	
Text[%d].Outline.filled	0x0100 0x0235 0x0244	%"d"	Text[%d].Outline	
Text[%d].Outline.origin	0x0100 0x0235 0x0244	%.16g %.16g %.16g"	Text[%d].Outline	
Text[%d].Outline.outlineHeight	0x0100 0x0235 0x0244	%.16g"	Text[%d].Outline	
Text[%d].Outline.outlineWidth	0x0100 0x0235 0x0244	%.16g"	Text[%d].Outline	
Text[%d].Outline.thickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d].Outline	
Text[%d].Outline.visible	0x0100 0x0235 0x0244	%"d"	Text[%d].Outline	

Q.13.44 Text[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text[%d].bold	0x0100 0x0235 0x0244	%"d"	Text[%d]	
Text[%d].font	0x0100 0x0235 0x0244	%"s"	Text[%d]	
Text[%d].italic	0x0100 0x0235 0x0244	%"d"	Text[%d]	
Text[%d].italicAngle	0x0100 0x0235 0x0244	%.16g"	Text[%d]	
Text[%d].justification	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	Text[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Text[%d].language	0x0100 0x0235 0x0244	"%s"	Text[%d]	
Text[%d].lineFactor	0x0100 0x0235 0x0244	"%.16g"	Text[%d]	
Text[%d].maxExtend	0x0100 0x0235 0x0244	"%d"	Text[%d]	
Text[%d].name	0x0100 0x0235 0x0244	"%s"	Text[%d]	
Text[%d].outlineColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite Text[%d].Outline
Text[%d].outlineStyle	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Text[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text[%d].Outline.style which would match the more modern Outline syntax and require prerequisite Text[%d].Outline
Text[%d].outlineType	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Text[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text[%d].Outline.type which would match the more modern Outline syntax and require prerequisite Text[%d].Outline
Text[%d].outlineWidth.measurementType	0x0100 0x0235 0x0244	"%.16g"	Text[%d]	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				Text[%d].Outline.width.measureme ntType which would match the more modern Outline syntax and require prerequisite Text[%d].Outline
Text[%d].outlineWidth.name	0x0100 0x0235 0x0244	"%s"	Text[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading Text[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite Text[%d].Outline
Text[%d].spaceFactor	0x0100 0x0235 0x0244	"%.16g"	Text[%d]	
Text[%d].strikethrough	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=none, "1"=single, "2"=double	Text[%d]	
Text[%d].subscript	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=sub, "1"=super	Text[%d]	
Text[%d].textAspect	0x0100 0x0235 0x0244	"%.16g"	Text[%d]	
Text[%d].textColour	0x0100 0x0235 0x0244	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	Text[%d]	
Text[%d].textHeight	0x0100 0x0235 0x0244	"%.16g"	Text[%d]	
Text[%d].textLineWidth.measurem entType	0x0100 0x0235 0x0244	"%.16g"	Text[%d]	measurementType must be replaced with meterWidth or pixelWidth
Text[%d].textLineWidth.name	0x0100 0x0235 0x0244	"%s"	Text[%d]	
Text[%d].textOrientation	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=horizontal, "1"=vertical	Text[%d]	
Text[%d].textThickness	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	Text[%d]	
Text[%d].underline	0x0100 0x0235 0x0244	String representing enumeration such that: "0"=over, "1"=under	Text[%d]	

Q.13.45 ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d]	0x0081	NULL		
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].FreeState	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0081	%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.width.measurementType			TextLabel.Item[%d].Outline.Bottom	pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom .width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].	0x0081	String representing enumeration such that: "0"=unset,	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
TextLabel.Item[%d].Outline.Right.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	TextLabel.Item[%d].Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.width	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
dth.name			TextLabel.Item[%d].Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].bold	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].italic	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].font			ndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].italic	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=toleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].language	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete,	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jispot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskdiameter, "56"=eskdnumber, "57"=isoedge	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineWidth.m	0x0081	%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
measurementType			TextLabel.Item[%d]	pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].string	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth,	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
TextLabel.Item[%d].symbol		"3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textAspect	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textHeight	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textLineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Right.style		such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Right	
ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Right	
ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Right.width.meas urementType	0x0081	("%.16g"	ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Right	
ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top	0x0081	NULL	ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline	
ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top	
ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top	
ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top	
ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top.width.meas urementType	0x0081	("%.16g"	ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterI ndicator.DatumGroup.Datum[%d]. TextLabel.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.bold	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.font	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.italic	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.language	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.maxExtend	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.style which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline.width.name which would match the more

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textAspect	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textHeight	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textLineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel.textUnderline	0x0081	String representing enumeration	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ndicator.DatumGroup.Datum[%d].TextLabel.underline		such that: "0"=over, "1"=under	ndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].datumRef	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].label	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].modifier	0x0081	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d].projected	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.Datum[%d]	

Q.13.46 ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Item[%d].Outline.Top.thickness		"2"=thin	xt.Item[%d].Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].bold	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].font	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].italic	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].language	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd,	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jis spot, "49"=jis spotflatelectrode, "50"=eskdheat, "51"=eskds smooth,	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram,	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"22"=triangleleft, "23"=triangleright, "24"=squaredcircle		
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].string	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].string	0x0081	String representing enumeration	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Item[%d].subscript		such that: "0"=sub, "1"=super	xt.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].symbol	0x0081	("%.16g")	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Item[%d].textAspect			xt.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textHeight	0x0081	("%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textLineWidth.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Item[%d]	

Q.13.47 ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	0x0081	String representing enumeration such that: "0"=unset,	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Outline.Bottom.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	xt.Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Left	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Outline.Right			xt.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Right	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	0x0081	NULL	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.Outline.Top.width.measurementType			xt.Outline.Top	pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outline.bold	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.font			xt	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.italic	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.language	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.maxExtend	0x0081	"%d"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.spaceFactor	0x0081	("%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textAspect	0x0081	("%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textHeight	0x0081	("%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textLineWidth.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	0x0081	String representing enumeration such that: "0"=normal, "1"=thick,	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
xt.textThickness		"2"=thin	xt	
ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].AfterIndicator.DatumGroup.ExtendedText	

Q.13.48 ToleranceCompartment[%d].AfterIndicator.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].AfterIndicator.symbol	0x0081	String representing enumeration such that: "0"=parallel, "1"=perpendicular, "2"=angular, "3"=including	ToleranceCompartment[%d].AfterIndicator	
ToleranceCompartment[%d].AfterIndicator.type	0x0081	String representing enumeration such that: "0"=intersectionplane, "1"=orientationplane, "2"=collectionplane, "3"=directionfeature	ToleranceCompartment[%d].AfterIndicator	

Q.13.49 ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator	0x0081	NULL	ToleranceCompartment[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].FreeState	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
].TextLabel.Item[%d]].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	0x0081	String representing enumeration such that: "0"=unset,	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.TextLabel.Item[%d].Outline.Left.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	.TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Right.	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
width.name].TextLabel.Item[%d].Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.width.measurementType	0x0081	%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top.width.name	0x0081	%"s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.direction	0x0081	%.16g %.16g %.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.doubleOffset	0x0081	%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.fillColour	0x0081	%"d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
eIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.filled			eIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].bold	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].font	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].italic	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].language	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay,	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=singleu, "19"=singleigroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.TextLabel.Item[%d].outlineStyle		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	.TextLabel.Item[%d]	reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
].TextLabel.Item[%d].outlineWidth. name].TextLabel.Item[%d]	key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].string	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity,	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textAspect	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textHeight	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textLineWidth.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].textLineWidth.name	0x0081	("%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	0x0081	String representing enumeration such that: "0"=normal, "1"=thick,	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
].TextLabel.Item[%d].textThickness		"2"=thin].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.width.measurementType	0x0081	".16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom.width.name	0x0081	".s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
me].TextLabel.Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.origin	0x0081	("%.16g %.16g %.16g")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.outlineHeight	0x0081	("%.16g")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.outlineWidth	0x0081	("%.16g")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.visible	0x0081	("%d")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.bold	0x0081	("%d")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.font	0x0081	("%s")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.italic	0x0081	("%d")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.italicAngle	0x0081	("%.16g")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.language	0x0081	("%s")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.lineFactor	0x0081	("%.16g")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.maxExtend	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset,	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle].TextLabel.Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textAspect	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textHeight	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textLineWidth.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textLineWidth.name	0x0081	("%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].TextLabel	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].datumRef	0x0081	("%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].label	0x0081	("%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].modifier	0x0081	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d].projected	0x0081	("%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.Datum[%d]	

Q.13.50 ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0081	%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.name	0x0081	%"s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ext.Item[%d].Outline.Right.width.measurementType			ext.Item[%d].Outline.Right	pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].bold	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].font	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].italic	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].language	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay,	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspottlatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].Outline	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ext.Item[%d].outlineStyle		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ext.Item[%d]	reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ext.Item[%d].outlineWidth.name			ext.Item[%d]	key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].spaceFactor	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].string	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity,	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textAspect	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textHeight	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textLineWidth.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Item[%d]	

Q.13.51 ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Left	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ext.Outline.Left.colour		for the colour are encoded in the string	ext.Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Left	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Right	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline.Right	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedT ext.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
eIndicator.DatumGroup.ExtendedText.Outline.Right.width.name			eIndicator.DatumGroup.ExtendedText.Outline.Right	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	0x0081	NULL	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.origin	0x0081	("%.16g %.16g %.16g")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.outlineHeight	0x0081	("%.16g")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.outlineWidth	0x0081	("%.16g")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.visible	0x0081	("%d")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.bold	0x0081	("%d")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.font	0x0081	("%s")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.italic	0x0081	("%d")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.italicAngle	0x0081	("%.16g")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.language	0x0081	("%s")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.lineFactor	0x0081	("%.16g")	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.maxExtend	0x0081	"%d"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram,	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"22"=triangleleft, "23"=triangleright, "24"=squaredcircle		
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.outline
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textAspect	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textHeight	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textLineWidth.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	
ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].BeforeIndicator.DatumGroup.ExtendedText	

Q.13.52 ToleranceCompartment[%d].BeforeIndicator.<property>

	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].BeforeIndicator.symbol	0x0081	String representing enumeration such that: "0"=parallel, "1"=perpendicular, "2"=angular, "3"=including	ToleranceCompartment[%d].BeforeIndicator	
ToleranceCompartment[%d].BeforeIndicator.type	0x0081	String representing enumeration such that: "0"=intersectionplane, "1"=orientationplane, "2"=collectionplane,	ToleranceCompartment[%d].BeforeIndicator	

	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=directionfeature		

Q.13.53 ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.ExtendedText	0x0081	NULL	ToleranceCompartment[%d].DatumGroup	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom.width	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
utline.Bottom.width.name			utline.Bottom	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Left	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
utline.Right.thickness		"2"=thin	utline.Right	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Right	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.Top	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.doubleOffset	0x0081	"0x00%02x%02x%02x" such that	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
mGroup.ExtendedText.Item[%d].Outline.fillColour		the values of blue, green and red for the colour are encoded in the string	mGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Bold	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Font	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Italic	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].It	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
alicAngle				
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].language	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove,	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge		
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].OutlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].OutlineColour	0x0081	String representing enumeration such that: "0"=unset,	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
outlineStyle		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	mGroup.ExtendedText.Item[%d]	key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].	0x0081	"%s"	ToleranceCompartment[%d].Datum	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
utlineWidth.name			mGroup.ExtendedText.Item[%d]	key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].Outline
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].spaceFactor	0x0081	("%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].string	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity,	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textAspect	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textHeight	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textLineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d].u	0x0081	String representing enumeration	ToleranceCompartment[%d].DatumGroup.ExtendedText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
nderline		such that: "0"=over, "1"=under	mGroup.ExtendedText.Item[%d]	

Q.13.54 ToleranceCompartment[%d].DatumGroup.ExtendedText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom.width.measurementType	0x0081	%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom.width.name	0x0081	%"s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	0x0081	String representing enumeration such that: "0"=unset,	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Left	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Right	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].Datum	0x0081	"0x00%02x%02x%02x" such that	ToleranceCompartment[%d].Datum	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
mGroup.ExtendedText.Outline.Top.colour		the values of blue, green and red for the colour are encoded in the string	mGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.Top	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].Datum	0x0081	"%.16g"	ToleranceCompartment[%d].Datum	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
mGroup.ExtendedText.Outline.outlineWidth			mGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline	
ToleranceCompartment[%d].DatumGroup.ExtendedText.bold	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.font	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.italic	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.language	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.maxExtend	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.colour which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].DatumGroup.ExtendedText.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].DatumGroup.ExtendedText.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ToleranceCompartment[%d].DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].DatumGroup.ExtendedText.outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.ExtendedText.outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.ExtendedText.Outline
ToleranceCompartment[%d].DatumGroup.ExtendedText.spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.textAspect	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.textHeight	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.textLineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.ExtendedText	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.ExtendedText.textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	ToleranceCompartment[%d].DatumGroup.ExtendedText	
ToleranceCompartment[%d].DatumGroup.ExtendedText.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.ExtendedText	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.ExtendedText.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].DatumGroup.ExtendedText	

Q.13.55 ToleranceCompartment[%d].DatumGroup.Reference[%d].FreeState

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.Reference[%d]	0x0081	NULL	ToleranceCompartment[%d].DatumGroup	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.
ToleranceCompartment[%d].DatumGroup.Reference[%d].FreeState	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.Reference[%d]	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.

Q.13.56 ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d]	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	0x0081	String representing enumeration such that: "0"=unset,	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Item[%d].Outline.Bottom.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Item[%d].Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.Left	
ToleranceCompartment[%d].Datum	0x0081	NULL	ToleranceCompartment[%d].Datum	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
mGroup.Reference[%d].TextLabel. Item[%d].Outline.Right			mGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Right	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Right	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Right	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Right.width.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Right	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Top	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Top	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Top	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Item[%d].Outline.Top	
ToleranceCompartment[%d].Datum	0x0081	("%.16g"	ToleranceCompartment[%d].Datum	measurementType must be

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
mGroup.Reference[%d].TextLabel. Item[%d].Outline.Top.width.measur ementType			mGroup.Reference[%d].TextLabel. Item[%d].Outline.Top	replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.Top	
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].Outline	
ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d].bold	0x0081	"%d"	ToleranceCompartment[%d].Datu mGroup.Reference[%d].TextLabel. Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].font	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].italic	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].language	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr,	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough		
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskdiameter,	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"56"=eskdnnumber, "57"=isoedge		
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].measurementType	0x0081	%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Item[%d].outlineWidth.measurementType			Item[%d]	pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline.width.name which would match the more modern Outline syntax and require Prerequisite ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].Outline
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].string	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth,	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Item[%d].symbol		"3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation	Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textAspect	0x0081	%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textHeight	0x0081	("%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textLineWidth.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textLineWidth.name	0x0081	("%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Item[%d]	

Q.13.57 ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom.width.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Bottom	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left.width.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Left	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Right	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	0x0081	NULL	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline.Top.width.name			Outline.Top	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline	

Q.13.58 ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.bold	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.font	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.italic	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.language	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.maxExtend	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.Outline
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.	0x0081	String representing enumeration such that: "0"=unset,	ToleranceCompartment[%d].Datum	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
outlineStyle		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	mGroup.Reference[%d].TextLabel	key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Outline
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Outline
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Outline
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.	0x0081	"%s"	ToleranceCompartment[%d].Datum	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
outlineWidth.name			mGroup.Reference[%d].TextLabel	key, but also suggest support reading ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. Outline
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textAspect	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textHeight	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textLineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].Datum	0x0081	String representing enumeration	ToleranceCompartment[%d].Datum	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
mGroup.Reference[%d].TextLabel. textThickness		such that: "0"=normal, "1"=thick, "2"=thin	mGroup.Reference[%d].TextLabel	
ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel. underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].DatumGroup.Reference[%d].TextLabel	

Q.13.59 ToleranceCompartment[%d].DatumGroup.Reference[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].DatumGroup.Reference[%d].datumRef	0x0081	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path. This property formatting is used to semantically tie a singlar semantic aspect with an entity.	ToleranceCompartment[%d].DatumGroup.Reference[%d]	
ToleranceCompartment[%d].DatumGroup.Reference[%d].label	0x0081	"%s"	ToleranceCompartment[%d].DatumGroup.Reference[%d]	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.
ToleranceCompartment[%d].DatumGroup.Reference[%d].modifier	0x0081	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	ToleranceCompartment[%d].DatumGroup.Reference[%d]	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.
ToleranceCompartment[%d].DatumGroup.Reference[%d].projected	0x0081	"%d"	ToleranceCompartment[%d].DatumGroup.Reference[%d]	DatumGroup must be replaced with PrimaryDatum, SecondaryDatum or TertiaryDatum.

Q.13.60 ToleranceCompartment[%d].FreeState

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].FreeState	0x0081	"%d"	ToleranceCompartment[%d]	

Q.13.61 ToleranceCompartment[%d].Statistical

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].Statistical	0x0081	"%d"	ToleranceCompartment[%d]	

Q.13.62 ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextMaxBonusValue	0x0081	NULL	ToleranceCompartment[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.do	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ubleOffset				
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].bold	0x0081	"%d"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].font	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].italic	0x0081	"%d"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].language	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange,	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskdiameter, "56"=eskdnumber, "57"=isoedge		
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.style which would match the more

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].Outline
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].spaceFactor	0x0081	("%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].string	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency,	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textAspect	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textHeight	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textLineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	
ToleranceCompartment[%d].TextMaxBonusValue.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].TextMaxBonusValue.Item[%d]	

Q.13.63 ToleranceCompartment[%d].TextMaxBonusValue.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextMaxBonusValue.Outline	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Bottom	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Left	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Right	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	0x0081	NULL	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top.width.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue.Outline.Top	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.direction	0x0081	("%.16g %.16g %.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.doubleOffset	0x0081	("%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.origin	0x0081	("%.16g %.16g %.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.outlineHeight	0x0081	("%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.outlineWidth	0x0081	("%.16g"	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue.Outline	
ToleranceCompartment[%d].TextMaxBonusValue.Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].TextMaxBonusValue.Outline	

Q.13.64 ToleranceCompartment[%d].TextMaxBonusValue.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextMaxBonusValue.bold	0x0081	"%d"	ToleranceCompartment[%d].TextMaxBonusValue	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextMaxBonusValue.font	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.italic	0x0081	"%d"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.language	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.maxExtend	0x0081	"%d"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextMaxBonusValue.Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextMaxBonusValue.Outline
ToleranceCompartment[%d].TextMaxBonusValue.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextMaxBonusValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextMaxBonusValue.Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextM

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				axBonusValue.Outline
ToleranceCompartment[%d].TextMaxBonusValue.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ToleranceCompartment[%d].TextMaxBonusValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextMaxBonusValue.Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextMaxBonusValue.Outline
ToleranceCompartment[%d].TextMaxBonusValue.outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextMaxBonusValue.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextMaxBonusValue.Outline
ToleranceCompartment[%d].TextMaxBonusValue.outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextMaxBonusValue.Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextMaxBonusValue.Outline
ToleranceCompartment[%d].TextMaxBonusValue.spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single,	ToleranceCompartment[%d].TextMaxBonusValue	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=double		
ToleranceCompartment[%d].TextMaxBonusValue.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.textAspect	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.textHeight	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.textLineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextMaxBonusValue	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextMaxBonusValue.textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	ToleranceCompartment[%d].TextMaxBonusValue	
ToleranceCompartment[%d].TextMaxBonusValue.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextMaxBonusValue	

Q.13.65 ToleranceCompartment[%d].TextPrefix.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextPrefix	0x0081	NULL	ToleranceCompartment[%d]	
ToleranceCompartment[%d].TextPrefix.Item[%d]	0x0081	NULL	ToleranceCompartment[%d].TextPrefix	
ToleranceCompartment[%d].TextPrefix.Item[%d].Outline	0x0081	NULL	ToleranceCompartment[%d].TextPrefix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left	0x0081	NULL	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right	0x0081	NULL	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top	0x0081	NULL	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top.width.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.direction	0x0081	("%.16g %.16g %.16g"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.doubleOffset	0x0081	("%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.origin	0x0081	("%.16g %.16g %.16g"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.outlineHeight	0x0081	("%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.outlineWidth	0x0081	("%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].TextP refix.Item[%d].Outline	
ToleranceCompartment[%d].TextP refix.Item[%d].bold	0x0081	"%d"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].font	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list,	ToleranceCompartment[%d].TextP refix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"10"=datetime, "11"=none		
ToleranceCompartment[%d].TextP refix.Item[%d].italic	0x0081	"%d"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].language	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint,	ToleranceCompartment[%d].TextP refix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotallaround, "55"=eskdiameter, "56"=eskdnumber, "57"=isoedge		
ToleranceCompartment[%d].TextP refix.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextP refix.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextP refix.Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextP refix.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextP refix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextP refix.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextP refix.Item[%d].Outline
ToleranceCompartment[%d].TextP refix.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ToleranceCompartment[%d].TextP refix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextP refix.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextP refix.Item[%d].Outline
ToleranceCompartment[%d].TextP refix.Item[%d].outlineWidth.measur ementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextP refix.Item[%d].Outline.width.measur ementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextP refix.Item[%d].Outline
ToleranceCompartment[%d].TextP refix.Item[%d].outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				reading ToleranceCompartment[%d].TextP refix.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextP refix.Item[%d].Outline
ToleranceCompartment[%d].TextP refix.Item[%d].spaceFactor	0x0081	("%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].string	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal,	ToleranceCompartment[%d].TextP refix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ToleranceCompartment[%d].TextP refix.Item[%d].textAspect	0x0081	("%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].textHeight	0x0081	("%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].textLineWidth.meas urementType	0x0081	("%.16g"	ToleranceCompartment[%d].TextP refix.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextP refix.Item[%d].textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].TextP refix.Item[%d]	
ToleranceCompartment[%d].TextP refix.Outline	0x0081	NULL	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP	0x0081	"0x00%02x%02x%02x" such that	ToleranceCompartment[%d].TextP	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
refix.Outline.Bottom.colour		the values of blue, green and red for the colour are encoded in the string	refix.Outline.Bottom	
ToleranceCompartment[%d].TextP refix.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextP refix.Outline.Bottom	
ToleranceCompartment[%d].TextP refix.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Outline.Bottom	
ToleranceCompartment[%d].TextP refix.Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextP refix.Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Outline.Bottom	
ToleranceCompartment[%d].TextP refix.Outline.Left	0x0081	NULL	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Outline.Left	
ToleranceCompartment[%d].TextP refix.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextP refix.Outline.Left	
ToleranceCompartment[%d].TextP refix.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Outline.Left	
ToleranceCompartment[%d].TextP refix.Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextP refix.Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Outline.Left	
ToleranceCompartment[%d].TextP	0x0081	NULL	ToleranceCompartment[%d].TextP	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
refix.Outline.Right			refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Outline.Right	
ToleranceCompartment[%d].TextP refix.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextP refix.Outline.Right	
ToleranceCompartment[%d].TextP refix.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Outline.Right	
ToleranceCompartment[%d].TextP refix.Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextP refix.Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix.Outline.Right	
ToleranceCompartment[%d].TextP refix.Outline.Top	0x0081	NULL	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Outline.Top	
ToleranceCompartment[%d].TextP refix.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextP refix.Outline.Top	
ToleranceCompartment[%d].TextP refix.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Outline.Top	
ToleranceCompartment[%d].TextP refix.Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextP	0x0081	"%s"	ToleranceCompartment[%d].TextP	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
refix.Outline.Top.width.name			refix.Outline.Top	
ToleranceCompartment[%d].TextP refix.Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].TextP refix.Outline	
ToleranceCompartment[%d].TextP refix.bold	0x0081	"%d"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.font	0x0081	"%s"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.italic	0x0081	"%d"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].TextP refix	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextP refix.language	0x0081	"%s"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.maxExtend	0x0081	"%d"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextP refix.Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextP refix.Outline
ToleranceCompartment[%d].TextP refix.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextP refix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextP refix.Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextP refix.Outline
ToleranceCompartment[%d].TextP refix.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram,	ToleranceCompartment[%d].TextP refix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextP refix.Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextP refix.Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"22"=triangleleft, "23"=triangleright, "24"=squaredcircle		
ToleranceCompartment[%d].TextP refix.outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextP refix.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextP refix.Outline
ToleranceCompartment[%d].TextP refix.outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextP refix.Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextP refix.Outline
ToleranceCompartment[%d].TextP refix.spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.textAspect	0x0081	"%.16g"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextP refix	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextP refix.textHeight	0x0081	("%.16g"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.textLineWidth.measurementT ype	0x0081	("%.16g"	ToleranceCompartment[%d].TextP refix	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextP refix.textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextP refix	
ToleranceCompartment[%d].TextP refix.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].TextP refix	

Q.13.66 ToleranceCompartment[%d].TextSuffix.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextS uffix	0x0081	NULL	ToleranceCompartment[%d]	
ToleranceCompartment[%d].TextS uffix.Item[%d]	0x0081	NULL	ToleranceCompartment[%d].TextS uffix	
ToleranceCompartment[%d].TextS uffix.Item[%d].Outline	0x0081	NULL	ToleranceCompartment[%d].TextS uffix.Item[%d]	
ToleranceCompartment[%d].TextS uffix.Item[%d].Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].TextS uffix.Item[%d].Outline	
ToleranceCompartment[%d].TextS uffix.Item[%d].Outline.Bottom.col our	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextS uffix.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextS uffix.Item[%d].Outline.Bottom.styl e	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	ToleranceCompartment[%d].TextS uffix.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	0x0081	NULL	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	0x0081	NULL	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	0x0081	NULL	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.doubleOffset	0x0081	("%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.origin	0x0081	("%.16g %.16g %.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.outlineHeight	0x0081	("%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.outlineWidth	0x0081	("%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].TextSuffix.Item[%d].Outline	
ToleranceCompartment[%d].TextSuffix.Item[%d].bold	0x0081	"%d"	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].font	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].italic	0x0081	"%d"	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].italicAngle	0x0081	("%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright,	ToleranceCompartment[%d].TextSuffix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre		
ToleranceCompartment[%d].TextSuffix.Item[%d].language	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].lineWeldSupplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].lineWeldSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot,	ToleranceCompartment[%d].TextSuffix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ToleranceCompartment[%d].TextSuffix.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextSuffix.Item[%d].Outline
ToleranceCompartment[%d].TextSuffix.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextSuffix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextS

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				uffix.Item[%d].Outline
ToleranceCompartment[%d].TextSuffix.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ToleranceCompartment[%d].TextSuffix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextSuffix.Item[%d].Outline
ToleranceCompartment[%d].TextSuffix.Item[%d].outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextSuffix.Item[%d].Outline
ToleranceCompartment[%d].TextSuffix.Item[%d].outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextSuffix.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextSuffix.Item[%d].Outline
ToleranceCompartment[%d].TextSuffix.Item[%d].outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
uffix.Item[%d].spaceFactor			uffix.Item[%d]	
ToleranceCompartment[%d].TextS uffix.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].TextS uffix.Item[%d]	
ToleranceCompartment[%d].TextS uffix.Item[%d].string	0x0081	"%s"	ToleranceCompartment[%d].TextS uffix.Item[%d]	
ToleranceCompartment[%d].TextS uffix.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].TextS uffix.Item[%d]	
ToleranceCompartment[%d].TextS uffix.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch,	ToleranceCompartment[%d].TextS uffix.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ToleranceCompartment[%d].TextSuffix.Item[%d].textAspect	0x0081	("%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].textHeight	0x0081	("%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].textLineWidth.measurementType	0x0081	("%.16g"	ToleranceCompartment[%d].TextSuffix.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextSuffix.Item[%d].textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Item[%d]	
ToleranceCompartment[%d].TextSuffix.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].TextSuffix.Item[%d]	

Q.13.67 ToleranceCompartment[%d].TextSuffix.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextSuffix.Outline	0x0081	NULL	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix.Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextSuffix.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextSuffix.Outline.Bottom	
ToleranceCompartment[%d].TextSuffix.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Outline.Bottom	
ToleranceCompartment[%d].TextSuffix.Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextSuffix.Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Outline.Bottom	
ToleranceCompartment[%d].TextSuffix.Outline.Left	0x0081	NULL	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix.Outline.Left	
ToleranceCompartment[%d].TextSuffix.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextSuffix.Outline.Left	
ToleranceCompartment[%d].TextSuffix.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Outline.Left	
ToleranceCompartment[%d].TextSuffix.Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextSuffix.Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Outline.Left	
ToleranceCompartment[%d].TextSuffix.Outline.Right	0x0081	NULL	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red	ToleranceCompartment[%d].TextSuffix.Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		for the colour are encoded in the string		
ToleranceCompartment[%d].TextSuffix.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextSuffix.Outline.Right	
ToleranceCompartment[%d].TextSuffix.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Outline.Right	
ToleranceCompartment[%d].TextSuffix.Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextSuffix.Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Outline.Right	
ToleranceCompartment[%d].TextSuffix.Outline.Top	0x0081	NULL	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix.Outline.Top	
ToleranceCompartment[%d].TextSuffix.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextSuffix.Outline.Top	
ToleranceCompartment[%d].TextSuffix.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Outline.Top	
ToleranceCompartment[%d].TextSuffix.Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextSuffix.Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix.Outline.Top	
ToleranceCompartment[%d].TextSuffix.Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].TextSuffix.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextSuffix.Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].TextSuffix.Outline	
ToleranceCompartment[%d].TextSuffix.bold	0x0081	"%d"	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.font	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.italic	0x0081	"%d"	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.language	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
uffix.lineFactor			uffix	
ToleranceCompartment[%d].TextS uffix.maxExtend	0x0081	"%d"	ToleranceCompartment[%d].TextS uffix	
ToleranceCompartment[%d].TextS uffix.name	0x0081	"%s"	ToleranceCompartment[%d].TextS uffix	
ToleranceCompartment[%d].TextS uffix.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextS uffix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextS uffix.Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextS uffix.Outline
ToleranceCompartment[%d].TextS uffix.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextS uffix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextS uffix.Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextS uffix.Outline
ToleranceCompartment[%d].TextS uffix.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ToleranceCompartment[%d].TextS uffix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextS uffix.Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextS uffix.Outline
ToleranceCompartment[%d].TextS	0x0081	"%.16g"	ToleranceCompartment[%d].TextS	measurementType must be

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
uffix.outlineWidth.measurementType			uffix	replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextSuffix.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextSuffix.Outline
ToleranceCompartment[%d].TextSuffix.outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextSuffix.Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextSuffix.Outline
ToleranceCompartment[%d].TextSuffix.spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.textAspect	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.textHeight	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextSuffix.textLineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextSuffix	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextSuffix.textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextSuffix	
ToleranceCompartment[%d].TextSuffix.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].TextSuffix	

Q.13.68 ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextUnitBasisValue	0x0081	NULL	ToleranceCompartment[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom.width.measurementType	0x0081	%.16g	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom.width.name	0x0081	%s	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Bottom	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left.width.measurementType	0x0081	%.16g	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left.width.name	0x0081	%s	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Left	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Right	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.Top	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.dir	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ection				
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.doubleOffset	0x0081	("%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.origin	0x0081	("%.16g %.16g %.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.outlineHeight	0x0081	("%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.outlineWidth	0x0081	("%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].bold	0x0081	"%d"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].font	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].format	0x0081	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextU	0x0081	"%d"	ToleranceCompartment[%d].TextU	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
nitBasisValue.Item[%d].italic			nitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextU nitBasisValue.Item[%d].italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].TextU nitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextU nitBasisValue.Item[%d].justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].TextU nitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextU nitBasisValue.Item[%d].language	0x0081	"%s"	ToleranceCompartment[%d].TextU nitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextU nitBasisValue.Item[%d].lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextU nitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextU nitBasisValue.Item[%d].lineWeldS upplementalSymbol	0x0081	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	ToleranceCompartment[%d].TextU nitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextU nitBasisValue.Item[%d].lineWeldSy mbol	0x0081	String representing enumeration such that: "0"=unset, "1"=jisbeam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug,	ToleranceCompartment[%d].TextU nitBasisValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotlatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].outlineStyle	0x0081	String representing enumeration such that: "0"=unset,	ToleranceCompartment[%d].TextU	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
e		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	nitBasisValue.Item[%d]	key, but also suggest support reading ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].outlineWidth.measurementType	0x0081	%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].outlineWidth.name	0x0081	%"s"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextU

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				nitBasisValue.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].Outline
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].spaceFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].string	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].symbol	0x0081	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle,	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textAspect	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textHeight	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textLineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textLineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	
ToleranceCompartment[%d].TextUnitBasisValue.Item[%d].underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].TextUnitBasisValue.Item[%d]	

Q.13.69 ToleranceCompartment[%d].TextUnitBasisValue.Outline.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
--------------	---------------------------	------------------------------	------------------	-----------------

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextUnitBasisValue.Outline	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Bottom	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Left	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Right	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	0x0081	NULL	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top.colour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top.style	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top.width.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top.width.name	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue.Outline.Top	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.direction	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.doubleOffset	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.fillColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.filled	0x0081	"%d"	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.origin	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.outlineHeight	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.outlineWidth	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.thickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue.Outline	
ToleranceCompartment[%d].TextUnitBasisValue.Outline.visible	0x0081	"%d"	ToleranceCompartment[%d].TextUnitBasisValue.Outline	

Q.13.70 ToleranceCompartment[%d].TextUnitBasisValue.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].TextUnitBasisValue.bold	0x0081	"%d"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.font	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.italic	0x0081	"%d"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.italicAngle	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.justification	0x0081	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.language	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.lineFactor	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.maxExtend	0x0081	"%d"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.name	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.outlineColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextUnitBasisValue.Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextUnitBasisValue.Outline
ToleranceCompartment[%d].TextUnitBasisValue.outlineStyle	0x0081	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid,	ToleranceCompartment[%d].TextUnitBasisValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextU

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=centreline		nitBasisValue.Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextUnitBasisValue.Outline
ToleranceCompartment[%d].TextUnitBasisValue.outlineType	0x0081	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squaredcircle	ToleranceCompartment[%d].TextUnitBasisValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextUnitBasisValue.Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextUnitBasisValue.Outline
ToleranceCompartment[%d].TextUnitBasisValue.outlineWidth.measurementType	0x0081	"%.16g"	ToleranceCompartment[%d].TextUnitBasisValue	measurementType must be replaced with meterWidth or pixelWidth
				For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextUnitBasisValue.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceCompartment[%d].TextUnitBasisValue.Outline
ToleranceCompartment[%d].TextUnitBasisValue.outlineWidth.name	0x0081	"%s"	ToleranceCompartment[%d].TextUnitBasisValue	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceCompartment[%d].TextUnitBasisValue.Outline.width.name which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite ToleranceCompartment[%d].TextUnitBasisValue.Outline
ToleranceCompartment[%d].TextUnitBasisValue.spaceFactor	0x0081	%.16g"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.strikethrough	0x0081	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.subscript	0x0081	String representing enumeration such that: "0"=sub, "1"=super	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.textAspect	0x0081	%.16g"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.textColour	0x0081	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.textHeight	0x0081	%.16g"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.textLineWidth.measurementType	0x0081	%.16g"	ToleranceCompartment[%d].TextUnitBasisValue	measurementType must be replaced with meterWidth or pixelWidth
ToleranceCompartment[%d].TextUnitBasisValue.textLineWidth.name	0x0081	%"s"	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.textOrientation	0x0081	String representing enumeration such that: "0"=horizontal, "1"=vertical	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.textThickness	0x0081	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceCompartment[%d].TextUnitBasisValue	
ToleranceCompartment[%d].TextUnitBasisValue.underline	0x0081	String representing enumeration such that: "0"=over, "1"=under	ToleranceCompartment[%d].TextUnitBasisValue	

Q.13.71 ToleranceCompartment[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
--------------	---------------------------	------------------------------	------------------	-----------------

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].commonZone	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].derivedFeature	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].dynamicProfile	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].leastSquaresFeature	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].maxBonus	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].maxBonusValue	0x0081	"%.16g"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].maxBonusValueString	0x0081	"%s"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].maximumInscribedFeature	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].maximumFeature	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].minimumCircumscribedFeature	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].modifier	0x0081	String representing enumeration such that: "0"=lmc, "1"=mmc, "2"=rfs	ToleranceCompartment[%d]	
ToleranceCompartment[%d].precision	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].prefix	0x0081	"%s"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].projected	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].projectedValue	0x0081	"%s"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].projectionVector	0x0081	"%.16g %.16g %.16g"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].reciprocityRequirement	0x0081	"%d"	ToleranceCompartment[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceCompartment[%d].suffix	0x0081	"%s"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].tangentPlane	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].unequal	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].unequalDisplay	0x0081	String representing enumeration such that: "0"=circleu, "1"=uz	ToleranceCompartment[%d]	
ToleranceCompartment[%d].unequalValue	0x0081	"%s"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].unitBasis	0x0081	"%d"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].unitBasisValue	0x0081	"%s"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].value	0x0081	"%s"	ToleranceCompartment[%d]	
ToleranceCompartment[%d].zoneShape	0x0081	String representing enumeration such that: "0"=diameter, "1"=sphericaldiameter, "2"=square	ToleranceCompartment[%d]	

Q.13.72 ToleranceTextFormat[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceTextFormat[%d]	0x0082 0x0307 0X030D 0X030F 0x0313	NULL		
ToleranceTextFormat[%d].Item[%d]	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].Item[%d].Outline	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].Outline.Bottom	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.Bottom.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceTextFormat[%d].Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceTextFormat[%d].Item[%d].Outline.Bottom.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceTextFormat[%d].Item[%d].Outline.Bottom	
ToleranceTextFormat[%d].Item[%d].Outline.Bottom.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceTextFormat[%d].Item[%d].Outline.Bottom	
ToleranceTextFormat[%d].Item[%d].Outline.Bottom.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	("%.16g"	ToleranceTextFormat[%d].Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ToleranceTextFormat[%d].Item[%d].Outline.Bottom.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ToleranceTextFormat[%d].Item[%d].Outline.Bottom	
ToleranceTextFormat[%d].Item[%d].Outline.Left	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.Left.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceTextFormat[%d].Item[%d].Outline.Left	
ToleranceTextFormat[%d].Item[%d].Outline.Left.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceTextFormat[%d].Item[%d].Outline.Left	
ToleranceTextFormat[%d].Item[%d].Outline.Left.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceTextFormat[%d].Item[%d].Outline.Left	
ToleranceTextFormat[%d].Item[%d].Outline.Left.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	("%.16g"	ToleranceTextFormat[%d].Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ToleranceTextFormat[%d].Item[%d].Outline.Left.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ToleranceTextFormat[%d].Item[%d].Outline.Left	
ToleranceTextFormat[%d].Item[%d].Outline.Right	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.Right.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red	ToleranceTextFormat[%d].Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		for the colour are encoded in the string		
ToleranceTextFormat[%d].Item[%d].Outline.Right.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceTextFormat[%d].Item[%d].Outline.Right	
ToleranceTextFormat[%d].Item[%d].Outline.Right.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceTextFormat[%d].Item[%d].Outline.Right	
ToleranceTextFormat[%d].Item[%d].Outline.Right.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d].Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ToleranceTextFormat[%d].Item[%d].Outline.Right.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ToleranceTextFormat[%d].Item[%d].Outline.Right	
ToleranceTextFormat[%d].Item[%d].Outline.Top	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.Top.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceTextFormat[%d].Item[%d].Outline.Top	
ToleranceTextFormat[%d].Item[%d].Outline.Top.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceTextFormat[%d].Item[%d].Outline.Top	
ToleranceTextFormat[%d].Item[%d].Outline.Top.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceTextFormat[%d].Item[%d].Outline.Top	
ToleranceTextFormat[%d].Item[%d].Outline.Top.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d].Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ToleranceTextFormat[%d].Item[%d].Outline.Top.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ToleranceTextFormat[%d].Item[%d].Outline.Top	
ToleranceTextFormat[%d].Item[%d].Outline.direction	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g %.16g %.16g"	ToleranceTextFormat[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceTextFormat[%d].Item[%d].Outline.doubleOffset	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.fillColour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.filled	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.origin	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g %.16g %.16g"	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.outlineHeight	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.outlineWidth	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].Outline.visible	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ToleranceTextFormat[%d].Item[%d].Outline	
ToleranceTextFormat[%d].Item[%d].bold	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].font	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].format	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].italic	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].italicAngle	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].justification	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft,	ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=bottomright, "8"=bottomcentre		
ToleranceTextFormat[%d].Item[%d].language	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].lineFactor	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].lineWeldSupplementalSymbol	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrrp, "20"=surfacefinishmrrpcomplete, "21"=meltthrough	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].lineWeldSymbol	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface,	ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsmooth, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnumber, "57"=isoedge		
ToleranceTextFormat[%d].Item[%d].outlineColour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceTextFormat[%d].Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ToleranceTextFormat[%d].Item[%d].Outline
ToleranceTextFormat[%d].Item[%d].outlineStyle	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceTextFormat[%d].Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ToleranceTextFormat[%d].Item[%d].Outline
ToleranceTextFormat[%d].Item[%d]	0x0082 0x0307 0X030D 0X030F	String representing enumeration	ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
.outlineType	0x0313	such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		suggest sticking with this form of key, but also suggest support reading ToleranceTextFormat[%d].Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite ToleranceTextFormat[%d].Item[%d].Outline
ToleranceTextFormat[%d].Item[%d].outlineWidth.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	%.16g"	ToleranceTextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceTextFormat[%d].Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ToleranceTextFormat[%d].Item[%d].Outline
ToleranceTextFormat[%d].Item[%d].outlineWidth.name	0x0082 0x0307 0X030D 0X030F 0x0313	%"s"	ToleranceTextFormat[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ToleranceTextFormat[%d].Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ToleranceTextFormat[%d].Item[%d].Outline
ToleranceTextFormat[%d].Item[%d].spaceFactor	0x0082 0x0307 0X030D 0X030F 0x0313	%.16g"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].strikethrough	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=none, "1"=single,	ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=double		
ToleranceTextFormat[%d].Item[%d].string	0x0082 0x0307 0X030D 0X030F 0x0313	%s"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].subscript	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=sub, "1"=super	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].symbol	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross,	ToleranceTextFormat[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"62"=orientationconstraint, "63"=datumtranslation		
ToleranceTextFormat[%d].Item[%d].textAspect	0x0082 0x0307 0X030D 0X030F 0x0313	("%.16g"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].textColour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].textHeight	0x0082 0x0307 0X030D 0X030F 0x0313	("%.16g"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].textLineWidth.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	("%.16g"	ToleranceTextFormat[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceTextFormat[%d].Item[%d].textLineWidth.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].textThickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceTextFormat[%d].Item[%d]	
ToleranceTextFormat[%d].Item[%d].underline	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=over, "1"=under	ToleranceTextFormat[%d].Item[%d]	

Q.13.73 ToleranceTextFormat[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ToleranceTextFormat[%d].bold	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].font	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].italic	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].italicAngle	0x0082 0x0307 0X030D 0X030F 0x0313	("%.16g"	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].justification	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft,	ToleranceTextFormat[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"7"=bottomright, "8"=bottomcentre		
ToleranceTextFormat[%d].language	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].lineFactor	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].spaceFactor	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].strikethrough	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].subscript	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=sub, "1"=super	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].textAspect	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].textColour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].textHeight	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].textLineWidth.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ToleranceTextFormat[%d]	measurementType must be replaced with meterWidth or pixelWidth
ToleranceTextFormat[%d].textLineWidth.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].textThickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ToleranceTextFormat[%d]	
ToleranceTextFormat[%d].underline	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=over, "1"=under	ToleranceTextFormat[%d]	

Q.14 PMI Properties “U”

Q.14.1 UnitSymbol[%d].Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UnitSymbol[%d]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL		
UnitSymbol[%d].Item[%d]	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	UnitSymbol[%d]	
UnitSymbol[%d].Item[%d].Outline	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].Outline. Bottom	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].Outline. Bottom.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Item[%d].Outline. Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
UnitSymbol[%d].Item[%d].Outline. Bottom.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UnitSymbol[%d].Item[%d].Outline. Bottom	
UnitSymbol[%d].Item[%d].Outline. Bottom.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Item[%d].Outline. Bottom	
UnitSymbol[%d].Item[%d].Outline. Bottom.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Item[%d].Outline. Bottom	measurementType must be replaced with meterWidth or pixelWidth
UnitSymbol[%d].Item[%d].Outline. Bottom.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	UnitSymbol[%d].Item[%d].Outline. Bottom	
UnitSymbol[%d].Item[%d].Outline. Left	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].Outline.	0x0004 0x0008 0x0041 0x0042	"0x00%02x%02x%02x" such that	UnitSymbol[%d].Item[%d].Outline.	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Left.colour	0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	the values of blue, green and red for the colour are encoded in the string	Left	
UnitSymbol[%d].Item[%d].Outline. Left.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UnitSymbol[%d].Item[%d].Outline. Left	
UnitSymbol[%d].Item[%d].Outline. Left.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Item[%d].Outline. Left	
UnitSymbol[%d].Item[%d].Outline. Left.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Item[%d].Outline. Left	measurementType must be replaced with meterWidth or pixelWidth
UnitSymbol[%d].Item[%d].Outline. Left.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	UnitSymbol[%d].Item[%d].Outline. Left	
UnitSymbol[%d].Item[%d].Outline. Right	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	NULL	UnitSymbol[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
UnitSymbol[%d].Item[%d].Outline. Right.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Item[%d].Outline. Right	
UnitSymbol[%d].Item[%d].Outline. Right.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UnitSymbol[%d].Item[%d].Outline. Right	
UnitSymbol[%d].Item[%d].Outline. Right.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Item[%d].Outline. Right	
UnitSymbol[%d].Item[%d].Outline. Right.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Item[%d].Outline. Right	measurementType must be replaced with meterWidth or pixelWidth
UnitSymbol[%d].Item[%d].Outline. Right.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	"%s"	UnitSymbol[%d].Item[%d].Outline. Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
UnitSymbol[%d].Item[%d].Outline. Top	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].Outline. Top.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Item[%d].Outline. Top	
UnitSymbol[%d].Item[%d].Outline. Top.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UnitSymbol[%d].Item[%d].Outline. Top	
UnitSymbol[%d].Item[%d].Outline. Top.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Item[%d].Outline. Top	
UnitSymbol[%d].Item[%d].Outline. Top.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	UnitSymbol[%d].Item[%d].Outline. Top	measurementType must be replaced with meterWidth or pixelWidth
UnitSymbol[%d].Item[%d].Outline.	0x0004 0x0008 0x0041 0x0042	"%s"	UnitSymbol[%d].Item[%d].Outline.	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Top.width.name	0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313		Top	
UnitSymbol[%d].Item[%d].Outline.direction	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].Outline.doubleOffset	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].Outline.fillColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].Outline.filled	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].Outline.origin	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	"%.16g %.16g %.16g"	UnitSymbol[%d].Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
UnitSymbol[%d].Item[%d].Outline.outlineHeight	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].Outline.outlineWidth	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].Outline.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].Outline.visible	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	UnitSymbol[%d].Item[%d].Outline	
UnitSymbol[%d].Item[%d].bold	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	"%d"	UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
UnitSymbol[%d].Item[%d].font	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].format	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].italic	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].italicAngle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].justification	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].language	0x0004 0x0008 0x0041 0x0042	"%s"	UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
e	0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
UnitSymbol[%d].Item[%d].lineFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].lineWeld SupplementalSymbol	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].lineWeld Symbol	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug,	UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotlatelectrode, "50"=eskdheat, "51"=eskdsmoother, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
UnitSymbol[%d].Item[%d].outlineColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UnitSymbol[%d].Item[%d].Outline.c olour which would match the more modern Outline syntax and require prerequisite UnitSymbol[%d].Item[%d].Outline
UnitSymbol[%d].Item[%d].outlineStyle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	"5"=dashed, "6"=solid, "7"=centreline		UnitSymbol[%d].Item[%d].Outline.s tyle which would match the more modern Outline syntax and require prerequisite UnitSymbol[%d].Item[%d].Outline
UnitSymbol[%d].Item[%d].outlineT ype	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UnitSymbol[%d].Item[%d].Outline.t ype which would match the more modern Outline syntax and require prerequisite UnitSymbol[%d].Item[%d].Outline
UnitSymbol[%d].Item[%d].outlineW idth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	%.16g"	UnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UnitSymbol[%d].Item[%d].Outline. width.measurementType which would match the more modern Outline syntax and require prerequisite UnitSymbol[%d].Item[%d].Outline
UnitSymbol[%d].Item[%d].outlineW idth.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0x030D 0x030F 0x0311 0x0313	%"s"	UnitSymbol[%d].Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UnitSymbol[%d].Item[%d].Outline. width.name which would match the more modern Outline syntax and require prerequisite UnitSymbol[%d].Item[%d].Outline

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UnitSymbol[%d].Item[%d].spaceFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	("%.16g"	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].strikethrough	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].string	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	("%s"	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].subscript	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=sub, "1"=super	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].symbol	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc,	UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
UnitSymbol[%d].Item[%d].textAspect	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].textColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0X030F 0x0311 0x0313			
UnitSymbol[%d].Item[%d].textHeight	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].textLineWidth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	UnitSymbol[%d].Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
UnitSymbol[%d].Item[%d].textLineWidth.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%"s"	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].textThickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Item[%d]	
UnitSymbol[%d].Item[%d].underline	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=over, "1"=under	UnitSymbol[%d].Item[%d]	

Q.14.2 UnitSymbol[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UnitSymbol[%d].Outline	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	UnitSymbol[%d]	
UnitSymbol[%d].Outline.Bottom	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	UnitSymbol[%d].Outline	
UnitSymbol[%d].Outline.Bottom.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Outline.Bottom	
UnitSymbol[%d].Outline.Bottom.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UnitSymbol[%d].Outline.Bottom	
UnitSymbol[%d].Outline.Bottom.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UnitSymbol[%d].Outline.Bottom.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
UnitSymbol[%d].Outline.Bottom.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	UnitSymbol[%d].Outline.Bottom	
UnitSymbol[%d].Outline.Left	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	UnitSymbol[%d].Outline	
UnitSymbol[%d].Outline.Left.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Outline.Left	
UnitSymbol[%d].Outline.Left.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UnitSymbol[%d].Outline.Left	
UnitSymbol[%d].Outline.Left.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Outline.Left	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
UnitSymbol[%d].Outline.Left.width. measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
UnitSymbol[%d].Outline.Left.width. name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	UnitSymbol[%d].Outline.Left	
UnitSymbol[%d].Outline.Right	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	UnitSymbol[%d].Outline	
UnitSymbol[%d].Outline.Right.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Outline.Right	
UnitSymbol[%d].Outline.Right.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UnitSymbol[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
UnitSymbol[%d].Outline.Right.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Outline.Right	
UnitSymbol[%d].Outline.Right.width.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
UnitSymbol[%d].Outline.Right.width.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	UnitSymbol[%d].Outline.Right	
UnitSymbol[%d].Outline.Top	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	NULL	UnitSymbol[%d].Outline	
UnitSymbol[%d].Outline.Top.colour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Outline.Top	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UnitSymbol[%d].Outline.Top.style	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UnitSymbol[%d].Outline.Top	
UnitSymbol[%d].Outline.Top.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Outline.Top	
UnitSymbol[%d].Outline.Top.width. measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
UnitSymbol[%d].Outline.Top.width. name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	UnitSymbol[%d].Outline.Top	
UnitSymbol[%d].Outline.direction	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"	UnitSymbol[%d].Outline	
UnitSymbol[%d].Outline.doubleOff set	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230	"%.16g"	UnitSymbol[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
UnitSymbol[%d].Outline.fillColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d].Outline	
UnitSymbol[%d].Outline.filled	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	UnitSymbol[%d].Outline	
UnitSymbol[%d].Outline.origin	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g %.16g %.16g"	UnitSymbol[%d].Outline	
UnitSymbol[%d].Outline.outlineHeight	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d].Outline	
UnitSymbol[%d].Outline.outlineWidth	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245	"%.16g"	UnitSymbol[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
UnitSymbol[%d].Outline.thickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d].Outline	
UnitSymbol[%d].Outline.visible	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	UnitSymbol[%d].Outline	
UnitSymbol[%d].bold	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	UnitSymbol[%d]	
UnitSymbol[%d].font	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	UnitSymbol[%d]	
UnitSymbol[%d].italic	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	UnitSymbol[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UnitSymbol[%d].italicAngle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d]	
UnitSymbol[%d].justification	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	UnitSymbol[%d]	
UnitSymbol[%d].language	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	UnitSymbol[%d]	
UnitSymbol[%d].lineFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d]	
UnitSymbol[%d].maxExtend	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d"	UnitSymbol[%d]	
UnitSymbol[%d].name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230	"%s"	UnitSymbol[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
UnitSymbol[%d].outlineColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UnitSymbol[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite UnitSymbol[%d].Outline
UnitSymbol[%d].outlineStyle	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UnitSymbol[%d].Outline.style which would match the more modern Outline syntax and require prerequisite UnitSymbol[%d].Outline
UnitSymbol[%d].outlineType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UnitSymbol[%d].Outline.type which would match the more modern Outline syntax and require prerequisite UnitSymbol[%d].Outline
UnitSymbol[%d].outlineWidth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241	%.16g"	UnitSymbol[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			suggest sticking with this form of key, but also suggest support reading UnitSymbol[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite UnitSymbol[%d].Outline
UnitSymbol[%d].outlineWidth.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%s"	UnitSymbol[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UnitSymbol[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite UnitSymbol[%d].Outline
UnitSymbol[%d].spaceFactor	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%.16g"	UnitSymbol[%d]	
UnitSymbol[%d].strikethrough	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	UnitSymbol[%d]	
UnitSymbol[%d].subscript	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=sub, "1"=super	UnitSymbol[%d]	
UnitSymbol[%d].textAspect	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088	"%.16g"	UnitSymbol[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
UnitSymbol[%d].textColour	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UnitSymbol[%d]	
UnitSymbol[%d].textHeight	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	UnitSymbol[%d]	
UnitSymbol[%d].textLineWidth.measurementType	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%.16g"	UnitSymbol[%d]	measurementType must be replaced with meterWidth or pixelWidth
UnitSymbol[%d].textLineWidth.name	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	%"s"	UnitSymbol[%d]	
UnitSymbol[%d].textOrientation	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241	String representing enumeration such that: "0"=horizontal, "1"=vertical	UnitSymbol[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			
UnitSymbol[%d].textThickness	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UnitSymbol[%d]	
UnitSymbol[%d].underline	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	String representing enumeration such that: "0"=over, "1"=under	UnitSymbol[%d]	

Q.14.3 UserDefinedSymbolText[%d].Text.Item[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UserDefinedSymbolText[%d]	0x0114	NULL		
UserDefinedSymbolText[%d].Text	0x0114	NULL	UserDefinedSymbolText[%d]	
UserDefinedSymbolText[%d].Text.Item[%d]	0x0114	NULL	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text.Item[%d].Outline	0x0114	NULL	UserDefinedSymbolText[%d].Text.Item[%d]	
UserDefinedSymbolText[%d].Text.Item[%d].Outline.Bottom	0x0114	NULL	UserDefinedSymbolText[%d].Text.Item[%d].Outline	
UserDefinedSymbolText[%d].Text.Item[%d].Outline.Bottom.colour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text.Item[%d].Outline.Bottom	
UserDefinedSymbolText[%d].Text.Item[%d].Outline.Bottom.style	0x0114	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted,	UserDefinedSymbolText[%d].Text.Item[%d].Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline		
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Bottom.thickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Bottom	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Bottom.width.me asurementType	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Bottom.width.na me	0x0114	"%s"	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Bottom	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left	0x0114	NULL	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left.colour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left.style	0x0114	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left.thickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left.width.measur ementType	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left.width.name	0x0114	"%s"	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Left	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right	0x0114	NULL	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right.colour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right.style	0x0114	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right.thickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right.width.measurementType	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right.width.name	0x0114	"%s"	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Right	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top	0x0114	NULL	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top.colour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top.style	0x0114	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top.thickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top.width.measurementType	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top.width.name	0x0114	"%s"	UserDefinedSymbolText[%d].Text. Item[%d].Outline.Top	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.direction	0x0114	"%.16g %.16g %.16g"	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.doubleOffset	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UserDefinedSymbolText[%d].Text. Item[%d].Outline.fillColour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.filled	0x0114	"%d"	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.origin	0x0114	"%.16g %.16g %.16g"	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.outlineHeight	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.outlineWidth	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.thickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].Outline.visible	0x0114	"%d"	UserDefinedSymbolText[%d].Text. Item[%d].Outline	
UserDefinedSymbolText[%d].Text. Item[%d].bold	0x0114	"%d"	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].font	0x0114	"%s"	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].format	0x0114	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].italic	0x0114	"%d"	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].italicAngle	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].justification	0x0114	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	UserDefinedSymbolText[%d].Text. Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UserDefinedSymbolText[%d].Text.Item[%d].language	0x0114	"%s"	UserDefinedSymbolText[%d].Text.Item[%d]	
UserDefinedSymbolText[%d].Text.Item[%d].lineFactor	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text.Item[%d]	
UserDefinedSymbolText[%d].Text.Item[%d].lineWeldSupplementalSymbol	0x0114	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=meltthrough	UserDefinedSymbolText[%d].Text.Item[%d]	
UserDefinedSymbolText[%d].Text.Item[%d].lineWeldSymbol	0x0114	String representing enumeration such that: "0"=unset, "1"=jis seam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1,	UserDefinedSymbolText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface, "30"=steepflankedsinglev, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
UserDefinedSymbolText[%d].Text. Item[%d].outlineColour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text. Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UserDefinedSymbolText[%d].Text. Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite UserDefinedSymbolText[%d].Text. Item[%d].Outline
UserDefinedSymbolText[%d].Text. Item[%d].outlineStyle	0x0114	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UserDefinedSymbolText[%d].Text. Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UserDefinedSymbolText[%d].Text. Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite UserDefinedSymbolText[%d].Text. Item[%d].Outline
UserDefinedSymbolText[%d].Text.	0x0114	String representing enumeration such that: "0"=box, "1"=triangle,	UserDefinedSymbolText[%d].Text.	For compatibility reasons we suggest sticking with this form of

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Item[%d].outlineType		"2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	Item[%d]	key, but also suggest support reading UserDefinedSymbolText[%d].Text. Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite UserDefinedSymbolText[%d].Text. Item[%d].Outline
UserDefinedSymbolText[%d].Text. Item[%d].outlineWidth.measurementType	0x0114	("%.16g"	UserDefinedSymbolText[%d].Text. Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UserDefinedSymbolText[%d].Text. Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite UserDefinedSymbolText[%d].Text. Item[%d].Outline
UserDefinedSymbolText[%d].Text. Item[%d].outlineWidth.name	0x0114	"%s"	UserDefinedSymbolText[%d].Text. Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UserDefinedSymbolText[%d].Text. Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite UserDefinedSymbolText[%d].Text. Item[%d].Outline
UserDefinedSymbolText[%d].Text. Item[%d].spaceFactor	0x0114	("%.16g"	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].strikethrough	0x0114	String representing enumeration such that: "0"=none, "1"=single,	UserDefinedSymbolText[%d].Text. Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"2"=double		
UserDefinedSymbolText[%d].Text.Item[%d].string	0x0114	"%s"	UserDefinedSymbolText[%d].Text.Item[%d]	
UserDefinedSymbolText[%d].Text.Item[%d].subscript	0x0114	String representing enumeration such that: "0"=sub, "1"=super	UserDefinedSymbolText[%d].Text.Item[%d]	
UserDefinedSymbolText[%d].Text.Item[%d].symbol	0x0114	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth, "3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross,	UserDefinedSymbolText[%d].Text.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"62"=orientationconstraint, "63"=datumtranslation		
UserDefinedSymbolText[%d].Text. Item[%d].textAspect	0x0114	".16g"	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].textColour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].textHeight	0x0114	".16g"	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].textLineWidth.measur ementType	0x0114	".16g"	UserDefinedSymbolText[%d].Text. Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
UserDefinedSymbolText[%d].Text. Item[%d].textLineWidth.name	0x0114	".s"	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].textThickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Item[%d]	
UserDefinedSymbolText[%d].Text. Item[%d].underline	0x0114	String representing enumeration such that: "0"=over, "1"=under	UserDefinedSymbolText[%d].Text. Item[%d]	

Q.14.4 UserDefinedSymbolText[%d].<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
UserDefinedSymbolText[%d].Text. Outline	0x0114	NULL	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text. Outline.Bottom	0x0114	NULL	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. Outline.Bottom.colour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text. Outline.Bottom	
UserDefinedSymbolText[%d].Text. Outline.Bottom.style	0x0114	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	UserDefinedSymbolText[%d].Text. Outline.Bottom	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
UserDefinedSymbolText[%d].Text. Outline.Bottom.thickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Outline.Bottom	
UserDefinedSymbolText[%d].Text. Outline.Bottom.width.measuremen tType	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
UserDefinedSymbolText[%d].Text. Outline.Bottom.width.name	0x0114	"%s"	UserDefinedSymbolText[%d].Text. Outline.Bottom	
UserDefinedSymbolText[%d].Text. Outline.Left	0x0114	NULL	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. Outline.Left.colour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text. Outline.Left	
UserDefinedSymbolText[%d].Text. Outline.Left.style	0x0114	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UserDefinedSymbolText[%d].Text. Outline.Left	
UserDefinedSymbolText[%d].Text. Outline.Left.thickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Outline.Left	
UserDefinedSymbolText[%d].Text. Outline.Left.width.measuremen tType	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
UserDefinedSymbolText[%d].Text. Outline.Left.width.name	0x0114	"%s"	UserDefinedSymbolText[%d].Text. Outline.Left	
UserDefinedSymbolText[%d].Text. Outline.Right	0x0114	NULL	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. Outline.Right.colour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text. Outline.Right	
UserDefinedSymbolText[%d].Text.	0x0114	String representing enumeration such that: "0"=unset,	UserDefinedSymbolText[%d].Text.	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline.Right.style		"1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	Outline.Right	
UserDefinedSymbolText[%d].Text. Outline.Right.thickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Outline.Right	
UserDefinedSymbolText[%d].Text. Outline.Right.width.measurementT ype	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
UserDefinedSymbolText[%d].Text. Outline.Right.width.name	0x0114	"%s"	UserDefinedSymbolText[%d].Text. Outline.Right	
UserDefinedSymbolText[%d].Text. Outline.Top	0x0114	NULL	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. Outline.Top.colour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text. Outline.Top	
UserDefinedSymbolText[%d].Text. Outline.Top.style	0x0114	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UserDefinedSymbolText[%d].Text. Outline.Top	
UserDefinedSymbolText[%d].Text. Outline.Top.thickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Outline.Top	
UserDefinedSymbolText[%d].Text. Outline.Top.width.measurementTy pe	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
UserDefinedSymbolText[%d].Text. Outline.Top.width.name	0x0114	"%s"	UserDefinedSymbolText[%d].Text. Outline.Top	
UserDefinedSymbolText[%d].Text. Outline.direction	0x0114	"%.16g %.16g %.16g"	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. Outline.doubleOffset	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text.	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red	UserDefinedSymbolText[%d].Text.	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
Outline.fillColour		for the colour are encoded in the string	Outline	
UserDefinedSymbolText[%d].Text. Outline.filled	0x0114	"%d"	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. Outline.origin	0x0114	"%.16g %.16g %.16g"	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. Outline.outlineHeight	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. Outline.outlineWidth	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. Outline.thickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. Outline.visible	0x0114	"%d"	UserDefinedSymbolText[%d].Text. Outline	
UserDefinedSymbolText[%d].Text. bold	0x0114	"%d"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text. font	0x0114	"%s"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text.i talic	0x0114	"%d"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text.i talicAngle	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text.j ustification	0x0114	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=toleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text.l anguage	0x0114	"%s"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text.l ineFactor	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text. maxExtend	0x0114	"%d"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text.	0x0114	"%s"	UserDefinedSymbolText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
name				
UserDefinedSymbolText[%d].Text. outlineColour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UserDefinedSymbolText[%d].Text. Outline.colour which would match the more modern Outline syntax and require prerequisite UserDefinedSymbolText[%d].Text. Outline
UserDefinedSymbolText[%d].Text. outlineStyle	0x0114	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	UserDefinedSymbolText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UserDefinedSymbolText[%d].Text. Outline.style which would match the more modern Outline syntax and require prerequisite UserDefinedSymbolText[%d].Text. Outline
UserDefinedSymbolText[%d].Text. outlineType	0x0114	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	UserDefinedSymbolText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UserDefinedSymbolText[%d].Text. Outline.type which would match the more modern Outline syntax and require prerequisite UserDefinedSymbolText[%d].Text. Outline
UserDefinedSymbolText[%d].Text. outlineWidth.measurementType	0x0114	%.16g"	UserDefinedSymbolText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				reading UserDefinedSymbolText[%d].Text. Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite UserDefinedSymbolText[%d].Text. Outline
UserDefinedSymbolText[%d].Text. outlineWidth.name	0x0114	"%s"	UserDefinedSymbolText[%d].Text	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading UserDefinedSymbolText[%d].Text. Outline.width.name which would match the more modern Outline syntax and require prerequisite UserDefinedSymbolText[%d].Text. Outline
UserDefinedSymbolText[%d].Text. spaceFactor	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text. strikethrough	0x0114	String representing enumeration such that: "0"=none, "1"=single, "2"=double	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text. subscript	0x0114	String representing enumeration such that: "0"=sub, "1"=super	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text. textAspect	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text. textColour	0x0114	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text. textHeight	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text. textLineWidth.measurementType	0x0114	"%.16g"	UserDefinedSymbolText[%d].Text	measurementType must be replaced with meterWidth or pixelWidth
UserDefinedSymbolText[%d].Text. textLineWidth.name	0x0114	"%s"	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text.	0x0114	String representing enumeration	UserDefinedSymbolText[%d].Text	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
textOrientation		such that: "0"=horizontal, "1"=vertical		
UserDefinedSymbolText[%d].Text. textThickness	0x0114	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].Text. underline	0x0114	String representing enumeration such that: "0"=over, "1"=under	UserDefinedSymbolText[%d].Text	
UserDefinedSymbolText[%d].textD irection	0x0114	"%.16g %.16g %.16g"	UserDefinedSymbolText[%d]	
UserDefinedSymbolText[%d].textO rigin	0x0114	"%.16g %.16g %.16g"	UserDefinedSymbolText[%d]	

Q.15 PMI Properties “V”

Q.15.1 ValueText.Item[#] .<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ValueText	0x0082 0x0307 0X030D 0X030F 0x0313	NULL		
ValueText.Item[%d]	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText	
ValueText.Item[%d].Outline	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText.Item[%d]	
ValueText.Item[%d].Outline.Botto m	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.Botto m.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Item[%d].Outline.Botto m	
ValueText.Item[%d].Outline.Botto m.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ValueText.Item[%d].Outline.Botto m	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ValueText.Item[%d].Outline.Bottom.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Item[%d].Outline.Bottom	
ValueText.Item[%d].Outline.Bottom.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	%.16g"	ValueText.Item[%d].Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth
ValueText.Item[%d].Outline.Bottom.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Item[%d].Outline.Bottom	
ValueText.Item[%d].Outline.Left	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.Left.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Item[%d].Outline.Left	
ValueText.Item[%d].Outline.Left.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ValueText.Item[%d].Outline.Left	
ValueText.Item[%d].Outline.Left.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Item[%d].Outline.Left	
ValueText.Item[%d].Outline.Left.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	%.16g"	ValueText.Item[%d].Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ValueText.Item[%d].Outline.Left.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Item[%d].Outline.Left	
ValueText.Item[%d].Outline.Right	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.Right.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Item[%d].Outline.Right	
ValueText.Item[%d].Outline.Right.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom,	ValueText.Item[%d].Outline.Right	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"5"=dashed, "6"=solid, "7"=centreline		
ValueText.Item[%d].Outline.Right.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Item[%d].Outline.Right	
ValueText.Item[%d].Outline.Right.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d].Outline.Right	measurementType must be replaced with meterWidth or pixelWidth
ValueText.Item[%d].Outline.Right.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Item[%d].Outline.Right	
ValueText.Item[%d].Outline.Top	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.Top.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Item[%d].Outline.Top	
ValueText.Item[%d].Outline.Top.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ValueText.Item[%d].Outline.Top	
ValueText.Item[%d].Outline.Top.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Item[%d].Outline.Top	
ValueText.Item[%d].Outline.Top.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d].Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ValueText.Item[%d].Outline.Top.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Item[%d].Outline.Top	
ValueText.Item[%d].Outline.direction	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g %.16g %.16g"	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.doubleOffset	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.fillColour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the	ValueText.Item[%d].Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		string		
ValueText.Item[%d].Outline.filled	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.origin	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g %.16g %.16g"	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.outline Height	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.outline Width	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.thickn ess	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Item[%d].Outline	
ValueText.Item[%d].Outline.visible	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ValueText.Item[%d].Outline	
ValueText.Item[%d].bold	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ValueText.Item[%d]	
ValueText.Item[%d].font	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Item[%d]	
ValueText.Item[%d].format	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=int, "1"=ints, "2"=real, "3"=reals, "4"=boolean, "5"=booleans, "6"=string, "7"=reference, "8"=enum, "9"=list, "10"=datetime, "11"=none	ValueText.Item[%d]	
ValueText.Item[%d].italic	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ValueText.Item[%d]	
ValueText.Item[%d].italicAngle	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d]	
ValueText.Item[%d].justification	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ValueText.Item[%d]	
ValueText.Item[%d].language	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ValueText.Item[%d].lineFactor	0x0082 0x0307 0X030D 0X030F 0x0313	("%.16g"	ValueText.Item[%d]	
ValueText.Item[%d].lineWeldSupplementalSymbol	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=convex, "2"=toesblended, "3"=concave, "4"=flush, "5"=permanentbackingstrip, "6"=removablebackingstrip, "7"=stud, "8"=intermittent, "9"=backing, "10"=backingremoveafterweld, "11"=spacer, "12"=consumableinsert, "13"=flusheskd, "14"=machininggradedjunction, "15"=surfacefinishbasic, "16"=surfacefinishbasiccomplete, "17"=surfacefinishmrr, "18"=surfacefinishmrrcomplete, "19"=surfacefinishmrp, "20"=surfacefinishmrpcomplete, "21"=melthrough	ValueText.Item[%d]	
ValueText.Item[%d].lineWeldSymbol	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=jisseam, "2"=singlebevelgroove, "3"=singleugroove, "4"=edgeflange, "5"=surface, "6"=steepflankedsinglebevel, "7"=flaresinglevgroove, "8"=surfacejoint, "9"=singlevgroove, "10"=inclinedjoint, "11"=plug, "12"=fillet, "13"=squaregroove, "14"=spot, "15"=singlej, "16"=square, "17"=overlay, "18"=singleu, "19"=singlejgroove, "20"=doubleflange, "21"=singleflange, "22"=spotprojected, "23"=plugandslot, "24"=singlebevelbroadrootface, "25"=edge, "26"=jisstaggeredfillet1, "27"=singlev, "28"=flaresinglebevelgroove, "29"=singlevbroadrootface,	ValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"30"=steepflankedsingle, "31"=removablebackingstrip, "32"=permanentbackingstrip, "33"=jisfillet, "34"=singlebevel, "35"=backing, "36"=foldjoint, "37"=jisstaggeredfillet2, "38"=seam, "39"=bead, "40"=stud, "41"=intermittent, "42"=backingplate, "43"=meltthrough, "44"=solder, "45"=kgroove, "46"=stake, "47"=keyhole, "48"=jisspot, "49"=jisspotflatelectrode, "50"=eskdheat, "51"=eskdsMOOTH, "52"=eskdstaggerchain, "53"=eskdstaggercheck, "54"=eskdnotalaround, "55"=eskddiameter, "56"=eskdnnumber, "57"=isoedge		
ValueText.Item[%d].outlineColour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Item[%d]	For compatiblity reasons we suggest sticking with this form of key, but also suggest support reading ValueText.Item[%d].Outline.colour which would match the more modern Outline syntax and require prerequisite ValueText.Item[%d].Outline
ValueText.Item[%d].outlineStyle	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ValueText.Item[%d]	For compatiblity reasons we suggest sticking with this form of key, but also suggest support reading ValueText.Item[%d].Outline.style which would match the more modern Outline syntax and require prerequisite ValueText.Item[%d].Outline
ValueText.Item[%d].outlineType	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft,	ValueText.Item[%d]	For compatiblity reasons we suggest sticking with this form of key, but also suggest support reading ValueText.Item[%d].Outline.type which would match the more modern Outline syntax and require prerequisite

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle		ValueText.Item[%d].Outline
ValueText.Item[%d].outlineWidth. measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ValueText.Item[%d].Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ValueText.Item[%d].Outline
ValueText.Item[%d].outlineWidth.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Item[%d]	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ValueText.Item[%d].Outline.width.name which would match the more modern Outline syntax and require prerequisite ValueText.Item[%d].Outline
ValueText.Item[%d].spaceFactor	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d]	
ValueText.Item[%d].strikethrough	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ValueText.Item[%d]	
ValueText.Item[%d].string	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Item[%d]	
ValueText.Item[%d].subscript	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=sub, "1"=super	ValueText.Item[%d]	
ValueText.Item[%d].symbol	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=centreline, "1"=partingline, "2"=depth,	ValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
		"3"=countersink, "4"=conicaltaper, "5"=slope, "6"=counterbore, "7"=square, "8"=phi, "9"=plusminus, "10"=degrees, "11"=between, "12"=arclength, "13"=leftparenthesis, "14"=rightparenthesis, "15"=projectedtolerance, "16"=mmc, "17"=lmc, "18"=freestate, "19"=ohm, "20"=circularrunout, "21"=totalrunout, "22"=profileofasurface, "23"=profileofaline, "24"=flatness, "25"=straightness, "26"=symmetry, "27"=perpendicularity, "28"=parallelism, "29"=cylindricity, "30"=concentricity, "31"=circularity, "32"=angularity, "33"=micro, "34"=position, "35"=envelope, "36"=rfs, "37"=tangentplane, "38"=lessthanorequal, "39"=greaterthanorequal, "40"=threadprefix, "41"=triangle, "42"=statistical, "43"=radius, "44"=circledu, "45"=fitfunction, "46"=safetycompliance, "47"=quantity, "48"=independency, "49"=continuousfeature, "50"=spotface, "51"=sphi, "52"=sphere, "53"=lefttaper, "54"=righttaper, "55"=leftpitch, "56"=rightpitch, "57"=approximatedimension, "58"=axisintersection, "59"=eskdperpendicular, "60"=eskdparallel, "61"=eskdcross, "62"=orientationconstraint, "63"=datumtranslation		
ValueText.Item[%d].textAspect	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d]	
ValueText.Item[%d].textColour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Item[%d]	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ValueText.Item[%d].textHeight	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d]	
ValueText.Item[%d].textLineWidth. measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Item[%d]	measurementType must be replaced with meterWidth or pixelWidth
ValueText.Item[%d].textLineWidth. name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Item[%d]	
ValueText.Item[%d].textThickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Item[%d]	
ValueText.Item[%d].underline	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=over, "1"=under	ValueText.Item[%d]	

Q.15.2 ValueText.<property>

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ValueText.Outline	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText	
ValueText.Outline.Bottom	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText.Outline	
ValueText.Outline.Bottom.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Outline.Bottom	
ValueText.Outline.Bottom.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ValueText.Outline.Bottom	
ValueText.Outline.Bottom.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Outline.Bottom	
ValueText.Outline.Bottom.width. measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Outline.Bottom	measurementType must be replaced with meterWidth or pixelWidth

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ValueText.Outline.Bottom.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Outline.Bottom	
ValueText.Outline.Left	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText.Outline	
ValueText.Outline.Left.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Outline.Left	
ValueText.Outline.Left.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ValueText.Outline.Left	
ValueText.Outline.Left.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Outline.Left	
ValueText.Outline.Left.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Outline.Left	measurementType must be replaced with meterWidth or pixelWidth
ValueText.Outline.Left.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Outline.Left	
ValueText.Outline.Right	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText.Outline	
ValueText.Outline.Right.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Outline.Right	
ValueText.Outline.Right.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ValueText.Outline.Right	
ValueText.Outline.Right.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Outline.Right	
ValueText.Outline.Right.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Outline.Right	measurementType must be

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
surementType	0x0313			replaced with meterWidth or pixelWidth
ValueText.Outline.Right.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Outline.Right	
ValueText.Outline.Top	0x0082 0x0307 0X030D 0X030F 0x0313	NULL	ValueText.Outline	
ValueText.Outline.Top.colour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Outline.Top	
ValueText.Outline.Top.style	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ValueText.Outline.Top	
ValueText.Outline.Top.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Outline.Top	
ValueText.Outline.Top.width.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Outline.Top	measurementType must be replaced with meterWidth or pixelWidth
ValueText.Outline.Top.width.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText.Outline.Top	
ValueText.Outline.direction	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g %.16g %.16g"	ValueText.Outline	
ValueText.Outline.doubleOffset	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Outline	
ValueText.Outline.fillColour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText.Outline	
ValueText.Outline.filled	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ValueText.Outline	
ValueText.Outline.origin	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g %.16g %.16g"	ValueText.Outline	

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ValueText.Outline.outlineHeight	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Outline	
ValueText.Outline.outlineWidth	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText.Outline	
ValueText.Outline.thickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText.Outline	
ValueText.Outline.visible	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ValueText.Outline	
ValueText.bold	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ValueText	
ValueText.font	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText	
ValueText.italic	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ValueText	
ValueText.italicAngle	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText	
ValueText.justification	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=right, "1"=centre, "2"=left, "3"=topleft, "4"=topright, "5"=topcentre, "6"=bottomleft, "7"=bottomright, "8"=bottomcentre	ValueText	
ValueText.language	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText	
ValueText.lineFactor	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText	
ValueText.maxExtend	0x0082 0x0307 0X030D 0X030F 0x0313	"%d"	ValueText	
ValueText.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText	
ValueText.outlineColour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ValueText.Outline.colour which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite ValueText.Outline
ValueText.outlineStyle	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=unset, "1"=longdashed, "2"=dotted, "3"=dotteddashed, "4"=phantom, "5"=dashed, "6"=solid, "7"=centreline	ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ValueText.Outline.style which would match the more modern Outline syntax and require prerequisite ValueText.Outline
ValueText.outlineType	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=box, "1"=triangle, "2"=circle, "3"=ellipse, "4"=underline, "5"=square, "6"=scoredcircle, "7"=diamond, "8"=flagright, "9"=flagleft, "10"=flagboth, "11"=oblong, "12"=oblongright, "13"=oblongleft, "14"=sticking, "15"=set, "16"=fixedsupport, "17"=nota, "18"=symmetricalpart, "19"=symmetricalset, "20"=scoredrectangle, "21"=parallelogram, "22"=triangleleft, "23"=triangleright, "24"=squarecircle	ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ValueText.Outline.type which would match the more modern Outline syntax and require prerequisite ValueText.Outline
ValueText.outlineWidth.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText	measurementType must be replaced with meterWidth or pixelWidth For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ValueText.Outline.width.measurementType which would match the more modern Outline syntax and require prerequisite ValueText.Outline
ValueText.outlineWidth.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText	For compatibility reasons we suggest sticking with this form of key, but also suggest support reading ValueText.Outline.width.name which would match the more modern Outline syntax and require

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				prerequisite ValueText.Outline
ValueText.spaceFactor	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText	
ValueText.strikethrough	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=none, "1"=single, "2"=double	ValueText	
ValueText.subscript	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=sub, "1"=super	ValueText	
ValueText.textAspect	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText	
ValueText.textColour	0x0082 0x0307 0X030D 0X030F 0x0313	"0x00%02x%02x%02x" such that the values of blue, green and red for the colour are encoded in the string	ValueText	
ValueText.textHeight	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText	
ValueText.textLineWidth.measurementType	0x0082 0x0307 0X030D 0X030F 0x0313	"%.16g"	ValueText	measurementType must be replaced with meterWidth or pixelWidth
ValueText.textLineWidth.name	0x0082 0x0307 0X030D 0X030F 0x0313	"%s"	ValueText	
ValueText.textOrientation	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=horizontal, "1"=vertical	ValueText	
ValueText.textThickness	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=normal, "1"=thick, "2"=thin	ValueText	
ValueText.underline	0x0082 0x0307 0X030D 0X030F 0x0313	String representing enumeration such that: "0"=over, "1"=under	ValueText	

Q.15.3 ValueToCustomer

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
ValueToCustomer	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230	"%s"		

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
	0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313			

Q.16 PMI Properties “JtTk”

Q.16.1 ____JtTkIntersectionReference__reference0

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
____JtTkIntersectionReference__ _reference0	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	ORIGINreference1	____JtTkIntersectionReference__ _reference1	ORIGIN is optional and should only be added if the Intersection reference is also an Origin reference reference0 and reference1 should be in the format "%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path. Should exist in pairs, with the opposite ordering of values also persited, to identify both way which references are tied together as an intersection reference

Q.16.2 ____JtTkIntersectionReference__reference1

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
____JtTkIntersectionReference__ _reference1	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	ORIGINreference0	____JtTkIntersectionReference__ _reference0	ORIGIN is optional and should only be added if the Intersection reference is also an Origin reference reference0 and reference1 should be in the format "%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
				path Should exist in pairs, with the opposite ordering of values also persited, to identify both way which references are tied together as an intersection reference

Q.16.3 ____JtTkOriginReference____reference

Property Key	Supported PMI_Type values	Value Format/Expected Values	Prerequisite Key	Additional Note
____JtTkOriginReference____reference	0x0004 0x0008 0x0041 0x0042 0x0081 0x0082 0x0084 0x0088 0x0100 0x0114 0x0118 0x0230 0x0231 0x0232 0x0233 0x0235 0x0238 0x0239 0x0240 0x0241 0x0242 0x0243 0x0244 0x0245 0x0246 0x0306 0x0307 0X030D 0X030F 0x0311 0x0313	"%d %d %d %s" such that first in is the dst id, second the dst type, third the reason(optional) and the string the path.		reference is the property value encoded also into the key identifying which reference is an origin reference.

Annex R

Change History

R.1 High Level Summary of changes from JTIAP Edition 2

The technical description for MbStrings in Table 4 Composite Data Types has been updated to include UTF 16

The UChar: Version string description from Figure 11 File Header data collection has been updated to reflect the JT version being 10.5

New segment types have been added to Table 6 “Segment Types”. The new types include; Smart Topolgy Table (STT), Info Segment and AEC Shape. The complete descriptions for STT is provided in Annex J. The complete description for Info Segment is added in Chapter 10. The AEC Shape data description is under development.

The Object Type Identifier value for the STEP segment has changed due to the addition of the STT segment. (see the Object Type Identifiers table). The STT Segment is identified by the value 32 and the STEP Segment is value 33.

The loop for Texture Coordinate Generator Attribute Elements has been removed from Figure 20 LSG Segment data collection

The Base Attribute Data description found in 6.2 Attribute Elements has been expanded to include the logical collection Base Attribute Data Fields V2. This logical collection is used to support per face group attributes.

The logical collection Base Attribute Data Fields V2 has been added to the following attribute elements; 6.2.1 Material Attribute Element, 6.2.2 Texture Image Attribute Element, 6.2.3 Draw Style Attribute Element, 6.2.4 Light Set Attribute Element, 6.2.5 Linestyle Attribute Element, 6.2.6 Pointstyle Attribute Element, 6.2.7 Geometric Transform Attribute Element, 6.2.8 Palette Map Attribute Element

A new attribute element has been added to the LSG definition, it is 6.2.8 Palette Map Attribute Element. A Palette Map Attribute is used on a shape such that any face group can be rendered with a chosen entry from the palette.

A new attribute element, “6.2.9 Sabot V104 Attribute Element”, has been added to the LSG definition. Sabot V104 is used to insulate pre JTIAP Edition 3 readers from attributes with non-fallback pallet Index attributes in order to preserve forward compatibility

In Section 9.2.2 PMI Associations, Table 55 PMI Associations Source Data values has new values added; =20 B-rep body and =23 Group. Table 56 — PMI Associations Reason Code values has two new values =20 Association is to a PMI B-rep entity contained in a virtual group. Similar to reason code 14 but for a virtual group and =78 Association is to a product instance to cut by a PMI section. Only required for partial scene sectioning.

The Table “Common Property Keys and Their Value Encoding formats” has been removed from the PMI Property descriptions in section 9.2.5 PMI Model Views. A complete description of PMI properties is provided in Annex Q.

Common Property Keys and Their Value Encoding formats

“Key” Property Atom Value String	“Value” Property Atom Value String Encoding Format	Decoding Notes
“PMI_PROP_ANCHOR_POINT”	“Px Py Pz”	Each Px, Py, Pz is a F32 value using “%f” format
“PMI_PROP_NOTE_HAS_URL”	“0” or “1”	0 = = False; 1 = = True

“Key” Property Atom Value String	“Value” Property Atom Value String Encoding Format	Decoding Notes
“PMI_PROP_NORMAL_DIR”	“Dx Dy Dz”	Each Dx, Dy, Dz is a F32 value using “%f” format
“PMI_PROP_APPROACH_DIR”	“Dx Dy Dz”	Each Dx, Dy, Dz is a F32 value using “%f” format
“PMI_PROP_CLAMPING_DIR”	“Dx Dy Dz”	Each Dx, Dy, Dz is a F32 value using “%f” format
“PMI_PROP_MEAS_DIR”	“Dx Dy Dz”	Each Dx, Dy, Dz is a F32 value using “%f” format
“PMI_PROP_COORD_DIR”	“Dx Dy Dz”	Each Dx, Dy, Dz is a F32 value using “%f” format
“PMI_PROP_MEAS_LEVEL”	“#”	Integer representing level number

In section 9.2.6 Generic PMI Entities, Table 59 Generic PMI Entity Type values has a new value; 0x0309 Weld Note Type

Annex E Per Face Group Attributes has been added. This provides the description for the applying attributes, such as material and texture image, to a group of faces in the Logical Scene Graph (LSG).

Annex Q, JT PMI Properties, has been updated to include tables of properties for each PMI Type.

R.2 Detailed Format changes

Reading 9.5 JT format changes

Implementers wishing to read or write data as defined in previous versions of JTIAP or ISO 14306 should work from this section for format specification.

R.2.1 File Structure – see core spec

R.2.1.1 File Header – see core spec

R.2.1.2 TOC Segment – see core spec

R.2.1.3 Data Segment

All data stored in a JT file shall be defined within a Data Segment. Data Segments are “typed” based on the general classification of data they contain. See Segment Type field description below for a complete list of the segment types.

Beyond specific data field compression/encoding, some Data Segment types also have a ZLIB compression conditionally applied to all the Data bytes of information persisted within the segment. Whether ZLIB compression is conditionally applied to a segment’s Data bytes of information is indicated by information stored with the first “Element” in the segment. Also Table 6 — Segment Types has a column indicating whether the Segment Type may have ZLIB compression applied to its Data bytes.

All Data Segments have the same basic structure.




Figure R 1 — Data Segment data collection

Segment Header

Segment Header contains information that determines how the remainder of the Segment is interpreted by the loader.




Figure R 2 — Segment Header data collection

GUID: Segment ID

Global Unique Identifier for the segment.

I32: Segment Type

Segment Type defines a broad classification of the segment contents. For example, a Segment Type of “1” denotes that the segment contains Logical Scene Graph material; “2” denotes contents of a B-Rep, etc.

The complete list of segment types is as follows. The column labelled "ZLIB Applied?" denotes whether ZLIB compression is conditionally applied to the entirety of the segment's Data payload.

Table R 1 — Segment Types

Type	Data Contents	ZLIB Applied?	Deprecated
1	Logical Scene Graph	Yes	No
2	JT B-Rep	Yes	Yes
3	PMI Data	Yes	Yes
4	Meta Data	Yes	No
6	Shape	No	No
7	Shape LOD0	No	No
8	Shape LOD1	No	No
9	Shape LOD2	No	No
10	Shape LOD3	No	No
11	Shape LOD4	No	No
12	Shape LOD5	No	No
13	Shape LOD6	No	No
14	Shape LOD7	No	No
15	Shape LOD8	No	No
16	Shape LOD9	No	No
17	XT B-Rep	Yes	No

Type	Data Contents	ZLIB Applied?	Deprecated
18	Wireframe Representation	Yes	No
20	ULP	Yes	No
24	LWPA	Yes	No

NOTE 1 Segment Types 7-16 all identify the contents as LOD Shape data, where the increasing type number is intended to convey some notion of how high an LOD the specific shape segment represents. The lower the type in this 7-16 range the more detailed the Shape LOD (i.e. Segment Type 7 is the most detailed Shape LOD Segment). For the rare case when there are more than 10 LODs, LOD9 and greater are all assigned Segment Type 16.

NOTE 2 The more generic Shape Segment type (i.e. Segment Type 6) is used when the Shape Segment has one or more of the following characteristics:

- not a descendant of an LOD node;
- is referenced by (i.e. is a child of) more than one LOD node;
- Shape has its own built-in LODs;
- no way to determine what LOD a Shape Segment represents.

I32 : Segment Length

Segment Length is the total size of the segment in bytes. This length value includes all segment Data bytes plus the Segment Header bytes (i.e. it is the size of the complete segment) and should be equal to the length value stored with this segment's TOC Entry.

Data

The interpretation of the Data section depends on the Segment Type. See Data Segments for complete description for all Data Segment that may be contained in a JT file.

Although the Data section is Segment Type dependent there is a common structure which often occurs within the Data section. This structure is a list or multiple lists of Elements where each Element has the same basic structure which consists of some fixed length header information describing the type of object contained in the Element, followed by some variable length object type specific data.

Individual data fields of an Element data collection (and its children data collections) may have advanced compression/encoding applied to them as indicated through compression related data values stored as part of the particular Element's storage format. In addition, another level of compression (i.e. ZLIB compression) may be conditionally applied to all bytes of information stored for all Elements within a particular Segment. Not all Segment types support ZLIB compression on all Segment data as indicated the Table Segment Types_If a particular file Segment is of the type which supports ZLIB compression on all the Segment data, whether this compression is applied or not is indicated by data values stored in the Logical Element Header ZLIB data collection of the first Element within the Segment. An in-depth description of JT file compression/encoding techniques can be found in Data Compression and Encoding.

For Segment Types that do **NOT** support ZLIB compression on all Segment Data. (see Table on Segment Types.)

For Segment Types that support ZLIB compression on all Segment Data (see Table on Segment Types.)

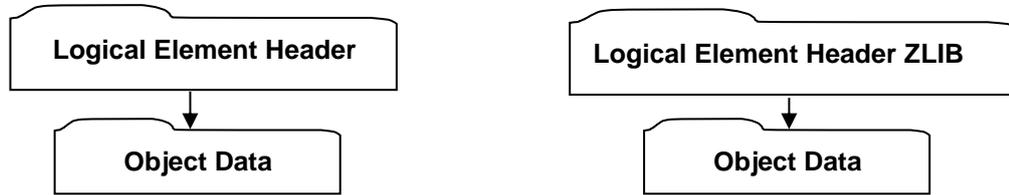


Figure R 3 — Data collection

Logical Element Header

Logical Element Header contains data defining the length in bytes of the Element along with the Element Header .




Figure R 4 — Logical Element Header data collection

Complete description for Logical Element Header can be found in this document.

I32: Element Length

Element Length is the total length in bytes of the element Object Data.

Element Header

Element Header contains data describing the object type contained in the Element.

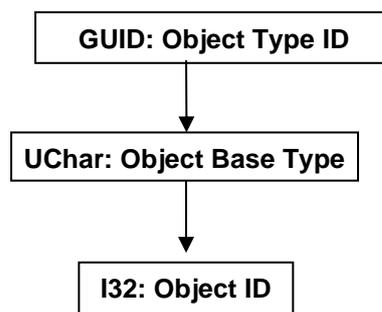


Figure R 5 — Element Header data collection

GUID: Object Type ID

Object Type ID is the globally unique identifier for the object type. A complete list of the assigned GUID for all object types stored in a JT file can be found in Annex A. If the GUID is not found in Annex A, the reader should skip Element Length + 1 number of bytes.

UChar: Object Base Type

Object Base Type identifies the base object type. If the Object Base Type is not present in the Table 246 — Object_Base_Types then the loader should simply skip (read pass) Element Length number of bytes.

Valid Object Base Types include the following:

Table R 2 — Object Base Types

Base Type	Description	Base Type's Data Format
255	None	None
0	Base Graph Node Object	Base Node Data
1	Group Graph Node Object	Group Node Data
2	Shape Graph Node Object	Base Shape Data
3	Base Attribute Object	Base Attribute Data
4	Shape LOD	None
5	Base Property Object	Base Property Atom Data
6	JT Object Reference Object	<u>JT Object Reference Property Atom Element</u> without the Logical Element Header ZLIB data collection.
8	JT Late Loaded Property Object	<u>Late Loaded Property Atom Element</u> without the Logical Element Header ZLIB data collection.
9	JtBase (none)	None

I32: Object ID

Object ID is the identifier for this Object. Other objects referencing this particular object do so using the Object ID.

Logical Element Header ZLIB

Logical Element Header ZLIB data collection is the format of Element Header data used by all Elements within Segment Types that support ZLIB compression on all data in the Segment. See Segment Type Table for information on whether a particular Segment Type supports ZLIB compression on all data in the Segment.

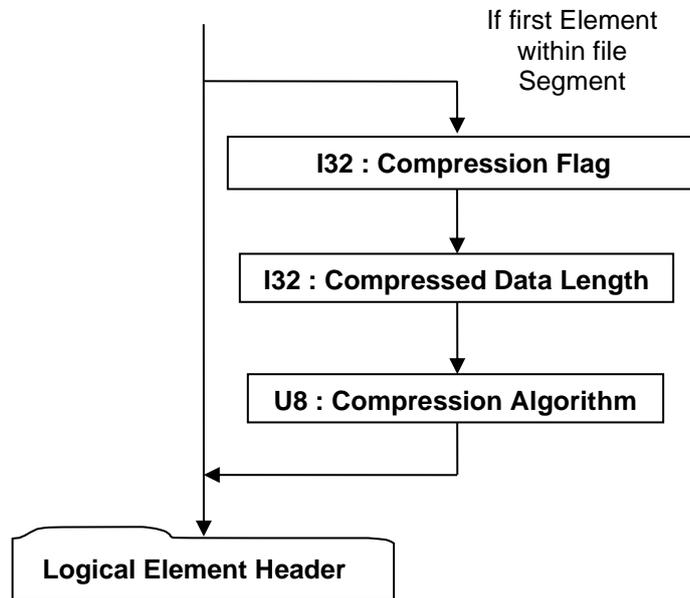


Figure R 6 — Logical Element Header ZLIB data collection

Complete description for Logical Element Header can be found this document under Data Segment. Note that if Compression Flag indicates that ZLIB compression is ON for all element data in the Segment, then the Logical Element Header data collection is also compressed accordingly.

I32 : Compression Flag

Compression Flag is a flag indicating whether ZLIB compression is ON/OFF for all data elements in the file Segment. Valid values include the following:

Table R 3 — Compression flag values

= 2	ZLIB compression is ON
!= 2	ZLIB compression is OFF.

I32 : Compressed Data Length

Compressed Data Length specifies the compressed data length in number of bytes. Note that data field Compression Algorithm is included in this count.

U8 : Compression Algorithm

Compression Algorithm specifies the compression algorithm applied to all data in the Segment. Valid values include the following:

Table R 4 — Compression algorithm values

= 1	No compression
= 2	ZLIB compression

Object Data

The interpretation of the Object Data section depends upon the Object Type ID stored in the Logical Element Header (see Logical Element Header).

R.2.2 Data Segments - see core spec

R.2.3 LSG Segment – see core spec

R.2.3.1 Node Elements

Node Elements represent the relationships of a model's components. The model's component hierarchy is formed via certain types of Node Elements containing collections of references to other Node Elements who in turn may reference other collections of Node Elements. Node Elements are also the holders (either directly or indirectly) of geometric shape, properties, and other information defining a model's components and representations.

R.2.3.1.1 Base Node Element

Object Type ID: 0x10dd1035, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Base Node Element represents the simplest form of a node that can exist within the LSG. The Base Node Element has no implied LSG semantic behaviour nor can it contain any children nodes.

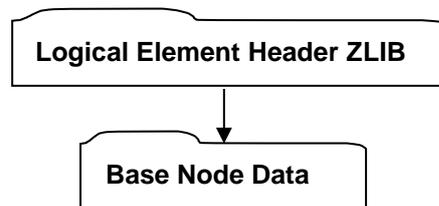


Figure R 7 — Base Node Element data collection

Complete description for Logical Element Header ZLIB can be found in **Logical Element Header ZLIB** definition.

Base Node Data

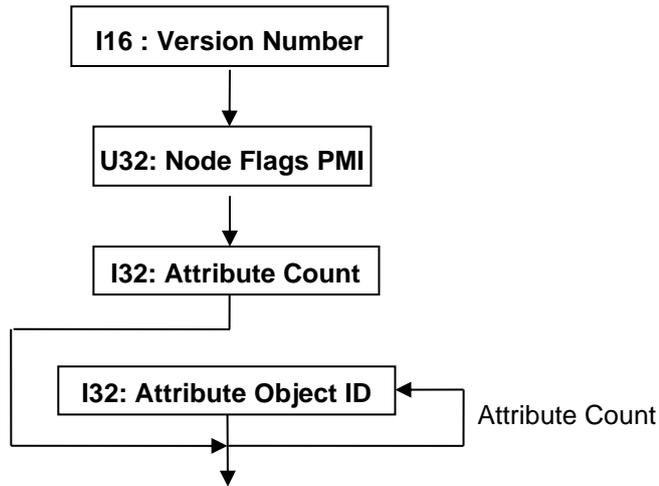


Figure R 8 — Base Node Data collection

I16 : Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

U32 : Node Flags PMI

Node Flags is a collection of flags. The flags are combined using the binary OR operator. These flags store various state information of the node object. All bits fields that are not defined as in use should be set to “0”.

Table R 5 — Node Flag values

0x00000001	Ignore Flag = 0 – Algorithms traversing the LSG structure should include/process this node. = 1 – Algorithms traversing the LSG structure should skip the whole subgraph rooted at this node. Essentially the traversal should be pruned.
------------	---

I32 : Attribute Count

Attribute Count indicates the number of Attribute Objects referenced by this Node Object. A node may have zero Attribute Object references.

I32 : Attribute Object ID

Attribute Object ID is the identifier for a referenced Attribute Object.

R.2.3.1.2 Partition Node Element

Object Type ID: 0x10dd103e, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A partition in a JT file must always be either the root or leaf node. A leaf partition node represents an external JT file reference and provides a means to partition a model into multiple physical JT files (e.g. separate JT file per part in an assembly).

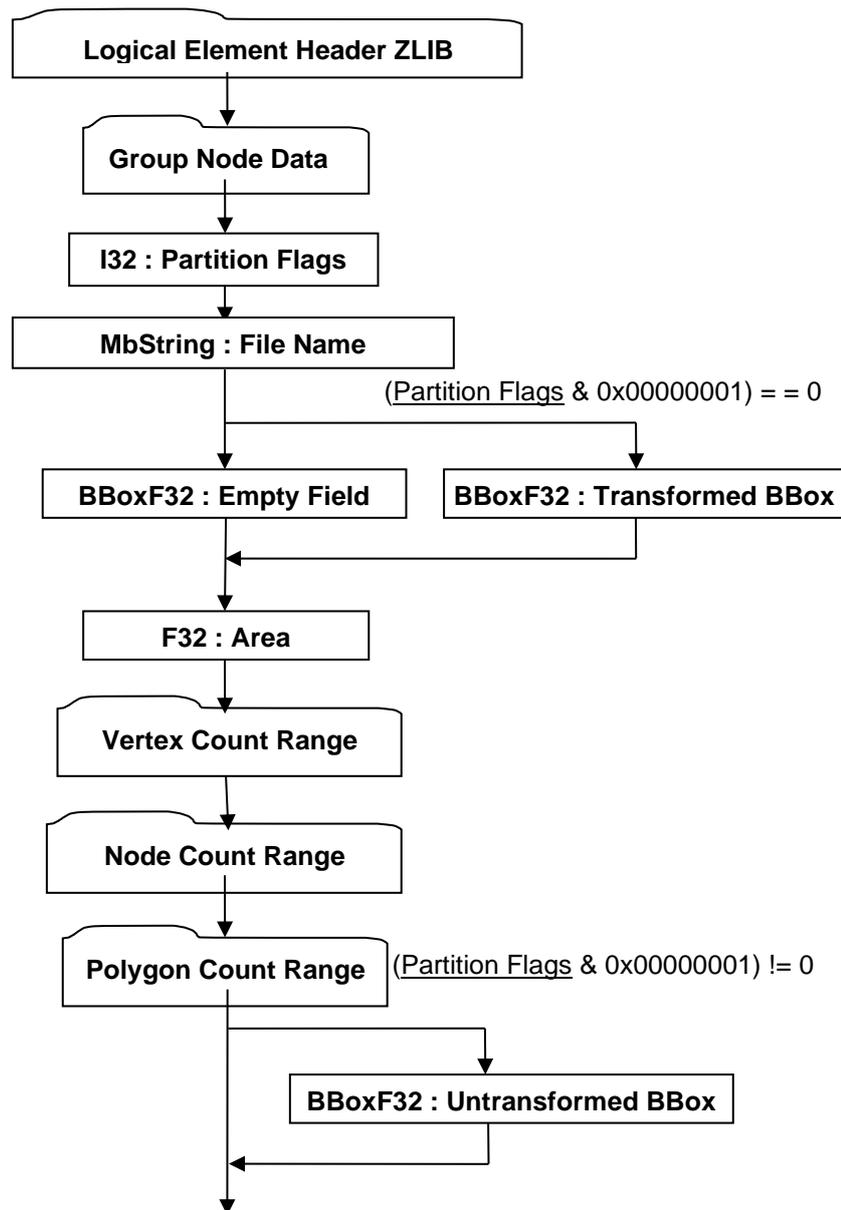


Figure R 9 — Partition Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB. Complete description for Group Node Data can be found in Group Node Data.

I32 : Partition Flags

Partition Flags is a collection of flags. The flags are combined using the binary OR operator. These flags store various state information of the Partition Node Object such as indicating the presence of optional data. All bits fields that are not defined as in use should be set to “0”.

Table R 6 — Partition flag bits

0x00000001	Untransformed bounding box is written.
------------	--

MbString : File Name

File Name is the relative path portion of the Partition’s file location. Where “relative path” should be interpreted to mean the string contains the file name along with any additional path information that locates the partition JT file relative to the location of the referencing JT file.

BBoxF32 : Empty Field

Refer to Common Data Conventions and Constructs, _Empty Field.

BBoxF32 : Transformed BBox

The Transformed BBox is an MCS axis aligned bounding box and represents the transformed geometry extents for all geometry contained in the Partition Node. This bounding box information may be used by a renderer of JT data to determine whether to load the data contained within the Partition node (i.e. is any part of the bounding box within the view frustum).

F32 : Area

Area is the total surface area for this node and all of its descendants. This value is stored in MCS coordinate space (i.e. values scaled by MCS scaling).

BBoxF32 : Untransformed BBox

The Untransformed BBox is only present if Bit 0x00000001 of Partition Flags data field is ON. The Untransformed BBox is an LCS axis-aligned bounding box and represents the untransformed geometry extents for all geometry contained in the Partition Node. This bounding box information may be used by a renderer of JT data to determine whether to load the data contained within the Partition node (i.e. is any part of the bounding box within the view frustum).

Vertex Count Range

Vertex Count Range is the aggregate minimum and maximum vertex count for all descendants of the Partition Node. There is a minimum and maximum value to accommodate descendant branches having LOD nodes, which encompass a range of count values within the branch, and to accommodate nodes that can themselves generate varying representations. The minimum value represents the least vertex count that can be achieved by the Partition Node's descendants. The maximum value represents the greatest vertex count that can be achieved by the Partition Node's descendants.




Figure R 10 — Vertex Count Range data collection

I32 : Min Count

Min Count is the least vertex count that can be achieved by the Partition Node's descendants.

I32 : Max Count

Max Count is the maximum vertex count that can be achieved by the Partition Node's descendants.

Node Count Range

Node Count Range is the aggregate minimum and maximum count of all node descendants of the Partition Node. There is a minimum and maximum value to accommodate descendant branches having LOD nodes, which encompass a range of descendant node count values within the branch. The minimum value represents the least node count that can be achieved by the Partition Node's descendants. The maximum value represents the greatest node count that can be achieved by the Partition Node's descendants.

The data format for Node Count Range is the same as that described in Vertex Count Range.

Polygon Count Range

Polygon Count Range is the aggregate minimum and maximum polygon count for all descendants of the Partition Node. There is a minimum and maximum value to accommodate

descendent branches having LOD nodes, which encompass a range of count values within the branch, and to accommodate nodes that can themselves generate varying representations. The minimum value represents the least polygon count that can be achieved by the Partition Node's descendants. The maximum value represents the greatest polygon count that can be achieved by the Partition Node's descendants.

The data format for Polygon Count Range is the same as that described in Vertex Count Range.

R.2.3.1.3 Group Node Element

Object Type ID: 0x10dd101b, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Group Nodes contain an ordered list of references to other nodes, called the group's *children*. Group nodes may contain zero or more children; the children may be of any node type. Group nodes may not contain references to themselves or their ancestors.

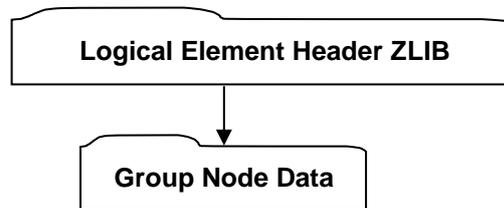


Figure R 11 — Group Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Group Node Data

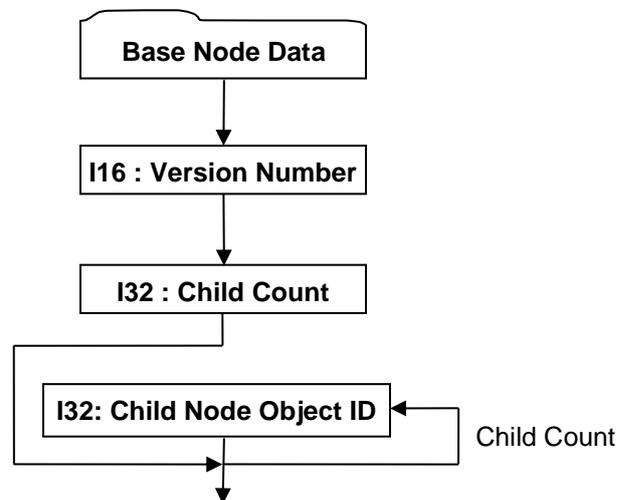


Figure R 12 — Group Node Data collection

Complete description for Base Node Data can be found in Base Node Data.

I16 : Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

I32 : Child Count

Child Count indicates the number of child nodes for this Group Node Object. A node may have zero children.

I32 : Child Node Object ID

Child Node Object ID is the identifier for the referenced Node Object.

R.2.3.1.4 Instance Node Element

Object Type ID: 0x10dd102a, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

An Instance Node contains a single reference to another node. Their purpose is to allow sharing of nodes and assignment of instance-specific attributes for the instanced node. Instance Nodes may not contain references to themselves or their ancestors.

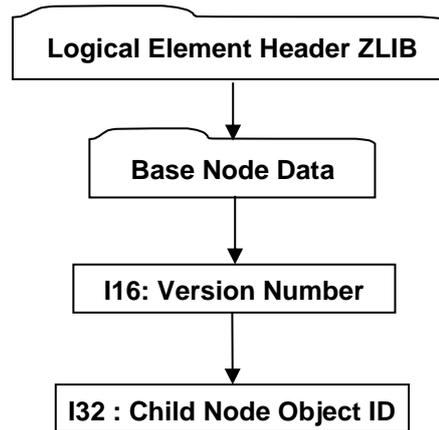


Figure R 13 — Instance Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Node Data can be found in Base Node Data.

I16: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

I32 : Child Node Object ID

Child Node Object ID is the identifier for the instanced Node Object.

R.2.3.1.5 Part Node Element

Object Type ID: 0xce357244, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1

A Part Node Element represents the root node for a particular Part within a LSG structure. Every unique Part represented within a LSG structure should have a corresponding Part Node Element. A Part Node Element typically references (using Late Loaded Property Atoms) additional Part specific geometric data and/or properties (e.g. B-Rep data, PMI data).

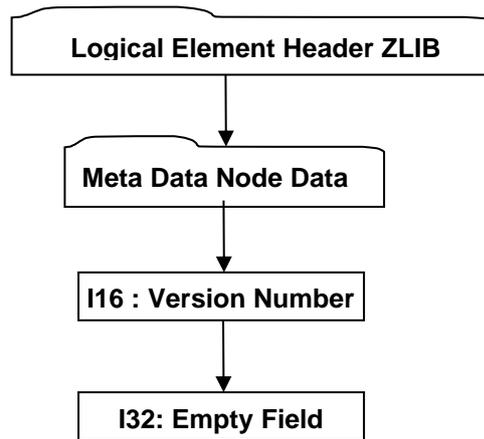


Figure R 14 — Part Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Meta Data Node Data can be found in Meta Data Node Data.

I16 : Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

I32: Empty Field

Refer to Common Data Conventions and Constructs, Empty Field.

R.2.3.1.6 Meta Data Node Element

Object Type ID: 0xce357245, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1

The Meta Data Node Element is a node type used for storing references to specific “late loaded” meta-data (e.g. properties, PMI). The referenced meta-data is stored in a separate addressable segment of the JT File (see 17 Meta Data Segment) and thus the use of this Meta Data Node Element is in support of the JT file loader/reader “best practice” of late loading data (i.e. storing the referenced meta-data in separate addressable segment of the JT file allows a JT file loader/reader to ignore this node’s meta-data on initial load and instead late-load the node’s meta-data upon demand so that the associated meta-data does not consume memory until needed).

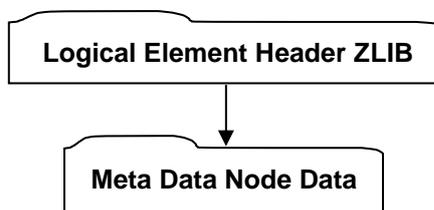


Figure R 15 — Meta Data Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Meta Data Node Data




Figure R 16 — Meta Data Node Data collection

Complete description for Group Node Data can be found in Group Node Data.

I16 : Version Number

Version Number is the version identifier for this data. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

R.2.3.1.7 LOD Node Element

Object Type ID: 0x10dd102c, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

An LOD Node holds a list of alternate representations. The list is represented as the children of a base group node, however, there are no implicit semantics associated with the ordering. Traversers of LSG may apply semantics to the ordering as part of alternative representation selection.

Each alternative representation could be a sub-assembly where the alternative representation is a group node with an assembly of children.

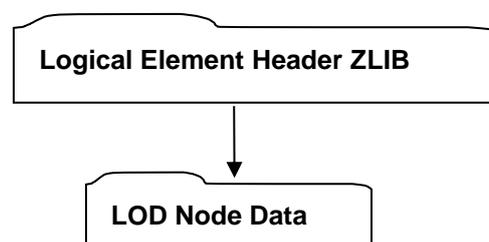


Figure R 17 — LOD Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

LOD Node Data

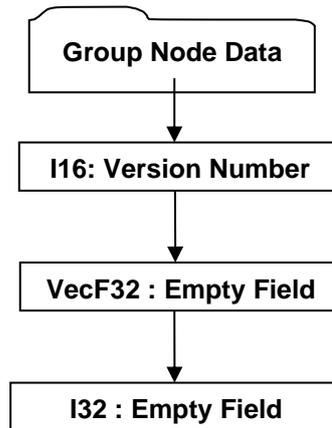


Figure R 18 — LOD Node Data collection

Complete description for Group Node Data can be found in Group Node Data.

I16: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

VecF32 : Empty Field

A vector data field. Refer to Common Data Conventions and Constructs, Empty Field.

I32 : Empty Field

Refer to Common Data Conventions and Constructs, Empty Field.

R.2.3.1.8 Range LOD Node Element

Object Type ID: 0x10dd104c, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Range LOD Nodes hold a list of alternate representations and the ranges over which those representations are appropriate. Range Limits indicate the distance between a specified centre point and the eye point, within which the corresponding alternate representation is appropriate. Traversers of LSG consult these range limit values when making an alternative representation selection.

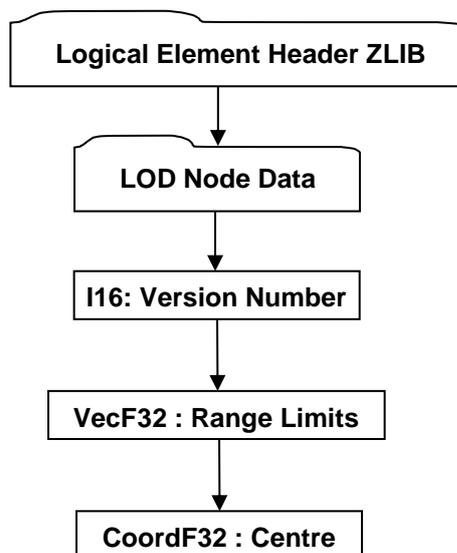


Figure R 19 — Range LOD Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for LOD Node Data can be found in LOD Node Data.

I16: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

VecF32 : Range Limits

Range Limits indicate the WCS distance between a specified centre point and the eye point, within which the corresponding alternate representation is appropriate. It is not required that the count of range limits is equivalent to the number of alternative representations. These values are considered “soft values” in that loaders/viewers of JT data are free to throw these values away and compute new values based on their desired LOD selection semantics.

Common Data Conventions and Constructs suggest that LSG traversers apply the following strategy, at Range LOD Nodes, when making alternative representation selection decisions based on Range Limits: The first alternate representation is valid when the distance between the centre and the eye point is less than or equal to the first range limit (and when no range limits are specified). The second alternate representation is valid when the distance is greater than the first limit and less than or equal to the second limit, and so on. The last alternate representation is valid for all distances greater than the last specified limit.

CoordF32 : Centre

Centre specifies the X, Y, Z coordinates for the MCS centre point upon which alternative representation selection eye distance computations are based. Typically this location is the centre of the highest-detail alternative representation. These values are considered “soft values” in that loaders/viewers of JT data are free to throw these values away and compute new values based on their desired LOD selection semantics.

R.2.3.1.9 Switch Node Element

Object Type ID: 0x10dd10f3, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

The Switch Node is very much like a Group Node in that it contains an ordered list of references to other nodes, called the *children* nodes. The difference is that a Switch Node also contains additional data indicating which child (one or none) a LSG traverser should process/traverse.

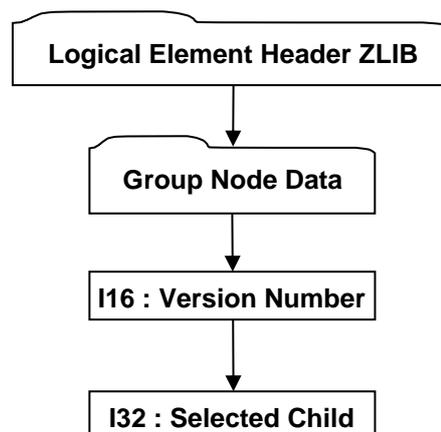


Figure R 20 — Switch Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Group Node Data can be found in Group Node Data.

I16 : Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

I32 : Selected Child

Selected Child is the index for the selected child node. Valid Selected Child values reside within the following range: “-1 < Selected Child < Child Count”. Where “-1” indicates that no child is to be selected and “Child Count” is the data field value from Group Node Data.

Shape Node Elements

Shape Node Elements are “leaf” nodes within the LSG structure and contain or reference the geometric shape definition data (e.g. vertices, polygons, normals, etc.).

Typically Shape Node Elements do not directly contain the actual geometric shape definition data, but instead reference (using Late Loaded Property Atoms) Shape LOD Segments within the file for the actual geometric shape definition data. Storing the geometric shape definition data within separate independently addressable data segments in the JT file, allows a JT file reader to be structured to support the “best practice” of delaying the loading/reading of associated data until it is actually needed. Complete descriptions for Late Loaded Property Atom Elements and Shape LOD Segments can be found in Late Loaded Property Atom Element and 7 Shape LOD Segment respectively.

There are several types of Shape Node Elements which the JT format supports. The following sections document the various Shape Node Element types.

R.2.3.1.10 Base Shape Node Element

Object Type ID: 0x10dd1059, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Base Shape Node Element represents the simplest form of a shape node that can exist within the LSG.

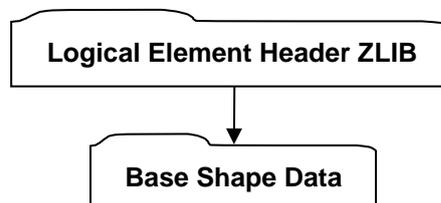


Figure R 21 — Base Shape Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Base Shape Data

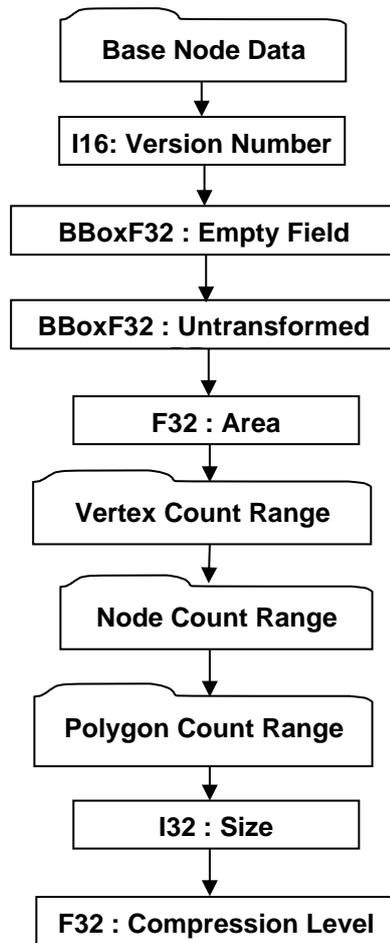


Figure R 22 — Base Shape Data collection

Complete description for Base Node Data can be found in Base Node Data.

I16: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

BBoxF32 : Empty Field

Refer to Common Data Conventions and Constructs, Empty Field.

BBoxF32 : Untransformed BBox

The Untransformed BBox is an axis-aligned LCS bounding box and represents the untransformed geometry extents for all geometry contained in the Shape Node.

F32 : Area

Area is the total surface area for this node and all of its descendents. This value is stored in MCS coordinate space (i.e. values scaled by MCS scaling).

I32 : Size

Size specifies the in memory length in bytes of the associated/referenced Shape LOD Element. This Size value has no relevancy to the on-disk (JT File) size of the associated/referenced Shape LOD Element. A value of zero indicates that the in memory size is unknown. See Shape LOD element for complete description of Shape LOD Elements. JT file loaders/readers can

leverage this Size value during late load processing to help pre-determine if there is sufficient memory to load the Shape LOD Element.

F32 : Compression Level

Compression Level specifies the qualitative compression level applied to the associated/referenced Shape LOD Element. See Shape LOD Element for complete description of Shape LOD Elements. This compression level value is a qualitative representation of the compression applied to the Shape LOD Element. The absolute compression (derived from this qualitative level) applied to the Shape LOD Element is physically represented in the JT format by other data stored with both the Shape Node and the Shape LOD Element (e.g.), and thus it is not necessary to understand how to map this qualitative value to absolute compression values in order to uncompress/decode the data.

Table R 7 — Compression level values

= 0.0	“Lossless” compression used.
= 0.1	“Minimally Lossy” compression used. This setting generally results in modest compression ratios with little if any visual difference when compared to the same images rendered from “Lossless” compressed Shape LOD Element.
= 0.5	“Moderate Lossy” compression used. The setting results in more data loss than “Minimally Lossy” and thus higher compression ratio is obtained. Some visual difference will likely be noticeable when compared to the same images rendered from “Lossless” compressed Shape LOD Element.
= 1.0	“Aggressive Lossy” compression used. With this setting as much data as possible will be thrown away, resulting in highest compression ratio, while still maintaining a modestly useable representation of the underlying data. Visual differences may be evident when compared to the same images rendered from “Lossless” compressed Shape LOD Element.

Vertex Count Range

Vertex Count Range is the aggregate minimum and maximum vertex count for this Shape Node. There is a minimum and maximum value to accommodate shape types that can themselves generate varying representations. The minimum value represents the least vertex count that can be achieved by the Shape Node. The maximum value represents the greatest vertex count that can be achieved by the Shape Node.




Figure R 23 — Vertex Count Range data collection

I32 : Min Count

Min Count is the least vertex count that can be achieved by this Shape Node.

I32 : Max Count

Max Count is the maximum vertex count that can be achieved by this Shape Node. A value of “-1” indicates maximum vertex count is unknown.

Node Count Range

Node Count Range is the aggregate minimum and maximum count of all node descendents of the Shape Node. The minimum value represents the least node count that can be achieved by the Shape Node’s descendants. The maximum value represents the greatest node count that

can be achieved by Shape Node’s descendants. For Shape Nodes the minimum and maximum count values should always be equal to “1”.

The data format for Node Count Range is the same as that described in Vertex Count Range.

Polygon Count Range

Polygon Count Range is the aggregate minimum and maximum polygon count for this Shape Node. There is a minimum and maximum value to accommodate shape types that can themselves generate varying representations. The minimum value represents the least polygon count that can be achieved by the Shape Node. The maximum value represents the greatest polygon count that can be achieved by the Shape Node.

The data format for Polygon Count Range is the same as that described in Vertex Count Range.

R.2.3.1.11 Vertex Shape Node Element

Object Type ID: 0x10dd107f, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Vertex Shape Node Element represents shapes defined by collections of vertices.

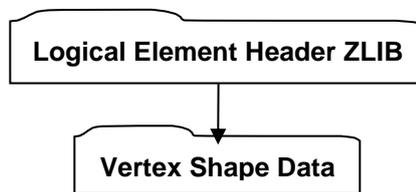


Figure R 24 — Vertex Shape Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Vertex Shape Data

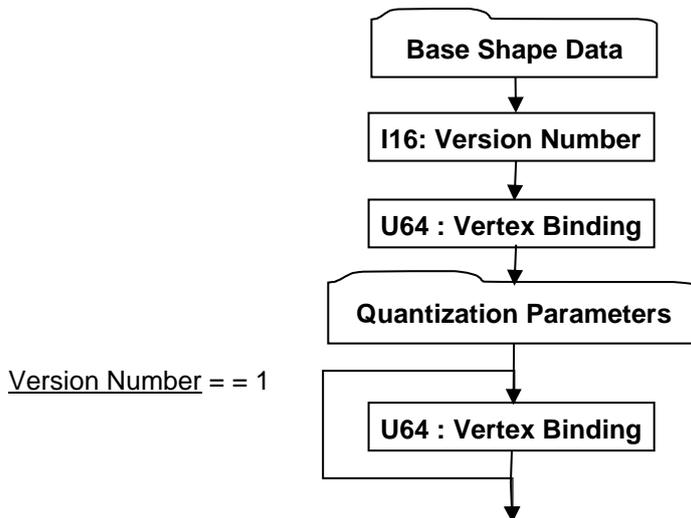


Figure R 25 — Vertex Shape Data collection

Complete description for Base Shape Data can be found in Base Shape Data.

I16: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

U64 : Vertex Binding

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to “0”. For more information see Vertex Shape LOD Data U64 : Vertex Binding.

Quantization Parameters

Quantization Parameters specifies for each shape data type grouping (i.e. Vertex, Normal, Texture Coordinates, Colour) the number of quantization bits used for given qualitative compression level. Although these values are saved in the associated/referenced Shape LOD Element, they are also saved here so that a JT File loader/reader does not have to load the Shape LOD Element in order to determine the Shape quantization level. See Shape LOD Element for complete description of Shape LOD Elements.

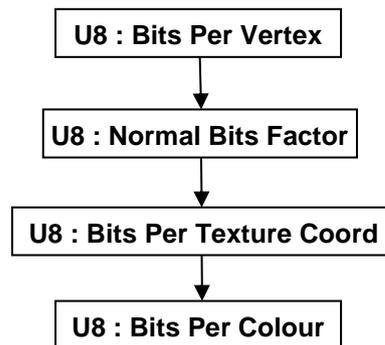


Figure R 26 — Quantization Parameters data collection

U8 : Bits Per Vertex

Bits Per Vertex specifies the number of quantization bits per vertex coordinate component. Value shall be within range [0:24] inclusive.

U8 : Normal Bits Factor

Normal Bits Factor is a parameter used to calculate the number of quantization bits for normal vectors. Value shall be within range [0:13] inclusive. The actual number of quantization bits per normal is computed using this factor and the following formula: “BitsPerNormal = 6 + 2 * Normal Bits Factor”.

U8 : Bits Per Texture Coord

Bits Per Texture Coord specifies the number of quantization bits per texture coordinate component. Value shall be within range [0:24] inclusive.

U8 : Bits Per Colour

Bits Per Colour specifies the number of quantization bits per colour component. Value shall be within range [0:24] inclusive.

R.2.3.1.12 Tri-Strip Set Shape Node Element

Object Type ID: 0x10dd1077, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Tri-Strip Set Shape Node Element defines a collection of independent and unconnected triangle strips. Each strip constitutes one primitive of the set and is defined by one list of vertex coordinates.

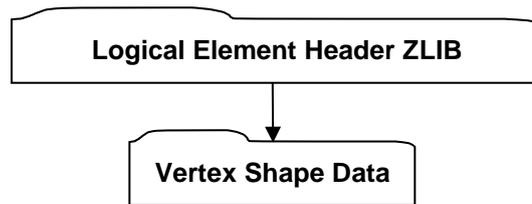


Figure R 27 — Tri-Strip Set Shape Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Vertex Shape Data can be found in Vertex Shape Data.

R.2.3.1.13 Polyline Set Shape Node Element

Object Type ID: 0x10dd1046, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Polyline Set Shape Node Element defines a collection of independent and unconnected polylines. Each polyline constitutes one primitive of the set and is defined by one list of vertex coordinates.

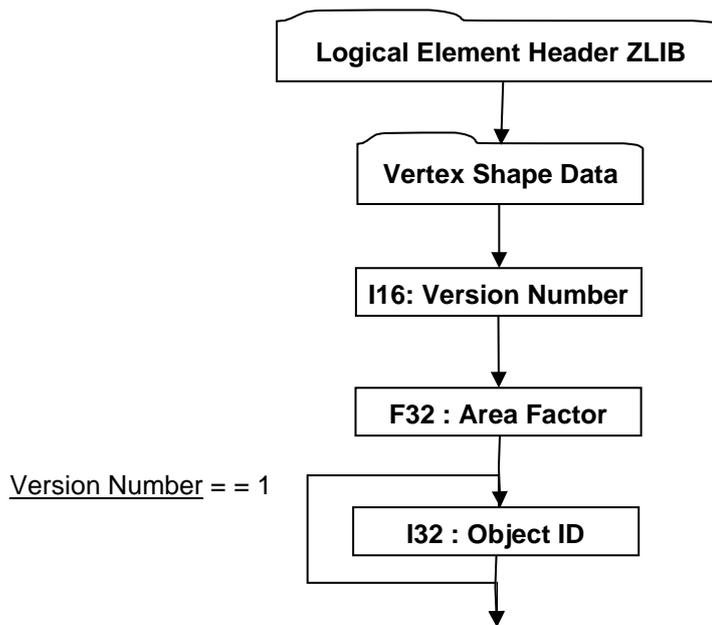


Figure R 28 — Polyline Set Shape Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Vertex Shape Data can be found in Vertex Shape Data.

I16: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

F32 : Area Factor

Area Factor specifies a multiplier factor applied to a Polyline Set computed surface area. In JT data viewer applications, there may be LOD selection semantics that are based on screen coverage calculations. The so-called "surface area" of a polyline is computed as if each line segment were a square. This Area Factor turns each edge into a narrow rectangle. Valid Area Factor values lie in the range (0,1].

U64: Vertex Bindings

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to “0”. For more information see Vertex Shape LOD Data U64: Vertex Bindings.

R.2.3.1.14 Point Set Shape Node Element

Object Type ID: 0x98134716, 0x0010, 0x0818, 0x19, 0x98, 0x08, 0x00, 0x09, 0x83, 0x5d, 0x5a

A Point Set Shape Node Element defines a collection of independent and unconnected points. Each point constitutes one primitive of the set and is defined by one vertex coordinate.

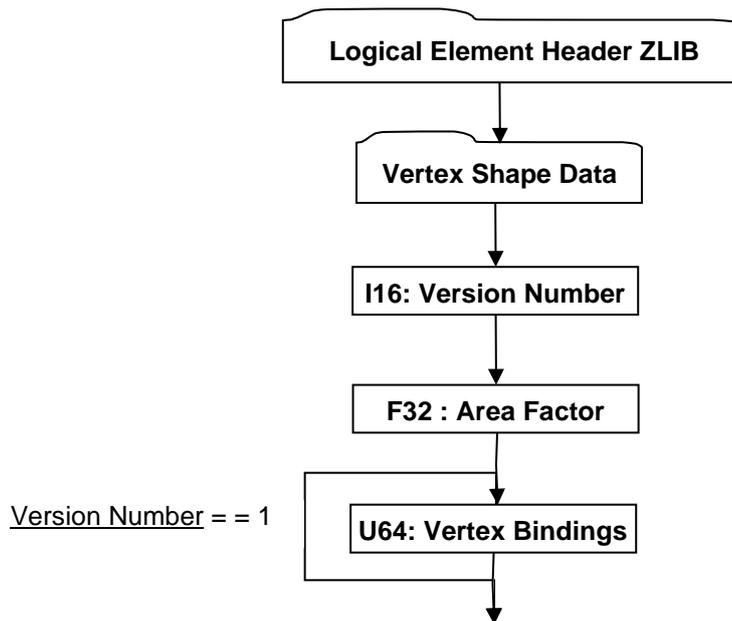


Figure R 29 — Point Set Shape Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Vertex Shape Data can be found in Vertex Shape Data.

I16: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

F32: Area Factor

Area Factor specifies a multiplier factor applied to the Point Set computed surface area. In JT data viewer applications there may be LOD selection semantics that are based on screen coverage calculations. The computed “surface area” of a Point Set is equal to the larger (i.e. whichever is greater) of either the area of the Point Set’s bounding box, or “1.0”. Area Factor scales the result of this “surface area” computation.

U64: Vertex Bindings

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to “0”. For more information see Vertex Shape LOD Data U64: Vertex Bindings.

R.2.3.1.15 Polygon Set Shape Node Element

Object Type ID: 0x10dd1048, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Polygon Set Shape Node Element defines a collection of independent and unconnected polygons. Each polygon constitutes one primitive of the set and is defined by one list of vertex coordinates.

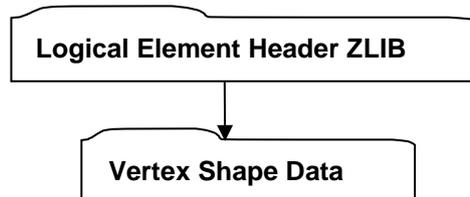


Figure R 30 — Polygon Set Shape Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Vertex Shape Data can be found in Vertex Shape Data.

R.2.3.1.16 NULL Shape Node Element

Object Type ID: 0xd239e7b6, 0xdd77, 0x4289, 0xa0, 0x7d, 0xb0, 0xee, 0x79, 0xf7, 0x94, 0x94

A NULL Shape Node Element defines a shape which has no direct geometric primitive representation (i.e. it is empty/NULL). NULL Shape Node Elements are often used as “proxy/placeholder” nodes within the serialized LSG when the actual Shape LOD data is run time generated (i.e. not persisted).

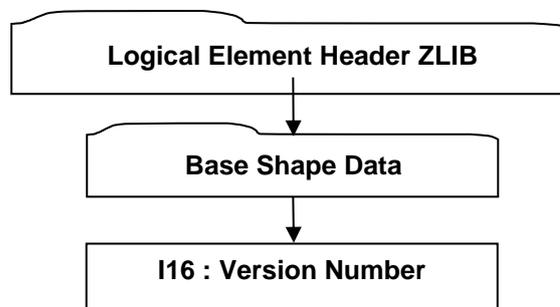


Figure R 31 — NULL Shape Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Shape Data can be found in Base Shape Data.

I16 : Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

R.2.3.1.17 Primitive Set Shape Node Element

Object Type ID: 0xe40373c1, 0x1ad9, 0x11d3, 0x9d, 0xaf, 0x0, 0xa0, 0xc9, 0xc7, 0xdd, 0xc2

A Primitive Set Shape Node Element represents a list/set of primitive shapes (e.g. box, cylinder, sphere, etc.) whose LODs can be procedurally generated. “Procedurally generate” means that the raw geometric shape definition data (e.g. vertices, polygons, normals, etc) for LODs is not

directly stored; instead some basic shape information is stored (e.g. sphere centre and radius) from which LODs can be generated.

Primitive Set Shape Node Elements actually do not even directly contain this basic shape definition data, but instead reference (using Late Loaded Property Atoms) Primitive Set Shape Elements within the file for the actual basic shape definition data. Storing the basic shape definition data within separate independently addressable data segments in the JT file, allows a JT file reader to be structured to support the “best practice” of delaying the loading/reading of associated data until it is actually needed. Complete descriptions for Late Loaded Property Atom Elements and Primitive Set Shape Element can be found in Late Loaded Property Atom Element and Primitive Set Shape Element respectively.

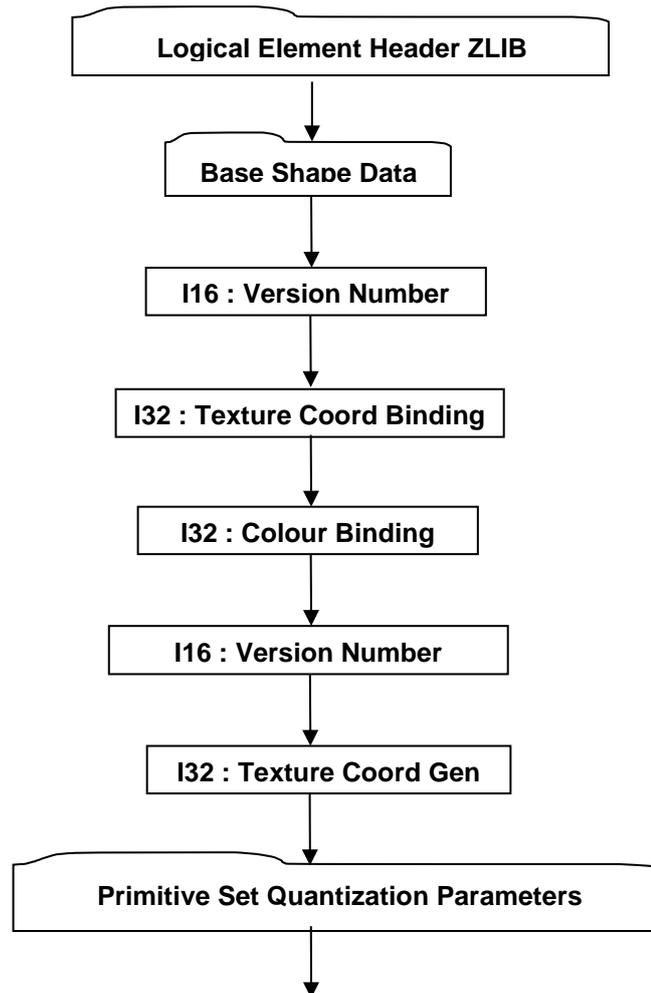


Figure R 32 — Primitive Set Shape Node Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Shape Data can be found in Base Shape Data.

I16 : Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

I32 : Texture Coord Binding

Texture Coord Binding specifies how (at what granularity) texture coordinate data is supplied (“bound”) for the shape in the associated/referenced Shape LOD Element. Valid values are as follows:

Table R 8 — Texture Coord Binding values

= 0	None. Shape has no texture coordinate data.
= 1	Per Vertex. Shape has texture coordinates for every vertex.

I32 : Colour Binding

Colour Binding specifies how (at what granularity) colour data is supplied (“bound”) for the shape in the associated/referenced Shape LOD Element. Valid values are the same as documented for Texture Coord Binding data field.

I16 : Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table R 9 — Version Number values

= 0	Version 0 Format
= 1	Version 1 Format

I32 : Texture Coord Gen Type

Texture Coord Gen Type specifies how a texture is applied to each face of the primitive. Single tile means one copy of the texture will be stretched to fit the face, isotropic means that the texture will be duplicated on the longer dimension of the face in order to maintain the texture’s aspect ratio.

Table R 10 — Texture Coord Gen Type values

= 0	Single Tile...Indicates that a single copy of a texture image will be applied to significant primitive features (i.e. cube face, cylinder wall, end cap) no matter how eccentrically shaped.
= 1	Isotropic...Implies that multiple copies of a texture image may be mapped onto eccentric surfaces such that a mapped texel stays approximately square.

Primitive Set Quantization Parameters

Primitive Set Quantization Parameters specifies for the two shape data type grouping (i.e. Vertex, Colour) the number of quantization bits used for given qualitative compression level. Although these values are saved in the associated/referenced Shape LOD Element, they are also saved here so that a JT File loader/reader does not have to load the Shape LOD Element in order to determine the Shape quantization level. See Shape LOD Element for complete description of Shape LOD Elements.




Figure R 33 — Primitive Set Quantization Parameters data collection

U8 : Bits Per Vertex

Bits Per Vertex specifies the number of quantization bits per vertex coordinate component. Value shall be within range [0:24] inclusive.

U8 : Bits Per Colour

Bits Per Colour specifies the number of quantization bits per colour component. Value shall be within range [0:24] inclusive.

R.2.3.2 Attribute Elements

Attribute Elements (e.g. colour, texture, material, lights, etc.) are placed in LSG as objects associated with nodes. Attribute Elements are not nodes themselves but can be associated with any node.

For applications producing or consuming JT format data, it is important that the JT format semantics of how attributes are meant to be applied and accumulated down the LSG are followed. If not followed, then consistency between the applications in terms of 3D positioning and rendering of LSG model data will not be achieved.

To that end each attribute type defines its own application and accumulation semantics, but in general attributes at lower levels in the LSG take precedence and replace or accumulate with attributes set at higher levels. Nodes without associated attributes inherit those of their parents. Attributes inherit only from their parents; thus, a node's attributes do not affect that node's siblings. The root of a partition inherits the attributes in effect at the referring partition node.

Attributes can be declared "final" (see Base Attribute Data), which terminates accumulation of that attribute type at that attribute and propagates the accumulated values there to all descendants of the associated node. Descendants can explicitly do a one-shot override of "final" using the attribute "force" flag (see Base Attribute Data), but do not by default. Note that "force" does not turn OFF "final" – it is simply a one-shot override of "final" for the specific attribute marked as "forcing." An analogy for this "force" and "final" interaction is that "final" is a backdoor in the attribute accumulation semantics, and that "force" is a doggy-door in the backdoor.

Common Attribute Data Containers

Base Attribute Data




Figure R 34 — Base Attribute Data collection

I16: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

U8 : State Flags

State Flags is a collection of flags. The flags are combined using the binary OR operator and store various state information for Attribute Elements; such as indicating that the attributes accumulation is final. All bits fields that are not defined as in use should be set to "0".

Table R 11 — State Flag values

0x01	<p>Accumulation Final flag.</p> <p>Provides a means to terminate a particular attribute type's accumulation at any node of the LSG and thereby force all descendants to have that value of the attribute.</p> <p>= 0 – Accumulation is to occur normally = 1 – Accumulation is "final"</p>
0x02	<p>Accumulation Force flag.</p> <p>Provides a way to assign nodes in LSG, attributes that shall not be overridden by ancestors.</p>

	= 0 – Accumulation of this attribute obeys ancestor’s Final flag setting. = 1 – Accumulation of this attribute is forced (overrides ancestor’s Final flag setting)
0x04	Accumulation Ignore Flag. Provides a way to indicate that the attribute is to be ignored (not accumulated). = 0 – Attribute is to be accumulated normally (subject to values of Force/Final flags = 1 – Attribute is to be ignored.
0x08	Attribute Persistable Flag. Provides a way to indicate that the attribute is to be persistable to a JT file. = 0 – Attribute is to be non-persistable. = 1 – Attribute is to be persistable.

U32 : Field Inhibit Flags

Field Inhibit Flags is a collection of flags. The flags are combined using the binary OR operator and store the per attribute value accumulation flag. Each value present in an Attribute Element is given a field number ranging from 0 to 31. If the field’s corresponding bit in Inhibit Flags is set, then the field should not participate in attribute accumulation. All bits are reserved.

See each particular Attribute Element (e.g. Material Attribute Element) for a description of bit field assignments for each attribute value.

R.2.3.2.1 Material Attribute Element

Object Type ID: 0x10dd1030, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Material Attribute Element defines the material properties of an object. JT format LSG traversal semantics state that material attributes accumulate down the LSG by replacement.

The Field Inhibit flag (see Base Attribute Data) bit assignments for the Material Attribute Element data fields, are as follows:

Table R 12 — Material Attribute data field inhibit values

Field Inhibit Flag Bit	Data Field(s) Bit Applies To
0	<u>Ambient Common RGB Value</u> , <u>Ambient Colour</u>
1	<u>Diffuse Colour and Alpha (Legacy)</u>
2	<u>Specular Common RGB Value</u> , <u>Specular Colour</u>
3	<u>Emission Common RGB Value</u> , <u>Emission Colour</u>
4	<u>Blending Flag</u> , <u>Source Blending Factor</u> , <u>Destination Blending Factor</u>
5	<u>Override Vertex Colour Flag</u>
6	<u>Material Reflectivity</u>
7	<u>Diffuse Colour</u>
8	<u>Diffuse Alpha</u>

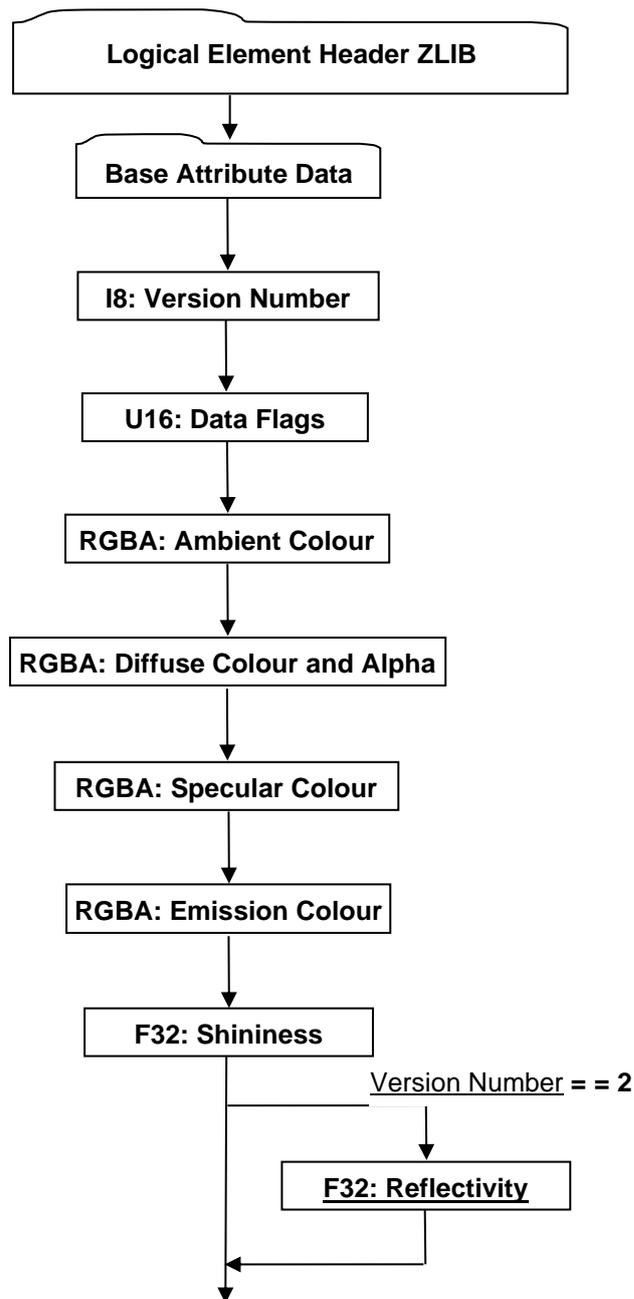


Figure R 35 — Material Attribute Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Attribute Data can be found in Base Attribute Data.

I16 : Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table R 13 — Material Attribute Version number value

= 1	Version-1 Format
= 2	Version-2 Format

U16 : Data Flags

Data Flags is a collection of flags and factor data. The flags and factor data are combined using the binary OR operator. The flags store information to be used for interpreting how to read subsequent Material data fields. All bits fields that are not defined as in use should be set to “0”.

Table R 14 — Material Attribute Data Flag values

0x0010	<p>Blending Flag. Blending is a colour combining operation in the graphics pipeline that happens just before writing a colour to the framebuffer. If Blending is ON then incoming fragment RGBA colour values are used (based on Source Blend Factor) and existing framebuffer's RGBA colour values are used (based on Destination Blend Factor) to blend between the incoming fragment RGBA and the current frame buffer RGBA to arrive at a new RGBA colour to write into the framebuffer. If Blending is OFF then incoming fragment RGBA colour is written directly into framebuffer unmodified (i.e. completely overriding existing framebuffer RGBA colour).</p> <p>= 0 – Blending OFF. = 1 – Blending ON</p>
0x0020	<p>Override Vertex Colours Flag. If ON, then a shape's per vertex colours are to be overridden by the accumulated Material colour.</p> <p>= 0 – Override OFF = 1 – Override ON</p>
0x07C0	<p>Source Blend Factor (stored in bits 6 – 10 or in binary notation 000001111000000). If Blending Flag enabled, this value indicates how the incoming fragment's (i.e. the source) RGBA colour values are to be used to blend with the current framebuffer's (i.e. the destination) RGBA colour values. Additional information on the interpretation of the Blending Factor values and how one might leverage them to render an image can be found in reference [1] listed in the bibliography section.</p> <p>= 0 – Interpret same as OpenGL GL_ZERO Blending Factor = 1 – Interpret same as OpenGL GL_ONE Blending Factor = 2 – Interpret same as OpenGL GL_DST_COLOUR Blending Factor = 3 – Interpret same as OpenGL GL_SRC_COLOUR Blending Factor = 4 – Interpret same as OpenGL GL_ONE_MINUS_DST_COLOUR Blending Factor = 5 – Interpret same as OpenGL GL_ONE_MINUS_SRC_COLOUR Blending Factor = 6 – Interpret same as OpenGL GL_SRC_ALPHA Blending Factor = 7 – Interpret same as OpenGL GL_ONE_MINUS_SRC_ALPHA Blending Factor = 8 – Interpret same as OpenGL GL_DST_ALPHA Blending Factor = 9 – Interpret same as OpenGL GL_ONE_MINUS_DST_ALPHA Blending Factor = 10 – Interpret same as OpenGL GL_SRC_ALPHA_SATURATE Blending Factor</p>
0xF800	<p>Destination Blend Factor (stored in bits 11 – 15 or in binary notation 1111100000000000).). If Blending Flag enabled, this value indicates how the current framebuffer's (the destination) RGBA colour values are to be used to blend with the incoming fragment's (the source) RGBA colour values. Additional information on the interpretation of the Blending Factor values and how one might leverage them to render an image can be found in reference [1] listed the bibliography section.</p> <p>= 0 – Interpret same as OpenGL GL_ZERO Blending Factor = 1 – Interpret same as OpenGL GL_ONE Blending Factor = 2 – Interpret same as OpenGL GL_DST_COLOUR Blending Factor = 3 – Interpret same as OpenGL GL_SRC_COLOUR Blending Factor = 4 – Interpret same as OpenGL GL_ONE_MINUS_DST_COLOUR Blending Factor = 5 – Interpret same as OpenGL GL_ONE_MINUS_SRC_COLOUR Blending Factor = 6 – Interpret same as OpenGL GL_SRC_ALPHA Blending Factor = 7 – Interpret same as OpenGL GL_ONE_MINUS_SRC_ALPHA Blending Factor = 8 – Interpret same as OpenGL GL_DST_ALPHA Blending Factor = 9 – Interpret same as OpenGL GL_ONE_MINUS_DST_ALPHA Blending Factor = 10 – Interpret same as OpenGL GL_SRC_ALPHA_SATURATE Blending Factor</p>

RGBA : Ambient Colour

Ambient Colour specifies the ambient red, green, blue, alpha colour values of the material.

RGBA : Diffuse Colour and Alpha

Diffuse Colour and Alpha specify the diffuse red, green, blue colour components, and alpha value of the material.

RGBA : Specular Colour

Specular Colour specifies the specular red, green, blue, alpha colour values of the material.

RGBA : Emission Colour

Emission Colour specifies the emissive red, green, blue, alpha colour values of the material.

F32 : Shininess

Shininess is the exponent associated with specular reflection and highlighting. Shininess controls the degree with which the specular highlight decays. Only values in the range [1,128] are valid.

F32 : Reflectivity

Reflectivity specifies the material reflectivity of the material. It represents the fraction of light reflected in the mirror direction by the material. Only values in the range [0.0, 1.0] are valid.

R.2.3.2.2 Texture Image Attribute Element

Object Type ID: 0x10dd1073, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Texture Image Attribute Element defines a texture image and its mapping environment. JT format LSG traversal semantics state that texture image attributes accumulate down the LSG by replacement on a per channel basis. See below for more information on texture image channels.

Note that additional information on the interpretation of the various Texture Image Attribute Element data fields can be found in the OpenGL references listed in the bibliography section [1].

The Field Inhibit flag (see Base Attribute Data) bit assignments for the Texture Image Attribute Element data fields, are as follows:

Element data fields, are as follows:

Table R 15 — Texture Image Attribute data field inhibit values

Field Flag Bit	Inhibit	Data Field(s) Bit Applies To
0		I32: <u>Texture Type</u> , <u>Mipmap Image Texel Data</u> , MBString: <u>External Storage Name</u> , <u>Shared Image Flag</u>
1		<u>Border Mode</u> , <u>Border Colour</u>
2		<u>Mipmap Minification Filter</u> , <u>Mipmap Magnification Filter</u>
3		<u>S-Dimen Wrap Mode</u> , <u>T-Dimen Wrap Mode</u> , <u>R-Dimen Wrap Mode</u>
4		<u>Blend Type</u> , <u>Blend Colour</u>
5		<u>Texture Transform</u>
6		<u>Tex Coord Gen Mode</u> , <u>Tex Coord Reference Plane</u>
8		<u>Internal Compression Level</u>

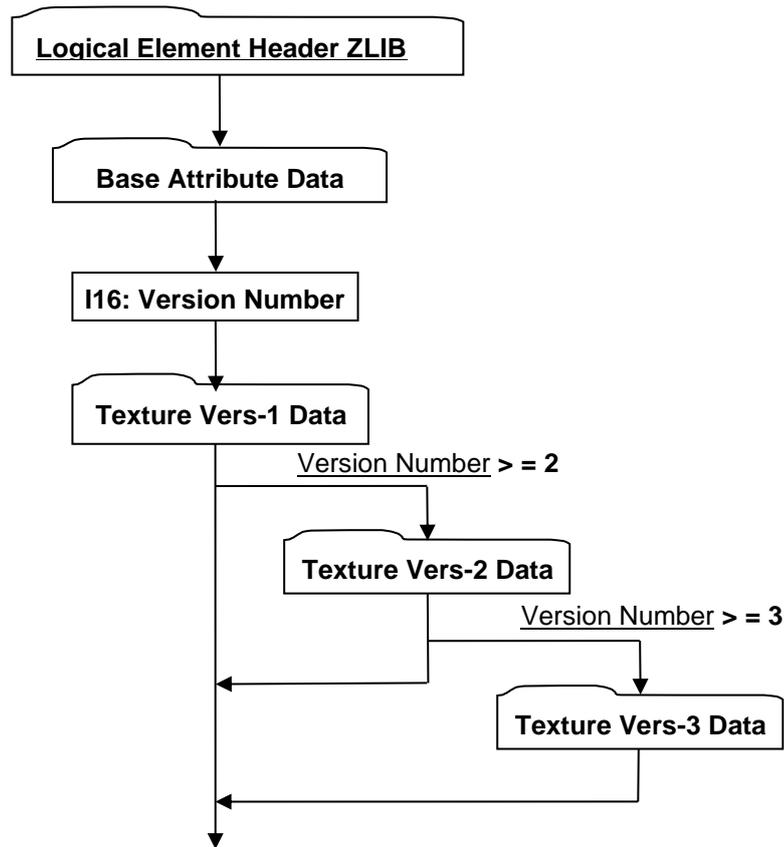


Figure R 36 — Texture Image Attribute Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Attribute Data can be found in [Base Attribute Data](#).

Complete description for Texture Vers-1 Data can be found in [Texture Vers-1 Data](#).

Complete description for Texture Vers-2 Data can be found in [Texture Vers-2 Data](#).

Complete description for Texture Vers-3 Data can be found in [Texture Vers-3 Data](#).

I16 : Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table R 16 — Texture Image Version Number values

= 1	Version-1 Format
= 2	Version-2 Format
= 3	Version-3 Format

When a data element in the JT file is versioned, it is for the purpose of adding a few pieces of new data onto the end of the existing data format. In this way, older viewers and readers of the JT file that do not yet know about higher local versions will naturally read the lower-numbered version blocks and ignore the higher-numbered ones they do not know how to read. This is sometimes the case with Texture Image Attribute Element, but sometimes not. Entirely new texture types with no analogous lower-level functionality have been added. In these cases, the most sensible thing for an older reader to do it to ignore the texture image entirely as if it were not even present in the JT file.

In order to support this sensible fallback mechanism, the following two general rules are followed: 1) a given texture image is written at the lowest version level that completely captures its contents, and 2) lower-order Texture Vers Data blocks are written with a "stub" texture.

Texture Vers-1 Data

Texture Vers-1 Data format is stored in JT file if the Texture Image Element is a vanilla/basic texture image (i.e. if texture does not use any advanced features as described in Texture Vers-2 Data and Texture Vers-3 Data). However, advanced textures *also* write a Texture Vers-1 Data block because of the need to be backward-compatible with older readers that may not understand Vers-2 and Vers-3 data.

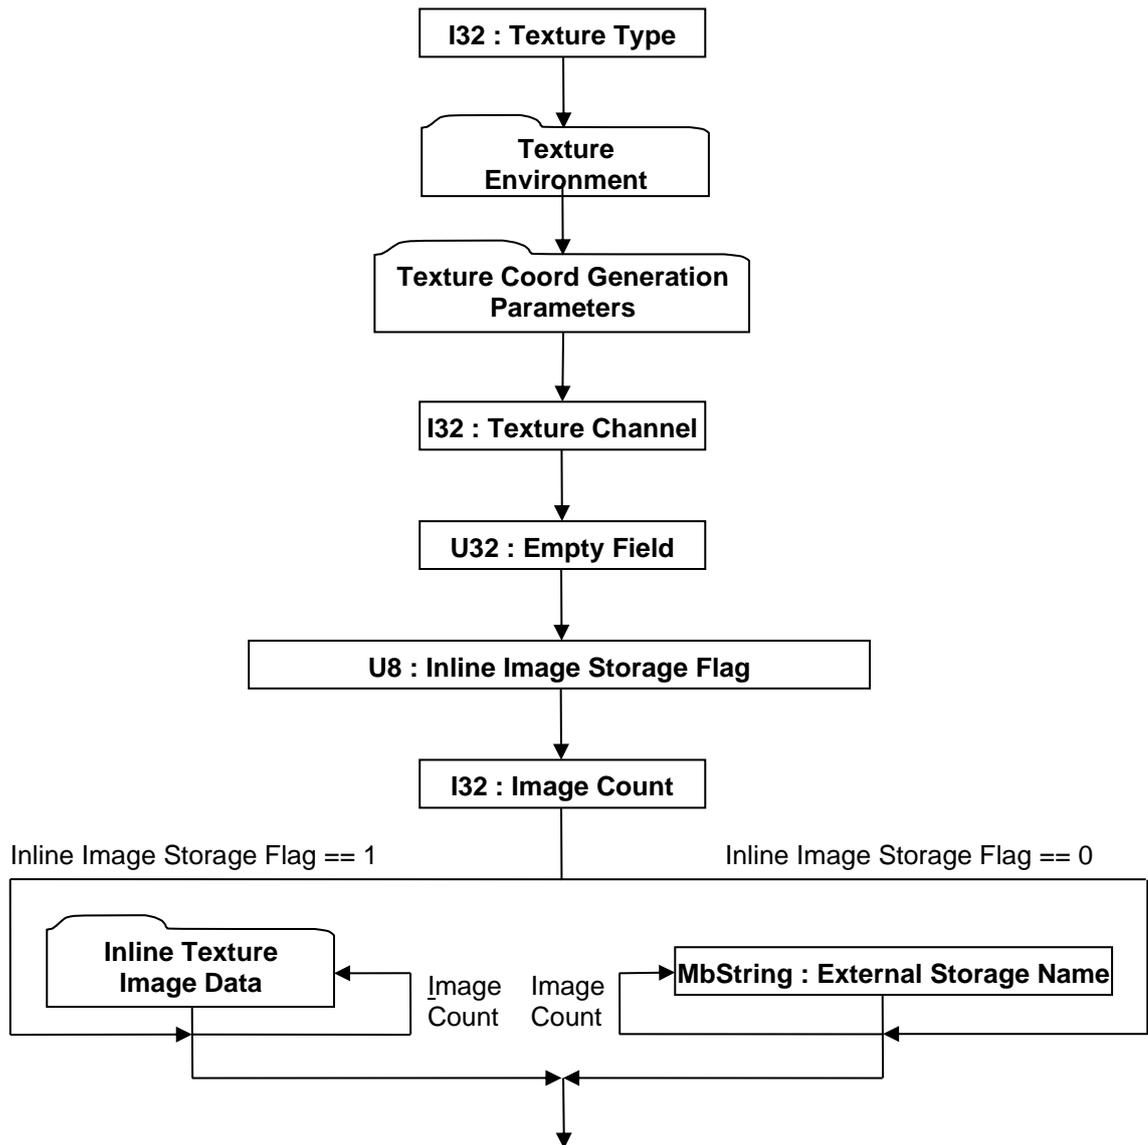


Figure R 37 — Texture Vers-1 Data collection

Complete details for Texture Environment can be found in Texture Environment.

Complete details for Texture Coord Generation Parameters can be found in Texture Coord Generation Parameters.

Complete details for Inline Texture Image Data can be found in Inline Texture Image Data.

I32 : Texture Type

Texture Type specifies the type of texture.

Table R 17 — Texture Vers-1 type values

= 0	None.
= 1	One-Dimensional. A one-dimensional texture has a height (T-Dimension) and depth (R-Dimension) equal to "1" and no top or bottom border.
= 2	Two-Dimensional. A two-dimensional texture has a depth (R-Dimension) equal to "1."
= 3	Three-Dimensional. A three-dimensional texture can be thought of as layers of two-dimensional sub image rectangles arranged in a sequence.
= 4	Bump Map. A bump map texture is a texture where the image texel data (e.g. RGB colour values) represents surface normal XYZ components.
= 5	Cube Map. A cube map texture is a texture cube centred at the origin and formed by a set of six two-dimensional texture images.
= 6	Depth Map. A depth map texture is a texture where the image texel data represents depth values.

I32 : Texture Channel

Texture Channel specifies the texture channel number for the Texture Image Element. For purposes of multi-texturing, the JT concept of a texture channel corresponds to the OpenGL concept of a "texture unit." The Texture Channel value shall be between 0 and 31 inclusive. Common Data Conventions and Constructs suggest that renderers of JT data ignore all but channel-0 if the renderer does not support multi-textured geometry. Also for purposes of blending, renderers of JT data should assume that higher numbered texture channels "blend over" lower numbered ones.

U32 : Empty Field

Refer to Common Data Conventions and Constructs, Empty Field.

U8 : Inline Image Storage Flag

Inline Image Storage Flag is a flag that indicates whether the texture image is stored within the JT File (i.e. inline) or in some other external file.

Table R 18 — Texture Vers-1 Inline Image Storage Flag values

= 0	Texture image stored in an external file.
= 1	Texture image stored inline in this JT file.

I32 : Image Count

Image Count specifies the number of texture images. A "Cube Map" [I32 : Texture Type](#) shall have six images while all other Texture Types should only have one image

MbString : External Storage Name

External Storage Name is a string identifying the name of an external texture image storage. External Storage Name is only present if data field Inline Image Storage Flag equals "0." If present there will be data field Image Count number of External Storage Name instances. This External Storage Name string is a relative path based name for the texture image file. Where "relative path" should be interpreted to mean the string contains the file name along with any additional path information that locates the texture image file relative to the location of the referencing JT file.

Texture Environment

The Texture Environment is a collection of data defining various aspects of how a texture image is to be mapped/applied to a surface.

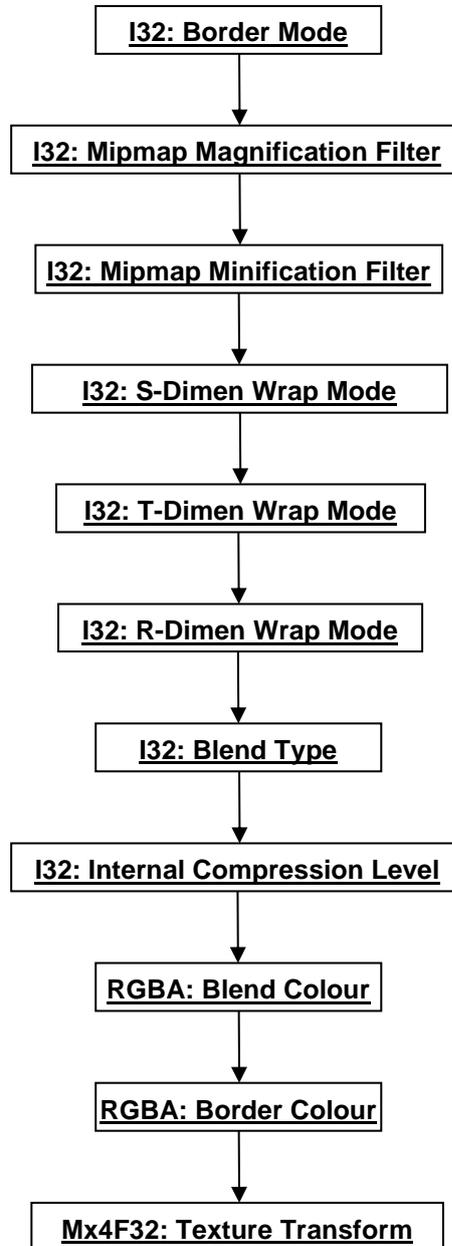


Figure R 38 — Texture Environment data collection

I32 : Border Mode

Border Mode specifies the texture border mode.

Table R 19 — Texture Vers-1 Texture Environment Border Mode values

= 0	No border.
= 1	Constant Border Colour. Indicates that the texture has a constant border colour whose value is defined in data field <u>Border Colour</u> .
= 2	Explicit. Indicates that a border texel ring is present in the texture image definition.

I32 : Mipmap Magnification Filter

Mipmap Magnification Filter specifies the texture filtering method to apply when a single pixel on screen maps to a tiny portion of a texel.

Table R 20 — Texture Vers-1 Texture Environment Mipmap Magnification Filter values

= 0	None.
= 1	Nearest. Texel with coordinates nearest the centre of the pixel is used.
= 2	Linear. A weighted linear average of the 2 x 2 array of texels nearest to the centre of the pixel is used. For one-dimensional texture is average of 2 texels. For three dimensional texel is 2 x 2 x 2 array.

I32 : Mipmap Minification Filter

Mipmap Minification Filter specifies the texture filtering method to apply when a single pixel on screen maps to a large collection of texels.

Table R 21 — Texture Vers-1 Texture Environment Mipmap Minification Filter values

= 0	None.
= 1	Nearest. Texel with coordinates nearest the centre of the pixel is used.
= 2	Linear. A weighted linear average of the 2 x 2 array of texels nearest to the centre of the pixel is used. For one-dimensional texture is average of 2 texels. For three-dimensional texture is 2 x 2 x 2 array.
= 3	Nearest in Mipmap. Within an individual mipmap, the texel with coordinates nearest the centre of the pixel is used.
= 4	Linear in Mipmap. Within an individual mipmap, a weighted linear average of the 2 x 2 array of texels nearest to the centre of the pixel is used. For one-dimensional texture is average of 2 texels. For three-dimensional texture is 2 x 2 x 2 array
= 5	Nearest between Mipmaps. Within each of the adjacent two mipmaps, selects the texel with coordinates nearest the centre of the pixel and then interpolates linearly between these two selected mipmap values.
= 6	Linear between Mipmaps. Within each of the two adjacent mipmaps, computes value based on a weighted linear average of the 2 x 2 array of texels nearest to the centre of the pixel and then interpolates linearly between these two computed mipmap values.

I32 : S-Dimen Wrap Mode

S-Dimen Wrap Mode specifies the mode for handling texture coordinates S-Dimension values outside the range [0, 1].

Table R 22 — Texture Vers-1 Texture Environment S-Dimen Wrap Mode values

= 0	None.
= 1	Clamp. Any values greater than 1.0 are set to 1.0; any values less than 0.0 are set to 0.0
= 2	Repeat Integer parts of the texture coordinates are ignored (i.e. retains only the fractional component of texture coordinates greater than 1.0 and only one-minus the fractional component of values less than zero). Resulting in copies of the texture map tiling the surface
= 3	Mirror Repeat. Like Repeat, except the surface tiles “flip-flop” resulting in an alternating mirror pattern of surface tiles.
= 4	Clamp to Edge. Border is always ignored and instead texel at or near the edge is chosen for coordinates outside the range [0, 1]. Whether the exact nearest edge texel or some average of the nearest edge texels is used is dependent upon the mipmap filtering value.
= 5	Clamp to Border. Nearest border texel is chosen for coordinates outside the range

	[0, 1]. Whether the exact nearest border texel or some average of the nearest border texels is used is dependent upon the mipmap filtering value.
--	---

I32 : T-Dimen Wrap Mode

T-Dimen Wrap Mode specifies the mode for handling texture coordinates T-Dimension values outside the range [0, 1]. Same mode values as documented for S-Dimen Wrap Mode.

I32 : R-Dimen Wrap Mode

R-Dimen Wrap Mode specifies the mode for handling texture coordinates R-Dimension values outside the range [0, 1]. Same mode values as documented for S-Dimen Wrap Mode.

I32 : Blend Type

Blend Type contains information indicating how the values in the texture map are to be modulated/combined/blended with the original colour of the surface or some other alternative colour to compute the final colour to be painted on the surface. Additional information on the interpretation of the Blend Type values and how one might leverage them to render an image can be found in reference [1] listed in the bibliography section.

Table R 23 — Texture Vers-1 Texture Environment Blend Type values

= 0	None.
= 1	Decal. Interpret same as OpenGL GL_DECAL environment mode.
= 2	Modulate. Interpret same as OpenGL GL_MODULATE environment mode.
= 3	Replace. Interpret same as OpenGL GL_REPLACE environment mode.
= 4	Blend. Interpret same as OpenGL GL_BLEND environment mode.
= 5	Add. Interpret same as OpenGL GL_ADD environment mode.
= 6	Combine. Interpret same as OpenGL GL_COMBINE environment mode.

I32 : Internal Compression Level

Internal Compression Level specifies a data compression hint/recommendation that a JT file loader is free to follow for internally (in memory) storing texel data. This setting does not affect how image texel data is actually stored in JT files or other externally referenced files.

Table R 24 — Texture Vers-1 Texture Environment Internal Compression Level values

= 0	None. No compression of texel data.
= 1	Conservative. Lossless compression of texel data.
= 2	Moderate. Texel components truncated to 8-bits each.
= 3	Aggressive. Texel components truncates to 4-bits each (or 5 bits for RGB images).

RGBA : Blend Colour

Blend Colour specifies the colour to be used for the “Blend” mode of Blend Type operations.

RGBA : Border Colour

Border Colour specifies the constant border colour to use for “Clamp to Border” style wrap modes when the texture itself does not have a border.

Mx4F32 : Texture Transform

Texture Transform defines the texture coordinate transformation matrix. A renderer of JT data would typically apply this transform to texture coordinates prior to applying the texture.

Texture Coord Generation Parameters

Texture Coord Generation Parameters contains information indicating if and how texture coordinate components should be automatically generated for each of the 4 components (S, T, R, Q) of a texture coordinate.

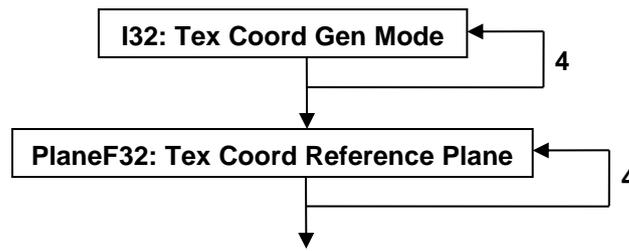


Figure R 39 — Texture Coord Generation Parameters data collection

I32 : Tex Coord Gen Mode

Tex Coord Gen Mode specifies the texture coordinate generation mode for each component (S, T, R, Q) of texture coordinate. There are four mode values stored, one for each component of texture coordinate. The mode values are stored in S, T, R, Q order.

Table R 25 — Texture Vers-1 Texture Coord Generation Gen Mode values

= 0	None. No texture coordinates automatically generated.
= 1	Model Coordinate System Linear. Texture coordinates computed as a distance from a reference plane specified in model coordinates.
= 2	View Coordinate System Linear. Texture coordinates computed as a distance from a reference plane specified in view coordinates.
= 3	Sphere Map. Texture coordinates generated based on spherical environment mapping.
= 4	Reflection Map. Texture coordinates generated based on cubic environment mapping.
= 5	Normal Map. Texture coordinates computed/set by copying vertex normal in view coordinates to S, T, R.

PlaneF32 : Tex Coord Reference Plane

Reference Plane specifies the reference plane used for “Model Coordinate System Linear” and “View Coordinate System Linear” texture coordinate generation modes. There are four Reference Planes stored, one for each component of texture coordinate. The Reference Planes are stored in S, T, R, Q order. Even if a components “Tex Coord Gen Mode” is one that does not require a reference plane, dummy reference planes are still stored in JT file.

Inline Texture Image Data

Inline Texture Image Data is a collection of data defining the texture format properties and image texel data for one texture image. Inline Texture Image Data is only present if data field Inline Image Storage Flag equals “1.” If present there will be data field Image Count number of Inline Texture Image Data instances.

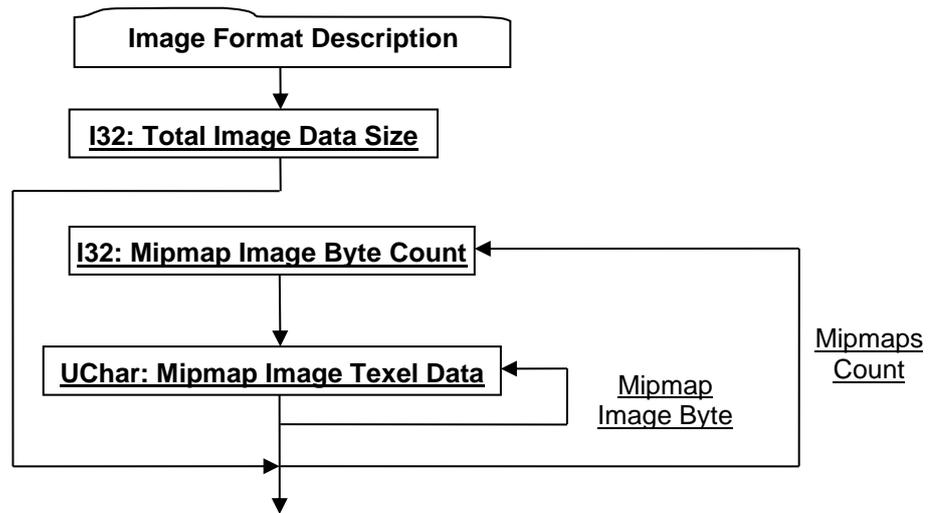


Figure R 40 — Inline Texture Image Data collection

Complete description for Image Format Description can be found in Image Format Description.

I32 : Total Image Data Size

Total Image Data Size specifies the total length, in bytes, of the on-disk representation for all mipmap images. This byte total does not include the I32 Mipmap Image Byte Count data field storage (4 bytes per) for each mipmap.

I32 : Mipmap Image Byte Count

Mipmap Image Byte Count specifies the length, in bytes, of the on-disk representation of the next mipmap image.

UChar : Mipmap Image Texel Data

Mipmap Image Texel Data is the mipmap’s block of image data. The length of this field in bytes is specified by the value of data field Mipmap Image Byte Count.

Image Format Description

The Image Format Description is a collection of data defining the pixel format, data type, size, and other miscellaneous characteristics of the texel image data.

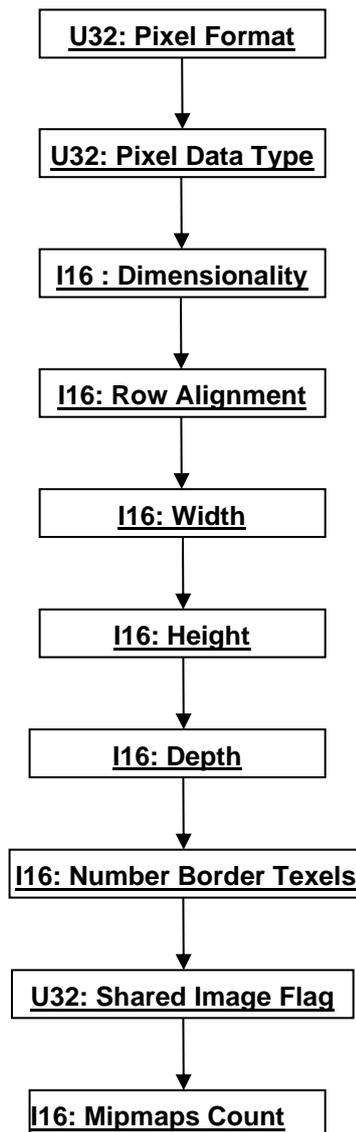


Figure R 41 — Image Format Description data collection

U32 : Pixel Format

Pixel format specifies the format of the texture image pixel data. Depending on the format, anywhere from one to four elements of data exists per texel.

Table R 26 — Texture Vers-1 Image Format Description Pixel Format values

= 0	No format specified. Texture mapping is not applied.
= 1	RGB: A red colour component followed by green and blue colour components
= 2	RGBA: A red colour component followed by green, blue, and alpha colour components
= 3	LUM: A single luminance component
= 4	LUMA: A luminance component followed by an alpha colour component.
= 5	A single stencil index.
= 6	A single depth component
= 7	A single red colour component
= 8	A single green colour component
= 9	A single blue colour component
= 10	A single alpha colour component

= 11	A blue colour component, followed by green and red colour components
= 12	A blue colour component, followed by green , red, and alpha colour components
= 13	A depth component, followed by a stencil component

U32 : Pixel Data Type

Pixel Data Type specifies the data type used to store the per texel data. If the Pixel Format represents a multi component value (e.g. red, green, blue) then each value requires the Pixel Data Type number of bytes of storage (e.g. a Pixel Format Type of “1” with Pixel Data Type of “3” would require 3 bytes of storage for each texel).

Table R 27 — Texture Vers-1 Image Format Description Pixel Data values

= 0	No type specified. Texture mapping is not applied.
= 1	Signed 8-bit integer
= 2	Single-precision 32-bit floating point
= 3	Unsigned 8-bit integer
= 4	Single bits in unsigned 8-bit integers
= 5	Unsigned 16-bit integer
= 6	Signed 16-bit integer
= 7	Unsigned 32-bit integer
= 8	Signed 32-bit integer
= 9	16-bit floating point according to IEEE-754 format (i.e. 1 sign bit, 5 exponent bits, 10 mantissa bits)

I16 : Dimensionality

Dimensionality specifies the number of dimensions the texture image has. Valid values include:

Table R 28 — Texture Vers-1 Image Format Description Dimensionality values

= 1	One-dimensional texture
= 2	Two-dimensional texture
= 3	Three-dimensional texture

I16 : Row Alignment

Row Alignment specifies the byte alignment for image data rows. This data field shall have a value of 1, 2, 4, or 8. If set to 1 then all bytes are used (i.e. no bytes are wasted at end of row). If set to 2, then if necessary, an extra wasted byte(s) is/are stored at the end of the row so that the first byte of the next row has an address that is a multiple of 2 (multiple of four for Row Alignment equal 4 and multiple of 8 for row alignment equal 8). The actual formula (using C syntax) to determine number of bytes per row is as follows:

$$\text{BytesPerRow} = (\text{numBytesPerPixel} * \text{ImageWidth} + \text{RowAlignment} - 1) \& \sim(\text{RowAlignment} - 1)$$

I16 : Width

Width specifies the width dimension (number of texel columns) of the texture image in number of pixels.

I16 : Height

Height specifies the height dimension (number of texel rows) of the texture image in number of pixels. Height is 1 for one-dimensional images.

I16 : Depth

Depth specifies the depth dimension (number of texel slices) of the texture image in number of pixels. Depth is 1 for one-dimensional and two-dimensional images.

I16 : Number Border Texels

Number Border Texels specifies the number of border texels in the texture image definition. Valid values are 0 and 1.

U8 : Shared Image Flag

Shared Image Flag is a flag indicating whether this texture image is shareable with other Texture Image Element attributes.

Table R 29 — Texture Vers-1 Image Format Description Shared Image Flag values

= 0	Image is not shareable with other Texture Image Elements.
= 1	Image is shareable with other Texture Image Elements.

I16 : Mipmaps Count

Mipmaps Count specifies the number of mipmap images. A value of 1 indicates that no mipmaps are used. A value greater than 1 indicates that mipmaps are present all the way down to a 1-by-1 texel.

Texture Vers-2 Data

Texture Vers-2 Data collection supports texturing effects not representable in the Texture Vers-1 Data format (e.g. more precise texture types, automatic texture channel, etc.). Any Texture Image Attribute Element using the Texture Vers-2 Data format will contain a “degenerate” Texture Vers-1 Data block, where Image Count data field has a value of “0”.

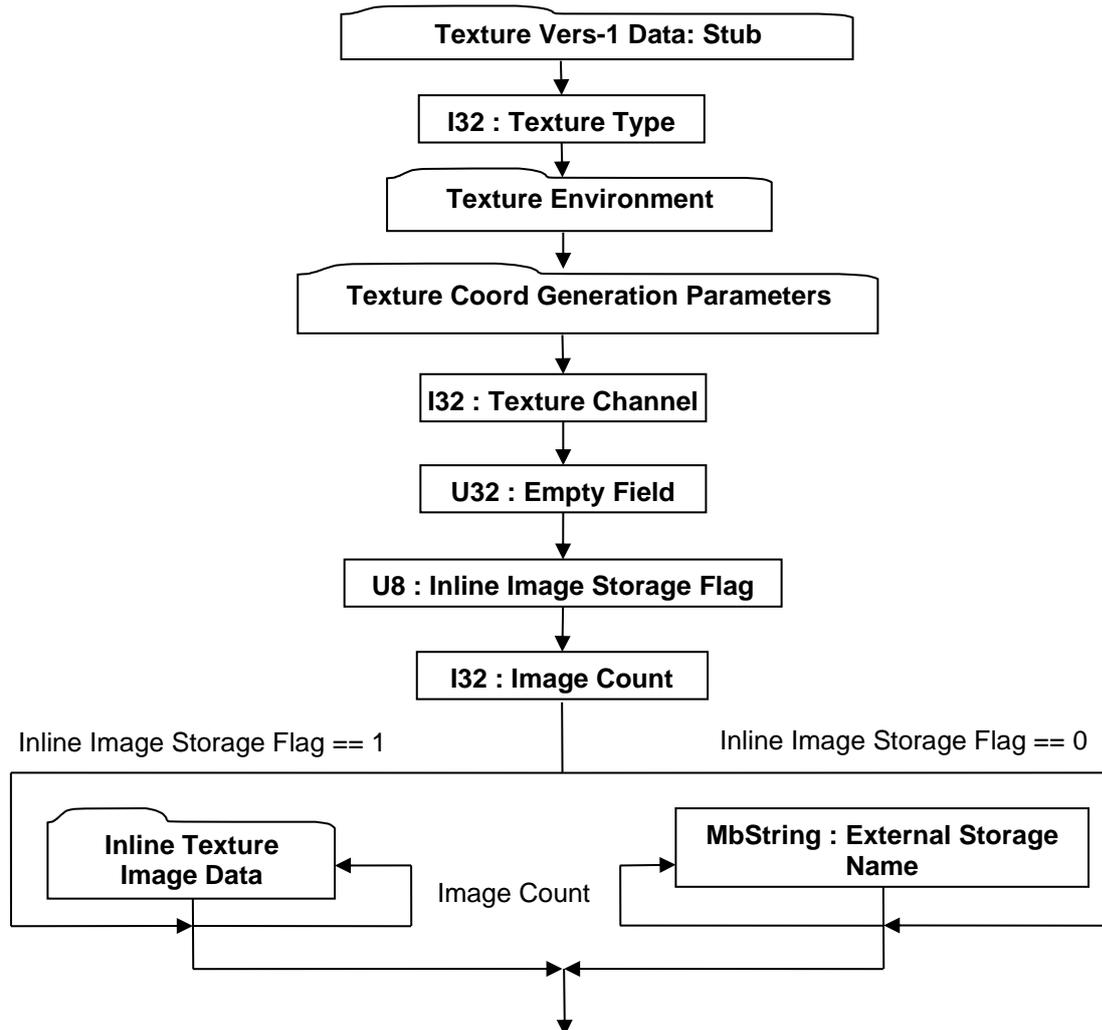


Figure R 42 — Texture Vers-2 Data collection

Complete details for Texture Environment can be found in [Texture Environment](#).

Complete details for Texture Coord Generation Parameters can be found in [Texture Coord Generation Parameters](#).

Complete details for Inline Texture Image Data can be found in [Inline Texture Image Data](#).

Texture Vers-1 Data: Stub

This is a dummy block written with its `I32 : Texture Type` field set to "None". This block is included so that older readers that do not understand [Texture Vers-2 Data](#) will read an "empty" texture.

I32 : Texture Type

Texture Type specifies the type of texture. There is a complete restructuring and redefinition of what a "texture type" implies in [Texture Vers-2 Data](#). It is a much stronger concept now, that not only describes generally what the texture image contains, but also defines precisely what the texture is being used for. In the following list, "image" refers to an image texture, "pre-lit" indicates that the image texture is to be applied before lighting when rendering the object to which it is applied, and "post-lit" indicates that the image texture is to be applied after lighting. A gloss map is a pre-lit texture that applies itself to the specular material component of lighting instead of the diffuse component. A light map is an environment texture (texture at infinity surrounding the whole model) that serves as a source of illumination during shading calculations.

Table R 30 — Texture Vers-2 Texture Type values

Texture Type	Description	Explicit Channel	Auto Channel
= 0	None.	N/A	N/A
= 1	One-Dimensional post-lit image texture.	Yes	No
= 2	Two-Dimensional post-lit image texture.	Yes	No
= 3	Three-Dimensional post-lit image texture.	Yes	No
= 4	Two-Dimensional 3-component tangent-space normal map.	No	Yes
= 5	Cube post-lit image texture.	Yes	No
= 7	Cube pre-lit image texture.	Yes	No
= 8	One-Dimensional pre-lit image texture.	Yes	No
= 9	Two-Dimensional pre-lit image texture.	Yes	No
= 10	Three-Dimensional pre-lit image texture.	Yes	No
= 11	Cube environment map.	No	Yes
= 12	One-Dimensional gloss map (specular) texture.	No	Yes
= 13	Two-Dimensional gloss map (specular) texture.	No	Yes
= 14	Three-Dimensional gloss map (specular) texture.	No	Yes
= 15	Cube gloss map (specular) texture.	No	Yes
= 16	Two-Dimensional 1-component bumpmap.	No	Yes
= 17	Two-Dimensional 3-component world-space normal map.	No	Yes
= 18	Two-Dimensional sphere environment map.	No	Yes
= 19	Two-Dimensional latitude/longitude environment map.	No	Yes
= 20	Two-Dimensional spherical diffuse light map.	No	Yes
= 21	Cube diffuse light map.	No	Yes
= 22	Two-Dimensional latitude/longitude diffuse light map.	No	Yes
= 23	Two-Dimensional spherical specular light map.	No	Yes
= 24	Cube specular light map.	No	Yes
= 25	Two-Dimensional latitude/longitude specular light map.	No	Yes

I32 : Texture Channel

Texture Channel specifies the texture channel number for the Texture Image Element. For purposes of multi-texturing, the JT concept of a texture channel corresponds to the OpenGL concept of a “texture unit.” The Texture Channel value shall be between -1 and 31 inclusive. The value -1 is accepted to denote a texture whose channel number is to be automatically assigned. This assignment will never displace another texture with an explicit texture channel assignment from its slot. Common Data Conventions and Constructs suggest that renderers of JT data ignore all but channel-0 if the renderer does not support multi-textured geometry. Also for purposes of blending, any renderer of JT data should ensure that higher numbered texture channels “blend over” lower numbered ones.

Pre- and post-lit image textures shall specify an explicit texture channel. All other texture types shall specify -1 for their texture channel.

U32 : Empty Field

Refer to Common Data Conventions and Constructs, Empty Field.

U8 : Inline Image Storage Flag

Inline Image Storage Flag is a flag that indicates whether the texture image is stored within the JT File (i.e. inline) or in some other external file.

Table R 31 — Texture Vers-2 Inline Image Storage Flag values

= 0	Texture image stored in an external file.
= 1	Texture image stored inline in this JT file.

I32 : Image Count

Image Count specifies the number of texture images. A “Cube Map” I32 : Texture Type shall have six images while all other Texture Types may only have one image.

MbString : External Storage Name

External Storage Name is a string identifying the name of an external texture image storage. External Storage Name is only present if data field Inline Image Storage Flag equals 0. If present, there will be data field Image Count number of External Storage Name instances. This External Storage Name string is a relative path based name for the texture image file. Where “relative path” should be interpreted to mean the string contains the file name along with any additional path information that locates the texture image file relative to the location of the referencing JT file.

Texture Vers-3 Data

Texture Vers-3 Data collection supports texturing effects not representable in the Texture Vers-1 Data format or the Texture Vers-2 Data format (e.g. texture coordinate channel, separator texture type, and texture channel greater than 31). Any Texture Image Attribute Element using the Texture Vers-3 Data format will contain a “degenerate” Texture Vers-1 Data block, and a “degenerate” Texture Vers-2 Data block, where Image Count data field has a value of 0 and the Texture Type will be set to None.

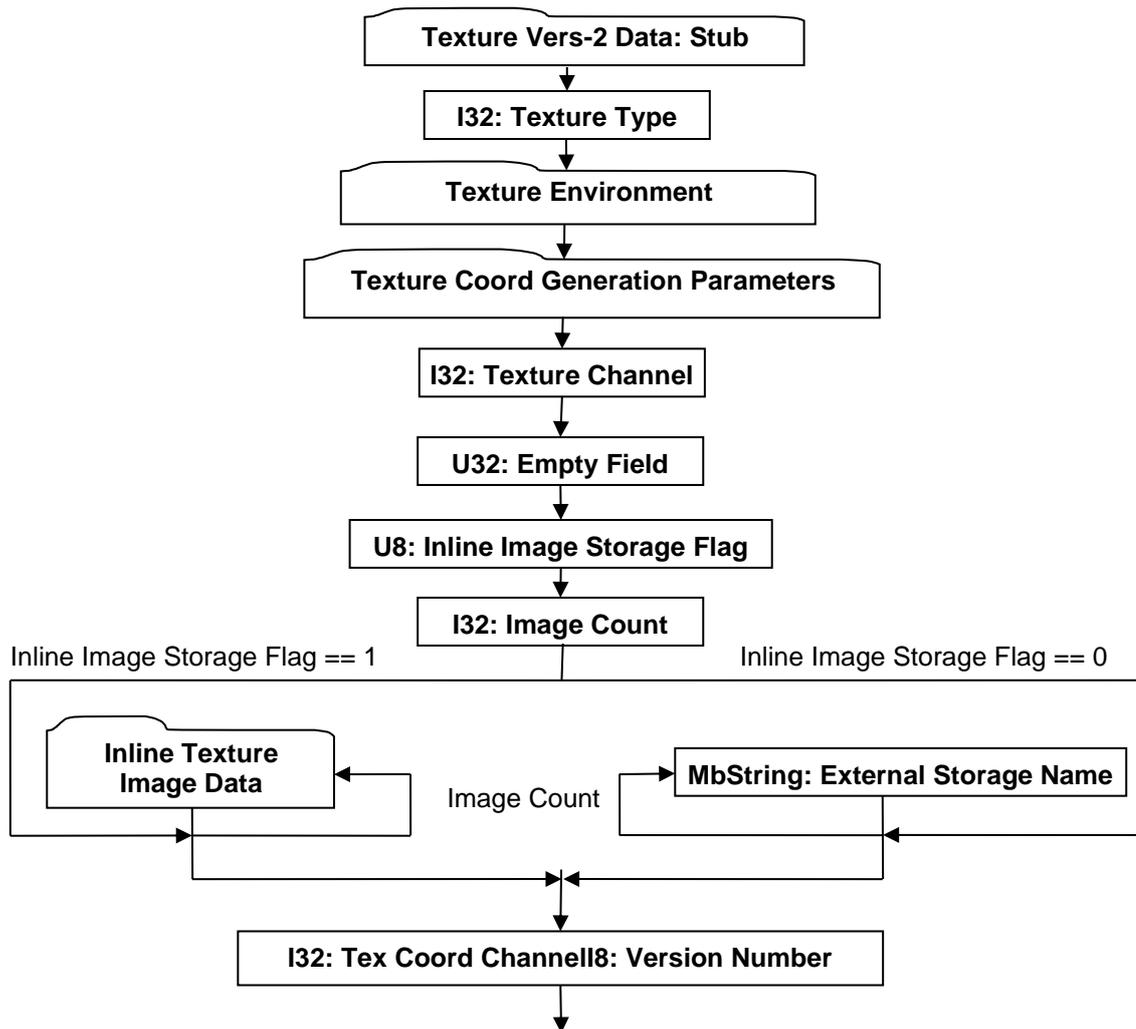


Figure R 43 — Texture Vers-3 Data collection

Complete details for Texture Environment can be found in [Texture Environment](#).

Complete details for Texture Coord Generation Parameters can be found in [Texture Coord Generation Parameters](#).

Complete details for Inline Texture Image Data can be found in [Inline Texture Image Data](#).

Texture Vers-2 Data: Stub

This is a dummy block written with its I32: Texture Type field set to "None". This block is included so that older readers that do not understand Texture Vers-1 Data will read an "empty" texture.

I32 : Texture Type

Texture Type specifies the type of texture. A new texture type, separator texture, is defined in Texture Vers-1 Data to support resetting the texture accumulation state mid-graph. Shadow maps and prefiltered light maps, however, are a general exception to this rule. In the following list, "image" refers to an image texture, "pre-lit" indicates that the image texture is to be applied before lighting when rendering the object to which it is applied, and "post-lit" indicates that the image texture is to be applied after lighting. A gloss map is a pre-lit texture that applies itself to the specular material component of lighting instead of the diffuse component. A light map is an environment texture (texture at infinity surrounding the whole model) that serves as a source of illumination during shading calculations.

Table R 32 — Texture Vers-3 Texture Type values

Texture Type	Description	Explicit Channel	Auto Channel
= 0	None.	N/A	N/A
= 1	One-Dimensional post-lit image texture.	Yes	No
= 2	Two-Dimensional post-lit image texture.	Yes	No
= 3	Three-Dimensional post-lit image texture.	Yes	No
= 4	Two-Dimensional 3-component tangent-space normal map.	No	Yes
= 5	Cube post-lit image texture.	Yes	No
= 7	Cube pre-lit image texture.	Yes	No
= 8	One-Dimensional pre-lit image texture.	Yes	No
= 9	Two-Dimensional pre-lit image texture.	Yes	No
= 10	Three-Dimensional pre-lit image texture.	Yes	No
= 11	Cube environment map.	No	Yes
= 12	One-Dimensional gloss map (specular) texture.	No	Yes
= 13	Two-Dimensional gloss map (specular) texture.	No	Yes
= 14	Three-Dimensional gloss map (specular) texture.	No	Yes
= 15	Cube gloss map (specular) texture.	No	Yes
= 16	Two-Dimensional 1-component bumpmap.	No	Yes
= 17	Two-Dimensional 3-component world-space normal map.	No	Yes
= 18	Two-Dimensional sphere environment map.	No	Yes
= 19	Two-Dimensional latitude/longitude environment map.	No	Yes
= 20	Two-Dimensional spherical diffuse light map.	No	Yes
= 21	Cube diffuse light map.	No	Yes
= 22	Two-Dimensional latitude/longitude diffuse light map.	No	Yes
= 23	Two-Dimensional spherical specular light map.	No	Yes
= 24	Cube specular light map.	No	Yes
= 25	Two-Dimensional latitude/longitude specular light map.	No	Yes
=26	Resets texture state except shadow map and light maps.	N/A	N/A

I32 : Texture Channel

Texture Channel specifies the texture channel number for the Texture Image Element. For purposes of multi-texturing, the JT concept of a texture channel corresponds to the OpenGL concept of a “texture unit.” The Texture Channel value shall be between -1 and 2,147,483,647 inclusive. The value -1 is accepted to denote a texture whose channel number is to be automatically assigned. This assignment will never displace another texture with an explicit texture channel assignment from its slot. Common Data Conventions and Constructs suggest that renderer of JT data ignore all but channel-0 if the renderer does not support multi-textured geometry. Also for purposes of blending, any renderer of JT data should ensure that higher numbered texture channels “blend over” lower numbered ones.

Pre- and post-lit image textures shall specify an explicit texture channel. All other texture types shall specify -1 for their texture channel.

U32 : Empty Field

Refer to Common Data Conventions and Constructs, Empty Field.

U8 : Inline Image Storage Flag

Inline Image Storage Flag is a flag that indicates whether the texture image is stored within the JT File (i.e. inline) or in some other external file.

Table R 33 — Texture Vers-3 Inline Image Storage Flag values

= 0	Texture image stored in an external file.
= 1	Texture image stored inline in this JT file.

I32 : Image Count

Image Count specifies the number of texture images. A “Cube Map” I32: Texture Type shall have six images while all other Texture Types should only have one image.

MbString : External Storage Name

External Storage Name is a string identifying the name of an external texture image storage. External Storage Name is only present if data field Inline Image Storage Flag equals “0.” If present there will be data field Image Count number of External Storage Name instances. This External Storage Name string is a relative path based name for the texture image file. Where “relative path” should be interpreted to mean the string contains the file name along with any additional path information that locates the texture image file relative to the location of the referencing JT file.

I32 : Tex Coord Channel

Tex Coord Channel specifies the channel number for texture coordinate generation. Value shall be within range [-1, 2147483647] inclusive.

R.2.3.2.3 Draw Style Attribute Element

Object Type ID: 0x10dd1014, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Draw Style Attribute Element contains information defining various aspects of the graphics state/style that should be used for rendering associated geometry. JT format LSG traversal semantics state that draw style attributes accumulate down the LSG by replacement.

The Field Inhibit flag (see Base Attribute Data) bit assignments for the Draw Style Attribute Element data fields, are as follows:

Table R 34 — Draw Style Attribute Field Inhibit flag values

Field Inhibit Flag Bit	Data Field(s) Bit Applies To
0	Two Sided Lighting Flag
1	Back-face Culling Flag
2	Outlined Polygons Flag
3	Lighting Enabled Flag
4	Flat Shading Flag
5	Separate Specular Flag

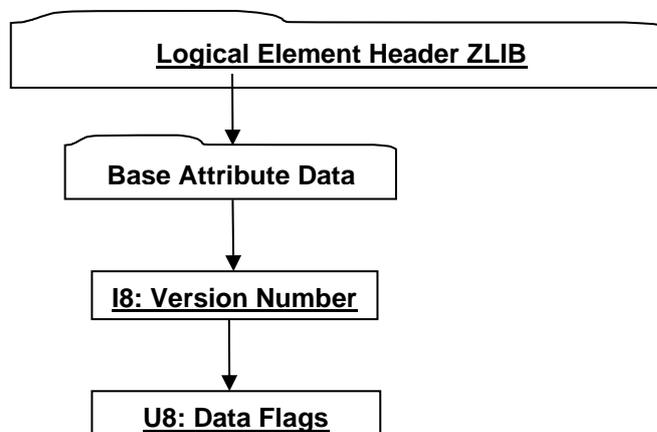


Figure R 44 — Draw Style Attribute Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Attribute Data can be found in Base Attribute Data.

I16 : Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

U8 : Data Flags

Data Flags is a collection of flags. The flags are combined using the binary OR operator and store various state settings for Draw Style Attribute Elements. All bits fields that are not defined as in use should be set to "0".

Table R 35 — Draw Style Attribute Data Flag values

0x01	Back-face Culling Flag. Indicates if back-facing polygons should be discarded (culled). = 0 – Back-facing polygons not culled. = 1 – Back-facing polygons culled.
0x02	Two Sided Lighting Flag. Indicates if two sided lighting should be enabled to insure that polygons are illuminated on both sides. = 0 – Disable two sided lighting. = 1 – Enable two sided lighting.
0x04	Outlined Polygons Flag. Indicates if polygons should be draw as "wireframes" i.e. not filled. = 0 – Polygons drawn as filled. = 1 – Only polygon's outline drawn.
0x08	Lighting Enabled Flag. Indicates if lighting should be enabled. If lighting disabled, then renderer should perform no calculations concerning normals, light sources, material properties, etc. = 0 – Disable lighting. = 1 – Enable lighting.
0x10	Flat Shading Flag. Indicates if the geometry should be rendered with single colour (flat shading) or with many different colour (smooth/Gouraud) shading. = 0 – Disable flat shading (i.e. use smooth/Gouraud shading). = 1 – Enable flat shading.
0x20	Separate Specular Flag. Indicates if the application of the specular colour should be delayed until after texturing. If no texture mapping then this flag setting is irrelevant. = 0 – Apply specular colour contribution before texture mapping. = 1 – Apply specular colour contribution after texture mapping.

R.2.3.2.4 Light Set Attribute Element

Object Type ID: 0x10dd1096, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Light Set Attribute Element holds an unordered list of Lights. JT format LSG traversal semantics state that light set attributes accumulate down the LSG through addition of lights to an attribute list.

Light Set Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments

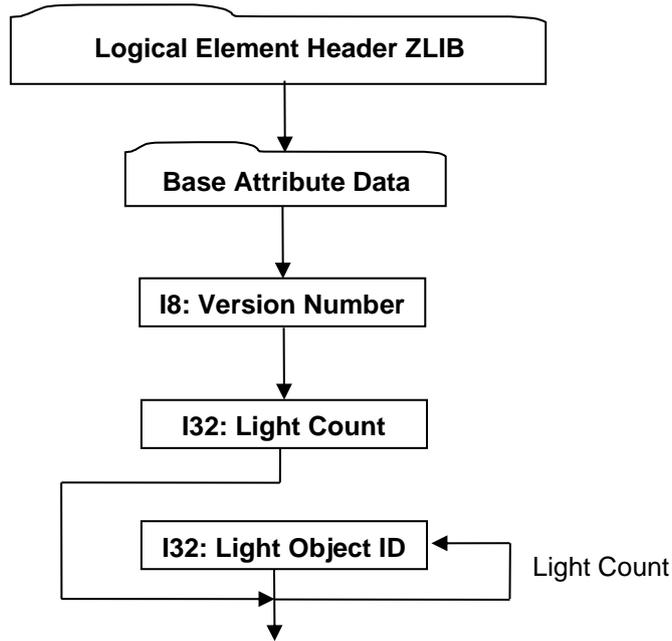


Figure R 45 — Light Set Attribute Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Attribute Data can be found in [Base Attribute Data](#).

I16 : Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

I32 : Light Count

Light Count specifies the number of lights in the Light Set.

I32 : Light Object ID

Light Object ID is the identifier for a referenced Light Object.

R.2.3.2.5 Infinite Light Attribute Element

Object Type ID: 0x10dd1028, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Infinite Light Attribute Element specifies a light source emitting unattenuated light in a single direction from every point on an infinite plane. The infinite location indicates that the rays of light can be considered parallel by the time they reach an object.

JT format LSG traversal semantics state that infinite light attributes accumulate down the LSG through addition of lights to an attribute list.

Infinite Light Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

Base Light Data

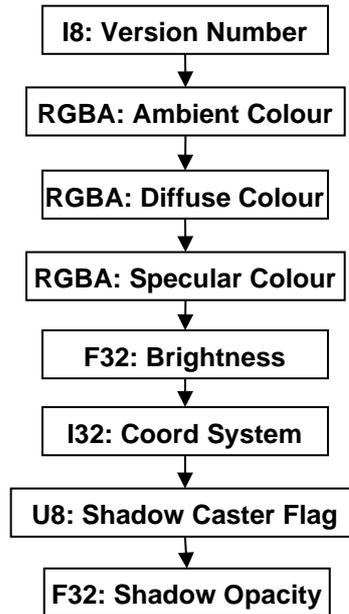


Figure R 47 — Base Light Data collection

I16 : Version Number

Version number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

RGBA : Ambient Colour

Ambient Colour specifies the ambient red, green, blue, alpha colour values of the light.

RGBA : Diffuse Colour

Diffuse Colour specifies the diffuse red, green, blue, alpha colour values of the light.

RGBA : Specular Colour

Specular Colour specifies the specular red, green, blue, alpha colour values of the light.

F32 : Brightness

Brightness specifies the Light brightness. The Brightness value shall be greater than or equal to “-1”.

I32 : Coord System

Coord System specifies the coordinate space in which Light source is defined. Valid values include the following:

Table R 37 — Base Light Data Coord System values

= 1	Viewpoint Coordinate System. Light source is to move together with the viewpoint
= 2	Model Coordinate System. Light source is affected by whatever model transforms that are current when the light source is encountered in LSG.
= 3	World Coordinate system. Light source is not affected by model transforms in the LSG.

U8 : Shadow Caster Flag

Shadow Caster Flag is a flag that indicates whether the light is a shadow caster or not.

Table R 38 — Base Light Data Shadow Caster Flag values

= 0	Light source is not a shadow caster.
= 1	Light source is a shadow caster.

F32 : Shadow Opacity

Shadow Opacity specifies the shadow opacity factor on Light source. Value shall be within range [0.0, 1.0] inclusive. Shadow Opacity is intended to convey how dark a shadow cast by this light source are to be rendered. A value of 1.0 means that no light from this light source reaches a shadowed surface, resulting in a black shadow.

Shadow Parameters




Figure R 48 — Shadow Parameters data collection

F32 : Non-shadow Alpha Factor

Non-shadow Alpha Factor is one of a matched pair of fields intended to govern how a shadowing light source (one whose Shadow Caster Flag is set) casts "alpha light" into areas that it directly illuminates (i.e. are not in shadow). Those fragments directly lit by this light source will have their alpha values scaled by Non-shadow Alpha Factor. Non-shadow Alpha Factor value shall lie on the range [0.0, 1.0] inclusive.

This field can be used to create "drop shadows" by setting its value to 0. The effect being that all geometry illuminated by the light source will be "burned away," leaving behind only those parts lying in shadow. Naturally, implementing this intended behaviour implies extensive viewer support.

F32 : Shadow Alpha Factor

Shadow Alpha Factor is one of a matched pair of fields intended to govern how a shadowing light source (one whose Shadow Caster Flag is set) casts "alpha light" into areas that it does not illuminate (i.e. are in shadow). Those fragments in shadow from this light source will have their alpha values scaled by Shadow Alpha Factor. Shadow Alpha Factor value shall lie on the range [0.0, 1.0] inclusive.

This field has the opposite effect of Non-shadow Alpha Factor. If set to a value of 0, for example, it will cause all geometry shadowed from the light source to be burned away, leaving behind only those parts directly illuminated by the light source. Naturally, implementing this intended behaviour implies extensive viewer support.

R.2.3.2.6 Point Light Attribute Element

Object Type ID: 0x10dd1045, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Point Light Attribute Element specifies a light source emitting light from a specified position, along a specified direction, and with a specified spread angle.

JT format LSG traversal semantics state that point light attributes accumulate down the LSG through addition of lights to an attribute list.

Point Light Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

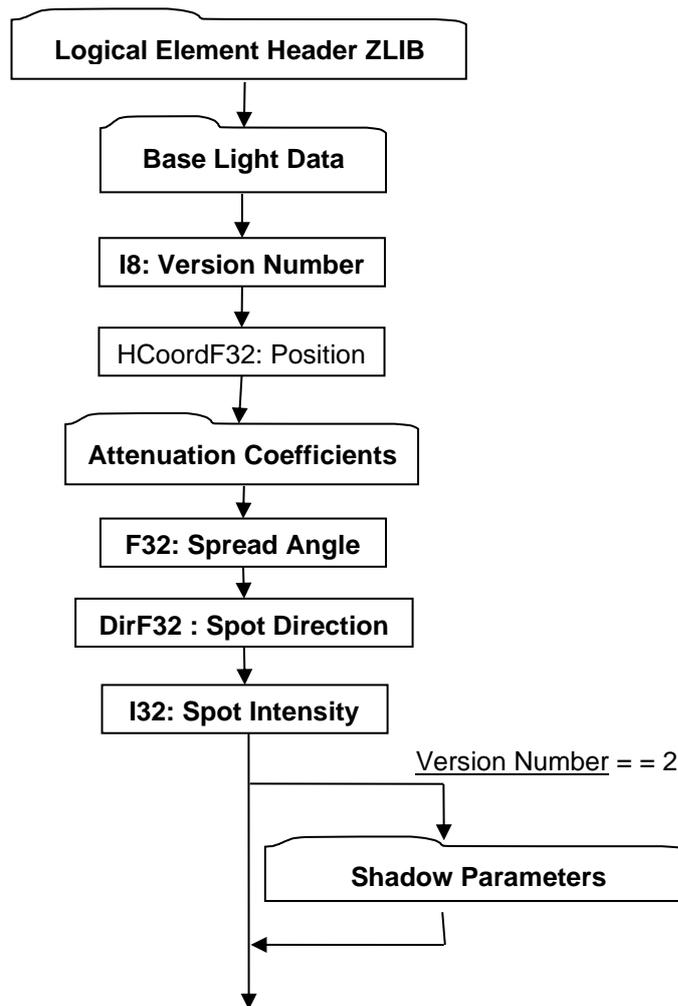


Figure R 49 — Point Light Attribute Element data collection

Complete description for Logical Element Header ZLIB can be found in [Logical Element Header ZLIB](#).

Complete description for Base Light Data can be found in [Base Light Data](#).

Complete description for Attenuation Coefficients can be found in [Attenuation Coefficients](#).

Complete description for Shadow Parameters can be found in [Shadow Parameters](#).

I16 : Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table R 39 — Point Light Attribute Version Number values

= 1	Version-1 Format
= 2	Version-2 Format

HCoordF32 : Position

Position specifies the light position in homogeneous coordinates.

F32 : Spread Angle

Spread Angle, as shown in the Figure below, specifies in degrees the half angle of the light cone. Valid Spread Angle values are clamped and interpreted as follows:

Table R 40 — Point Light Attribute Spread Angle values

angle == 180.0	Simple point light
0.0 >= angle <= 90.0	Spot Light

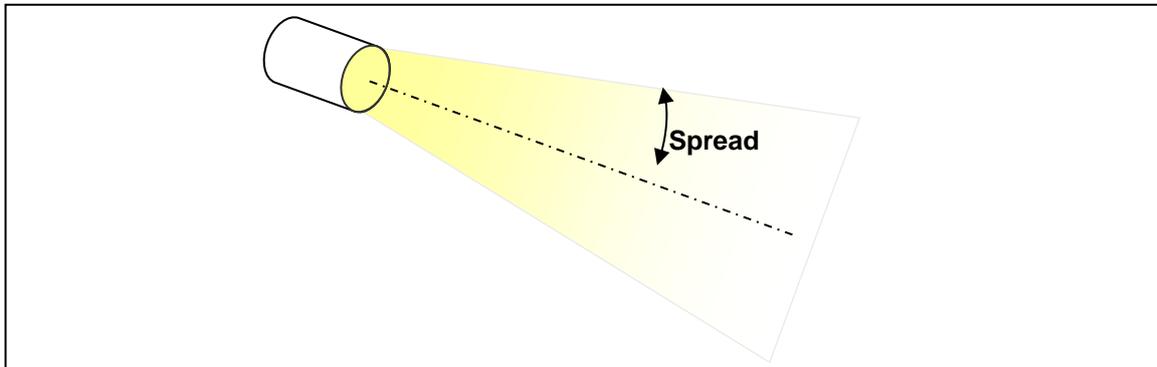


Figure R 50 — Spread Angle value with respect to the light cone

DirF : Spot Direction

Spot Direction specifies the direction the spot light is pointing in.

I32 : Spot Intensity

Spot Intensity specifies the intensity distribution of the light within the spot light cone. Spot Intensity is really a “spot exponent” in a lighting equation and indicates how focused the light is at the centre. The larger the value, the more focused the light source. Only non-negative Spot intensity values are valid.

Attenuation Coefficients

Attenuation Coefficients data collection contains the coefficients for how light intensity decreases with distance.

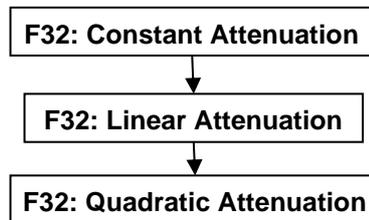


Figure R 51 — Attenuation Coefficients data collection

F32 : Constant Attenuation

Constant Attenuation specifies the constant coefficient for how light intensity decreases with distance. Value shall be greater than or equal to “0”.

F32 : Linear Attenuation

Linear Attenuation specifies the linear coefficient for how light intensity decreases with distance. Value shall be greater than or equal to “0”.

F32 : Quadratic Attenuation

Quadratic Attenuation specifies the quadratic coefficient for how light intensity decreases with distance. Value shall be greater than or equal to “0”.

R.2.3.2.7 Linestyle Attribute Element

Object Type ID: 0x10dd10c4, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Linestyle Attribute Element contains information defining the graphical properties to be used for rendering polylines. JT format LSG traversal semantics state that Linestyle attributes accumulate down the LSG by replacement.

Linestyle Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments

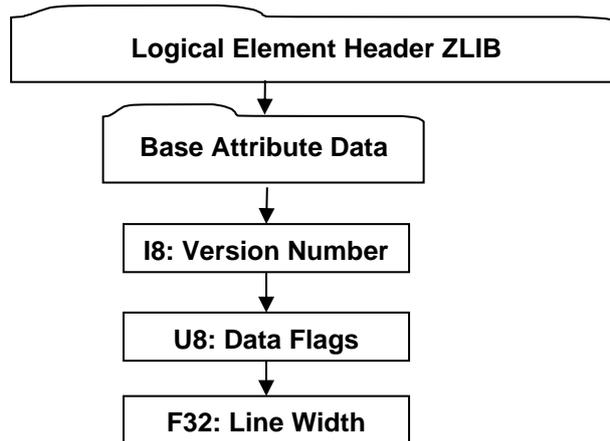


Figure R 52 — Linestyle Attribute Element data collection

Complete description for Logical Element Header ZLIB can be found in [Logical Element Header ZLIB](#).

Complete description for Base Attribute Data can be found in [Base Attribute Data](#).

I16: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

U8 : Data Flags

Data Flags is a collection of flags and line type data. The flags and line type data are combined using the binary OR operator and store various polyline rendering attributes. All bits fields that are not defined as in use should be set to “0”.

Table R 41 — Linestyle Attribute Data Flag values

0x0 F	Line Type (stored in bits 0 – 3 or in binary notation 00001111) Line type specifies the polyline rendering stipple-pattern. = 0 - Solid = 1 – Dash = 2 – Dot = 3 – Dash_Dot = 4 – Dash_Dot_Dot = 5 – Long_Dash = 6 – Centre_Dash = 7 – Centre_Dash_Dash
0x1 0	Antialiasing Flag (stored in bit 4 or in binary notation 00010000) Indicates if antialiasing should be applied as part of rendering polylines. = 0 – Antialiasing disabled. = 1 – Antialiasing enabled.

F32 : Line Width

Line Width specifies the width in pixels that should be used for rendering polylines. The value of this field shall be greater than 0.0.

R.2.3.2.8 Pointstyle Attribute Element

Object Type ID: 0x8d57c010, 0xe5cb, 0x11d4, 0x84, 0xe, 0x00, 0xa0, 0xd2, 0x18, 0x2f, 0x9d

Pointstyle Attribute Element contains information defining the graphical properties that should be used for rendering points. JT format LSG traversal semantics state that Pointstyle attributes accumulate down the LSG by replacement.

Pointstyle Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

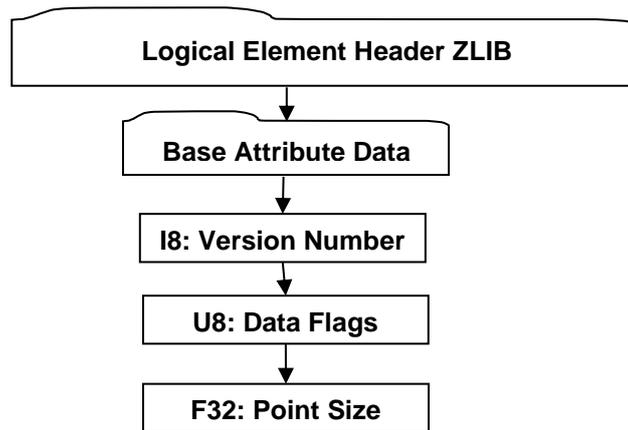


Figure R 53 — Pointstyle Attribute Element data collection

Complete description for Logical Element Header ZLIB can be found in [Logical Element Header ZLIB](#).

Complete description for Base Attribute Data can be found in [Base Attribute Data](#).

I16 : Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

U8 : Data Flags

Data Flags is a collection of flags and point type data. The flags and point type data are combined using the binary OR operator and store various point rendering attributes. All bits fields that are not defined as in use should be set to “0”.

Table R 42 — Pointstyle Attribute Data Flag values

0x0F	Point Type (stored in bits 0 – 3 or in binary notation 00001111) These bits are reserved for future expansion of the format to support Point Types.
0x10	Antialiasing Flag (stored in bit 4 or in binary notation 00010000) Indicates if antialiasing should be applied as part of rendering points. = 0 – Antialiasing disabled. = 1 – Antialiasing enabled.

F32 : Point Size

Point Size specifies the size in pixels that should be used for rendering points. The value shall be greater than 0.0.

R.2.3.2.9 Geometric Transform Attribute Element

Object Type ID: 0x10dd1083, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Geometric Transform Attribute Element contains a 4x4 homogeneous transformation matrix that positions the associated LSG node's coordinate system relative to its parent LSG node. JT format LSG traversal semantics state that geometric transform attributes accumulate down the LSG through matrix multiplication as follows:

$$p' = pAM$$

Where p is a point of the model, p' is the transformed point, M is the current modelling transformation matrix inherited from ancestor LSG nodes and previous Geometric Transform Attribute Element, and A is the transformation matrix of this Geometric Transform Attribute Element. The matrix is allowed to contain translation, rotation, and uniform- and non-uniform scaling factors, including negative scales. It is not allowed to contain shearing or projective components, or scaling factors of zero (which would make the matrix singular).

Geometric Transform Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

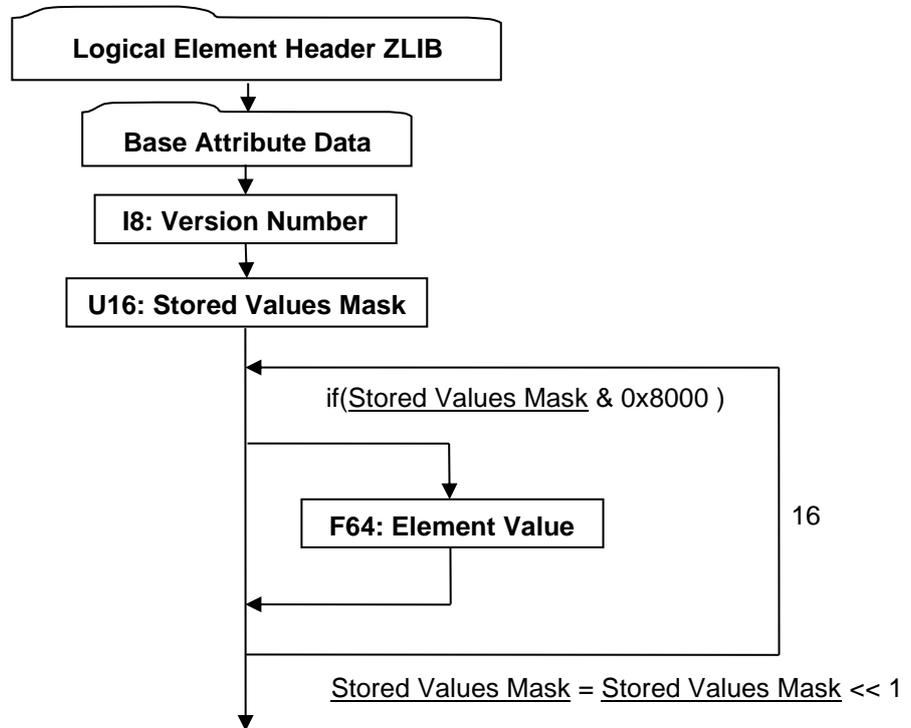


Figure R 54 — Geometric Transform Attribute Element data collection

Complete description for Logical Element Header ZLIB can be found in [Logical Element Header ZLIB](#).

Complete description for Base Attribute Data can be found in [Base Attribute Data](#).

I16: Version Number

Version Number is the version identifier for this node. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

U16 : Stored Values Mask

Stored Values mask is a 16-bit mask where each bit is a flag indicating whether the corresponding element in the matrix is different from the identity matrix. Only elements which are different from the identity matrix are actually stored. The bits are assigned to matrix elements as follows:

Bit15 Bit14 Bit13 Bit12
 Bit11 Bit10 Bit9 Bit8
 Bit7 Bit6 Bit5 Bit4
 Bit3 Bit2 Bit1 Bit0

The individual bit-flag values are interpreted as follows:

Table R 43 — Geometric Transform Attribute Stored Value Mask individual bit-flag values

= 0	Value not stored (matrix value same as corresponding element in identity matrix)
= 1	Value stored

F32 : Element Value

Element Value specifies a particular matrix element value.

R.2.3.2.10 Shader Effects Attribute Element

Object Type ID: 0xaa1b831d, 0x6e47, 0x4fee, 0xa8, 0x65, 0xcd, 0x7e, 0x1f, 0x2f, 0x39, 0xdb

Shader Effects Attribute Element contains information specifying “high-level” shader functionality (e.g. Phong shading, bump mapping, etc.) that should be used for rendering the geometry this attribute element is associated with.

JT format LSG traversal semantics state that shader effects attributes accumulate down the LSG by replacement.

Shader Effects Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

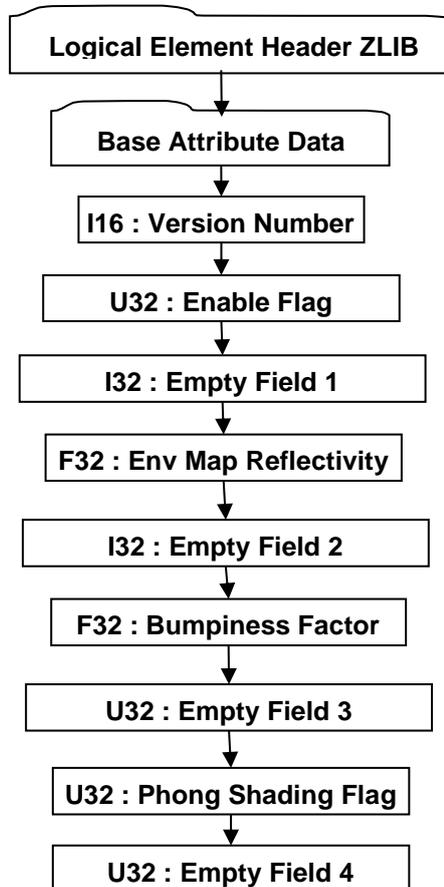


Figure R 55 — Shader Effects Attribute Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Attribute Data can be found in [Base Attribute Data](#)

I16 : Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

U32 : Enable Flag

Enable Flag specifies whether this Shader Effects Attribute is enabled. Valid values include the following:

Table R 44 — Shader Effects Attribute Enable Flag values

= 0	Shader Effects Attribute disabled
= 1	Shader Effects Attribute enabled

I32 : Empty Field 1

Refer to Common Data Conventions and Constructs, Empty Field.

F32 : Env Map Reflectivity

Env Map Reflectivity specifies the fraction of the environment to be reflected (1 minus this fraction will show through from the underlying texture channel). Valid value shall be in the range [0:1] inclusive.

I32 : Empty Field 2

Refer to Common Data Conventions and Constructs, Empty Field.

F32 : Bumpiness Factor

Bumpiness Factor specifies the degree of “bumpiness”, or the relative “height” of the bump map. Larger values make the bumps appear deep and more severe. Negative values invert the sense of the bump map, making the surface appear engraved, rather than embossed. This value only has an effect with tangent space bump maps; it has no effect on the appearance of object space bump maps.

U32 : Empty Field 3

Refer to Common Data Conventions and Constructs, Empty Field.

U32 : Phong Shading Flag

Phong Shading Flag specifies whether Phong Shading (i.e. per fragment lighting) is enabled. Valid values include the following:

Table R 45 — Shader Effects Attribute Phong Shading Flag values

= 0	Phong Shading disabled
= 1	Phong Shading enabled

U32 : Empty Field 4

Refer to Common Data Conventions and Constructs, Empty Field.

R.2.3.2.11 Texture Coordinate Generator Attribute Element

Object Type ID: 0xaa1b831d, 0x6e47, 0x4fee, 0xa8, 0x65, 0xcd, 0x7e, 0x1f, 0x2f, 0x39, 0xdc

Texture Coordinate Generator Attribute Element defines texture coordinate generation for texture mapping. Multiple texture coordinate generation at a given node is supported by way of

the “texture coordinate channel” concept. JT format LSG traversal semantics state that Texture Coordinate Generator attributes accumulate down the LSG by replacement on a per-channel basis.

Texture Coordinate Generator Attribute Element does not have any Field Inhibit flag (see Base Attribute Data) bit assignments.

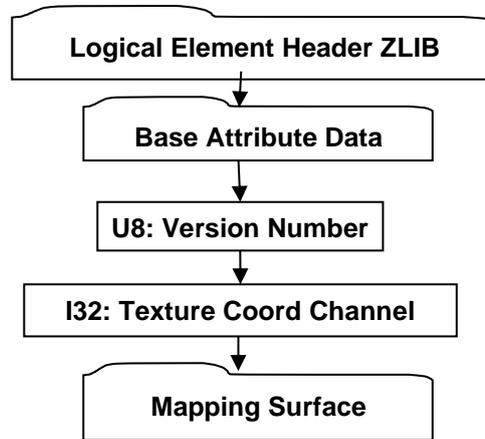


Figure R 56 — Texture Coordinate Generator Attribute Element data collection

Complete description for Logical Element Header ZLIB can be found in [Logical Element Header ZLIB](#).

Complete description for Base Attribute Data can be found in [Base Attribute Data](#).

Complete description for Mapping Surface can be found in [Mapping Surface](#).

I16 : Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

I32 : Texture Coord Channel

Tex Coord Channel specifies the channel number for texture coordinate generation. Value shall be within range [0, 2147483647] inclusive. This number is intended to match up with the I32: Tex Coord Channel field on Texture Image Attribute Element in order to associate a specific Texture Coordinate Generator with a Specific Texture Image.

Mapping Surface

Mapping Surface defines the mapping surface for texture coordinate generation. Four kinds of mapping surfaces, Mapping Plane Element, Mapping Cylinder Element, Mapping Sphere Element, and Mapping TriPlanar Element are defined to support texture coordinate generation.

R.2.3.2.12 Mapping Plane Element

Object Type ID: 0xa3cfb921, 0xbdeb, 0x48d7, 0xb3, 0x96, 0x8b, 0x8d, 0xe, 0xf4, 0x85, 0xa0

Mapping Plane Element defines the mapping plane for texture coordinate generation.

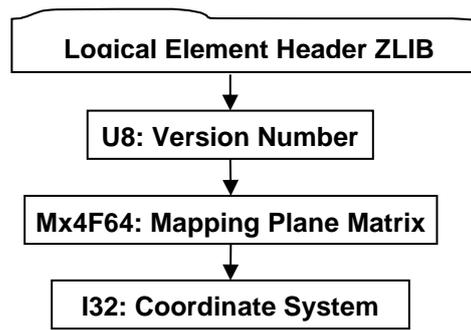


Figure R 57 — Mapping Plane Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

I16 : Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

Mx4F64 : Mapping Plane Matrix

Mx4F64: Mapping Plane Matrix specifies the transformation matrix and mapping parameters for the mapping plane. The transformation matrix defines the mapping coordinate system transformed from I32: Coordinate System. The mapping parameters specifies the width and height of the mapping plane. The mapping plane is defined in the + xy-plane of the mapping coordinate system. In the mapping process, the geometry vertex coordinates in Model Coordinate System are transformed to the mapping coordinate system at first, and then the transformed vertex coordinates are mapped to texture coordinates as following:

s-coordinate = x-coordinate of the transformed vertex / the width of the mapping plane

t-coordinate = y-coordinate of the transformed vertex / the height of the mapping plane

I32 : Coordinate System

Coordinate system specifies the coordinate space in which mapping plane is defined. Valid values include the following:

Table R 46 — Mapping Plane Matrix Coordinate System values

= 0	Undefined Coordinate System.
= 1	Viewpoint Coordinate System. Mapping plane is to move together with the viewpoint.
= 2	Model Coordinate System. Mapping plane is affected by whatever model transforms that are current when the mapping plane is encountered in LSG.
= 3	World Coordinate system. Mapping plane is not affected by model transforms in the LSG.

R.2.3.2.13 Mapping Cylinder Element

Object Type ID: 0x3e70739d, 0x8cb0, 0x41ef, 0x84, 0x5c, 0xa1, 0x98, 0xd4, 0x0, 0x3b, 0x3f

Mapping Cylinder Element defines the mapping cylinder for texture coordinate generation.

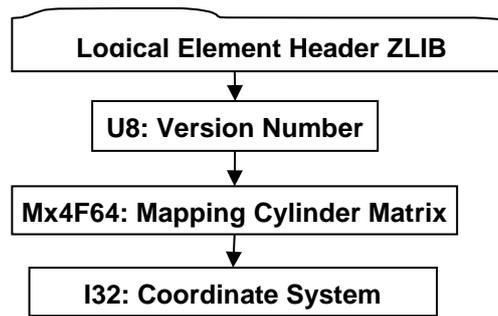


Figure R 58 — Mapping Cylinder Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

I16 : Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

Mx4F64 : Mapping Cylinder Matrix

Mx4F64: Mapping Cylinder Matrix specifies the transformation matrix and mapping parameters for the mapping cylinder. The transformation matrix defines the mapping coordinate system transformed from I32: Coordinate System. The mapping parameters specifies the horizontal sweep angle and height of the mapping cylinder. The mapping cylinder's axis is parallel to the z-axis of the mapping coordinate system, and the horizontal sweep angle starts from the +x-axis in a counter clockwise direction. In the mapping process, the geometry vertex coordinates in Model Coordinate System are transformed to the mapping coordinate system at first, and then the transformed vertex coordinates are mapped to texture coordinates as following:

s-coordinate = the horizontal sweep angle of the vertex / the horizontal sweep angle of the mapping cylinder

t-coordinate = the z-coordinate of the vertex / height of the mapping cylinder

Mapping Cylinder Element implements the strategy to handle texture coordinates who cross the seam of the texture in the mapping process.

I32 : Coordinate System

Coordinate system specifies the coordinate space in which mapping cylinder is defined. Valid values include the following:

Table R 47 — Mapping Cylinder Matrix Coordinate System values

= 0	Undefined Coordinate System.
= 1	Viewpoint Coordinate System. Mapping cylinder is to move together with the viewpoint.
= 2	Model Coordinate System. Mapping cylinder is affected by whatever model transforms that are current when the mapping cylinder is encountered in LSG.
= 3	World Coordinate system. Mapping cylinder is not affected by model transforms in the LSG.

R.2.3.2.14 Mapping Sphere Element

Object Type ID: 0x72475fd1, 0x2823, 0x4219, 0xa0, 0x6c, 0xd9, 0xe6, 0xe3, 0x9a, 0x45, 0xc1

Mapping Sphere Element defines the mapping sphere for texture coordinate generation.

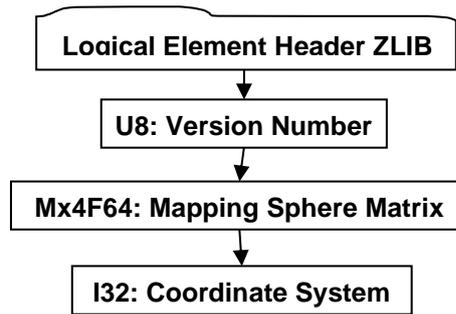


Figure R 59 — Mapping Sphere Element data collection

Complete description for Logical Element Header ZLIB can be found in [Logical Element Header ZLIB](#).

I16 : Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

Mx4F64 : Mapping Sphere Matrix

Mx4F64: Mapping Sphere Matrix specifies the transformation matrix and mapping parameters of the mapping sphere. The transformation matrix defines the mapping coordinate system transformed from I32: Coordinate System. The mapping parameters specify the horizontal sweep angle and vertical sweep angle of the mapping sphere. The mapping sphere's centre is at the origin of the mapping coordinate system, and the poles of the sphere are parallel to the z-axis of the coordinate system. The horizontal sweep angle starts from the +x-axis in a counter clockwise direction, and the vertical sweep angle is from the +z-axis to the -z-axis. In the mapping process, the geometric vertex coordinates in Model Coordinate System are transformed to the mapping coordinate system at first, and then the transformed vertex coordinates are mapped to texture coordinates as following:

s-coordinate = the horizontal sweep angle of the vertex / the horizontal sweep angle of the mapping sphere

t-coordinate = the vertical sweep angle of the vertex / the vertical sweep angle of the mapping sphere

Mapping Sphere Element implements the strategy to handle texture coordinates who cross the seam of the texture in the mapping process.

I32 : Coordinate System

Coordinate system specifies the coordinate space in which mapping sphere is defined. Valid values include the following:

Table R 48 — Mapping Sphere Matrix Coordinate System values

= 0	Undefined Coordinate System.
= 1	Viewpoint Coordinate System. Mapping sphere is to move together with the viewpoint.
= 2	Model Coordinate System. Mapping sphere is affected by whatever model transforms that are current when the mapping sphere is encountered in LSG.
= 3	World Coordinate system. Mapping sphere is not affected by model transforms in the LSG.

R.2.3.2.15 Mapping TriPlanar Element

Object Type ID: 0x92f5b094, 0x6499, 0x4d2d, 0x92, 0xaa, 0x60, 0xd0, 0x5a, 0x44, 0x32, 0xcf

Mapping TriPlanar Element defines the mapping triplanar surface for texture coordinate generation.

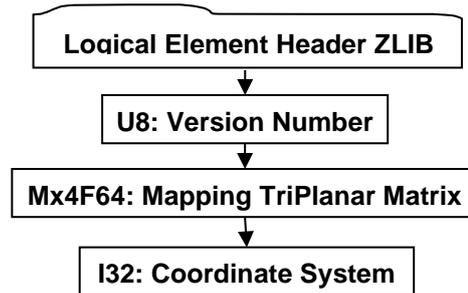


Figure R 60 — Mapping TriPlanar Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

I16 : Version Number

Version Number is the version identifier for this element. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

Mx4F64 : Mapping TriPlanar Matrix

Mx4F64: Mapping TriPlanar Matrix specifies the transformation matrix and mapping parameter for the mapping triplanar. The transformation matrix defines the mapping coordinate system transformed from I32: Coordinate System. The mapping parameter specifies the planar length of the triplanar. The left bottom corner of the triplanar is located at the origin of the mapping coordinate system, and the three planes are in the + xy-plane, + yz-plane, and + xz-plane respectively. In the mapping process, the geometry vertex coordinates in Model Coordinate System are transformed to the mapping coordinate system at first, and then the transformed vertex coordinates are projected to the corresponding plane based on the maximum component of its normals, and at last the projected vertex coordinates are mapped to texture coordinates as following:

s-coordinate = the first-coordinate of the projected vertex / the planar length of the triplanar

t-coordinate = the second-coordinate of the projected vertex / the planar length of the triplanar

I32 : Coordinate System

Coordinate system specifies the coordinate space in which mapping triplanar surface is defined. Valid values include the following:

Table R 49 — Mapping TriPlanar Matrix Coordinate System values

= 0	Undefined Coordinate System.
= 1	Viewpoint Coordinate System. Mapping triplanar surface is to move together with the viewpoint.
= 2	Model Coordinate System. Mapping triplanar surface is affected by whatever model transforms that are current when the mapping triplanar surface is encountered in LSG.
= 3	World Coordinate system. Mapping triplanar surface is not affected by model transforms in the LSG.

R.2.3.3 Property Atom Elements

Property Atom Elements are meta-data objects associated with nodes or Attributes. Property Atom Elements are not nodes or attributes themselves, but can be associated with any node or Attribute to maintain arbitrary application- or enterprise information (meta-data) pertaining to that node or Attribute. Each Node Element or Attribute Element in an LSG may hold zero or more Property Atom Elements and this relationship information is stored within Property Table section of a JT file.

An individual property is specified as a *key/value* Property Atom Element pair, where the *key* identifies the type and meaning of the *value*. The JT format supports many different Property Atom Element key/value object types. The different Property Atom Element key/value object types are documented in the following subsections.

R.2.3.3.1 Base Property Atom Element

Object Type ID: 0x10dd104b, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Base Property Atom Element represents the simplest form of a property that can exist within the LSG and has no type specific value data associated with it.

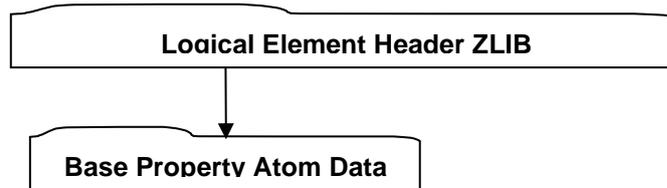


Figure R 61 — Base Property Atom Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Base Property Atom Data




Figure R 62 — Base Property Atom Data collection

I16: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

U32 : State Flags

State Flags is a collection of flags. The flags are combined using the binary OR operator and store various state information for property atoms. Bits 0 – 7 are freely available for an application to store whatever property atom information desired. All other bits are reserved for future expansion of the file format.

The State Flags shall be defaulted to 0x40000000 and persisted as such.

R.2.3.3.2 String Property Atom Element

Object Type ID: 0x10dd106e, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

String Property Atom Element represents a character string property atom.

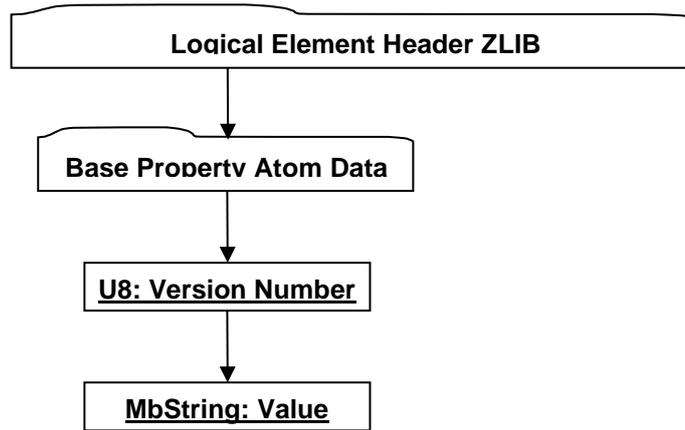


Figure R 63 — String Property Atom Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Property Atom Data can be found in [Base Property Atom Data](#).

I16: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

MbString : Value

Value contains the character string value for this property atom.

R.2.3.3.3 Integer Property Atom Element

Object Type ID: 0x10dd102b, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Integer Property Atom Element represents a property atom whose value is of I32 data type.

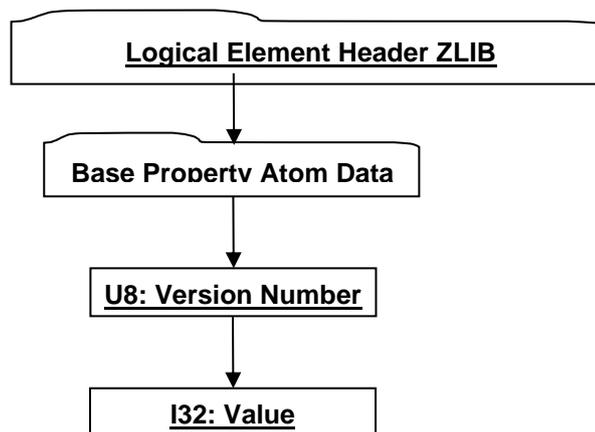


Figure R 64 — Integer Property Atom Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Property Atom Data can be found in [Base Property Atom Data](#).

I16: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

I32 : Value

Value contains the integer value for this property atom.

R.2.3.3.4 Floating Point Property Atom Element

Object Type ID: 0x10dd1019, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Floating Point Property Atom Element represents a property atom whose value is of F32 data type.

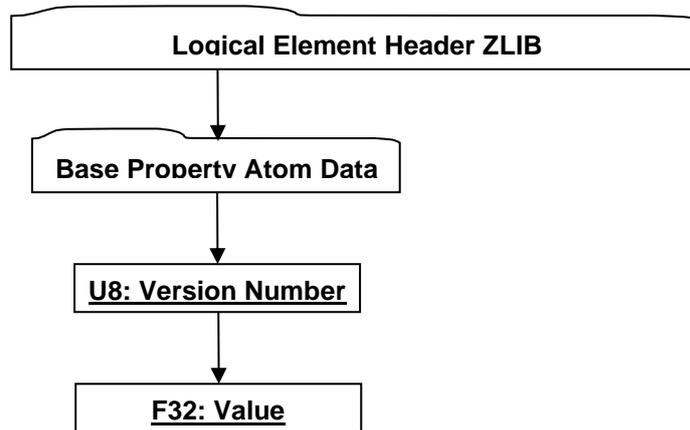


Figure R 65 — Floating Point Property Atom Element data collection

Complete description for Logical Element Header ZLIB can be found in [Logical Element Header ZLIB](#).

Complete description for Base Property Atom Data can be found in [Base Property Atom Data](#).

I16: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see [Common Data Conventions and Constructs, Local version Numbers](#).

F32 : Value

Value contains the floating point value for this property atom.

R.2.3.3.5 JT Object Reference Property Atom Element

Object Type ID: 0x10dd1004, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

JT Object Reference Property Atom Element represents a property atom whose value is an object ID for another object within the JT file.

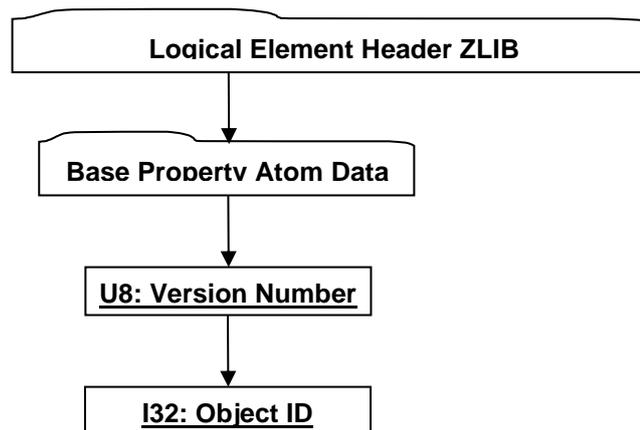


Figure R 66 — JT Object Reference Property Atom Element data collection

Complete description for Logical Element Header ZLIB can be found in [Logical Element Header ZLIB](#).

Complete description for Base Property Atom Data can be found in [Base Property Atom Data](#).

I16: Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see [Common Data Conventions and Constructs, Local version Numbers](#).

I32 : Object ID

Object ID specifies the identifier within the JT file for the referenced object.

R.2.3.3.6 Date Property Atom Element

Object Type ID: 0xce357246, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1

Date Property Atom Element represents a property atom whose value is a “date”.

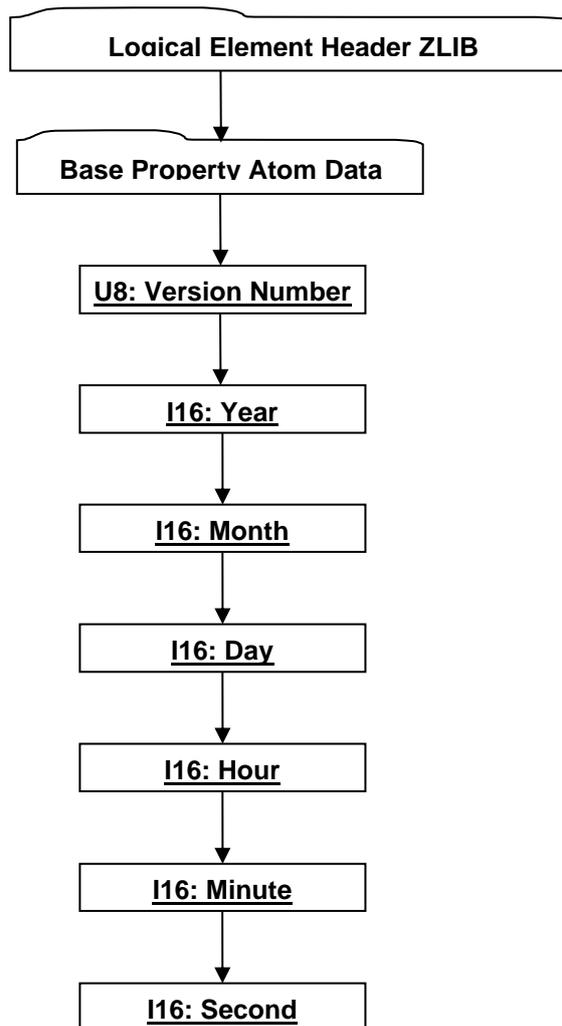


Figure R 67 — Date Property Atom Element data collection

Complete description for Logical Element Header ZLIB can be found in [Logical Element Header ZLIB](#).

Complete description for Base Property Atom Data can be found in [Base Property Atom Data](#)

I16 : Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

I16 : Year

Year specifies the date year value. Valid values are [1900, 2999] inclusive.

I16 : Month

Month specifies the date month value. Valid values are [0, 11] inclusive.

I16 : Day

Day specifies the date day value. Valid values are [1, 31] inclusive.

I16 : Hour

Hour specifies the date hour value. Valid values are [0, 23] inclusive.

I16 : Minute

Minute specifies the date minute value. Valid values are [0, 59] inclusive.

I16 : Second

Second specifies the date Second value. Valid values are [0, 59] inclusive.

R.2.3.3.7 Late Loaded Property Atom Element

Object Type ID: 0xe0b05be5, 0xfbbd, 0x11d1, 0xa3, 0xa7, 0x00, 0xaa, 0x00, 0xd1, 0x09, 0x54

Late Loaded Property Atom Element is a property atom type used to reference an associated piece of atomic data in a separate addressable segment of the JT file. The “Late Loaded” connotation derives from the associated data being stored in a separate addressable segment of the JT file, and thus a JT file reader can be structured to support the “best practice” of delaying the loading/reading of the associated data until it is actually needed.

Late Loaded Property Atom Elements are used to store a variety of data, including, but not limited to, Shape LOD Segments and B-Rep Segments (see Shape LOD Element chapter and JT B-Rep Segment chapter).

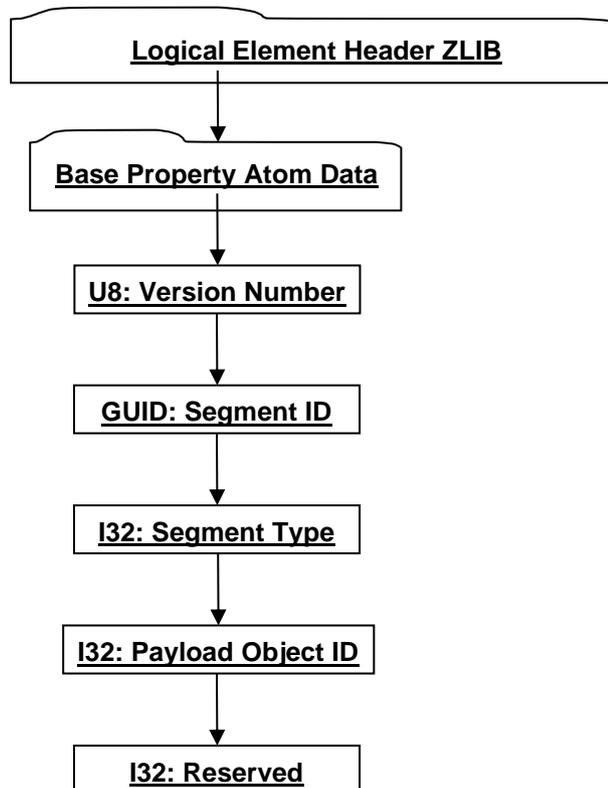


Figure R 68 — Late Loaded Property Atom Element data collection

Complete description for Logical Element Header ZLIB can be found in [Logical Element Header ZLIB](#).

Complete description for Base Property Atom Data can be found in [Base Property Atom Data](#).

I16 : Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

GUID : Segment ID

Segment ID is the globally unique identifier for the associated data segment in the JT file. See 5.1.2 TOC Segment for additional information on how this Segment ID can be used in conjunction with the file TOC Entries to locate the associated data in the JT file.

The complete list of segment types can be found Table 8 — Segment Types.

I32 : Segment Type

Segment Type defines a broad classification of the associated data segment contents. For example, a Segment Type of “1” denotes that the segment contains Logical Scene Graph material; “2” denotes contents of a B-Rep, etc.

I32 : Payload Object ID

Object ID is the identifier for the payload. Other objects referencing this particular payload will do so using the Object ID.

I32 : Reserved

Reserved data field that is guaranteed to always be greater than or equal to 1.

R.2.3.3.8 Vector4f Property Atom Element

Object Type ID: 0x2e7db4be, 0xc71a, 0x4b18, 0x9d, 0x7, 0xc7, 0x22, 0x7e, 0x9f, 0xef, 0x76

Vector4f Property Atom Element represents a property atom whose value is of VecF32 data type with the length to be equal to 4.

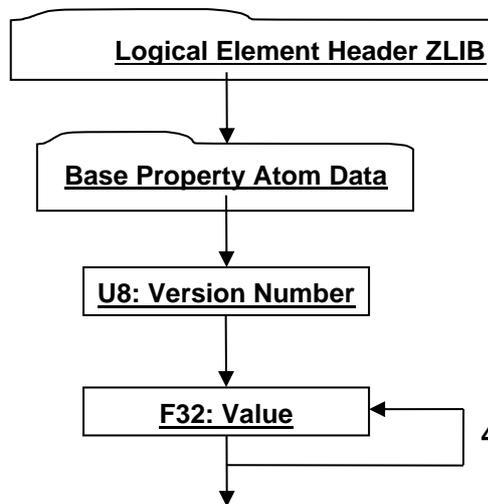


Figure R 69 — Vector4f Property Atom Element data collection

Complete description for Logical Element Header ZLIB can be found in Logical Element Header ZLIB.

Complete description for Base Property Atom Data can be found in Base Property Atom Data.

I16 : Version Number

Version Number is the version identifier for this data collection. For information on local version numbers see Common Data Conventions and Constructs, Local version Numbers.

F32 : Value

Value contains the floating point value for this property atom.

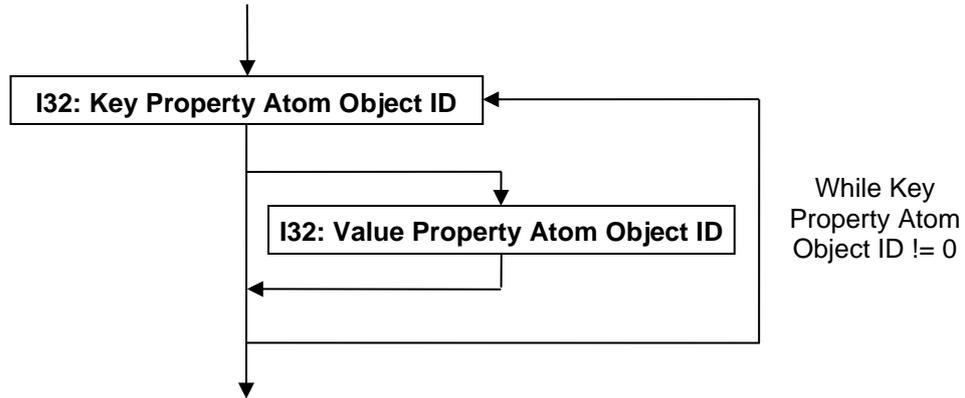


Figure R 71 — Element Property Table data collection

I32 : Key Property Atom Object ID

Key Property Atom Object ID is the identifier for the Property Atom Element object (see Texture Coordinate Generator Attribute Element) representing the “key” part of the property key/value pair. A value of “0” indicates the end of the Node Property Table.

I32 : Value Property Atom Object ID

Value Property Atom Object ID is the identifier for the Property Atom Element object (see Texture Coordinate Generator Attribute Element) representing the “value” part of the property key/value pair. A value is not stored if Key Property Atom Object ID has a value of “0”.

R.2.4 Shape LOD Segment


R.2.4.1 Shape LOD Element – see core spec

R.2.4.1.1 Base Shape LOD Element – see core spec

R.2.4.1.2 Vertex Shape LOD Element

Object Type ID: 0x10dd10b0, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

Vertex Shape LOD Element represents LODs defined by collections of vertices.

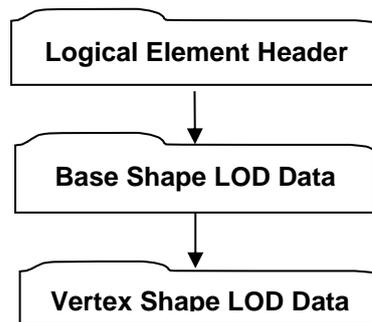

Logical Element Header

See logical Element Header definition in this document under Data Segment

Base Shape LOD Data – see core spec

Vertex Shape LOD Data

Vertex Shape LOD Data collection is an abstract container for geometric *primitives* such as triangle strips, line strips, or points, depending on the specific type of Vertex Shape. The set of primitives are further partitioned into so-called "face groups." The Vertex Shape LOD Data also

contains the vertex attribute bindings and quantization settings used to store the vertex records referenced by the primitives.

One use for face groups is to establish a correspondence between Brep faces and their triangle representation. A convention for mapping JTBrep and XTBrep faces to face groups is described in the Brep Face Group Associations section.

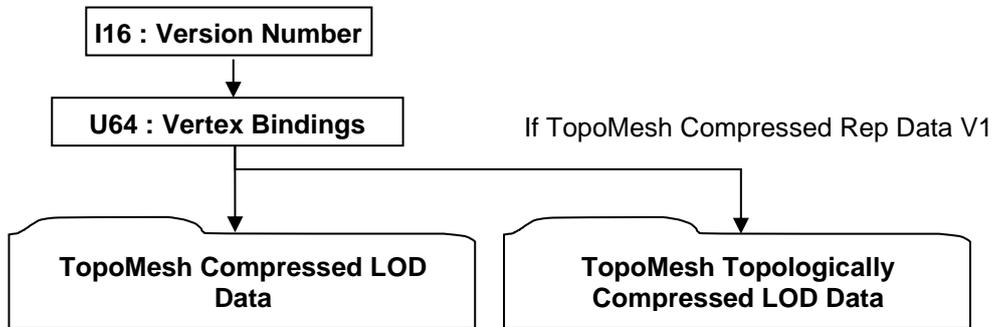


Figure R 72 — Vertex Shape LOD Data collection

I16 : Version Number

Version Number is the version identifier for this Vertex Shape LOD Data. For information on local version numbers see best the core specification.

U64 : Vertex Bindings

Binding Attributes is a collection of normal, texture coordinate, and colour binding information encoded within a single U64 using the following bit allocation. All bits fields that are not defined as in use should be set to “0”.

Table R 50 — Vertex Shape LOD Bindings values

Bits 1-3	Vertex Coordinate Binding. The Vertex Coordinate Binding denotes per vertex coordinate field data is present when one of the bits is set. Bit 1 - 2 Component Vertex Coordinates Bit 2 - 3 Component Vertex Coordinates Bit 3 - 4 Component Vertex Coordinates
Bit 4	Normal Binding. The Normal Binding denotes per vertex normal field data is present when the bit is set. Normal field data is always stored in 3 Component Normals when present.
Bits 5 -6	Colour Binding. The Colour Binding denotes per vertex colour field data is present when one of the bits is set. Bit 5 - 3 Component Colours Bit 6 - 4 Component Colour
Bit 7	Vertex Flag Binding. The Vertex Flag Binding denotes the per vertex flag field is present on the shape when the bit is set.
Bits 9-12	Texture Coordinate 0 Binding. The Texture Coordinate 0 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 9 - 1 Component Texture Coordinates Bit 10 - 2 Component Texture Coordinates Bit 11 - 3 Component Texture Coordinates Bit 12 - 4 Component Texture Coordinates
Bits 13-16	Texture Coordinate 1 Binding. The Texture Coordinate 1 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 13 - 1 Component Texture Coordinates Bit 14 - 2 Component Texture Coordinates

	Bit 15 - 3 Component Texture Coordinates Bit 16 - 4 Component Texture Coordinates
Bits 17-20	Texture Coordinate 2 Binding. The Texture Coordinate 2 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 17 - 1 Component Texture Coordinates Bit 18 - 2 Component Texture Coordinates Bit 19 - 3 Component Texture Coordinates Bit 20 - 4 Component Texture Coordinates
Bits 21-24	Texture Coordinate 3 Binding. The Texture Coordinate 3 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 21 - 1 Component Texture Coordinates Bit 22 - 2 Component Texture Coordinates Bit 23 - 3 Component Texture Coordinates Bit 24 - 4 Component Texture Coordinates
Bits 25-28	Texture Coordinate 4 Binding. The Texture Coordinate 4 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 25 - 1 Component Texture Coordinates Bit 26 - 2 Component Texture Coordinates Bit 27 - 3 Component Texture Coordinates Bit 28 - 4 Component Texture Coordinates
Bits 29-32	Texture Coordinate 5 Binding. The Texture Coordinate 5 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 29 - 1 Component Texture Coordinates Bit 30 - 2 Component Texture Coordinates Bit 31 - 3 Component Texture Coordinates Bit 32 - 4 Component Texture Coordinates
Bits 33-36	Texture Coordinate 6 Binding. The Texture Coordinate 6 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 33 - 1 Component Texture Coordinates Bit 34 - 2 Component Texture Coordinates Bit 35 - 3 Component Texture Coordinates Bit 36 - 4 Component Texture Coordinates
Bits 37-40	Texture Coordinate 7 Binding. The Texture Coordinate 7 binding denotes per vertex texture coordinates field data is present when one of the bits is set: Bit 37 - 1 Component Texture Coordinates Bit 38 - 2 Component Texture Coordinates Bit 39 - 3 Component Texture Coordinates Bit 40 - 4 Component Texture Coordinates
Bit 64	Auxiliary Vertex Field Binding. The Auxiliary Vertex Field Binding denotes per vertex auxiliary field data is present on the shape when the bit is set.

TopoMesh Compressed LOD Data

TopoMesh Compressed LOD Data collection contains the common items to all TopoMesh Compressed LOD data elements.

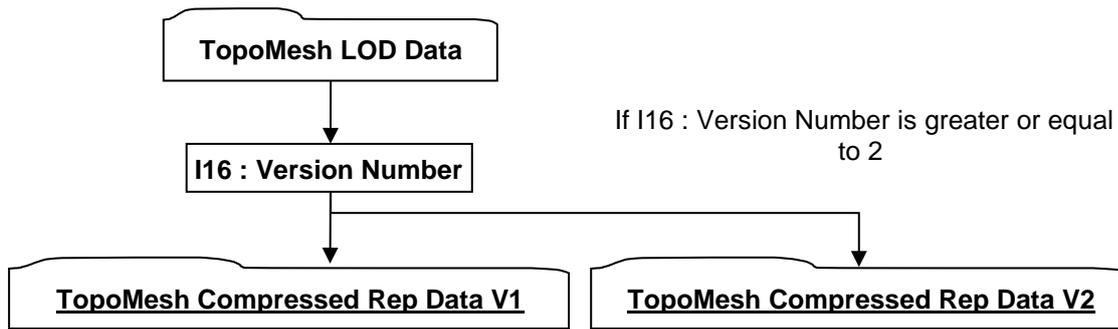


Figure R 73 — TopoMesh Compressed LOD Datacollection

TopoMesh LOD Data

TopoMesh LOD Data collection contains the common items to all TopoMesh LOD elements.




Figure R 74 — TopoMesh LOD Data collection

I16 : Version Number

Version Number is the version identifier for this TopoMesh LOD Data. See core spec for more information on version numbers.

I32: Vertex Records Object ID

Vertex Records Object ID is the identifier for the vertex records associated with this Object. Other objects referencing these vertex records will do so using this Object ID.


I16 : Version Number

Version Number is the version identifier for this TopoMesh LOD Data. See core spec for more information on version numbers.

TopoMesh Compressed Rep Data V1

TopoMesh Compressed Rep Data V1 contains the geometric shape definition data (e.g. vertices, colours, normals, etc.) in a lossy or lossless compressed formed.

Figure R 75 — TopoMesh Compressed Rep Data V1 data collection

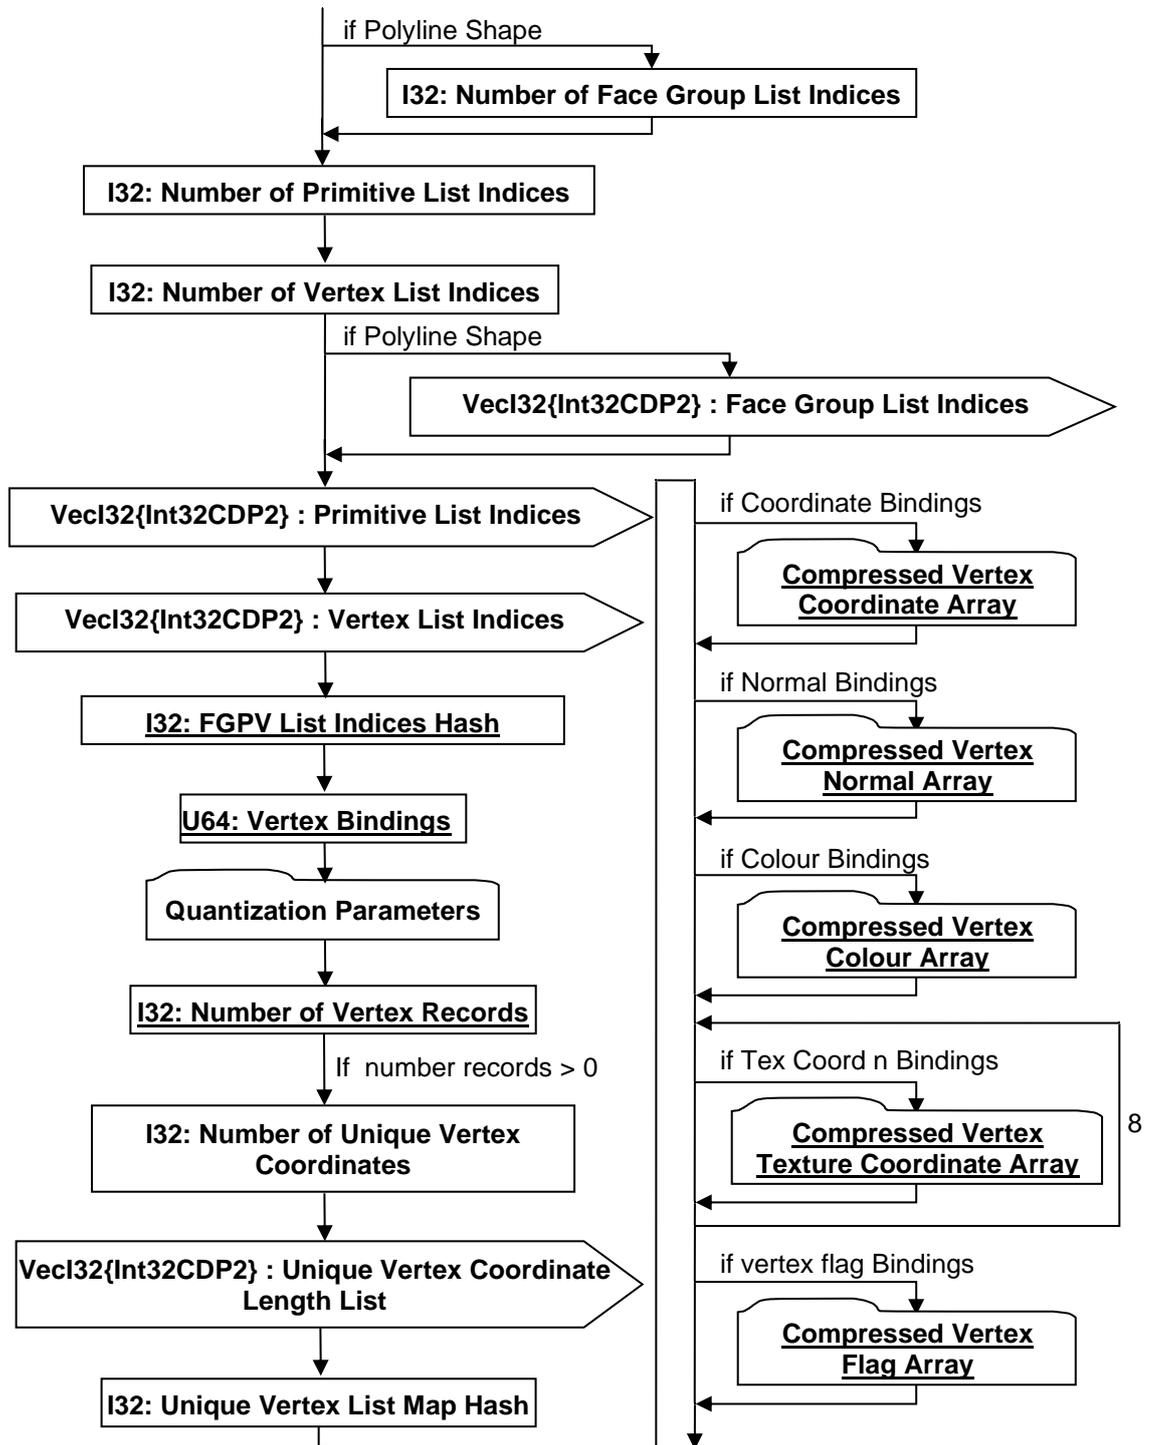

I32: Number of Face Group List Indices

Number of Face Group List Indices.

I32: Number of Primitive List Indices

Number of Primitive List Indices.

I32: Number of Vertex List Indices

Number of Vertex List Indices.

VecI32{Int32CDP2} : Face Group List Indices

Face Group List Indices is a vector of indices into the uncompressed Raw Primitive Data marking the start/beginning of Faces. Face Group List Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP2} : Primitive List Indices

Primitive List Indices is a vector of indices into the uncompressed Raw Vertex Data marking the start/beginning of primitives. Primitive List Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP2} : Vertex List Indices

Vertex List Indices is a vector of indices (one per vertex) into the uncompressed/unquantized unique vertex data arrays (Vertex Coords, Vertex Normals, Vertex Texture Coords, Vertex Colours) identifying each Vertex's data (i.e. for each Vertex there is an index identifying the location within the unique arrays of the particular Vertex's data). The Compressed Vertex Index List uses the Int32 version of the CODEC to compress and encode data.

I32: FGPV List Indices Hash

The FGPV Hash is the combined hash value of the Face Group List Indices (if Polyline), Primitive List Indices, and Vertex List Indices. Refer to Annex C Hashing – An Implementation, for a more detailed description on hashing.

```
UInt32 uHash      = 0;
UInt32 nFGIdx     = 0,
      nPrimIdx    = 0,
      nVtxIdx     = 0;
vecI32 vFGIndices, vPrimIndices, vVertexIndices;
...
if (bLineStrip)
    uHash = hash32( (UInt32*)&vFGIndices, nFGIdx+1, uHash );
uHash = hash32( (UInt32*)& vPrimIndices, nPrimIdx+1, uHash );
uHash = hash32( (UInt32*)& vVertexIndices, nVtxIdx , uHash );
```

U64: Vertex Bindings

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to "0". For more information see Vertex Shape LOD Data U64: Vertex Bindings.

Quantization Parameters

Complete description for Quantization Parameters can be found in the Quantization Parameters definition in *Vertex Shape Node Element*

I32: Number of Vertex Records

Number of vertex records.

I32: Number of Unique Vertex Coordinates

Number of unique vertex coordinates values in the Compressed Vertex Coordinate Array.

VecI32{Int32CDP2} : Unique Vertex Coordinate Length List

The Unique Vertex Length List contains the number of vertex records containing each of the unique vertex coordinates and should sum to the number of vertex records. When read in the Compressed Vertex Coordinate Array only contains a single value for each unique vertex coordinate value and is therefore parallel to the Unique Vertex Length List. In order to expand its coordinates into the vertex record space its unique coordinate value will need to be smeared out such that each unique vertex coordinate is repeated the number of times specified in the Unique Vertex Length List. The Compressed Vertex Normal, Colour, Texture, and Flag Arrays do not require the same expansion.

I32: Unique Vertex List Map Hash

The Unique Vertex List Map Hash is the hash value of Unique Vertex Coordinate Length List. Refer to Annex C Hashing – An Implementation, for a more detailed description on hashing.

```

UInt32 uHash      = 0;
UInt32 nUniqVtx  = 0;
vecF32 vUniqVtxIndices;
...
uHash = hash32( (UInt32*)&vUniqVtxIndices, nUniqVtx, uHash );
  
```

TopoMesh Compressed Rep Data V2

TopoMesh Compressed Rep Data V2 data contains additional geometric shape data (auxiliary vertex fields) that were not included in V1. Each Auxiliary field contains data that is parallel to the existing vertex record fields in order capture additional information about each vertex (e.g. Vertex Identifiers, Weights, ...).

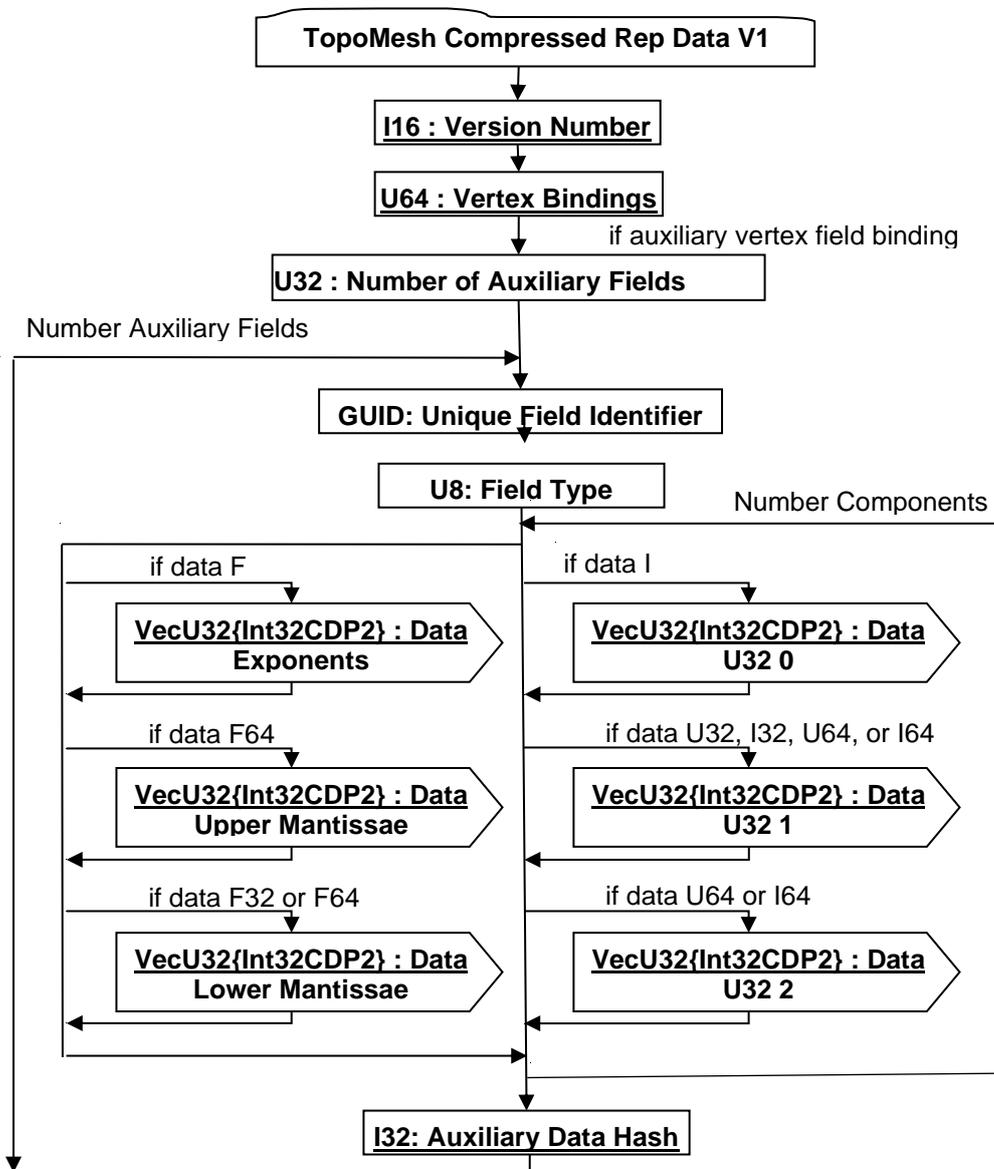


Figure R 76 — TopoMesh Compressed Rep Data V2 data collection

I16 : Version Number

Version Number is the version identifier for this TopoMesh Compressed Rep Data V2. See core spec for more information on version numbers.

U64 : Vertex Bindings

Vertex Bindings is a collection of normal, texture coordinate, and colour binding information encoded within a single U64. All bits fields that are not defined as in use should be set to "0". For more information see Vertex Shape LOD Data U64 : Vertex Bindings.

U32 : Number of Auxiliary Fields

The number of auxiliary vertex fields included in the data collection..

GUID : Unique Field Identifier

Each Auxiliary Vertex Field is associated with Unique Field Identifier to denote the usage of the contained data. This field is intended to be user defined. Any valid GUID, as defined in Table 4 - Composite Data Types, can be used as a Unique Field Identifier.

U8 : Field Type

Defines the number of components and type of data contained within the auxiliary field based upon the below table.

Table R 51 — TopoMesh Compressed Rep Data V2 Field Type values

Type	Data	Components	Type	Data	Components
1	U8	1	24	I32	4
2	U8	2	25	U64	1
3	U8	3	26	U64	2
4	U8	4	27	U64	3
5	I8	1	28	U64	4
6	I8	2	29	I64	1
7	I8	3	30	I64	2
8	I8	4	31	I64	3
9	U16	1	32	I64	4
10	U16	2	33	F32	1
11	U16	3	34	F32	2
12	U16	4	35	F32	3
13	I16	1	36	F32	4
14	I16	2	37	F32	2x2
15	I16	3	38	F32	3x3
16	I16	4	39	F32	4x4
17	U32	1	40	F64	1
18	U32	2	41	F64	2
19	U32	3	42	F64	3
20	U32	4	43	F64	4
21	I32	1	44	F64	2x2
22	I32	2	45	F64	3x3
23	I32	3	46	F64	4x4

VecU32{Int32CDP2} : Data U32_0

Data U32_0 contains the low order bits from the data i'th data component for each vertex record in an U32 vector. For U8, I8, U16, and I16 data types this contains all bits. For U32, I32, U64, and I64 data types it contains bits 0 through 30. Data U32_0 uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Data U32_1

Data U32_1 contains the middle order bits from the data i'th data component for each vertex record in an U32 vector. For U32 and I32 data types it only contains bit 31. For U64 and I64

data types it contains bits 31 through 61. Data U32_1 uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Data U32_2

Data U32_2 contains the upper order bits from the data i'th data component for each vertex record in an U32 vector. For U64 and I64 data types it contains bits 62 and 63. Data U32_2 uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Data Lower Mantissae

Vertex Coord Components is a vector of lower bits of Floating Point Mantissae for all the i'th component values of a set of vertex coordinates. For F32 data type this contains all bits of the mantissa, however for F64 data type it only contains bits 0 through 30. Data Lower Mantissae uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Data Upper Mantissae

Vertex Coord Components is a vector of upper bits of the Floating Point Mantissae for all the i'th component values of a set of vertex coordinates. For the F64 data type it contains bits 31 through 51. Data Upper Mantissae uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Data Exponents

Vertex Coord Components is a vector of Floating Point Exponents and Sign for all the i'th component values of a set of vertex coordinates. Data Exponents uses the Int32 version of the CODEC to compress and encode data.

I32 : Auxiliary Data Hash

The Auxiliary Data Hash is the combined hash of auxiliary field data arrays.

```
UInt32 uHash      = 0;
UInt32 nVtxRec   = 0,
      nComp      = 0;
vecU32 vU32_0, vU32_1, vU32_2, vLMANT, vUMANT, vEXP;
...
if ( bU8 || bI8 | bU16 | bI16 ) {
    for ( int i=0 ; i<nComp ; i++ ) {
        uHash = hash32( &vU32_0[i], nVtxRec, uHash );
    }
} else if ( bU32 || bI32 ) {
    for ( int i=0 ; i<nComp ; i++ ) {
        uHash = hash32( &vU32_0[i], nVtxRec, uHash );
        uHash = hash32( &vU32_1[i], nVtxRec, uHash );
    }
} else if ( bU64 || bI64 ) {
    for ( int i=0 ; i<nComp ; i++ ) {
        uHash = hash32( &vU32_0[i], nVtxRec, uHash );
        uHash = hash32( &vU32_1[i], nVtxRec, uHash );
        uHash = hash32( &vU32_2[i], nVtxRec, uHash );
    }
} else if ( bF32 ) {
    for ( int i=0 ; i<nComp ; i++ ) {
        uHash = hash32( &vLMANT[i], nVtxRec, uHash );
        uHash = hash32( &vEXP[i], nVtxRec, uHash );
    }
} else {
    for ( int i=0 ; i<nComp ; i++ ) {
        uHash = hash32( &vLMANT[i], nVtxRec, uHash );
        uHash = hash32( &vUMANT[i], nVtxRec, uHash );
        uHash = hash32( &vEXP[i], nVtxRec, uHash );
    }
}
}
```

TopoMesh Topologically Compressed LOD Data

TopoMesh Topologically Compressed LOD Data collection contains the common items to all TopoMesh Topologically Compressed LOD data elements.

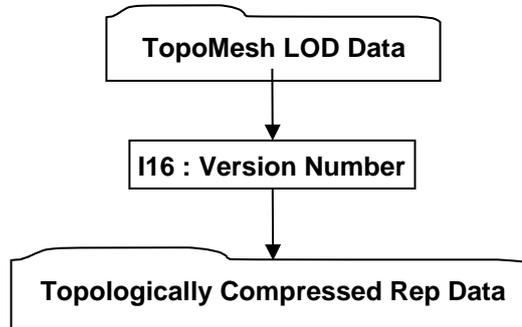


Figure R 77 — TopoMesh Topologically Compressed LOD Data collection

TopoMesh LOD Data

Complete description for TopoMesh LOD Data can be found in this document.

I16 : Version Number

Version Number is the version identifier for this TopoMesh Topologically Compressed LOD Data. See core spec for more information on version numbers.

Topologically Compressed Rep Data –see core spec

R.2.4.1.3 Tri-Strip Set Shape LOD Element

Object Type ID: 0x10dd10ab, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Tri-Strip Set Shape LOD Element contains the geometric shape definition data (e.g. vertices, polygons, normals, etc.) for a single LOD of a collection of independent and unconnected triangle strips. Each strip constitutes one primitive of the set and the ordering of the vertices in forming triangles, is the same as OpenGL's triangle strip definition [1].

A Tri-Strip Set Shape LOD Element is typically referenced by a Tri-Strip Set Shape Node Element using Late Loaded Property Atom Elements (see 6.1.1.10. Tri-Strip Set Shape Node Element and 6.2.7 Late Loaded Property Atom Element respectively).

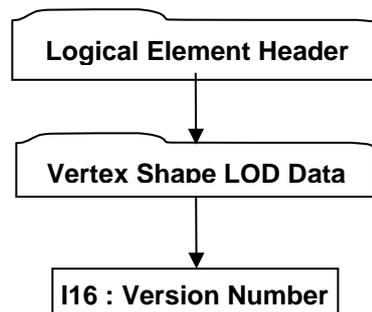


Figure R 78 — Tri-Strip Set Shape LOD Element data collection

Logical Element Header

See logical Element Header definition in this document under Data Segment.

Complete description for Vertex Shape LOD Data can be found in Vertex Shape LOD Data.

I16 : Version Number – see core spec

R.2.4.1.4 Polyline Set Shape LOD Element

Object Type ID: 0x10dd10a1, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Polyline Set Shape LOD Element contains the geometric shape definition data (e.g. vertices, normals, etc.) for a single LOD of a collection of independent and unconnected polylines. Each polyline constitutes one primitive of the set.

A Polyline Set Shape LOD Element is typically referenced by a Polyline Set Shape Node Element using Late Loaded Property Atom Elements (see Polyline Set Shape Node Element and Late Loaded Property Atom Element respectively).

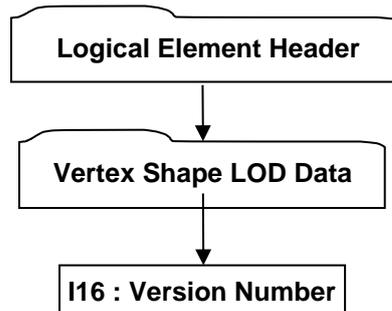


Figure R 79 — Polyline Set Shape LOD Element data collection

Logical Element Header

See logical Element Header definition in this document under Data Segment.

Vertex Shape LOD Data

Complete description for Vertex Shape LOD Data can be found in Vertex Shape LOD Data.

I16 : Version Number – see core spec

R.2.4.1.5 Point Set Shape LOD Element

Object Type ID: 0x98134716, 0x0011, 0x0818, 0x19, 0x98, 0x08, 0x00, 0x09, 0x83, 0x5d, 0x5a

A Point Set Shape LOD Element contains the geometric shape definition data (e.g. coordinates, normals, etc.) for a collection of independent and unconnected points. Each point constitutes one primitive of the set.

A Point Set Shape LOD Element is typically referenced by a Point Set Shape Node Element using Late Loaded Property Atom Elements (see Point Set Shape Node Element and Late Loaded Property Atom Element respectively).

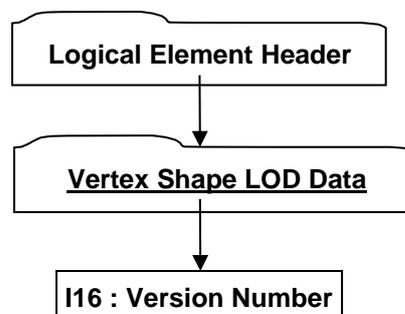


Figure R 80 — Point Set Shape LOD Element data collection

Logical Element Header

See logical Element Header definition in this document under Data Segment.

Vertex Shape LOD Data

Complete description for Vertex Shape LOD Data can be found in Vertex Shape LOD Data.

I16 : Version Number – see core spec

R.2.4.1.6 Null Shape LOD Element – see core spec

R.2.4.1.7 Primitive Set Shape LOD Element – see core spec

R.2.4.1.8 Polygon Set LOD Element

Object Type ID: 0x10dd109f, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Polygon Set LOD Element contains the geometric shape definition data (e.g. vertices, polygons, normals, etc.) for a single LOD of a collection of independent and unconnected polygons. Each polygon constitutes one primitive of the set and the ordering of the vertices in forming polygons, is the same as OpenGL's polygon definition [1].

A Polygon Set LOD Element is typically referenced by a Polygon Set Shape Node Element using Late Loaded Property Atom Elements (see Polygon Set Shape Node Element and Late Loaded Property Atom Element respectively).

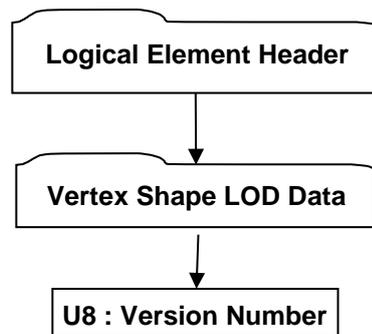


Figure R 81 — Polygon Set LOD Element data collection

Logical Element Header

See logical Element Header definition in this document under Data Segment.

Complete description for Vertex Shape LOD Data can be found in Vertex Shape LOD Data.

U8 : Version Number

Version Number is the version identifier for this Polygon Set LOD Element. For information on local version numbers see Common Data Conventions and Constructs Local version numbers.

R.2.4.1.9 Null Shape LOD Element

Object Type ID: 0x3e637aed, 0x2a89, 0x41f8, 0xa9, 0xfd, 0x55, 0x37, 0x37, 0x3, 0x96, 0x82

A Null Shape LOD Element represents the pseudo geometric shape definition data for a NULL Shape Node Element. Although a NULL Shape Node Element has no real geometric primitive representation (i.e. is empty), its usage as a “proxy/placeholder” node within the LSG still supports the concept of having a defined bounding box and thus the existence of this Null Shape LOD Element type.

A Null Shape LOD Element is typically referenced by a NULL Shape Node Element using Late Loaded Property Atom Elements (see NULL Shape Node Element and Late Loaded Property Atom Element respectively).

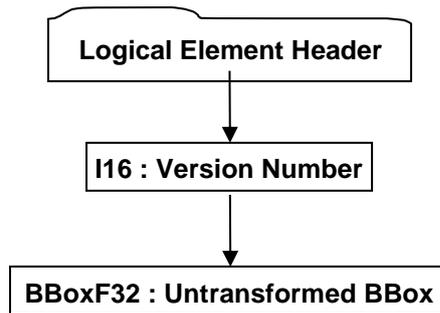


Figure R 82 — Null Shape LOD Element data collection

Logical Element Header

See logical Element Header definition in this document under Data Segment.

I16 : Version Number

Version Number is the version identifier for this Null Shape LOD Element. For information on local version numbers see best practice Local version numbers.

BBoxF32 : Untransformed BBox

The Untransformed BBox is an axis-aligned LCS bounding box and represents the untransformed extents for this Null Shape LOD Element.

R.2.4.1.10 Primitive Set Shape Element

Object Type ID: 0xe40373c2, 0x1ad9, 0x11d3, 0x9d, 0xaf, 0x0, 0xa0, 0xc9, 0xc7, 0xdd, 0xc2

A Primitive Set Shape Element defines the minimum data necessary to procedurally generate LODs for a list of primitive shapes (e.g. box, cylinder, sphere, etc.). “Procedurally generate” means that the raw geometric shape definition data (e.g. vertices, polygons, normals, etc.) for LODs is not directly stored; instead some basic shape information is stored (e.g. sphere centre and radius) from which LODs can be generated.

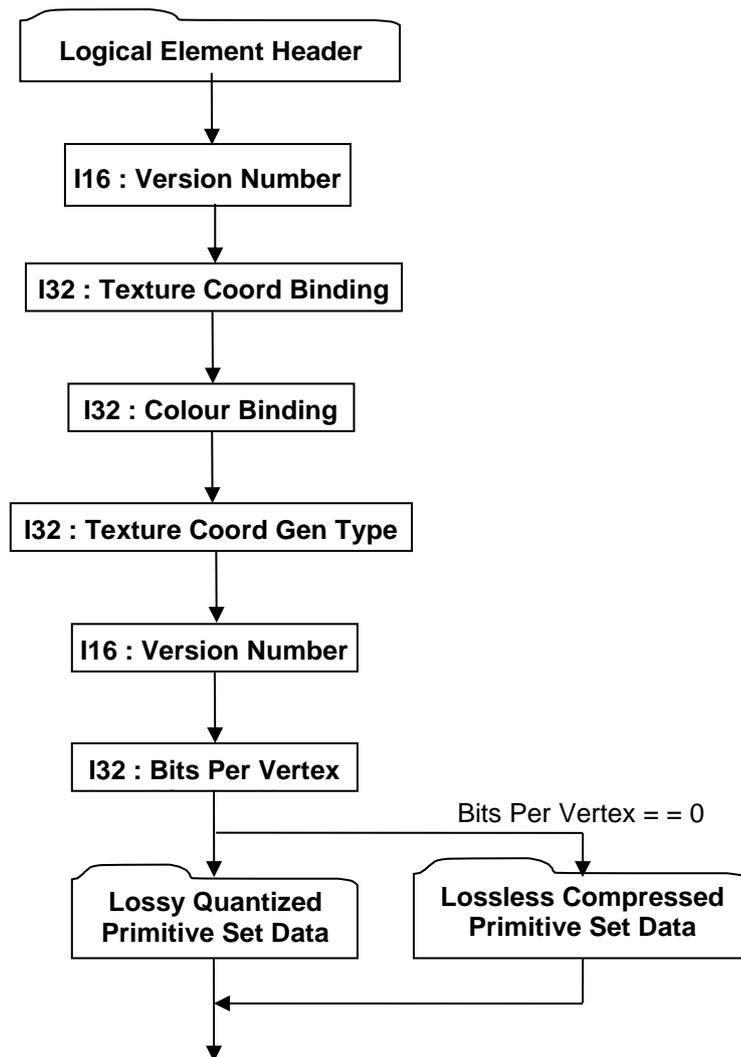


Figure R 83 — Primitive Set Shape Element data collection

16 : Version Number

Version Number is the version identifier for this element. For information on local version numbers see best practice Local version numbers.

32 : Texture Coord Binding

Texture Coord Binding specifies how (at what granularity) texture coordinate data is supplied (“bound”) for the shape. Valid values are as follows:

Table R 52 — Primitive Set Shape Texture Coord Binding values

= 0	None. Shape has no texture coordinate data.
= 1	Per Vertex. Shape has texture coordinates for every vertex.

32 : Colour Binding

Colour Binding specifies how (at what granularity) colour data is supplied (“bound”) for the shape. Valid values are the same as documented for Texture Coord Binding data field.

I16 : Version Number

Version Number is the version identifier for this element. The value of this Version Number indicates the format of data fields to follow.

Table R 53 — Primitive Set Shape Version Number values

= 1	Version-1 Format
= 2	Version-2 Format

I32 : Bits Per Vertex

Bits Per Vertex specifies the number of quantization bits per vertex coordinate component. Value shall be within range [0:32] inclusive.

I32 : Texture Coord Gen Type

Texture Coord Gen Type specifies how a texture is applied to each face of the primitive. Single tile means one copy of the texture will be stretched to fit the face, isotropic means that the texture will be duplicated on the longer dimension of the face in order to maintain the texture's aspect ratio.

Table R 54 — Primitive Set Shape Texture Coord Gen Type values

= 0	Single Tile...Indicates that a single copy of a texture image will be applied to significant primitive features (i.e. cube face, cylinder wall, end cap) no matter how eccentrically shaped.
= 1	Isotropic...Implies that multiple copies of a texture image may be mapped onto eccentric surfaces such that a mapped texel stays approximately square.

Lossless Compressed Primitive Set Data – see core spec

Lossy Quantized Primitive Set Data – see core spec

R.2.5 Wireframe Segment – see core spec

R.2.5.1 Wireframe Rep Element

Object Type ID: 0x873a70d0, 0x2ac8, 0x11d1, 0x9b, 0x6b, 0x00, 0x80, 0xc7, 0xbb, 0x59, 0x97

A Wireframe Rep Element represents a particular Part's precise 3D wireframe data (e.g. reference curves, section curves). Much of the "heavyweight" data contained within a Wireframe Rep Element is compressed and/or encoded. The compression and/or encoding state is indicated through other data stored in each Wireframe Rep Element.

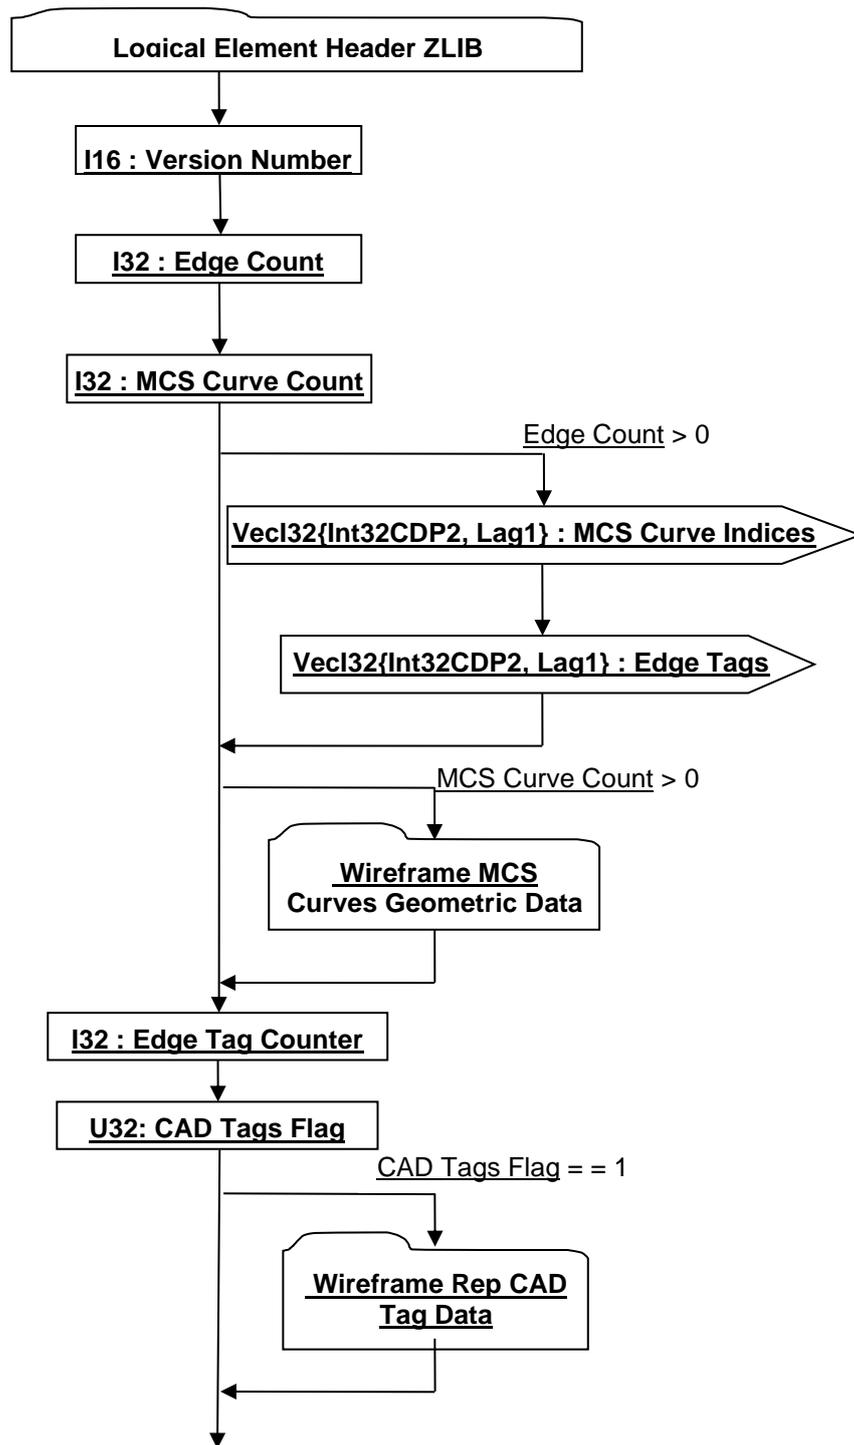


Figure R 84 — Wireframe Rep Element data collection

Logical Element Header

See logical Element Header definition in this document under Data Segment.

I16 : Version Number

Version Number is the version identifier for this JT Wireframe Rep Element. For information on local version numbers see best practice Local version numbers.

I32 : Edge Count

Edge Count indicates the number of topological Edge entities in the Wireframe Rep.

I32 : MCS Curve Count

MCS Curve Count indicates the number of distinct geometric (Model Coordinate Space) curves (i.e. XYZ curve) entities in the Wireframe Rep.

VecI32{Int32CDP2, Lag1} : MCS Curve Indices

MCS Curve Indices is a vector of indices representing the index of the MCS Curve (Model Space curve) for each Edge. MCS Curve Indices uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP2, Lag1} : Edge Tags

Each Edge has an identifier Tag. Edge Tags is a vector of identifier Tags for a set of Edges. Edge Tags uses the Int32 version of the CODEC to compress and encode data.

Wireframe MCS Curves Geometric Data

Wireframe MCS Curves Geometric Data collection contains the Wireframe Rep's Model Coordinate System geometric Curve data (i.e. XYZ Curve data). Currently only NURBS Curve types are supported within a Wireframe Rep. The count/number of MCS Curves within a Wireframe Rep is indicated by data field MCS Curve Count documented in 9.1 Wireframe Rep



Figure R 85 — Wireframe MCS Curves Geometric Data collection

Complete description for Compressed Curve Data can be found in this document.

I32 : Edge Tag Counter

Edge Tag Counter specifies the next available "unique" tag value for Edge entity.

U32: CAD Tags Flag

CAD Tags Flag is a flag indicating whether CAD Tag data exist for the Wireframe Rep.

Wireframe Rep CAD Tag Data

The Wireframe Rep CAD Tag Data collection contains the list of persistent IDs, as defined in the CAD System, to uniquely identify individual Edges in the Wireframe Rep. The existence of this Wireframe Rep CAD Tag Data collection is dependent upon the value of previously read data field CAD Tags Flag as documented in Wireframe Rep Element.

If Wireframe Rep CAD Tag Data collection is present, there will be a CAD Tag for every Edge in the Wireframe Rep. Therefore the total number of CAD Tags in the list should be equal to "Edge Count" as documented in Wireframe Rep Element.



Figure R 86 — Wireframe Rep CAD Tag Datacollection

R.2.6 Meta Data Segment

Meta Data Segments are used to store large collections of meta-data in separate addressable segments of the JT File. Storing meta-data in a separate addressable segment allows references (from within the JT file) to these segments to be constructed such that the meta-data can be late-loaded (i.e. JT file reader can be structured to support the “best practice” of delaying the loading/reading of the referenced meta-data segment until it is actually needed).

Meta Data Segments are typically referenced by Part Node Elements (see Part Node Element) using Late Loaded Property Atom Elements (see Late Loaded Property Atom Element).

The Meta Data Segment type supports ZLIB compression on all element data, so all elements in Meta Data Segment use the Logical Element Header ZLIB form of element header data.




Figure R 87 — Meta Data Segment data collection

Complete description for Segment Header can be found in Segment Header.

The following sub-sections document the various the various Meta Data Element types.

R.2.6.1 Property Proxy Meta Data Element

Object Type ID: 0xce357247, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1

A Property Proxy Meta Data Element serves as a “proxy” for all meta-data properties associated with a particular Meta Data Node Element (see Meta Data Node Element). The proxy is in the form of a list of key/value property pairs where the *key* identifies the type and meaning of the *value*. Although the property *key* is always in the form of a String data type, the *value* can be one of several data types.

U8 : Property Value Type

Property Value Type specifies the data type for the Property Value. If the type equals “0” then no Property Value is written. Valid types include the following:

Table R 55 — Property Proxy Meta Data Property Value Type values

= 0	Unknown
= 1	MbString data type value
= 2	I32 data type value
= 3	F32 data type value
= 4	Date value

MbString : String Property Value

String Property Value represents the property value when Property Value Type = = 1.

I32 : Integer Property Value

Integer Property Value represents the property value when Property Value Type = = 2.

F32 : Float Property Value

Float Property Value represents the property value when Property Value Type = = 3.

Date Property Value

Date Property Value represents the property value when Property Value Type = = 4. Date Property Value data collection represents a date as a combination of year, month, day, hour, minute, and second data fields.

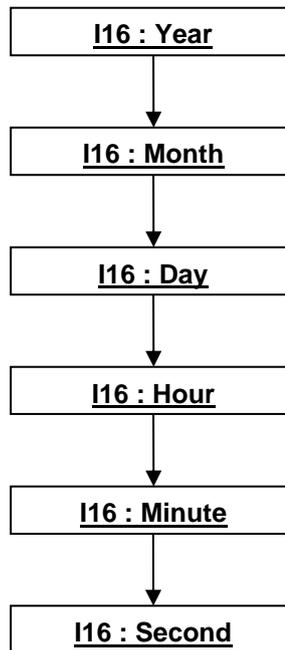


Figure R 89 — Date Property Value data collection

I16 : Year

Year specifies the date year value.

I16 : Month

Month specifies the date month value.

I16 : Day

Day specifies the date day value.

I16 : Hour

Hour specifies the date hour value.

I16 : Minute

Minute specifies the date minute value.

I16 : Second

Second specifies the date Second value.

R.2.6.2 PMI Manager Meta Data Element

Object Type ID: 0xce357249, 0x38fb, 0x11d1, 0xa5, 0x6, 0x0, 0x60, 0x97, 0xbd, 0xc6, 0xe1

The PMI Manager Meta Data Element data collection is a type of Meta Data Element which contains the Product and Manufacturing Information for a part/assembly.

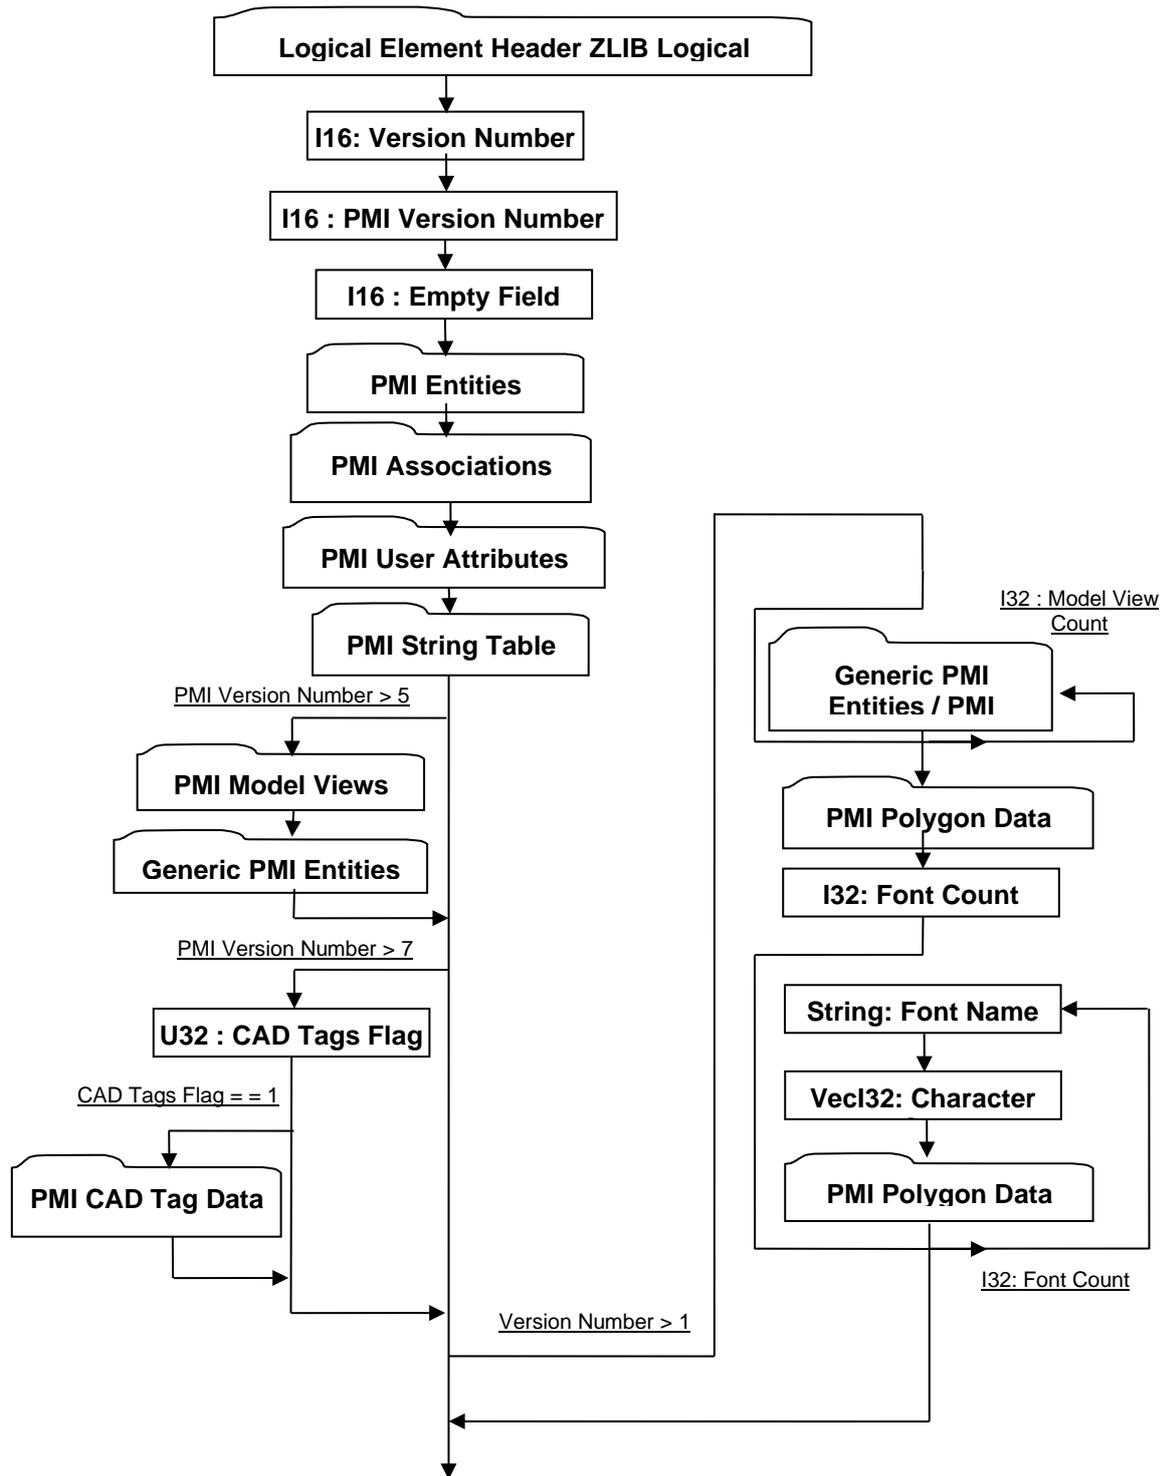


Figure R 90 — PMI Manager Meta Data Element data collection

Logical Element Header ZLIB

Complete description for Logical Element Header ZLIB can be found in in this document under Data Segment

I16: Version Number

Version Number is the version identifier for this PMI Manager Element. For information on local version numbers see best practices, Local version numbers.

I16 : PMI Version Number

PMI Version Number is the identifier that defines which classes of PMI data will be available in the PMI Manager Meta Data Element. PMI Version Number data is additive.

The valid PMI version numbers for JTIAP First and Second Edition are as follows:

Table R 56 — PMI Manager Meta Data Version Number values

= 3	Version 3 includes; <ul style="list-style-type: none"> • I32 : Attribute Count, Design Group Attribute (see Figure PMI Design Group Entities data collection)
= 4	Version 4 includes version 3 plus; <ul style="list-style-type: none"> • CoordF32 : Weld Point, DirF32 : Approach Direction, DirF32 : Clamping Direction, DirF32 : Normal Direction (see Figure PMI Spot Weld Entities data collection) • CoordF32 : Location, DirF32 : Measurement Direction, DirF32 : Coordinate Direction, DirF32 : Normal Direction (see Figure PMI Measurement Point Entities data collection)
= 5	Version 5 Includes version 4 plus; <ul style="list-style-type: none"> • U8 : Symbol Valid Flag (see Figure PMI Base Data collection) I32 : Polyline Type Count, I16 : Polyline Type (see Figure Non-Text Polyline Data collection)
= 6	Version 6 includes version 5 plus; <ul style="list-style-type: none"> • 10.2.5 PMI Model Views, 10.2.6 Generic PMI Entities (see Figure PMI Manager Meta Data Element data collection) • U32 : URL Flag (see Figure PMI Note Entities data collection) • I32 : Source Owning Entity String ID, I32: Destination Owning Entity String ID (see Figure PMI Associations data collection)
= 7	Version 7 includes version 6 plus ; <ul style="list-style-type: none"> • U16 : U16 : User Flags (see Figure Generic PMI Entity data collection) • U32 : Hidden Flag (Figure Key PMI Property Atom data collectionsee)
= 8	Version 8 Includes version 7 plus; <ul style="list-style-type: none"> • U32 : CAD Tags Flag (see Figure PMI Manager Meta Data Element data collection)

I16 : Empty Field

Refer to Common Data Practice Empty Field.

U32 : CAD Tags Flag

CAD Tags Flag is a flag indicating whether CAD Tag data exist for the PMI.

I32: Font Count

Number of sets of glyph definitions. Each set of glyphs represents a single font definition that consists of a name, a character set and polygonal glyph definition for each character in the set.

String: Font Name

Font name specifies a representative name for the font set.

Vecl32: Character Set

Integer identifiers for each character whose symbol is defined in the ensuing PolygonData segment.

PMI Entities

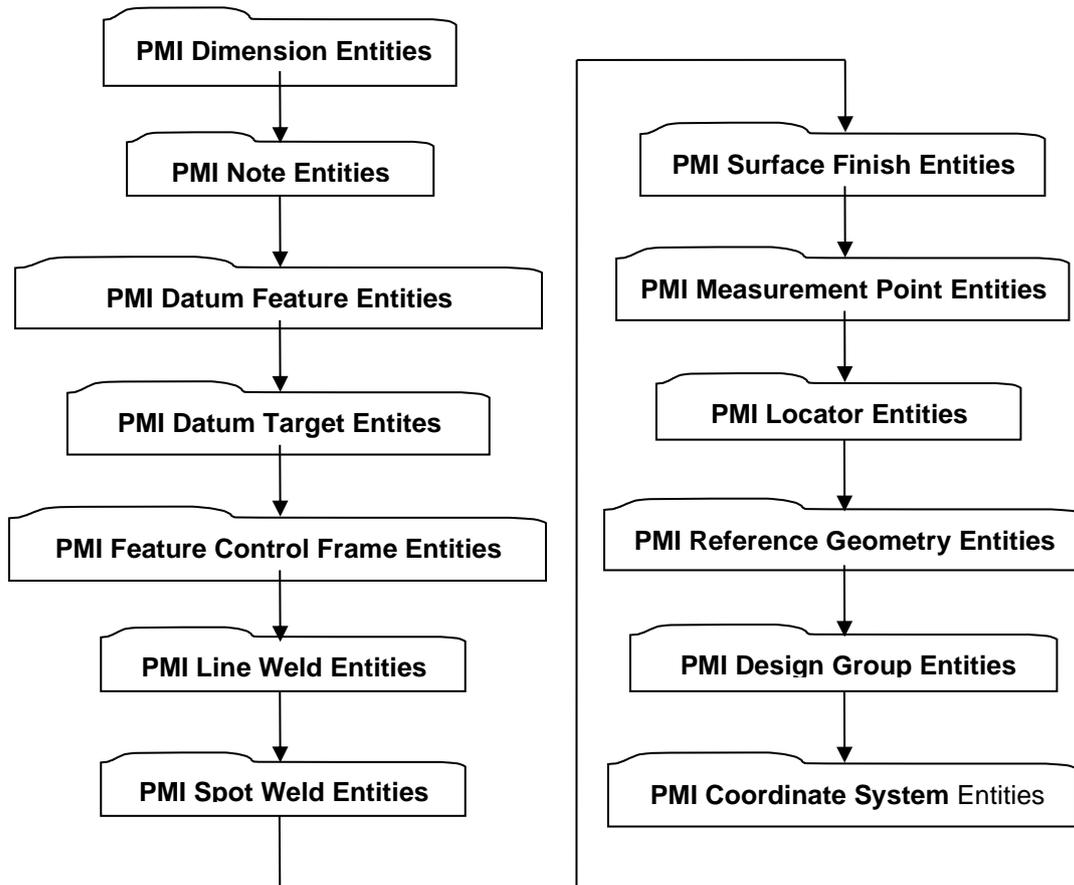


Figure R 91 — PMI Entities data collection

PMI Dimension Entities

The PMI Dimension Entities data collection defines data for a list of Dimensions.

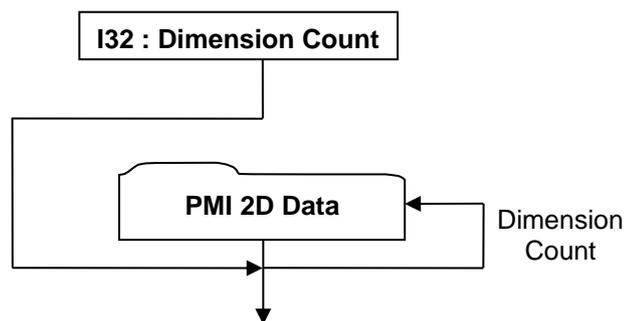


Figure R 92 — PMI Dimension Entities data collection

I32 : Dimension Count

Dimension Count specifies the number of Dimension entities.

PMI 2D Data

The PMI 2D Data collection defines a data format common to all 2D based PMI entities.

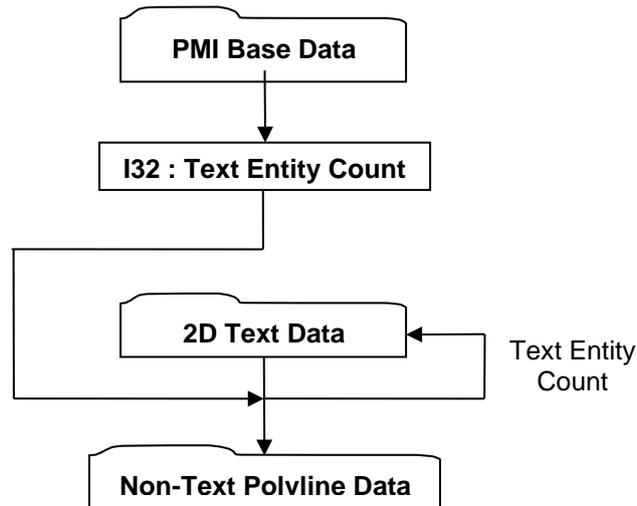


Figure R 93 — PMI 2D Data collection

I32 : Text Entity Count

Text Entity Count specifies the number of Text entities in the particular PMI entity.

PMI Base Data

The PMI Base Data collection defines the basic/common data that every 2D and 3D PMI entity contains.

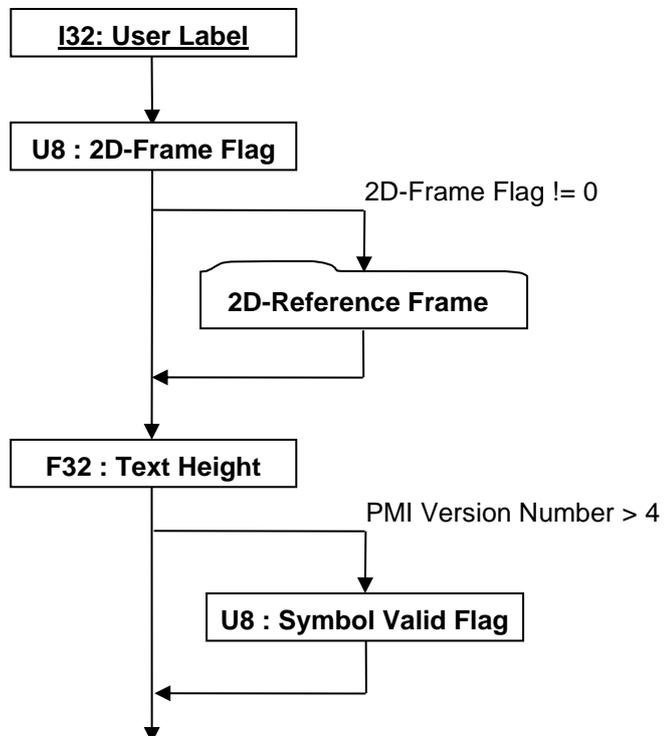


Figure R 94 — PMI Base Data collection

I32 : User Label

User Label specifies the particular PMI entity identifier.

U8 : 2D-Frame Flag

2D-Frame Flag is a flag specifying whether 2D-Reference Frame data is stored. If 2D-Frame Flag has a non-zero value then 2D-Reference Frame data is included. If 2D-Frame Flag has a value of -2^{11} , then dummy (i.e. all zeros) 2D-Reference Frame data is written. The -2^{11} case is used by Generic PMI Entities because for Generic PMI Entities all the Non-Text Polyline Data is already in 3D form (i.e. XYZ coordinate data).

F32 : Text Height

Text Height specifies the PMI text height in WCS.

U8 : Symbol Valid Flag

Symbol Valid Flag is a flag specifying whether the particular PMI entity is valid. If Symbol Valid Flag has a non-zero value then PMI entity is valid. This flag is only stored if the Version Number as defined in PMI Manager Meta Data Element is greater than "4."

2D-Reference Frame

The 2D-Reference Frame data collection defines a reference frame (2D coordinate system) where the PMI entity is displayed in 3D space. All the PMI entity's 2D and 3D polyline data is assumed to lie on the defined plane.




Figure R 95 — 2D-Reference Frame data collection

CoordF32 : Origin

Origin defines the origin (min-corner) of the 2D coordinate system.

CoordF32 : X-Axis Point

X-Axis Point defines a point along the X-Axis of the 2D coordinate system.

CoordF32 : Y-Axis Point

Y-Axis Point defines a point along the Y-Axis of the 2D coordinate system.

2D Text Data

The 2D Text Data collection defines a 2D text entity/primitive.

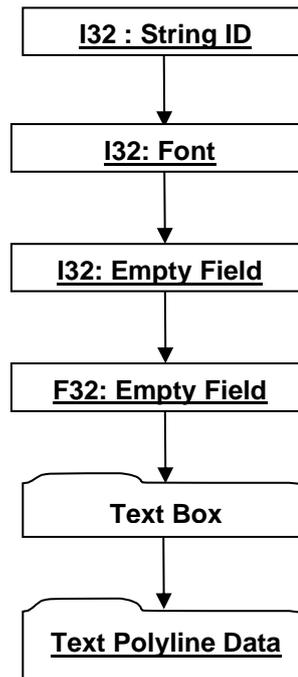


Figure R 96 — 2D Text Data collection

I32 : String ID

String ID specifies the identifier for the character string. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

I32 : Font

Font identifies the font to be used for this text. Valid values include the following:

Table R 57 — PMI 2D Base Data Font values

= 1	Simplex
= 2	Din
= 3	Military
= 4	ISO
= 5	Lightline
= 6	IGES 1001
= 7	Century
= 8	IGES 1002
= 9	IGES 1003
= 101	Japanese JISX 0208 coded character set
= 102	Japanese Extended Unix Codes JISX 0208 coded character set
= 103	Chinese GB 2312.1980 Simplified coded character set
= 104	Korean KSC 5601 coded character set
= 105	Chinese Big5 Traditional coded character set

I32 : Empty Field

Refer to best practice _Empty Field.

F32 : Empty Field

Refer to best practice _Empty Field.

Text Box

The Text Box data collection specifies a 2D box that particular text fits within. All values are with respect to 2D-Reference Frame documented in 2D-Reference Frame.

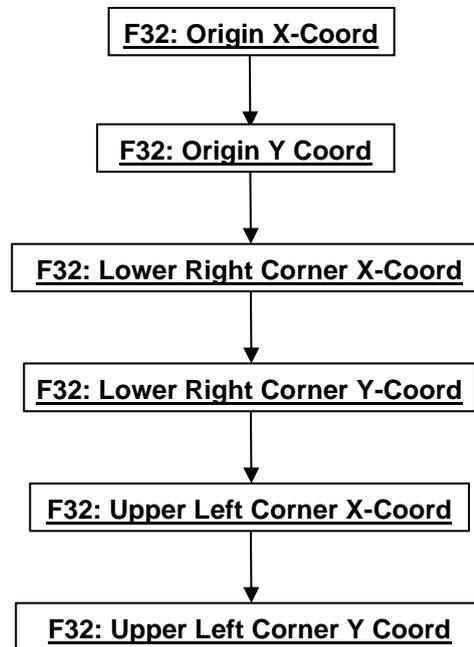


Figure R 97 — Text Box data collection

F32 : Origin X-Coord

Origin X-Coord defines the 2D X-coordinate of the text origin with respect to 2D-Reference Frame.

F32 : Origin Y Coord

Origin Y-Coord defines the 2D Y-coordinate of the text origin with respect to 2D-Reference Frame.

F32 : Lower Right Corner X-Coord

Lower Right Corner X-Coord defines the 2D X-coordinate of the lower right corner of the text with respect to 2D-Reference Frame.

F32 : Lower Right Corner Y-Coord

Lower Right Corner Y-Coord defines the 2D Y-coordinate of the lower right corner of the text with respect to 2D-Reference Frame.

F32 : Upper Left Corner X-Coord

Upper Left Corner X-Coord defines the 2D X-coordinate of the upper left corner of the text with respect to 2D-Reference Frame.

F32 : Upper Left Corner Y Coord

Upper Left Corner Y-Coord defines the 2D Y-coordinate of the upper left corner of the text with respect to 2D-Reference Frame.

Text Polyline Data

The Text Polyline Data collection defines any polyline segments which are part of the text representation. This existence of this polyline data is conditional (i.e. not all text has it) and is made up of an array of indices into an array of polyline segments packed as 2D vertex

coordinates, specifying where each polyline segment begins and ends. Polylines are constructed from these arrays of data as follows:

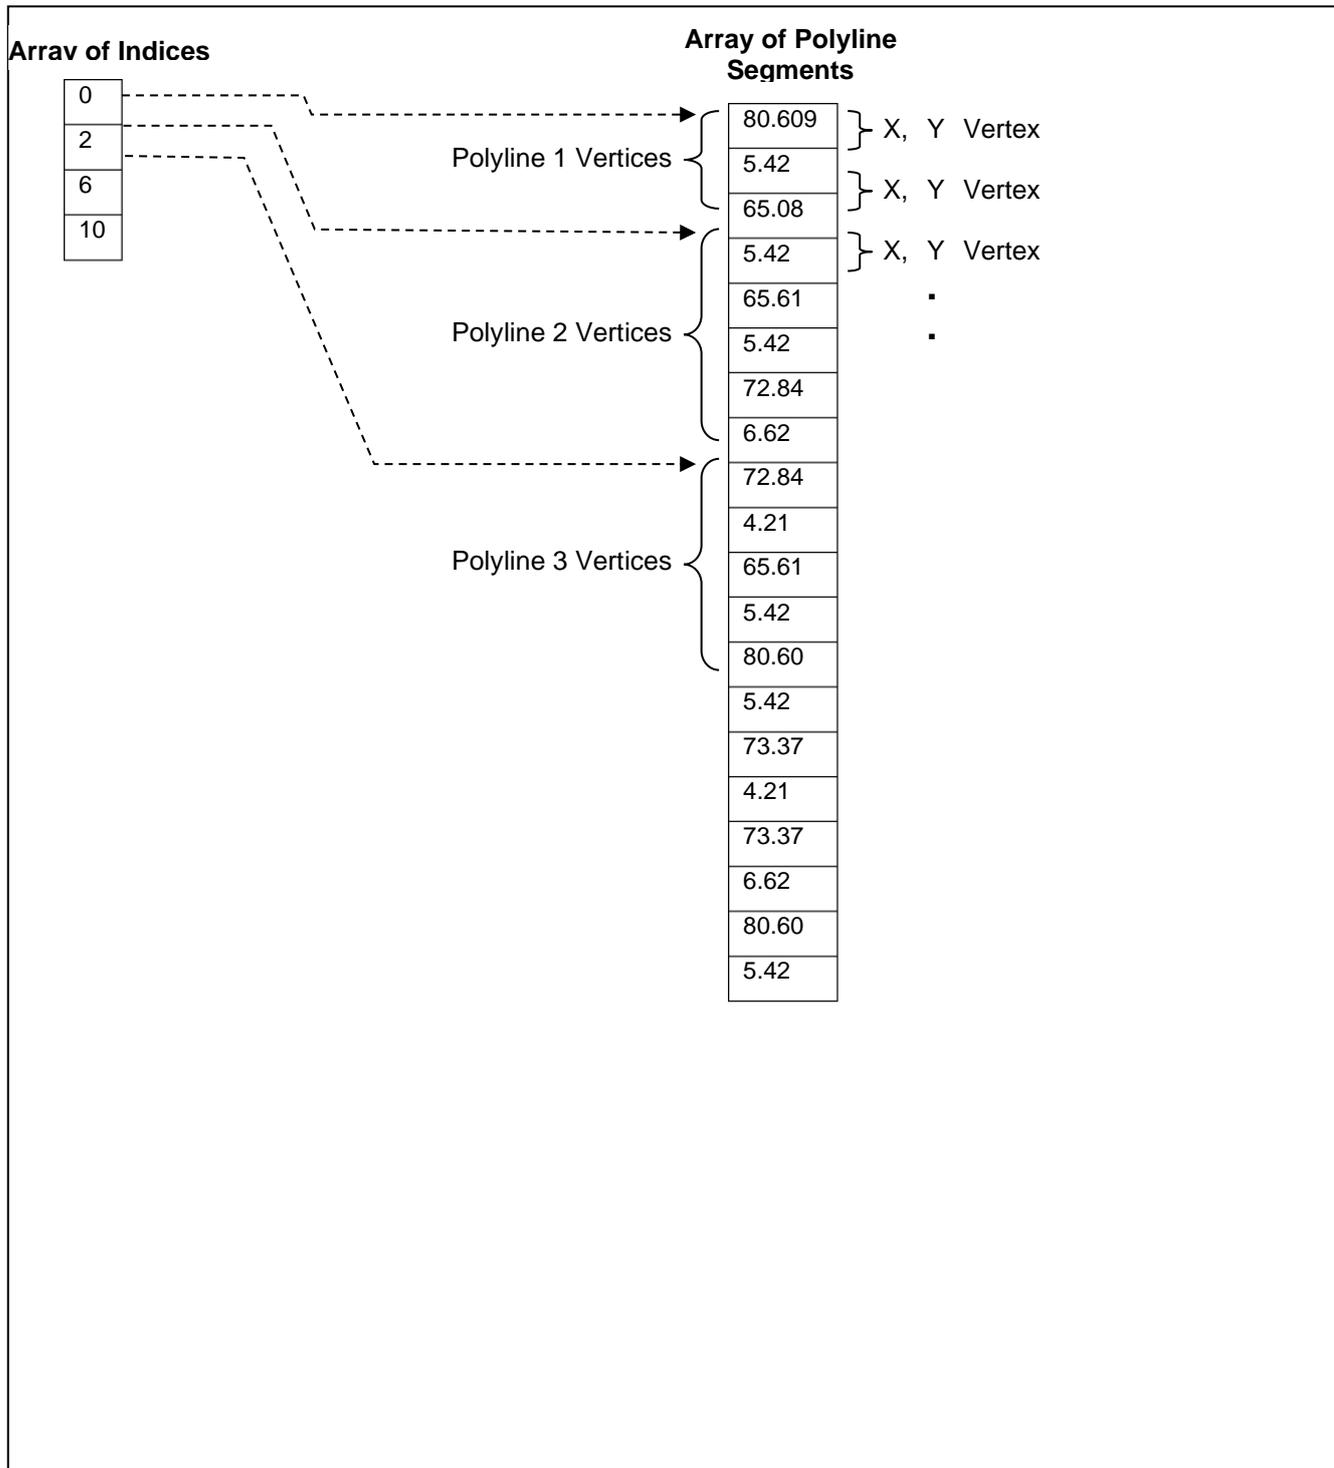


Figure R 98 — Constructing Text Polylines from data arrays

This data is represented in JT file in the following format:

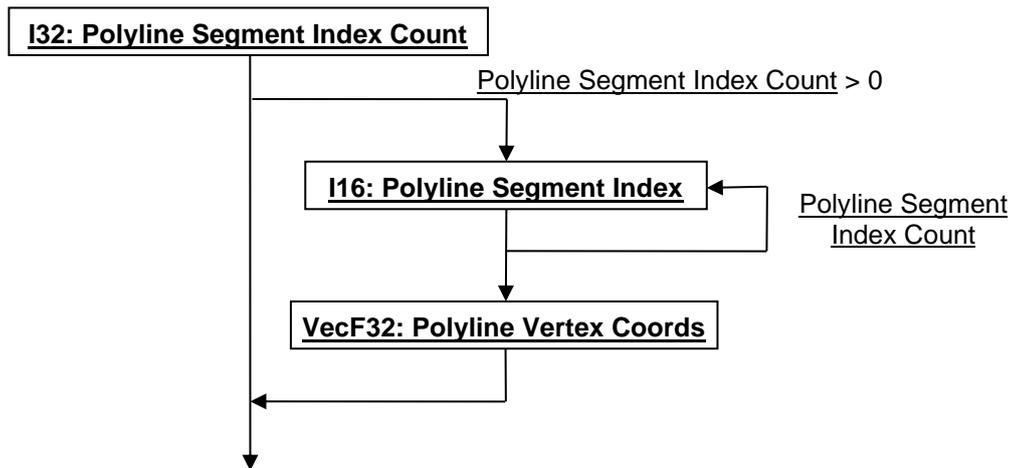


Figure R 99 — Text Polyline Data collection

I32 : Polyline Segment Index Count

Polyline Segment Index Count specifies the number of polyline segment indices.

I16 : Polyline Segment Index

Polyline Segment Index is an index into the Polyline Vertex Coords array specifying where polyline segment begins or ends. This index is a vertex coordinate index so the absolute index into the Polyline Vertex Coords array is computed by multiplying the index value by “2” (i.e. for 2D coordinates).

VecF32 : Polyline Vertex Coords

Polyline Vertex Coords is an array of polyline segments packed as 2D point coordinates. These 2D point coordinates are with respect to the 2D-Reference Frame documented in 2D-Reference Frame.

Non-Text Polyline Data

The Non-Text Polyline Data collection contains all the non-text polylines making up the particular PMI entity. Examples of non-text polylines include line attachments, text boxes, symbol box dividers, etc. The Non-Text Polyline Data collection is made up of an array of indices into an array of polyline segments packed as either 2D or 3D vertex coordinates, specifying where each polyline segment begins and ends. Whether vertex coordinates are 2D or 3D is dependent upon the PMI entity type using this data collection. If it is a Generic PMI Entities type then the packed coordinate data is 3D; for all other PMI entity types the packed coordinate data is 2D. Also for Version Number, as defined in PMI Manager Meta Data Element, greater than “4” an array of values that sequentially specify the polyline type in the polyline segments array is included.

The figure below shows how Polylines are constructed from these arrays of data for the packed 2D coordinates case. The packed 3D coordinates case is interpreted the same except that the coordinates array includes a Z component and is thus packed as “[XYZ][XYZ][XYZ]...”

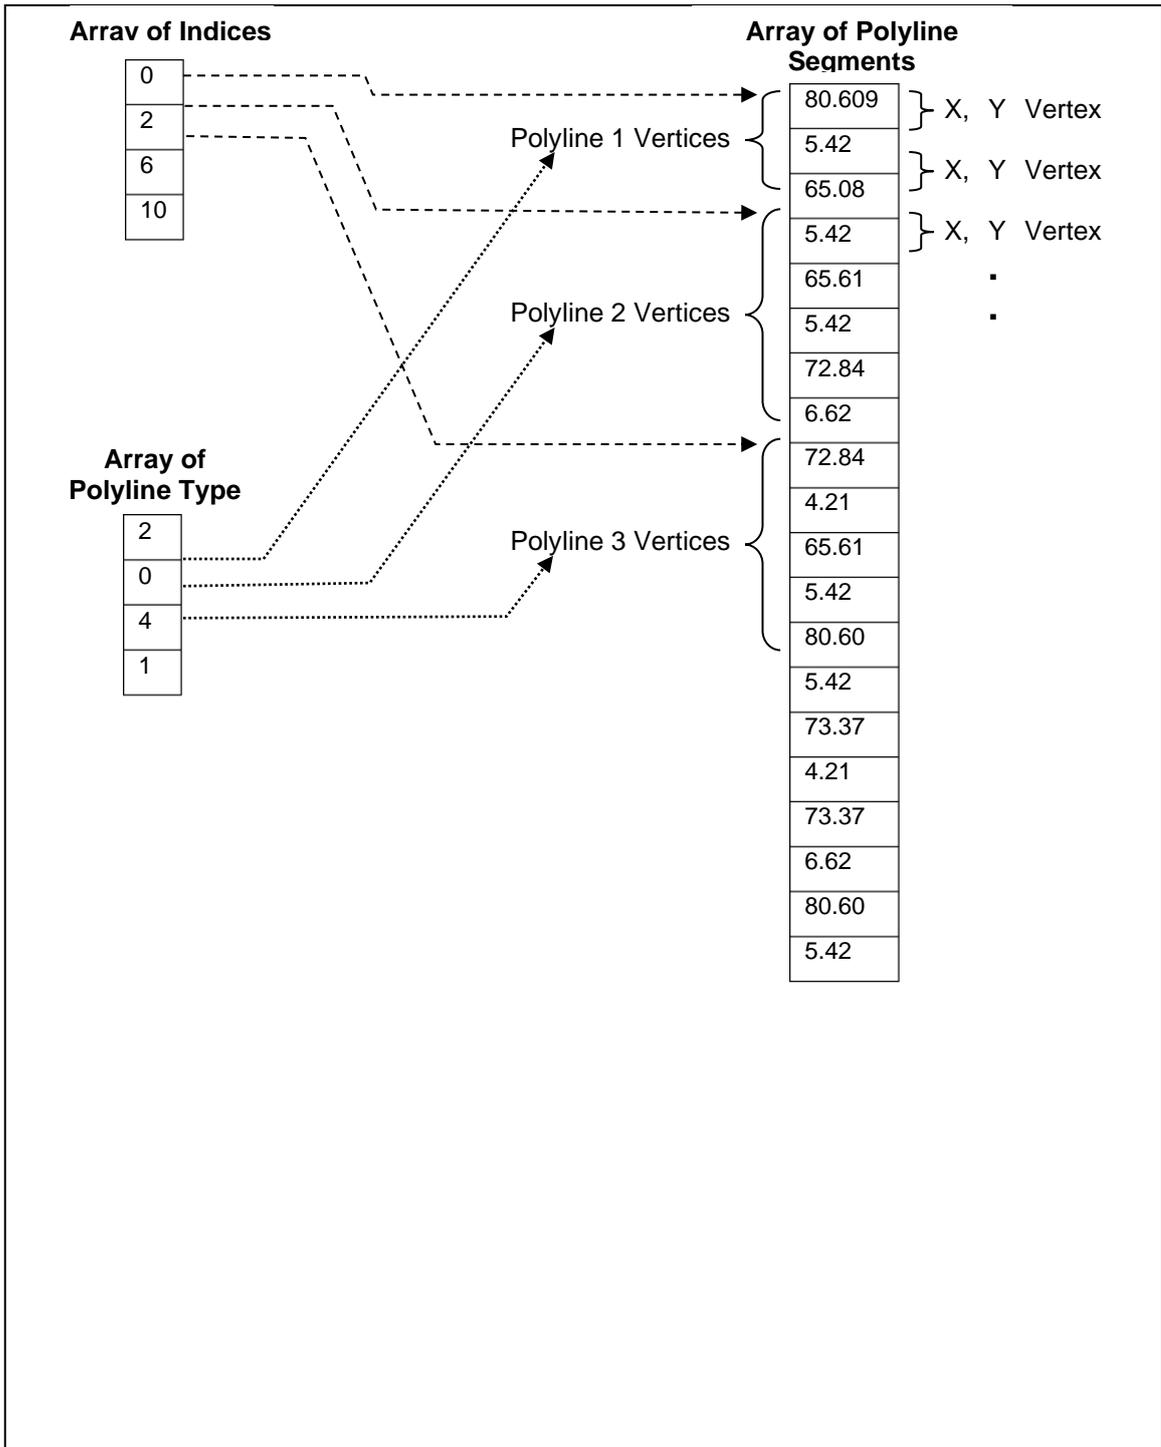


Figure R 100 — Constructing Non-Text Polylines from packed 2D data arrays

This data is represented in the JT Open format as follows:

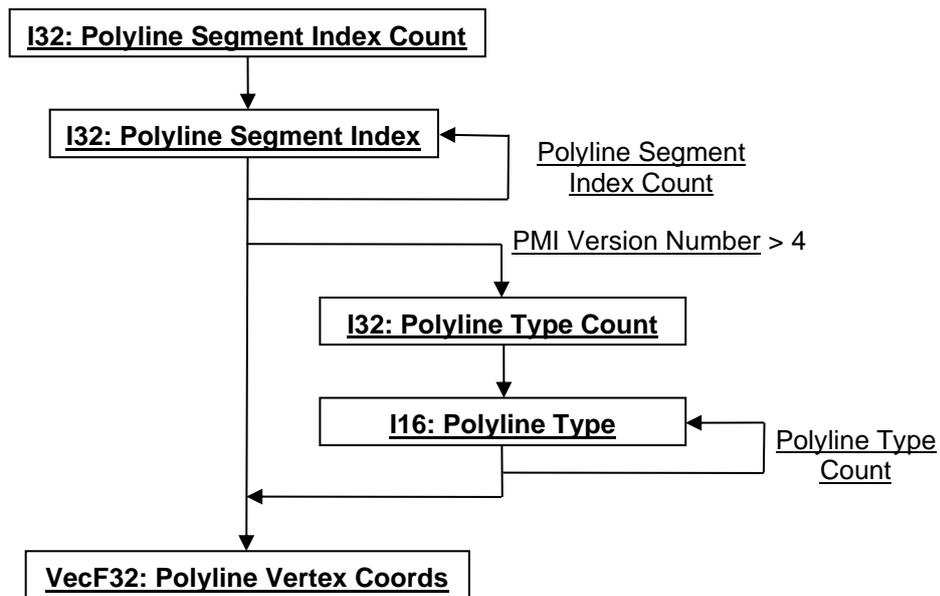


Figure R 101 — Non-Text Polyline Data collection

I32 : Polyline Segment Index Count

Polyline Segment Index Count specifies the number of polyline segment indices.

I16 : Polyline Segment Index

Polyline Segment Index is an index into the Polyline Vertex Coords array specifying where polyline segment begins or ends. This index is a vertex/coordinate index so the absolute index into the Polyline Vertex Coords array is computed by multiplying the index value by “2” (i.e. for 2D coordinates).

I32 : Polyline Type Count

Polyline Type Count specifies the number of polyline type values.

I16 : Polyline Type

Polyline Type specifies the type of polyline segment in Polyline Vertex Coords array. See Figure - Constructing Non-Text Polylines from packed 2D data arrays, for interpretation of this array of type values relative to the defined polylines. Valid values include the following:

Table R 58 — PMI 2D Non-Text Polyline Type values

= 0	General line
= 1	General arrow
= 2	General circle
= 3	General arc
= 4	Extended line 1
= 5	Extended line 2
= 6	Extended arc
= 7	Extended circle
= 8	Text line (used in text boxes and symbol box dividers)
= 9	Text string

VecF32 : Polyline Vertex Coords

Polyline Vertex Coords is an array of polyline segments packed as 2D point coordinates. These 2D point coordinates are with respect to the 2D-Reference Frame documented in [0_2D-Reference Frame](#).

PMI Note Entities

The PMI Note Entities data collection defines data for a list of Notes. Notes are used to connect textual information to specific Part entities.

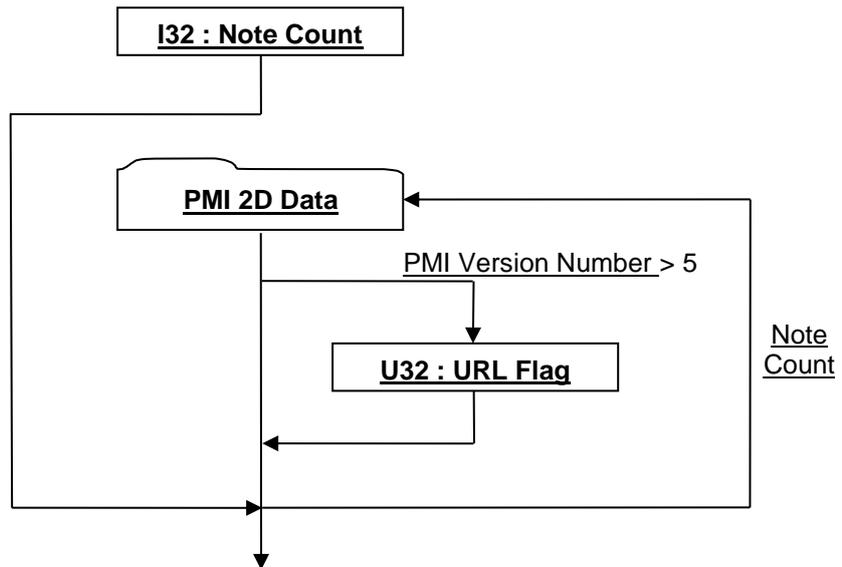


Figure R 102 — PMI Note Entities data collection

Complete description for PMI 2D Data can be found in [PMI 2D Data](#).

I32 : Note Count

Note Count specifies the number of Note entities.

U32 : URL Flag

URL Flag specifies whether Note is an URL. This data field is only present if Version Number, as defined in [PMI Manager Meta Data Element](#), is greater than "5". The URL is the actual text of the note as specified in [PMI 2D Data](#).

PMI Datum Feature Symbol Entities

The PMI Datum Feature Symbol Entities data collection defines data for a list of Datum Feature Symbols. A Datum Feature Symbol is a Geometric Dimensioning and Tolerancing (GD&T) symbol that provides a "label" for a part feature which is referenced by a Feature Control Frame.

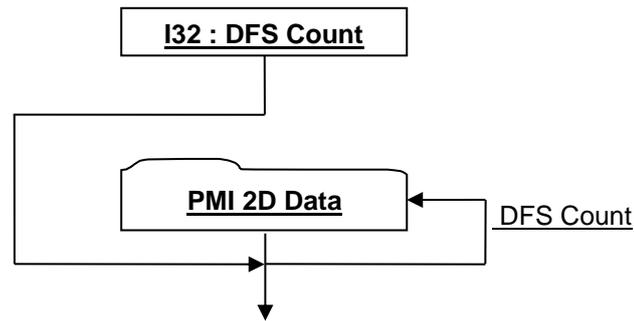


Figure R 103 — PMI Datum Feature Symbol Entities data collection

Complete description for PMI 2D Data can be found in [PMI 2D Data](#).

I32 : DFS Count

DFS Count specifies the number of Datum Feature Symbol entities.

PMI Datum Target Entities

The PMI Datum Target Entities data collection defines data for a list of Datum Targets. A Datum Target is a Geometric Dimensioning and Tolerancing (GD&T) symbol that specifies a point, a line, or an area on a part to define a “datum” for manufacturing and inspection operations.

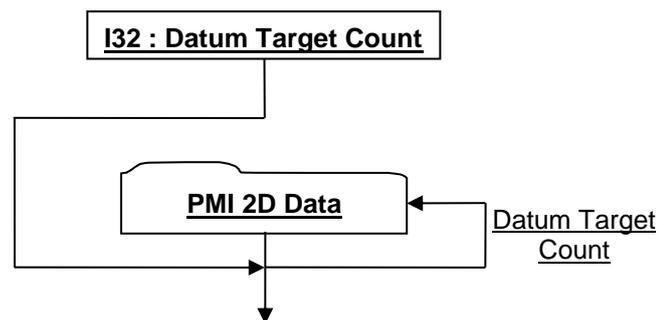


Figure R 104 — PMI Datum Target Entities data collection

Complete description for PMI 2D Data can be found in [PMI 2D Data](#).

I32 : Datum Target Count

Datum Target Count specifies the number of Datum Target entities.

PMI Feature Control Frame Entities

The PMI Feature Control Frame Entities data collection defines data for a list of Feature Control Frames. A Feature Control Frame is a Geometric Dimensioning and Tolerancing (GD&T) symbol used for expressing the geometric characteristics, form tolerance, runout or location tolerance, and relationships between the geometric features of a part. If necessary, Datum Feature and/or Datum Target references may be included in the Feature Control Frame symbol.

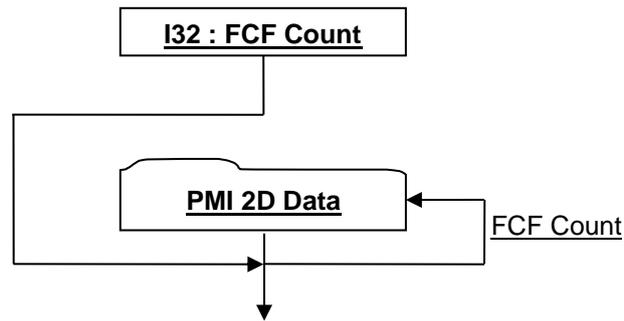


Figure R 105 — PMI Feature Control Frame Entities data collection

Complete description for PMI 2D Data can be found in [PMI 2D Data](#).

I32 : FCF Count

FCF Count specifies the number of Feature Control Frame entities.

PMI Line Weld Entities

The PMI Line Weld Entities data collection defines data for a list of Line Weld symbols. A Line Weld symbol describes the specifications for welding a joint.

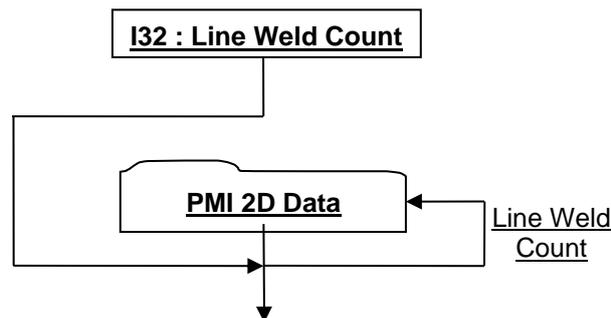


Figure R 106 — PMI Line Weld Entities data collection

Complete description for PMI 2D Data can be found in [PMI 2D Data](#).

I32 : Line Weld Count

Line Weld Count specifies the number of Line Weld entities.

PMI Spot Weld Entities

The PMI Spot Weld Entities data collection defines data for a list of Spot Weld Symbols. Spot Weld symbols describe the specifications for welding sheet metal.

Several data fields of the PMI Spot Weld Entities data collection are only present if [Version Number](#), as defined in [PMI Manager Meta Data Element](#), is greater than or equal to "4".

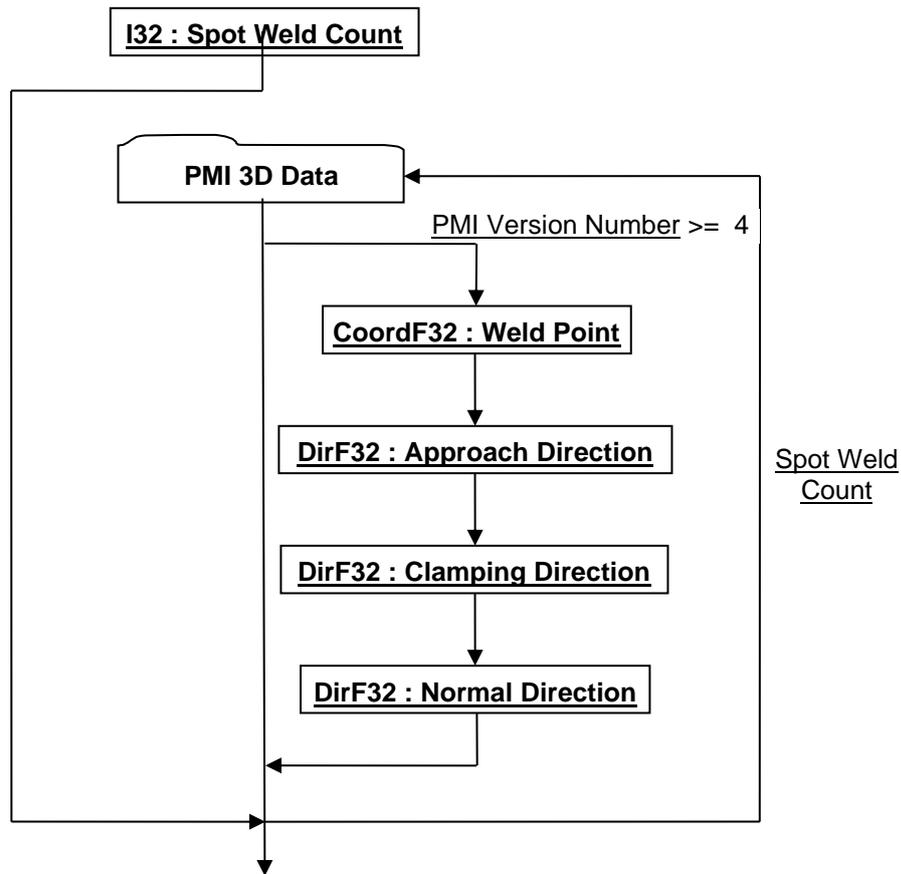


Figure R 107 — PMI Spot Weld Entities data collection

I32 : Spot Weld Count

Spot Weld Count specifies the number of Spot Weld entities.

CoordF32 : Weld Point

Weld Point specifies the coordinates of the weld point.

DirF32 : Approach Direction

Approach Direction specifies the components of the direction vector from which the weld gun approaches the part.

DirF32 : Clamping Direction

Clamping Direction specifies the components of the clamping force direction vector.

DirF32 : Normal Direction

Normal Direction specifies the components of the direction vector normal to the actual spot weld.

PMI 3D Data

The PMI 3D Data collection defines a data format common to all 3D based PMI entities.

Along with the PMI Base Data and String identifier, this data collection also includes non-text polyline data defined by an array of indices into an array of polyline segments packed as 2D/3D vertex coordinates, specifying where each polyline segment begins and ends. How polylines are constructed from this index array and packed vertex coordinates array is the same as that illustrated in [Figure Text Polyline Data](#).

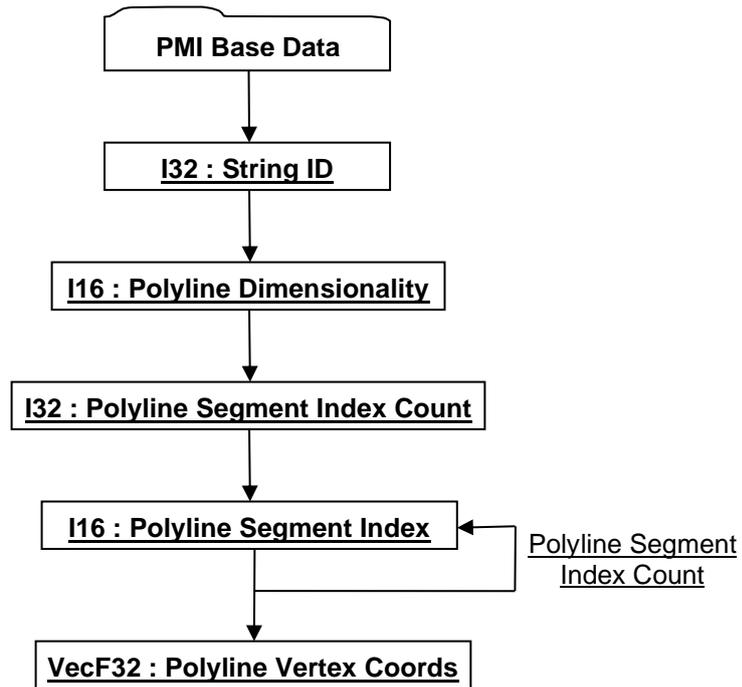


Figure R 108 — PMI 3D Data collection

Complete description for PMI Base Data can be found in PMI Base Data.

I32 : String ID

String ID specifies the identifier for the character string. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

I16 : Polyline Dimensionality

Polyline Dimensionality specifies the dimensionality of the polyline coordinates packed in Polyline Vertex Coords. Valid values include the following:

Table R 59 — PMI 3D Data Polyline Dimensionality values

= 2	Indicates 2-dimensiona! (xyxy...) data packing..
= 3	Indicates 3-dimensional (xyzxyz...) data packing.

I32 : Polyline Segment Index Count

Polyline Segment Index Count specifies the number of polyline segment indices.

I16 : Polyline Segment Index

Polyline Segment Index is an index into the Polyline Vertex Coords array specifying where polyline segment begins or ends. This index is a vertex coordinate index so the absolute index into the Polyline Vertex Coords array is computed by multiplying the index value by Polyline Dimensionality.

VecF32 : Polyline Vertex Coords

Polyline Vertex Coords is an array of polyline segments packed as Polyline Dimensionality point coordinates.

PMI Surface Finish Entities

The PMI Surface Finish Entities data collection defines data for a list of Surface Finish symbols. Surface Finish symbols indicate surface quality and generally are only specified where finish quality affects function (e.g. bearings, pistons, gears).

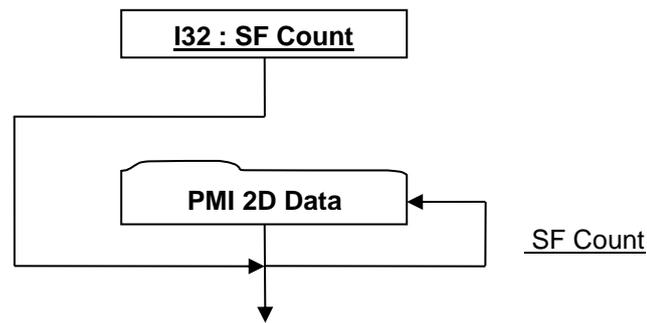


Figure R 109 — PMI Surface Finish Entities data collection

Complete description for PMI 2D Data can be found in [PMI 2D Data](#).

I32 : SF Count

SF Count specifies the number of Surface Finish symbol entities.

PMI Measurement Point Entities

The PMI Measurement Point Entities data collection defines data for a list of Measurement Point symbols. Measurement Points are predefined locations (i.e. geometric entities or theoretical, but measurable points, such as surface locations) which are measured on manufactured parts to verify the accuracy of the manufacturing process.

Several data fields of the PMI Measurement Point Entities data collection are only present if Version Number, as defined in [PMI Manager Meta Data Element](#), is greater than or equal to “4”.

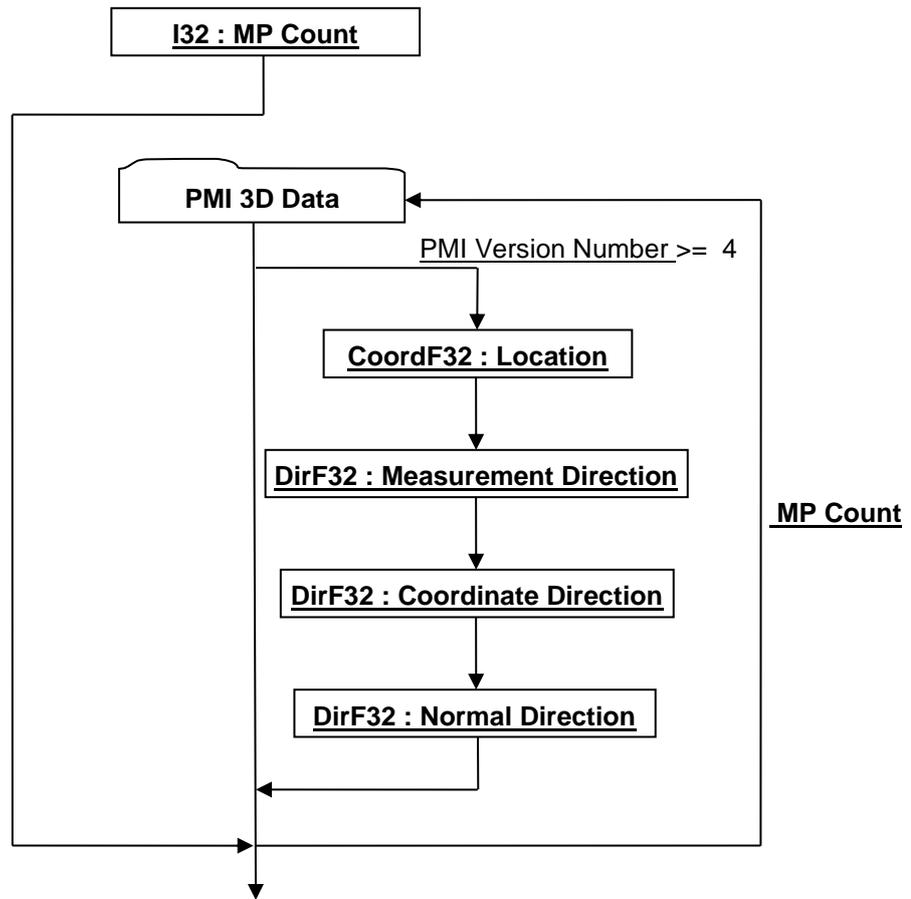


Figure R 110 — PMI Measurement Point Entities data collection

Complete description for PMI 3D Data can be found in PMI 3D Data.

I32 : MP Count

MP Count specifies the number of Measurement Point entities.

CoordF32 : Location

Location specifies the coordinates of the Measurement Point.

DirF32 : Measurement Direction

Measurement Direction specifies the components of the direction vector from which a CCM (Coordinate Measuring Machine) approaches when taking a measurement.

DirF32 : Coordinate Direction

Coordinate Direction specifies the components of the direction vector another Measurement Point on a mating part would like to align with a Measurement Point on the first part.

DirF32 : Normal Direction

Normal Direction specifies the components of the direction vector normal to the actual Measurement Point.

PMI Locator Entities

The PMI Locator Entities data collection defines data for a list of Locator symbols. Locator symbols are used to accurately locate components with respect to each other and the manufacturing tooling.

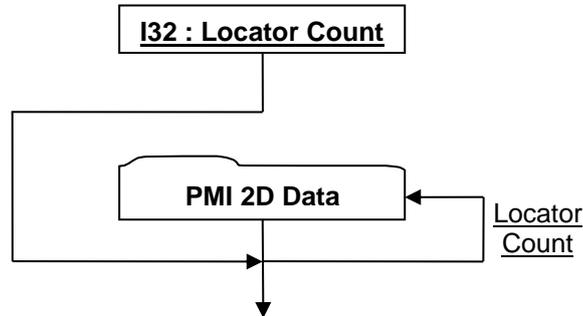


Figure R 111 — PMI Locator Entities data collection

Complete description for PMI 2D Data can be found in [PMI 2D Data](#).

I32 : Locator Count

Locator Count specifies the number of Locator symbol entities.

PMI Reference Geometry Entities

The PMI Reference Geometry Entities data collection defines data for a list of Reference Geometry. Reference Geometry can be thought of as user-definable datums, which are positioned relative to the topology of an existing entity. Each reference geometry type (point, polyline, polygon) can be implicitly determined by the value of [Polyline Segment Index\[1\]](#) as follows:

Table R 60 — PMI Reference Geometry Entity values

Polyline Segment Index[1]	Implied Reference Geometry Type
= 1	Point
= 2	Polyline
> 2	Polygon

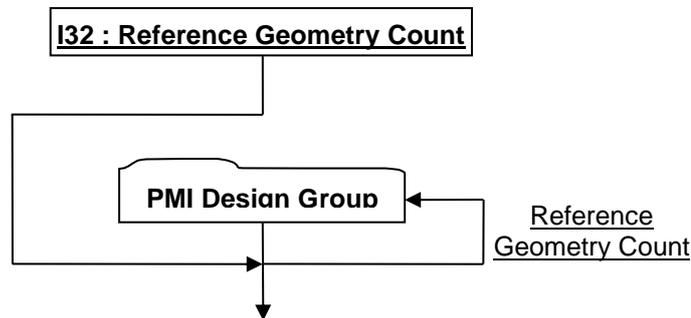


Figure R 112 — PMI Reference Geometry Entities data collection

Complete description for PMI 3D Data can be found in [PMI 3D Data](#).

I32 : Reference Geometry Count

Reference Geometry Count specifies the number of Reference Geometry entities

PMI Design Group Entities

The PMI Design Group Entities data collection defines data for a list of Design Groups. Design Groups are collections of PMI created to organize a model into smaller subsets of information. This organization is achieved via PMI Associations (PMI Associations), where specific PMI entities are associated as “destinations” to a “source” PMI Design Group.

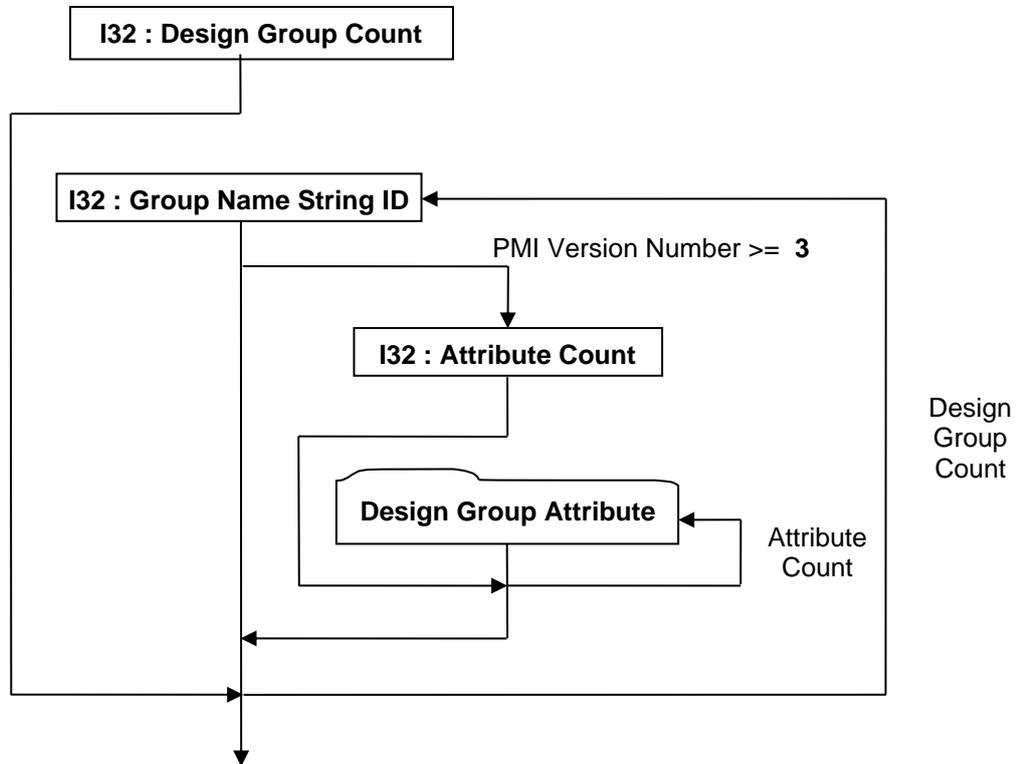


Figure R 113 — PMI Design Group Entities data collection

I32 : Design Group Count

Design Group Count specifies the number of Design Group entities.

I32 : Group Name String ID

Group Name String ID specifies the identifier for the group name character string. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

I32 : Attribute Count

Attribute Count specifies the number of Design Group Attribute data collections.

Design Group Attribute - see core spec

PMI Coordinate System Entities - see core spec

PMI Associations

The PMI Associations data collection defines data for a list of associations. An association defines a link (“relationship”) between two PMI, B-Rep, or Wireframe Rep entities where one entity is defined as the “source” and the other entity is defined as the “destination”.

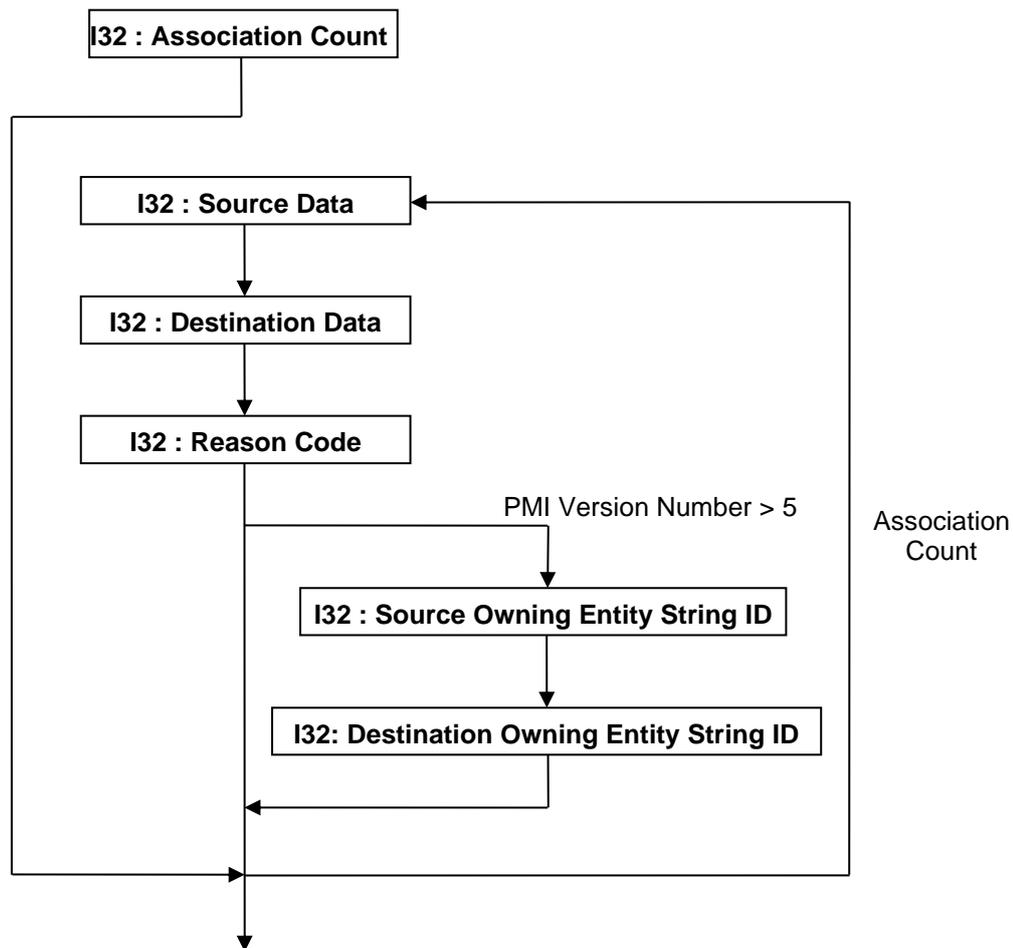


Figure R 114 — PMI Associations data collection

I32 : Association Count

Association Count specifies the number of associations.

I32 : Source Data

Source Data is a collection of source entity information encoded/packed within a single I32 using the following bit allocation. All bits fields that are not defined as in use should be set to "0".

Table R 61 — PMI Associations Source Data values

Bits 0 - 23	Source Entity Identifier. The interpretation of this identifier data is dependent upon the value of Bit 31 documented below.
Bits 24 -30	Source Entity PMI or B-Rep type. Valid types include the following: = 0 PMI - Dimension = 1 PMI - Note = 2 PMI - Datum Feature Symbol = 3 PMI - Datum Target = 4 PMI - Feature Control Frame = 5 PMI - Line Weld = 6 PMI - Spot Weld = 7 PMI - Measurement Point = 8 PMI - Surface Finish = 9 PMI - Locator Designator = 10 PMI - Reference Geometry = 11 PMI - Coordinate System

	= 12 PMI - Design Group = 13 PMI - User Attribute = 14 B-Rep - Vertex = 15 B-Rep - Edge = 16 B-Rep - Face = 17 PMI - Model View = 18 PMI - Generic = 19 Wireframe Rep - Edge = 20 PMI - Unspecified type = 21 Part Instance
Bit 31	Indirect Identifier Flag = 0 – Value in Bits 0-23 is not the actual CAD identifier, instead Bits 0-23 is an index into the source type's PMI array or index of the edge/face in B-Rep or Wireframe Rep for the source entity. = 1 – Value in Bits 0-23 is not the actual CAD identifier; instead Bits 0-23 is an index into the list of CAD Tags (as documented in PMI CAD Tag Data) identifying the CAD Tag belonging to the particular source entity.

I32 : Destination Data

Destination Data is a collection of destination entity information encoded/packed within a single I32. The encoding schema and interpretation of this data is the same as that documented in Source Data.

I32 : Reason Code

Reason Code specifies the “reason” for the association. Valid Reason Codes include the following:

Table R 62 — PMI Associations Reason Code values

= 0	Association is to the primary entity being dimensioned
= 1	Association is to the secondary entity being dimensioned
= 2	Association is to the dimension plane
= 5	Association is to the entity used to specify the Z-Axis of a coordinate system
= 10	Association is to an entity "associated" to or "included in" a PMI symbol
= 11	Association is to an entity used to "attach" a PMI symbol.
= 12	Association is to first entity used to “attach” a PMI symbol
= 13	Association is to second entity used to “attach” a PMI symbol
= 14	Specifying PMI grouping, source is PMI/B-Rep entity and destination is design group.
= 15	Association is to a weld line entity
= 16	Association is to a “hot spot”
= 17	Association is to a child in a PMI stack
= 72	Association is for PMI miscellaneous relation.
= 73	Association is for PMI related entity.
= 98	Association is to show the PMI when associated Model View is selected. Source is the PMI, and destination is Model View.
= 99	Association is to show/select PMI B, if showing/selecting PMI A. Source is PMI A, and destination is PMI B. This is different from an “attached” PMI , where the convention is to show the PMI visibly linked to one another.
= 100	Association is to show all parts except the associated part instance. Source is the part instance, and destination is Model View

I32 : Source Owning Entity String ID

Source Owning Entity String ID specifies the string identifier for the string which contains the unique CAD identifier of the component (part or assembly) that owns the source PMI or B-Rep entity. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string and implies that the

entity is to be found on the current node's PMI/B-Rep/Wireframe-Rep segment. It is valid for the source owning entity to be the same as the destination owning entity (i.e. an association between two PMI or B-Rep entities in the same part/assembly). This data field is only present if Version Number, as defined in PMI Manager Meta Data Element, is greater than "5".

I32 : Destination Owning Entity String ID

Destination Owning Entity String ID specifies the string identifier for the string which contains the unique CAD identifier of the component (part or assembly) that owns the destination PMI or B-Rep entity. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of "-1" indicates no string and implies that the entity is to be found on the current node's PMI/B-Rep/Wireframe-Rep segment. It is valid for the source owning entity to be the same as the destination owning entity (i.e. an association between two PMI or B-Rep entities in the same part/assembly). This data field is only present if Version Number, as defined in PMI Manager Meta Data Element, is greater than "5".

PMI User Attributes - see core spec

PMI String Table - see core spec

PMI Model Views

The PMI Model Views data collection defines data for a list of Model Views. A fully annotated part/assembly may contain so much PMI information, that it becomes very difficult to interpret the design intent when viewing a 3D Model (with PMI visible) of the part/assembly. Model Views provide a means to capture and organize PMI information about a 3D model so that the design intent can be clearly interpreted and communicated to others in later stages of the Product Lifecycle Management (PLM) process (e.g. manufacturing, inspection, assembly). This organization is achieved via PMI Associations (see PMI Associations), where specific PMI entities are associated as "destinations" to a "source" PMI Model View.

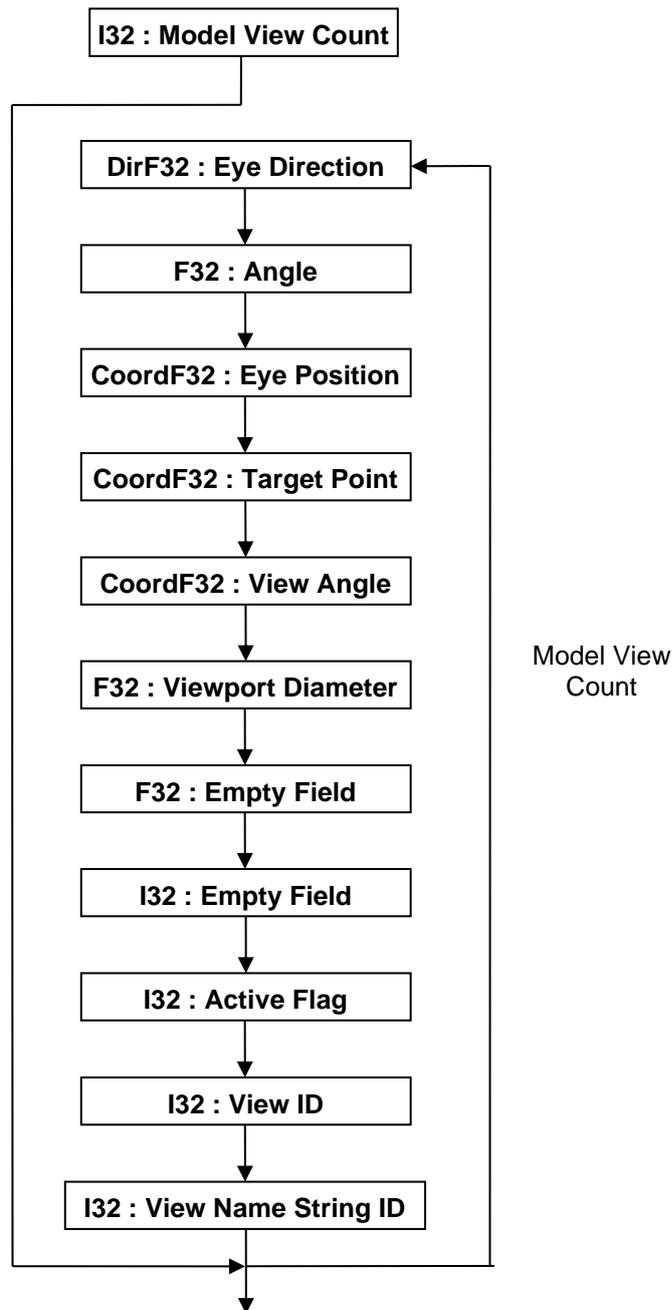


Figure R 115 — PMI Model Views data collection

I32 : Model View Count

Model View Count specifies the number of Model Views.

DirF32 : Eye Direction

Eye Direction specifies the camera direction vector.

F32 : Angle

Angle specifies the camera rotation angle (in degrees where positive is counter-clockwise) about the Eye Direction. So this Angle in combination with the Eye Direction is equivalent to specifying a rotation using axis-angle representation.

CoordF32 : Eye Position

Eye Position specifies the WCS coordinates of the eye/camera “look from” position.

CoordF32 : Target Point

Target Point specifies the WCS coordinates of the eye/camera “look at” position.

CoordF32 : View Angle

View angle specifies the X, Y, Z rotation angles (in degrees) of the model’s axis. The rotations are defined with respect to an initial orientation where the model’s axis are aligned with the screen’s axis (i.e. +X axis points to right, +Y axis points up, +Z axis points out at you).

F32 : Viewport Diameter

Viewport Diameter specifies the diameter in WCS coordinates of the largest possible circle that could be inscribed within viewport. If a large diameter value is specified, the model appears very small in relation to the viewport; whereas if a small diameter value is specified a close-up (“zoomed-in”) view of the model results.

F32 : Empty Field

Refer to best practice Empty Field

I32 : Empty Field

Refer to best practice Empty Field

I32 : Active Flag

Active Flag is a flag specifying whether this Model View is the “active” view. Valid values include the following:

Table R 63 — PMI Model Views Active Flag values

= 0	Is not the active Model View.
= 1	Is the active Model View

I32 : View ID

View ID specifies the Model View unique identifier.

I32 : View Name String ID

View Name String ID specifies the string identifier for the Model View’s name. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

Generic PMI Entities

The Generic PMI Entities data collection provides a “generic” format for defining various PMI entity types, including user defined types. The generic format defines the data making up the PMI Entity through a combination of the PMI 2D Data collection and a list of PMI Property data collections.

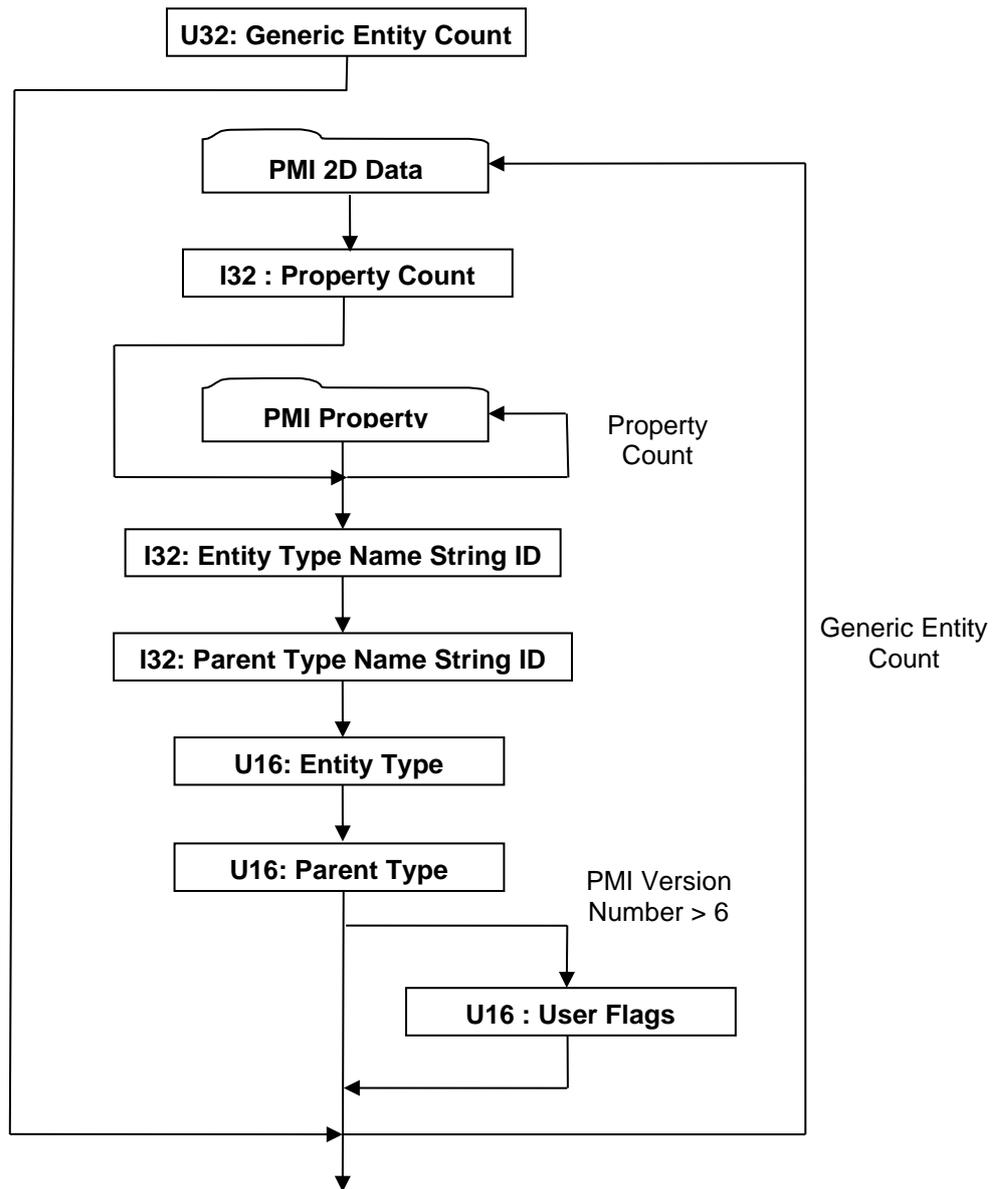


Figure R 116 — Generic PMI Entities data collection

Complete description for PMI 2D Data can be found in PMI 2D Data.

I32 : Generic Entity Count

Generic Entity Count specifies the number of Generic PMI Entities.

I32 : Property Count

Property Count specifies the number of PMI Properties.

I32 : Entity Type Name String ID

Entity Type Name String ID specifies the string identifier for the name of the Generic PMI Entity Type. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

I32 : Parent Type Name String ID

Parent Type Name String ID specifies the string identifier for the name of the parent Generic PMI Entity Type. This identifier is an index to a particular character string in the PMI String Table as defined in PMI String Table. An identifier value of “-1” indicates no string.

U16 : Entity Type

Entity Type specifies the Generic PMI Entity Type. The valid Entity Type values (in hexadecimal format) are documented in the following table. Note that for “user defined” Generic PMI Entities a hexadecimal value of “0x0114” (as documented in table below) should be used.

Table R 64 — Generic PMI Entity Type values

0x0001	PMI (generally only used as a Parent Type)
0x0002	Weld
0x0004	Spot Weld
0x0008	Line Weld
0x0010	Groove Weld
0x0011	Fillet Weld
0x0012	Slot Weld
0x0014	Edge Weld
0x0018	Arc Spot Weld
0x0020	Resistance Spot Weld
0x0021	Resistance Seam Weld
0x0022	Structural Adhesive Bead Shaped
0x0024	Structural Adhesive Tape Shaped
0x0028	Structural Adhesive Dollop Shaped
0x0040	Mechanical Clinch Connector
0x0041	Surface Finish
0x0042	Measurement Point
0x0044	Datum Locator
0x0048	Certification Point
0x0080	Geometric Dimensioning and Tolerancing
0x0081	Feature Control Frame
0x0082	Dimension
0x0084	Datum Feature Symbol
0x0088	Datum Target
0x0100	Note
0x0101	Face Attribute Note
0x0102	Model View Label Note
0x0104	Coordinate System
0x0108	Reference Geometry
0x0110	Reference Point
0x0111	Reference Axis
0x0112	Reference Plane
0x0114	User Defined
0x0118	Measurement Locator
0x0120	Datum Point
0x0121	Surface Vector Measurement Point
0x0122	Hole Vector Measurement Point
0x0124	Trimmed Sheet Vector Measurement Point
0x0128	Hem Vector Measurement Point
0x0230	Fastener PMI
0x0231	Material specification
0x0232	Process specification
0x0233	Part specification
0x0235	Balloon Note
0x0238	Circle Centre
0x0239	Coordinate Note
0x0240	AttributeNote
0x0241	Bundle or Dressing Note
0x0242	Cutting Plane Symbol

0x0243	Crosshatch
0x0244	E Marking (Note)
0x0245	Organization
0x0246	Region
0x0305	Section
0x0306	Centreline
0x0307	Fit Designation
0x0308	Composite Feature Control Frame

U16 : Parent Type

Parent Type specifies the parent Generic PMI Entity Type. The valid Parent Type values are the same as that documented above for Entity Type. The Parent Type is used to create a class hierarchy of PMI when presenting the PMI contents from a JT file.

U16 : User Flags

User Flags is a collection of flags. The flags are combined using the binary OR operator and store various state information for the Generic PMI Entity. All bits fields that are not defined as in use should be set to “0”.

Table R 65 — Generic PMI User Flag values

0x0001	Show PMI Entity “flat to screen only” flag = 0 – Allow PMI display plane to rotate with model. = 1 – Display PMI entity in the plane of the screen, so that it does not rotate with model.
--------	--

PMI Property

A PMI Property data collection consists of a key/value pair and is used to describe attributes of Generic PMI Entity or other specific data.

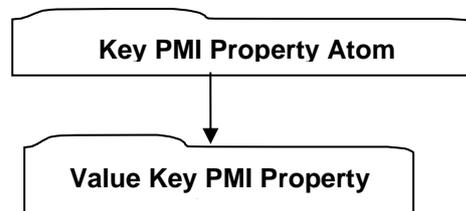


Figure R 117 — PMI Property data collection

Both Key and Value have the same format as that documented in PMI Property Atom.

Although there is no reference compliant requirements for what the PMI Property key/value pairs shall be for each Generic PMI Entity type, there are some common PMI Property keys and corresponding value formats that appear in JT File. The below table documents these common PMI Property keys (i.e. the keys encoded string value) and what the format of the value data is in the values encoded string (see **Key PMI Property Atom** for an explanation of what is meant by “encoded string value” for the “key” and “value” data, see [3] for an explanation of the “%f” format).

Table R 66 — Common Property Keys and Their Value Encoding formats

“Key” Property Atom Value String	“Value” Property Atom Value String Encoding Format	Decoding Notes
“PMI_PROP_ANCHOR_POINT”	“Px Py Pz”	Each Px, Py, Pz is a F32 value using “%f” format
“PMI_PROP_NOTE_HAS_URL”	“0” or “1”	0 = = False; 1 = = True
“PMI_PROP_NORMAL_DIR”	“Dx Dy Dz”	Each Dx, Dy, Dz is a F32 value using “%f”

“Key” Property Atom Value String	“Value” Property Atom Value String Encoding Format	Decoding Notes
		format
“PMI_PROP_APPROACH_DIR”	“Dx Dy Dz”	Each Dx, Dy, Dz is a F32 value using “%f” format
“PMI_PROP_CLAMPING_DIR”	“Dx Dy Dz”	Each Dx, Dy, Dz is a F32 value using “%f” format
“PMI_PROP_MEAS_DIR”	“Dx Dy Dz”	Each Dx, Dy, Dz is a F32 value using “%f” format
“PMI_PROP_COORD_DIR”	“Dx Dy Dz”	Each Dx, Dy, Dz is a F32 value using “%f” format
“PMI_PROP_MEAS_LEVEL”	“#”	Integer representing level number
“PMITextForegroundColour”	“#”	Hexadecimal integer representing RGB colour where value has “0x00bbgrr” form. The low-order byte contains a value for the relative intensity of red; the second byte contains a value for the relative intensity of green; and the third byte contains a value for the relative intensity of blue. The high-order byte shall be zero. The maximum value for a single byte is 0xFF (i.e. intensity value is in the range [0:255]).
“PMITextBackgroundColour”	“#”	Same as “PMITextForegroundColour”
“PMITextBackgroundOpacity”	“#”	Unsigned decimal integer representing opacity percentage. Actual opacity is: decoded# / 100.0
“PMITextShowBorder”	“#”	Unsigned decimal integer: 0 = = False; 1 = = True
“PMITextSize”	“#”	Unsigned decimal integer representing text size in units of pixels.
“PMITextInPlane”	“#”	Unsigned decimal integer: 0 = = False; 1 = = True where “1” indicates that text should be displayed in the plane of the entity so that it rotates with view.
“PMIGeometryColour”	“#”	Same as “PMITextForegroundColour”
“PMIGeometryWidth”	“#”	Unsigned decimal integer representing line width in units of pixels.
CLIP_NORMAL	“#,#,#”	Used for Entity Type = “0x0114” and Entity Type Name String = “Section” to specify the normal to the clipping plane. The clipping normal points toward the piece of the model that will be clipped away. Each # is a F64 value using “%lf” format.
CLIP_POSITION	“#,#,#”	Used for Entity Type = “0x0114” and Entity Type Name String = “Section” to specify one point on the clipping plane. Each # is a F64 value using “%lf” format.
TRANSFORMATION_MATRIX	“#,#,#,#,#,#,#,#,#,#,#,#,#”	Used for Entity Type = “0x0114” and Entity Type Name String = “Part Transform” to specify a transformation matrix. Each # is a F32 value using “%f” format.

PMI Property Atom

Key PMI Property Atom data collection represents the data format for both the key and value data of a PMI Property key/value pair.

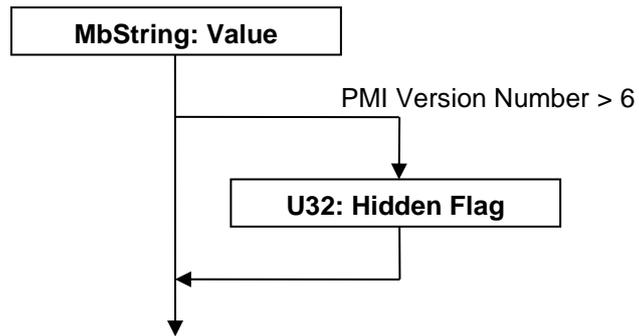


Figure R 118 — Key PMI Property Atom data collection

MbString : Value

Value specifies the property atom value encoded into a String. See Table Common Property Keys and Their Value Encoding formats above for encoding formats of the Value string.

U32 : Hidden Flag

Hidden Flag specifies if the property is “hidden” or not. A JT file reader could use this flag to control whether read properties should be exposed to the end user of the application reading the JT file. Valid values include the following:

Table R 67 — PMI Property Atom Hidden Flag values

= 0	Property is not hidden.
= 1	Property is hidden.

PMI CAD Tag Data

The PMI CAD Tag Data. collection contains the list of persistent IDs, as defined in the CAD System, to uniquely identify individual PMI entities. The existence of this PMI CAD Tag Data collection is dependent upon the value of previously read data field CAD Tags Flag as documented in PMI Manager Meta Data Element.

If PMI CAD Tag Data collection is present, there will be a CAD Tag for each PMI entity as specified by the below documented CAD Tag Index Count formula.

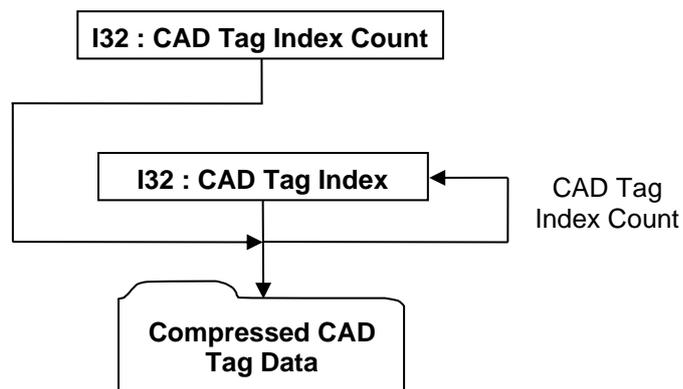


Figure R 119 — PMI CAD Tag Data collection

Complete description for Compressed CAD Tag Data can be found in Compressed CAD Tag Data.

I32 : CAD Tag Index Count

CAD Tag Index Count specifies the total number of CAD Tag indices. This value shall be equal to the summation of the previously read count values for all the PMI entities supporting CAD Tags. The formula is the sum of the following:

- Line Weld Count_i
- Spot Weld Count_i
- SF Count_i
- MP Count_i
- Reference Geometry Count_i
- Datum Target Count_i
- FCF Count_i
- Locator Count_i
- Dimension Count_i
- DFS Count_i
- Note Count_i
- Model View Count_i
- Design Group Count_i
- Coord Sys Count_i
- Generic Entity Count_i

I32 : CAD Tag Index

CAD Tag Index specifies an index into a list of CAD Tags, identifying the CAD Tag belonging to a particular PMI entity. There will be a total of CAD Tag Index Count number of CAD Tag Indices and the order of the indices will be as defined by the above documented CAD Tag Index Count formula (i.e. Line Weld CAD Tag Indices are first, followed by the Spot Weld CAD Tag Indices, followed by the Surface Finish CAD Tag Indices, etc.)

PMI Polygon Data

Matches the core spec with the exception of the version number.

I16: Version Number

Version number is the version identifier for this PMI Polygon Data Element. For information on local version numbers see Common Data Conventions and Constructs.

R.2.7 Data Compression and Encoding

The JT File format utilizes compression and encoding algorithms to produce compact and efficient representations of data. The types of compression algorithms supported by the JT format vary from standard data type agnostic ZLIB deflation to advanced arithmetic algorithms that exploit knowledge of the characteristics of the data types they are compressing. Some of the JT format data collections are always stored in a compressed format, whereas other data collections support multiple compression storage formats that qualitatively vary from “Lossless” compression to more aggressive strategies that employ “lossy” compression. This support by the JT format of varying qualitative levels of compression allows producers of JT data to fine tune the tradeoff between compression ratio and fidelity of the data.

In some instances, data may be encoded/compressed using multiple techniques applied on top of one another in a serial fashion (i.e. encoding applied to the output of another encoder). One common example of this multiple encoding is when an array/vector of floating point data is first quantized into some integer codes and then these resulting integer codes are further compressed/encoded using an Arithmetic or BitLength CODEC (see Encoding Algorithms).

Beyond the data collection specific compression/encoding, some JT format Data Segment types (see Data Segment) also support having a ZLIB compression conditionally applied to all the bytes of information persisted within the segment. So individual fields or collections of data may first have data type specific encoding/compression algorithms applied to them, and then if their Data Segment type supports it, the resulting data may be additionally compressed using a ZLIB deflation algorithm.

Whether, and at what qualitative level, a particular Data Segment's data is compressed/encoded is indicated through compression related data values stored as part of the particular Data Segment storage format. In general, aggressive application of advanced compression/encoding techniques is reserved for the heavy-weight renderable geometric data (e.g. triangles and wireframe lines) which can exist in a JT File.

The following sections document the format of the data compression/encoding within the JT file. Along with documenting the format, a technical description of the various compression/encoding algorithms is included and an example implementation of the decoding portion of the algorithms can be found within Annex B - Coding Algorithms – An Implementation

R.2.7.1 Common Compression Data Collection Formats

For convenience and brevity in documenting the JT format, this section of the reference documents the format for several common “data compression/encoding” related data collections that can exist in the JT format. You will find references to these common compression data collections in the Data Segments section of the document.

R.2.7.2 Int32 Compressed Data Packet

The Int32 Compressed Data Packet collection represents the format used to encode/compress a collection of data into a series of Int32 based symbols. Note that the Int32 Compressed Data Packet collection can in itself contain another Int32 Compressed Data Packet collection if there are any “Out-Of-Band data.” In the context of the JT format data compression algorithms and Int32 Compressed Data Packet, “out-of-band data” has the following meaning.

CODECs (e.g. Arithmetic, see Encoding Algorithms for technical description) exploit the statistics present in the relative frequencies of the values being encoded. Values that occur frequently enough allow these methods to encode each of the values as a “symbol” in fewer bits that it would take to encode the value itself. Values that occur too infrequently to take advantage of this property are written *aside* into the “out-of-band data” array to be encoded separately. An “escape” symbol is encoded in their place as a placeholder in the primal CODEC (note, see “Symbol” data field definition in Int32 Probability Context Table Entry for further details on the representation of “escape” symbol).

Essentially the “out-of-band data” is the high-entropy residue left over after the CODECs have squeezed all the advantage out of the original data stream that they can. However, this “out-of-band data” is sent back around for another pass because sometimes there are *different* statistics to be taken advantage of. When all other coding options have been exhausted, the Bitlength CODEC is invoked. The Bitlength CODEC directly encodes all values given to it, does not require a probability context, and hence never produces additional “out-of-band data”. The byte stops there, in other words.

In some cases, all values may be written as “out of band” when the Codec cannot perform *any* useful compression. In this case, the encoded I32 : CodeText Length field will be 0, and the I32 : Out-Of-Band Value Count will be equal to I32 : Value Element Count. The implied action in this case is to merely copy the Out-Of-Band value data into the output Value Element array instead of invoking the Codec.

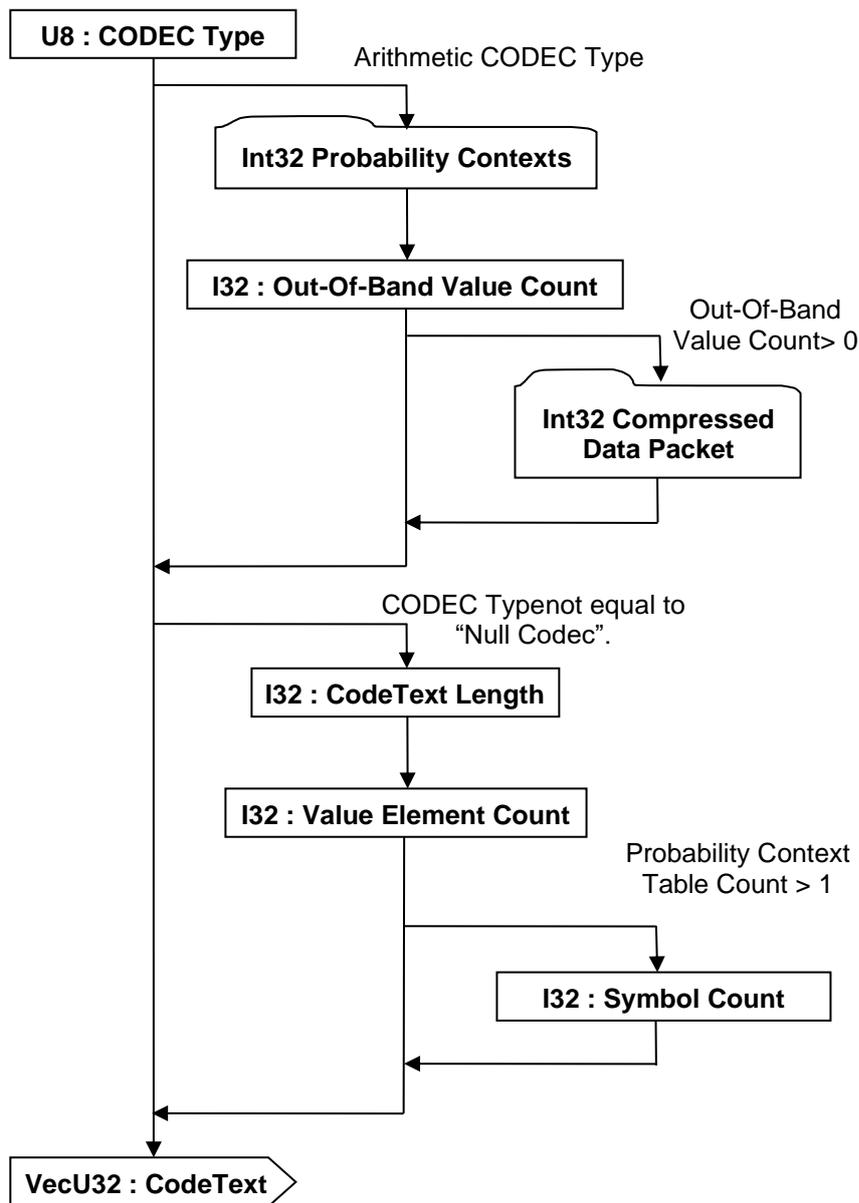


Figure R 120 — Int32 Compressed Data Packet data collection

U8 : CODEC Type

CODEC Type specifies the algorithm used to encode/decode the data. See Encoding Algorithms for complete explanation of each of the encoding algorithms.

Table R 68 — Common Compression CODEC Type values

= 0	Null CODEC
= 1	Bitlength CODEC
= 3	Arithmetic CODEC
= 4	Chopper CODEC

I32 : Out-Of-Band Value Count

Out-Of-Band Value Count specifies the number of values that are “Out-Of-Band.” This data field is only present for the Arithmetic CODEC Type.

I32 : CodeText Length

CodeText Length specifies the total number of bits of CodeText data (CodeText data field is described below). This data field is only present if CODEC Type is not equal to "Null CODEC."

I32 : Value Element Count

Value Element Count specifies the number of values that the CODEC is expected to decode (i.e. it is like the "length" field written if you are just writing out a vector of integers). This data field is only present if CODEC Type is not equal to "Null CODEC." Upon completion of decoding the CodeText data field below, the number of decoded Values should be equal to Value Element Count. When only a single Probability Context Table is used, Value Element Count will also be equal to the number of Symbols decoded upon completion of decoding.

I32 : Symbol Count

When two Probability Context Tables are being used, Symbol Count specifies the number of Symbols to be decoded by the Arithmetic CODEC. There is a subtlety present in the method `CodecDriver::addOutputSymbol()` when it is passed an Escape symbol. Only if the Codec is using Probability Context Table 0 when it receives an Escape symbol does it emit a Value from the "Out-Of-Band" data array. Because of this subtlety, the number of Symbols decoded can be larger than the number of Values produced, thus the reason for writing this field distinct from Value Element Count.

VecU32 : CodeText

CodeText is the array/vector of encoded symbols. For CODEC Type not equal to "Null CODEC", the total number of bits of encoded data in this array is indicated by the previously described CodeText Length data field.

Int32 Probability Contexts

Int32 Probability Contexts data collection is a list of Probability Context Tables. The Int32 Probability Contexts data collection is only present for the Arithmetic CODEC Type. A Probability Context Table is a trimmed and scaled histogram of the input values. It tallies the frequencies of the several most frequently occurring values. It is central to the operation of the arithmetic CODEC.

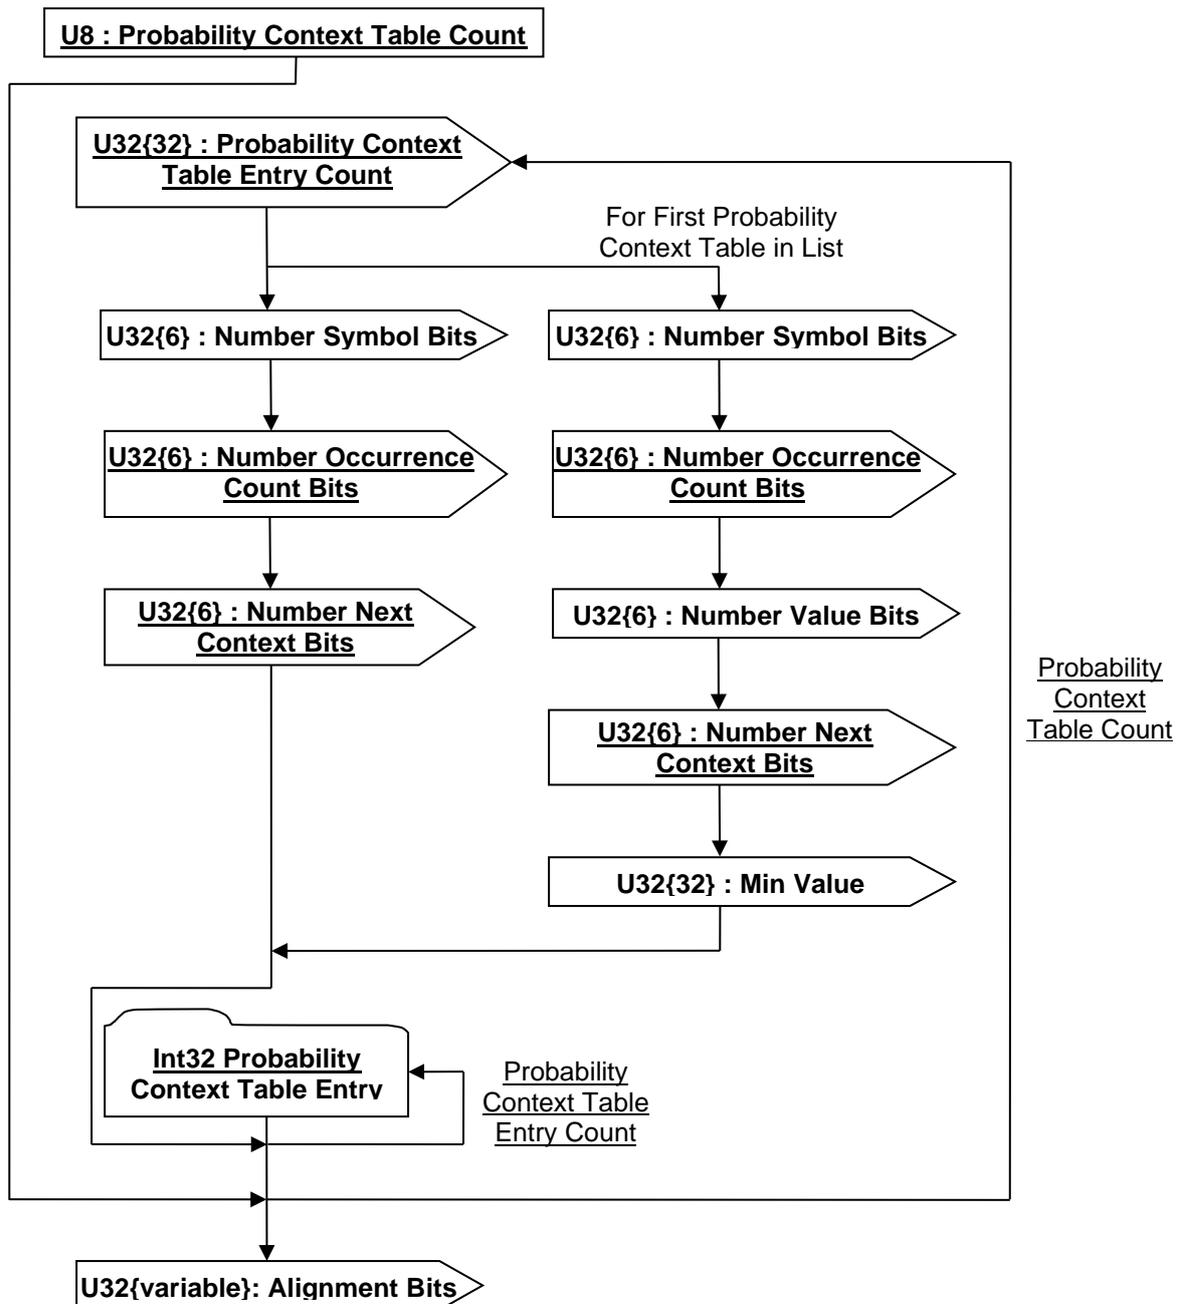


Figure R 121 — Int32 Probability Contexts data collection

U8 : Probability Context Table Count

Probability Context Table Count specifies the number of Probability Context Tables to follow and will always have a value of either “1” or “2”.

U32{32} : Probability Context Table Entry Count

Probability Context Table Entry Count specifies the number of entries in this Probability Context Table.

U32{6} : Number Symbol Bits

Number Symbol Bits specifies the number of bits used to encode the Symbol range.

U32{6} : Number Occurrence Count Bits

Number Occurrence Count Bits specifies the number of bits used to encode the Occurrence Count range.

U32{6} : Number Value Bits

Number Value Bits specifies the number of bits used to encode the Associated Value range. Note that Number Value Bits is only specified in the JT file for the *first* Probability Context Table. If a second Probability Context Table is present, the Number Value Bits from the first should be used for the second as well.

U32{6} : Number Next Context Bits

Number Next Context Field Bits specifies the number of bits used for the Next Context Field in Int32 Probability Context Table Entry.

U32{32} : Min Value

Min Value specifies the minimum of all Associated Values (i.e. one per table entry) stored in this Probability Context Table. This value is used to compute the real Associated Value for a Probability Context Table Entry. See Associated Value description in Int32 Probability Context Table Entry.

U32{variable}: Alignment Bits

Alignment Bits represents the number of additional padding bits stored to arrive at the next even multiple of 8 bits. Values of “0” are stored in the alignment bits.

Note: Data written into the JT file is always aligned on bytes. Therefore, after reading in a block of bit data such as the probability context tables it is necessary to discard any remaining bits on the last byte that is read in. This is represented by the “Alignment Bits” entry.

Int32 Probability Context Table Entry

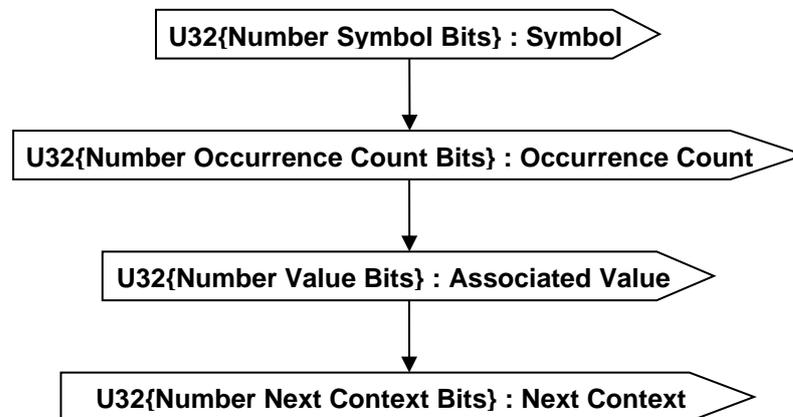


Figure R 122 — Int32 Probability Context Table Entry data collection

U32{Number Symbol Bits} : Symbol

Symbol is a small integer number associated with a specific value in the context table. It serves only to impose an order on the entries in the Probability Context Table. The symbol is stored with a “+2” added to the value and thus a reader shall subtract “2” from the read value to get the true symbol value. Complete description for Number Symbol Bits can be found in Int32 Probability Contexts.

Note: Even though the symbol is written as a U32{Number Symbol Bits} it is possible to end up with a negative number after subtracting “2” from the read in value. One example that will occur frequently is the escape symbol used for out-of-band data which will have the value “0” in the file, however it will become “-2”, its true symbol value, after subtracting “2” from the read in “0” value.

U32{Number Occurrence Count Bits} : Occurrence Count

Occurrence Count specifies the relative frequency of the value. Complete description for Number Occurrence Count Bits can be found in Int32 Probability Contexts.

Note: Occurrence Counts for all symbols are normalized (converted to a relative frequency) during the write process in order to ensure the minimum amount of bits possible is used to write them. This has several implications the reader should be aware of:

The sum of all Occurrence Counts is not guaranteed to equal the number of symbols to be decoded (see Value Element Count in section for number of symbols to be decoded). During Arithmetic decoding.

pDriver->numSymbolsToRead() – Refers to the total number of symbols to be decoded (i.e. Value Element Count in section when the number of Probability Context Tables is equal to 1, or Symbol Count when the number of Probability Context Tables is 2).

pCurrContext->totalCount() – Refers to the sum of the “Occurrence Count” values for all the symbols associated with a Probability Context.

U32{Number Value Bits} : Associated Value

Associated Value is the value (from the input data) that the symbol represents. The CODECs do not directly encode values, they encode symbols. Symbols, then, are associated with specific values, so when the CODEC decodes an array of symbols, you can reconstruct the array of values that was intended by looking up the symbols in the Probability Context Table. This value is stored with “Min Value” subtracted from the value. Complete descriptions for “Min Value” and Number Value Bits can be found in Int32 Probability Contexts.

Note: The associated value for an escape symbol is undefined and therefore can be any valid U32 number.

U32{Number Next Context Bits} : Next Context

Next Context field specifies which Probability Context Table to use when decoding the next symbol. The value of this field will be greater than or equal to 0, and less than Probability Context Table Count.

R.2.7.3 Int32 Compressed Data Packet Mk. 2

The Int32 Compressed Data Packet Mk. 2 collection represents an enhanced form of the original Int32 Compressed Data Packet. Note that the Int32 Compressed Data Packet Mk. 2 collection can in itself contain another Int32 Compressed Data Packet Mk. 2 collection if there are any “Out-Of-Band data.” In the context of the JT format data compression algorithms and Int32 Compressed Data Packet Mk. 2, “out-of-band data” has the meaning described below.

Entropy CODECs (e.g. Arithmetic) exploit the statistics present in the relative frequencies of the values being encoded. Values that occur frequently enough allow these methods to encode each of the values as a “symbol” in fewer bits that it would take to encode the value itself. Values that occur too infrequently to take advantage of this property are written *aside* into the “out-of-band data” array to be encoded separately. An “escape” symbol is encoded in their place as a placeholder in the primal CODEC (note, see “Symbol” data field definition in Int32 Probability Context Table Entry for further details on the representation of “escape” symbol).

Essentially the “out-of-band data” is the high-entropy residue left over after the CODEC has squeezed all the advantage out of the original data stream that it can. However, this “out-of-band data” is sent back around for another pass because sometimes there are *new* or *different* statistics to be exploited.

The Int32 Compressed Data Packet Mk. 2 brings the new *Chopper* pseudo-CODEC to the table. Its job is to identify fields of bits in a sequence of otherwise incompressible data that may be hiding low-entropy statistics that can be profitably exploited. In other words, it “chops” the input data up into bit fields, and then encodes them separately using the Arithmetic or BitLength CODECs, or in some cases, another round of chopping. The Chopper also removes *value bias* from the original input data array. Some input data arrays may contain values that are clustered around a certain central value. In these cases, it is profitable to first subtract out a *bias value*

from the original input data. In some cases, this simple expedient may dramatically reduce the apparent field width necessary to code the variation in the original sequence.

In some cases, all values may be written as "out of band" when the Codec cannot perform *any* useful compression. In this case, the encoded I32 : CodeText Length field will be 0, and the

I32 : Out-Of-Band Value Count will be equal to I32 : Value Element Count. The implied action in this case is to merely copy the Out-Of-Band value data into the output Value Element array instead of invoking the Codec.

When all other coding options have been exhausted, the Bitlength CODEC is invoked. The Bitlength CODEC directly encodes all values given to it, does not require a probability context, and hence never produces additional "out-of-band data". The byte stops there, in other words.

Note that in the diagram below, encoding can loop back recursively for Out-Of-Band data and chopper fields. For JT v9 files, the maximum recursion depth may not exceed three.

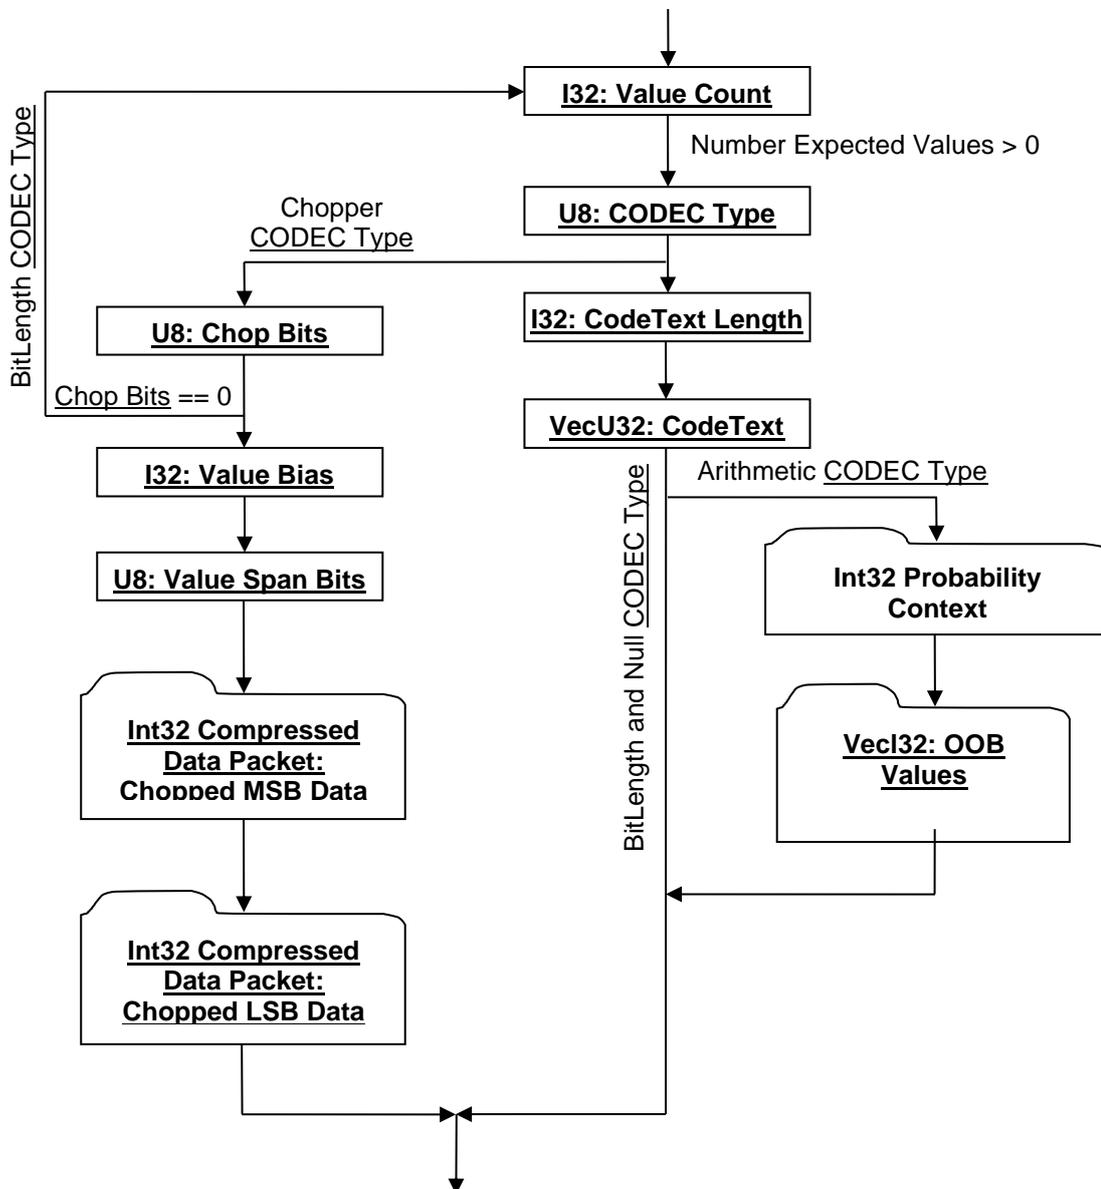


Figure R 123 — Int32 Compressed Data Packet Mk. 2 data collection

I32 : Value Count

Value Count specifies the number of values that the CODEC is expected to decode (i.e. it is like the “length” field written if you are just writing out a vector of integers). Upon completion of decoding the CodeText data field below, the number of decoded Values should be equal to Value Count. When only a single Probability Context Table is used, Value Element Count will also be equal to the number of Symbols decoded upon completion of decoding.

U8 : CODEC Type

CODEC Type specifies the algorithm used to encode/decode the data. See Encoding Algorithms for complete explanation of each of the encoding algorithms.

Table R 69 — Int32 Probability Contexts CODEC Type values

= 0	Null CODEC
= 1	Bitlength CODEC
= 3	Arithmetic CODEC
= 4	Chopper CODEC

I32 : CodeText Length

CodeText Length specifies the total number of bits of CodeText data (CodeText data field is described below).

VecU32 : CodeText

CodeText is the array/vector of encoded symbols. For CODEC Type not equal to “Null CODEC”, the total number of bits of encoded data in this array is indicated by the previously described CodeText Length data field.

U8 : Chop Bits

Chop Bits specifies the number of high-order bits "chopped off" from the *biased* input data array and coded separately from the low-order bits. Repeated applications of the Chopper pseudo-CODEC can expose low-entropy bit fields that would be inaccessible by directly coding the data array. Chop Bits is the number of bits coded into the Chopped MSB Data field.

I32 : Value Bias

Value Bias is the (signed) number that is subtracted from the original input data array elements *before* computing Value Span Bits and Chop Bits. See Chopped LSB Data below for a full explanation of how to reconstitute the original data values using Value Bias and the two chopped fields.

U8 : Value Span Bits

Value Span Bits specifies the total bit width of the *biased* input data array. Note that Value Span Bits minus Chop Bits is the number of low-order bits present in the Chopped LSB Data field.

Int32 Compressed Data Packet Mk. 2 : Chopped MSB Data

This field contains the separately compressed most significant bits of the *biased* input data array, whose elements contain Value Span Bits bits of significance. In other words, this field contains the bit field from the *biased* data array beginning at bit number ValueSpan-ChopBits and ending at bit number ValueSpan-1 inclusive. This field may contain negative numbers.

Int32 Compressed Data Packet Mk. 2 : Chopped LSB Data

This field contains the separately compressed most significant bits of the original input data array, whose elements contain Value Span Bits bits of significance. In other words, this field contains the bit field from the original data array beginning at bit number 0 and ending at bit number ValueSpan-ChopBits-1 inclusive. This field may only contain positive numbers; all bits above this range shall encode to 0. A pseudo-code representation of the re-constituting the original data values is as follows:

$$\text{OrigValue}[i] = (\text{LSBValue}[i] | (\text{MSBValue}[i] \ll (\text{ValSpanBits} - \text{ChopBits}))) + \text{ValueBias};$$

Int32 Compressed Data Packet Mk. 2 : OOB Data Values

This field encodes the out-of-band values associated with the Arithmetic CODEC.

Int32 Probability Contexts Mk. 2

Int32 Probability Context data collection encodes a Probability Context Table, and is present only for the Arithmetic CODEC Type. A Probability Context Table is a trimmed and scaled histogram of the input values. It tallies the frequencies of the several most frequently occurring values. It is central to the operation of the Arithmetic CODEC.

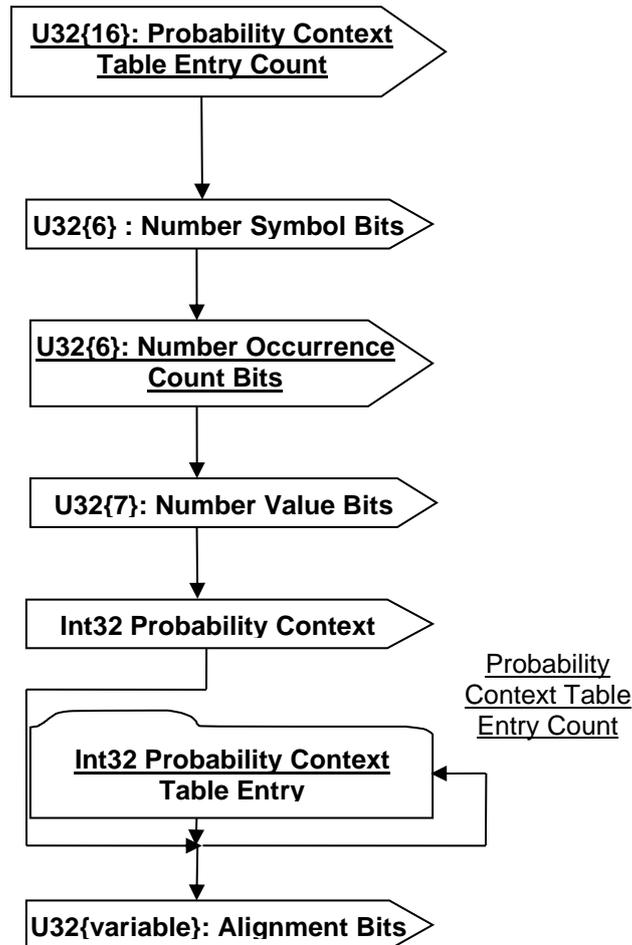


Figure R 124 — Int32 Probability Context data collection

U32{16} : Probability Context Table Entry Count

Probability Context Table Entry Count specifies the number of entries in this Probability Context Table.

U32{6} : Number Symbol Bits

Number Symbol Bits specifies the number of bits used to encode the Symbol range.

U32{6} : Number Occurrence Count Bits

Number Occurrence Count Bits specifies the number of bits used to encode the Occurrence Count range.

U32{6} : Number Value Bits

Number Value Bits specifies the number of bits used to encode the Associated Value range. Note that Number Value Bits is only specified in the JT file for the *first* Probability Context Table.

If a second Probability Context Table is present, the Number Value Bits from the first should be used for the second as well.

U32{32} : Min Value

Min Value specifies the minimum of all Associated Values (i.e. one per table entry) stored in this Probability Context Table. This value is used to compute the real Associated Value for a Probability Context Table Entry. See Associated Value description in Int32 Probability Context Table Entry.

U32{variable}: Alignment Bits

Alignment Bits represents the number of additional padding bits stored to arrive at the next even multiple of 8 bits. Values of "0" are stored in the alignment bits.

Note: Data written into a JT file is always aligned on bytes. Therefore after reading in a block of bit data such as the probability context tables it is necessary to discard any remaining bits on the last byte that is read in. This is represented by the "Alignment Bits" entry.

Int32 Probability Context Table Entry Mk. 2

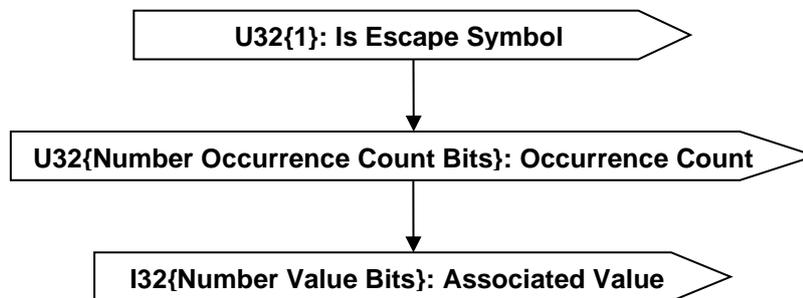


Figure R 125 — Int32 Probability Context Table Entry data collection

U32{Number Symbol Bits} : Symbol

Symbol is a small integer number associated with a specific value in the context table. It serves only to impose an order on the entries in the Probability Context Table. The symbol is stored with a "+2" added to the value and thus a reader shall subtract "2" from the read value to get the true symbol value. Complete description for Number Symbol Bits can be found in Int32 Probability Context.

Note: Even though the symbol is written as a U32 {Number Symbol Bits} it is possible to end up with a negative number after subtracting "2" from the read in value. One example that will occur frequently is the escape symbol used for out-of-band data which will have the value "0" in the file, however it will become "-2", its true symbol value, after subtracting "2" from the read in "0" value.

U32{Number Occurrence Count Bits} : Occurrence Count

Occurrence Count specifies the relative frequency of the value. Complete description for Number Occurrence Count Bits can be found in Int32 Probability Context.

.

Note: Occurrence Counts for all symbols are normalized (converted to a relative frequency) during the write process in order to ensure the minimum amount of bits possible is used to write them while closely approximating their actual frequency. This has several implications the reader should be aware of:

The sum of all Occurrence Counts is not guaranteed to equal the number of symbols to be decoded (see I32: Value Count in section for number of symbols to be decoded).

During Arithmetic decoding as described in the coding annex

pDriver->numSymbolsToRead () – Refers to the total number of symbols to be decoded (i.e. I32: Value Count in section).

pCurrContext->totalCount() – Refers to the sum of the “Occurrence Count” values for all the symbols associated with a Probability Context.

U32{Number Value Bits} : Associated Value

Associated Value is the value (from the input data) that the symbol represents. The CODECs do not directly encode values, they encode symbols. Symbols, then, are associated with specific values, so when the CODEC decodes an array of symbols, you can reconstruct the array of values that was intended by looking up the symbols in the Probability Context Table. This value is stored with “Min Value” subtracted from the value. Complete descriptions for “Min Value” and Number Value Bits can be found in Int32 Probability Context.

Note: The associated value for an escape symbol is undefined and therefore can be any valid U32 number.

R.2.7.4 Float64 Compressed Data Packet

The Float64 Compressed Data Packet collection represents the format used to encode/compress a collection of data into a series of Float64 based symbols. This compression format also uses the concept of “out-of-band data” in its data contents definition. In the context of the JT format data compression algorithms and Float64 Compressed Data Packet, “out-of-band data” has the following meaning.

The Arithmetic CODEC (see Encoding Algorithms for technical description) can exploit the statistics present in the relative frequencies of the values being encoded. Values that occur frequently enough allow the CODEC to encode each of the values as a “symbol” in fewer bits than it would take to encode the value itself. Values that occur too infrequently to take advantage of this property are written *aside* into the “out-of-band data” array. An “escape” symbol (i.e. value of “-2”) is encoded in their place as a marker in the primal CODEC. Essentially the “out-of-band data” is the high-entropy junk/residue/slag left over after the CODECs have squeezed all the advantage out that it can.

Whereas the Int32 Compressed Data Packet (see Int32 Compressed Data Packet) then sends this “out-of-band data” back around through a new CODEC looking for *different* statistics to be taken advantage of, the Float64 Compressed Data Packet simply writes out the “out-of-band data” array with no additional encoding attempted.

In some cases, all values may be written as “out of band” when the Codec cannot perform *any* useful compression. In this case, the encoded I32 : CodeText Length field will be 0, and the

I32 : Out-Of-Band Value Count will be equal to I32 : Value Element Count. The implied action in this case is to merely copy the Out-Of-Band value data into the output Value Element array instead of invoking the Codec.

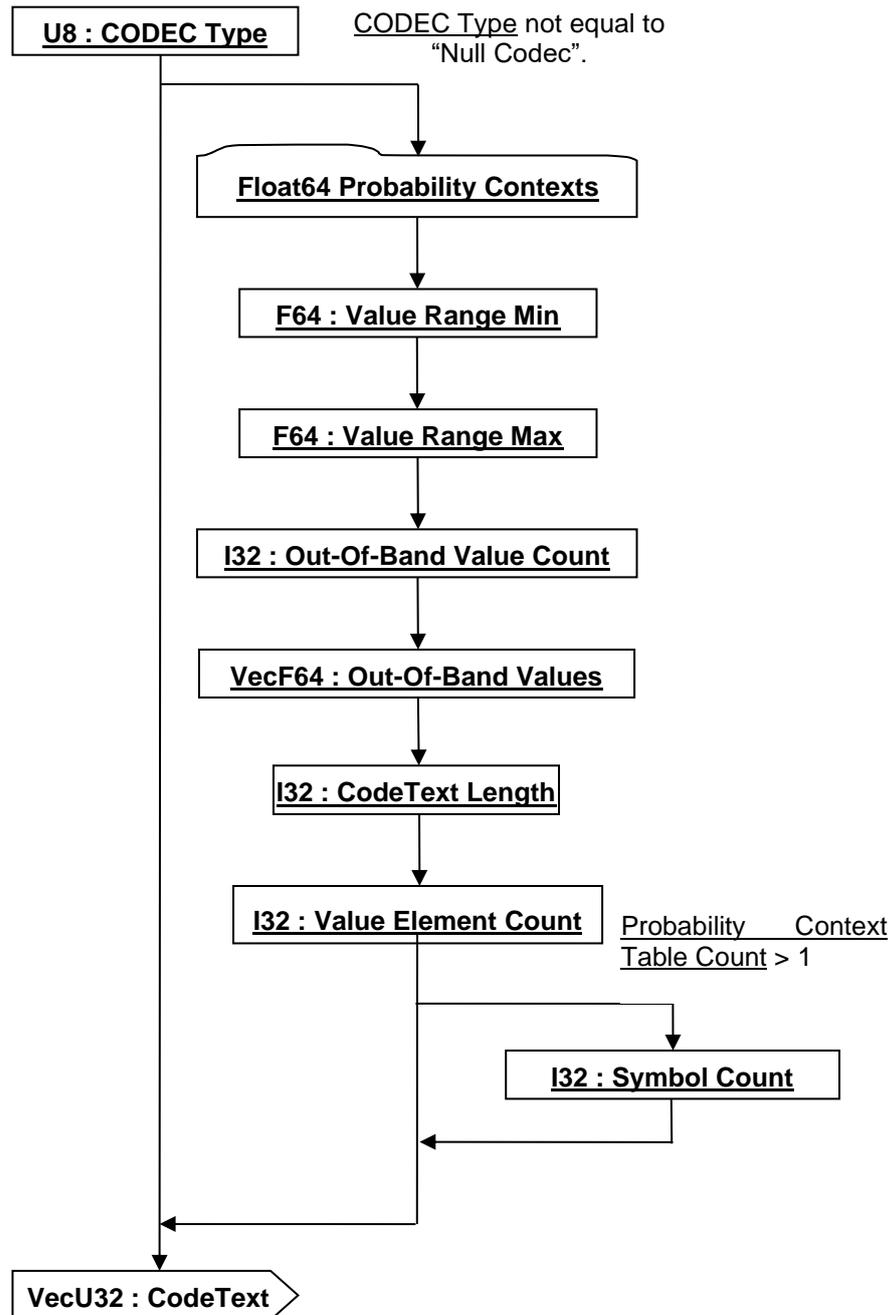


Figure R 126 — Float64 Compressed Data Packet data collection

U8 : CODEC Type

CODEC Type specifies the algorithm used to encode/decode the data. See Encoding Algorithms for complete explanation of each of the encoding algorithms.

Table R 70 — Float64 Compressed Data Packet CODEC Type values

= 0	Null CODEC
= 1	Bitlength CODEC
= 3	Arithmetic CODEC
= 4	Chopper CODEC

F64 : Value Range Min

Value Range Min specifies the minimum of the value range used to encode the values. This data field is only present if CODEC Type is not equal to “Null CODEC.”

F64 : Value Range Max

Value Range Max specifies the maximum of the value range used to encode the values. This data field is only present if CODEC Type is not equal to "Null CODEC."

I32 : Out-Of-Band Value Count

Out-Of-Band Value Count specifies the number of values that are "Out-Of-Band." This data field is only present if CODEC Type is not equal to "Null CODEC."

VecF64 : Out-Of-Band Values

Out-Of-Band Values specifies the vector/list of "Out-Of-Band" values. This data field is only present if CODEC Type is not equal to "Null CODEC."

I32 : CodeText Length

CodeText Length specifies the total number of bits of CodeText data (described below). This data field is only present if CODEC Type is not equal to "Null CODEC."

I32 : Value Element Count

Value Element Count specifies the number of values that the CODEC is expected to decode (i.e. it is like the "length" field written if you are just writing out a vector of integers). This data field is only present if CODEC Type is not equal to "Null CODEC." Upon completion of decoding the CodeText data field below, the number of decoded symbol values should be equal to Value Element Count.

I32 : Symbol Count

When two Probability Context Tables are being used, Symbol Count specifies the number of Symbols to be decoded by the Arithmetic CODEC. There is a subtlety present in the method `CodecDriver::addOutputSymbol()` when it is passed an Escape symbol. Only if the Codec is using Probability Context Table 0 when it receives an Escape symbol does it emit a Value from the "Out-Of-Band" data array. Because of this subtlety, the number of Symbols decoded can be larger than the number of Values produced, thus the reason for writing this field distinct from Value Element Count.

VecU32 : CodeText

CodeText is the array/vector of encoded symbols. For CODEC Type not equal to "Null CODEC", the total number of bits of encoded data in this array is indicated by the previously described CodeText Length data field.

Float64 Probability Contexts

Float64 Probability Contexts data collection is a list of Probability Context Tables. A Probability Context Table is a trimmed and scaled histogram of the input values. It tallies the frequencies of the several most frequently occurring values. It is central to the operation of the arithmetic CODEC.

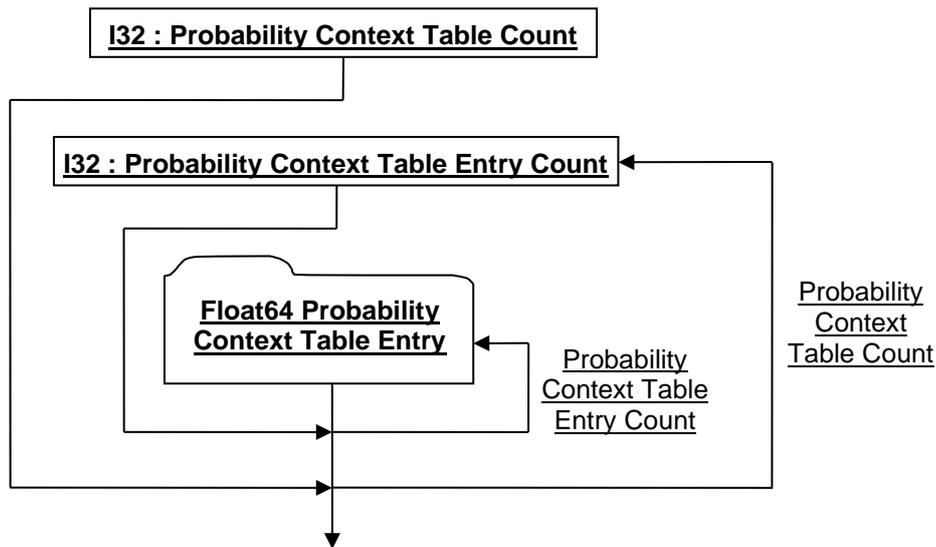


Figure R 127 — Float64 Probability Contexts data collection

I32 : Probability Context Table Count

Probability Context Table Count specifies the number of Probability Context Tables to follow and will always have a value of either “1” or “2”.

I32 : Probability Context Table Entry Count

Probability Context Table Entry Count specifies the number of entries in this Probability Context Table.

Float64 Probability Context Table Entry

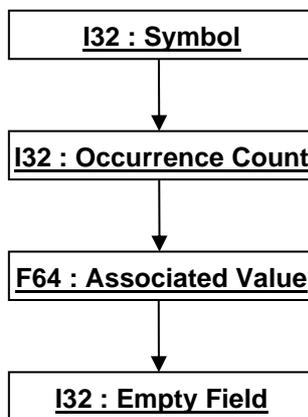


Figure R 128 — Float64 Probability Context Table Entry data collection

I32 : Symbol

Symbol is a small integer number associated with a specific value in the context table. It serves only to impose an order on the entries in the Probability Context Table. Note that a value of “-2” represents the “escape” symbol placeholder encoded for “out-of-band data” (see Float64 Compressed Data Packet for additional details).

I32 : Occurrence Count

Occurrence Count specifies the relative frequency of the value.

F64 : Associated Value

Associated Value is the value (from the input data) that the symbol represents. The CODECs do not directly encode *values*, they encode *symbols*. Symbols, then, are associated with specific values, so when the CODEC decodes an array of symbols, you can reconstruct the array of values that was intended by looking up the symbols in the Probability Context Table.

I32 : Empty Field

Refer to best practice `_Empty Field`.

Compressed Vertex Coordinate Array

The Compressed Vertex Coordinate Array data collection contains the quantization data/representation for a set of vertex coordinates.

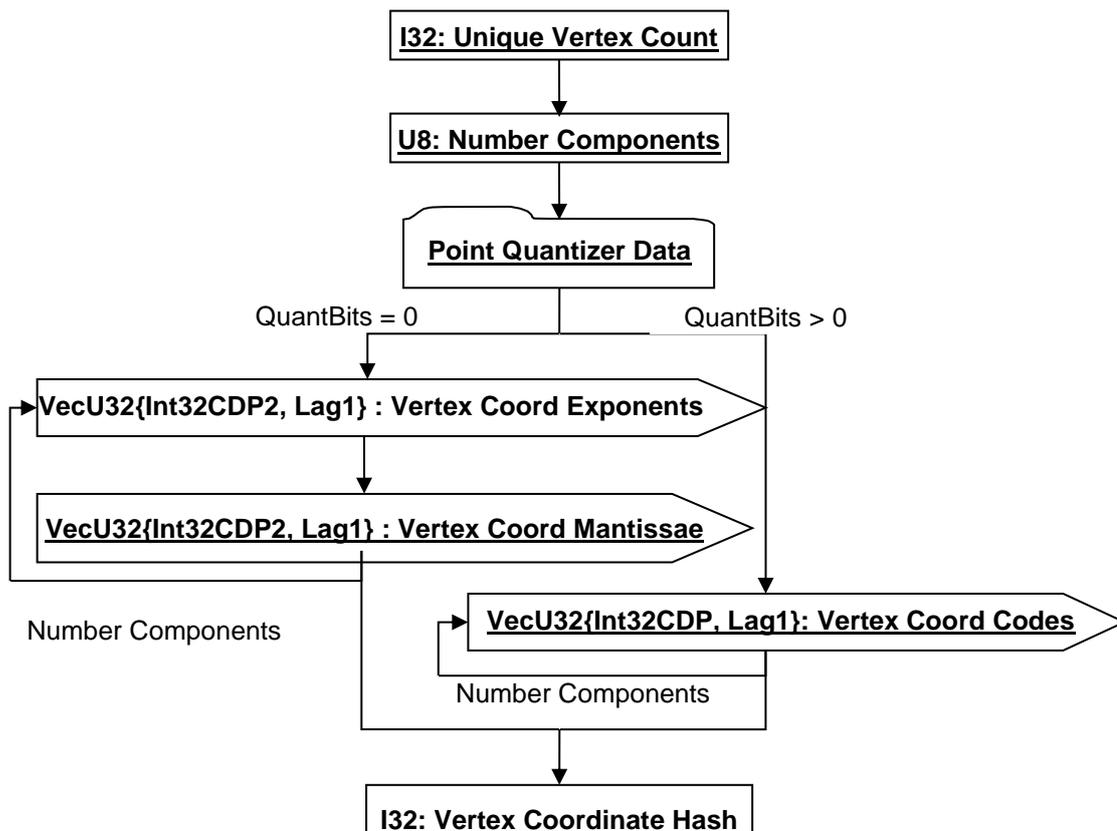


Figure R 129 — Compressed Vertex Coordinate Array data collection

Complete description for Point Quantizer Data can be found in Point Quantizer Data.

The above predicates “QuantBits = 0” and “QuantBits > 0” refer to the value of the field U8: Number Of Bits stored in the three components of 12.1.9 Point Quantizer Data. All three of these fields are required to be equal.

I32 : Unique Vertex Count

Vertex Count specifies the count (number of unique) vertices in the Vertex Codes arrays. Identical values are only stored once therefore it may be necessary to smear out the vertices as described in TopoMesh Compressed Rep Data and TopoMesh Topologically Compressed LOD Data.

U8 : Number Components

Number Components specifies the number of vertex components present for each vertex record in the set of vertex records.

VecU32{Int32CDP2, Lag1} : Vertex Coord Exponents

Vertex Coord Exponents is a vector of Floating Point Exponents and Sign for all the *i*th component values of a set of vertex coordinates. Vertex Coord Exponents uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2, Lag1} : Vertex Coord Mantissae

Vertex Coord Mantissae is a vector of Floating Point Mantissae for all the *i*th component values of a set of vertex coordinates. Vertex Coord Mantissae uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2, Lag1} : Vertex Coord Codes

Vertex Coord Codes is a vector of quantizer “codes” for all the *i*th component values of a set of vertex coordinates. Vertex Coord Codes uses the Int32 version of the CODEC to compress and encode data.

I32 : Vertex Coordinate Hash

The Vertex Coordinate Hash is the combined hash of the unique vertex coordinate records. If the number of quantization bits is equal to zero the hash value is equal to the combined hash of the vertex coordinate values for each of the component arrays. If the number of quantization bits is greater than 0 the hash value is equal to the combined hash of the vertex coordinates codes for each of the component arrays.

```
UInt32 uHash      = 0;
UInt32 nUniqVtx  = 0;
vecF32 vCoord[nUniqVtx][3];
vecU32 vCodes[3];
...
if ( uQuantBits == 0 ) {
    for ( int i=0 ; i<nComp ; i++ ) {
        for ( int j=0 ; j<nUniqVtx ; j++ ) {
            uHash = hash32( (UInt32*)&vCoord[j][i], 1, uHash );
        }
    }
} else {
    for ( int i=0 ; i<nComp ; i++ ) {
        uHash = hash32( &vCodes[i], nUniqVtx, uHash );
    }
}
```

Compressed Vertex Normal Array

The Compressed Vertex Normal Array data collection contains the compressed data/representation for a set of vertex normals. Compressed Vertex Normal Array data collection is only present if previously read vertex bindings denote normals are presents (See Vertex Shape LOD Data U64 : Vertex Bindings for complete explanation of the vertex bindings).

A variation of the CODEC developed by Michael Deering at Sun Microsystems is used to encode the normals when quantization is enabled. The variation being that the “Sextants” are arranged differently than in Deering’s scheme [4], for better delta encoding. See Deering Normal CODEC for a complete explanation on the Deering CODEC used.

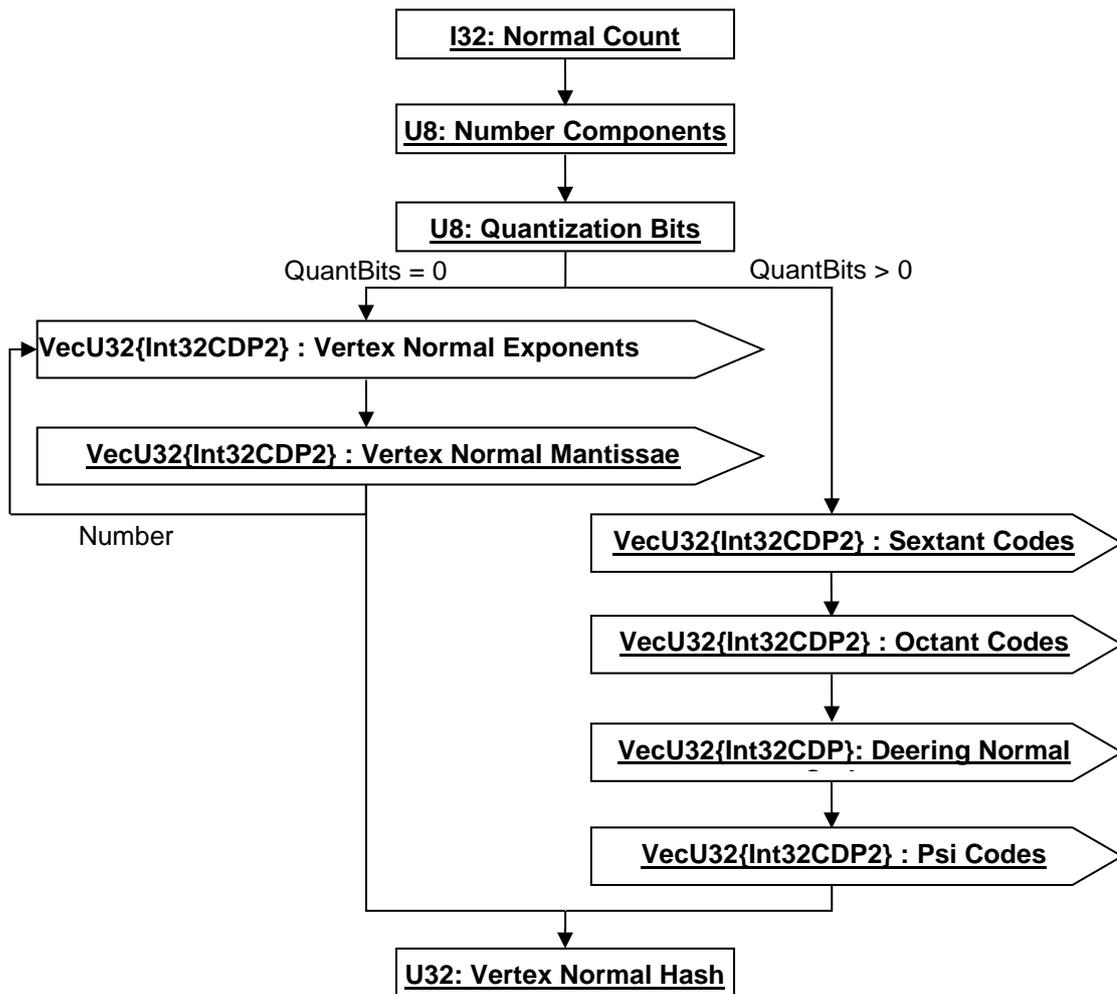


Figure R 130 — Compressed Vertex Normal Array data collection

I32 : Normal Count

Normal count specifies the number of normals. This number should equal the total number of vertex records.

U8 : Number Components

Number Components specifies the number of normal components present for each vertex record in the set of vertex records.

U8 : Quantization Bits

The number of bits used when the Deering Normal CODEC if quantization is enabled. A value of 0 denotes that quantization is disabled.

VecU32{Int32CDP2} : Vertex Normal Exponents

Vertex Normal Components is a vector of Floating Point Exponents for all the ith component values of a set of vertex coordinates. Vertex Normal Components uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Vertex Normal Mantissae

Vertex Normal Components is a vector of Floating Point Mantissae for all the ith component values of a set of vertex coordinates. Vertex Normal Components uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Sextant Codes

Sextant Codes is a vector of “codes” (one per normal) for a set of normals identifying which Sextant of the corresponding sphere Octant each normal is located in. Sextant Codes uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Octant Codes

Octant Codes is a vector of “codes” (one per normal) for a set of normals identifying which sphere Octant each normal is located in. Octant Codes uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Theta Codes

Theta Codes is a vector of “codes” (one per normal) for a set of normals representing in Sextant coordinates the quantized theta angle for each normal’s location on the unit radius sphere; where theta angle is defined as the angle in spherical coordinates about the Y-axis on a unit radius sphere. Theta Codes uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Psi Codes

Psi Codes is a vector of “codes” (one per normal) for a set of normals representing in Sextant coordinates the quantized Psi angle for each normal’s location on the unit radius sphere; where Psi angle is defined as the longitudinal angle in spherical coordinates from the $y = 0$ plane on the unit radius sphere. Psi Codes uses the Int32 version of the CODEC to compress and encode data.

U32 : Vertex Normal Hash

The Vertex Normal Hash is the combined hash of the vertex normals. If the number of quantization bits is equal to zero the hash value is equal to the combined hash of the vertex normal values for each of the component arrays. If the number of quantization bits is greater than 0 the hash value is equal to the combined hash of the Sextant, Octant, Theta, and Psi Codes for all vertex records. Refer to Annex C Hashing – An Implementation, for a more detailed description on hashing.

```
UInt32 uHash = 0;
uInt32 nVtxRec = 0;
vecF32 vNorm[nVtxRec][3];
vecU32 vSextant, vOctant, vTheta, vPsi;
...
if ( uQuantBits == 0 ) {
    for ( int i=0 ; i<nComp ; i++ ) {
        for ( int j=0 ; j<nVtxRec ; j++ ) {
            uHash = hash32( (UInt32*)&vNorm[j][i], 1, uHash );
        }
    }
} else {
    uHash = hash32( &vSextant, nVtxRec, uHash );
    uHash = hash32( &vOctant, nVtxRec, uHash );
    uHash = hash32( &vTheta, nVtxRec, uHash );
    uHash = hash32( &vPsi, nVtxRec, uHash );
}
```

Compressed Vertex Texture Coordinate Array

The Compressed Vertex Texture Coordinate Array data collection contains the quantization data/representation for a set of vertex texture coordinates. Compressed Vertex Texture Coordinate Array data collection is only present if previously read vertex bindings denote texture coordinates are presents (See Vertex Shape LOD Data U64 : Vertex Bindings for complete explanation of the vertex bindings).

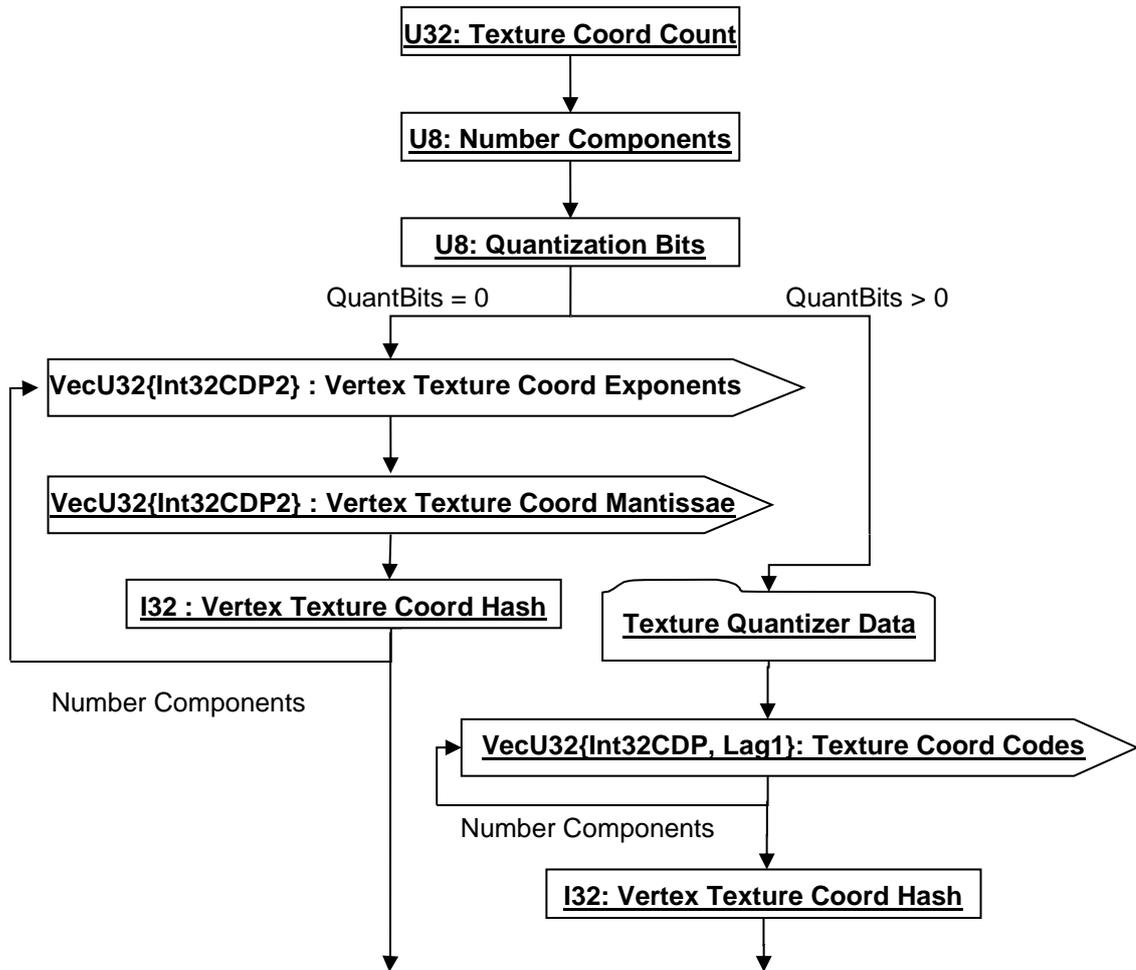


Figure R 131 — Compressed Vertex Texture Coordinate Array data collection

Complete description for Texture Quantizer Data can be found in Texture Quantizer Data description.

I32 : Texture Coord Count

Colour count specifies the number of Texture Coordinates. This number should equal the total number of vertex records.

U8 : Number Components

Number Components specifies the number of Texture Coordinate components present for each vertex record in the set of vertex records.

U8 : Quantization Bits

Number of Bits specifies the quantized size (i.e. the number of bits of precision) for each of the components. The actual number of quantization bits used is specified within Texture Quantizer Data. Value shall be within range [0:24] inclusive.

VecU32{Int32CDP2} : Vertex Texture Coord Exponents

Vertex Texture Coordinate Components is a vector of Floating Point Exponents for all the ith component values of a set of vertex coordinates. Vertex Texture Coordinate Components uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Vertex Texture Coord Mantissae

Vertex Texture Coordinate Components is a vector of Floating Point Mantissae for all the ith component values of a set of vertex coordinates. Vertex Texture Coordinate Components uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2, Lag1} : Texture Coord Codes

V-Texture Coord Codes is a vector of quantizer “codes” for all the nth-component of a set of vertex texture coordinates. V-Texture Coord Codes uses the Int32 version of the CODEC to compress and encode data.

U32 : Vertex Texture Coord Hash

The Vertex Texture Coord Hash is the combined hash of the Vertex Texture Coordinates. If the number of quantization bits is equal to zero the hash value is equal to the combined hash of the vertex texture coordinate values for each of the component arrays. If the number of quantization bits is greater than 0 the hash value is equal to the combined hash of the vertex texture coordinates codes for each of the component arrays. Refer to section for a more detailed description on hashing.

```
UInt32 uHash      = 0;
uInt32 nVtxRec    = 0;
vecF32 vTexCoord[nVtxRec][4];
vecU32 vCodes[4];
...
if ( uQuantBits == 0 ) {
    for ( int i=0 ; i<nComp ; i++ ) {
        for ( int j=0 ; j<nVtxRec ; j++ ) {
            uHash = hash32( (UInt32*)&vTexCoord[j][i], 1, uHash );
        }
    }
} else {
    for ( int i=0 ; i<nComp ; i++ ) {
        uHash = hash32( &vCodes[i], nVtxRec, uHash );
    }
}
```

Compressed Vertex Colour Array

The Compressed Vertex Colour Array data collection contains the quantization data/representation for a set of vertex colours. Compressed Vertex Colour Array data collection is only present if previously read Colour Binding value is not equal to zero (See Vertex Shape LOD Data for complete explanation of Colour Binding data field).

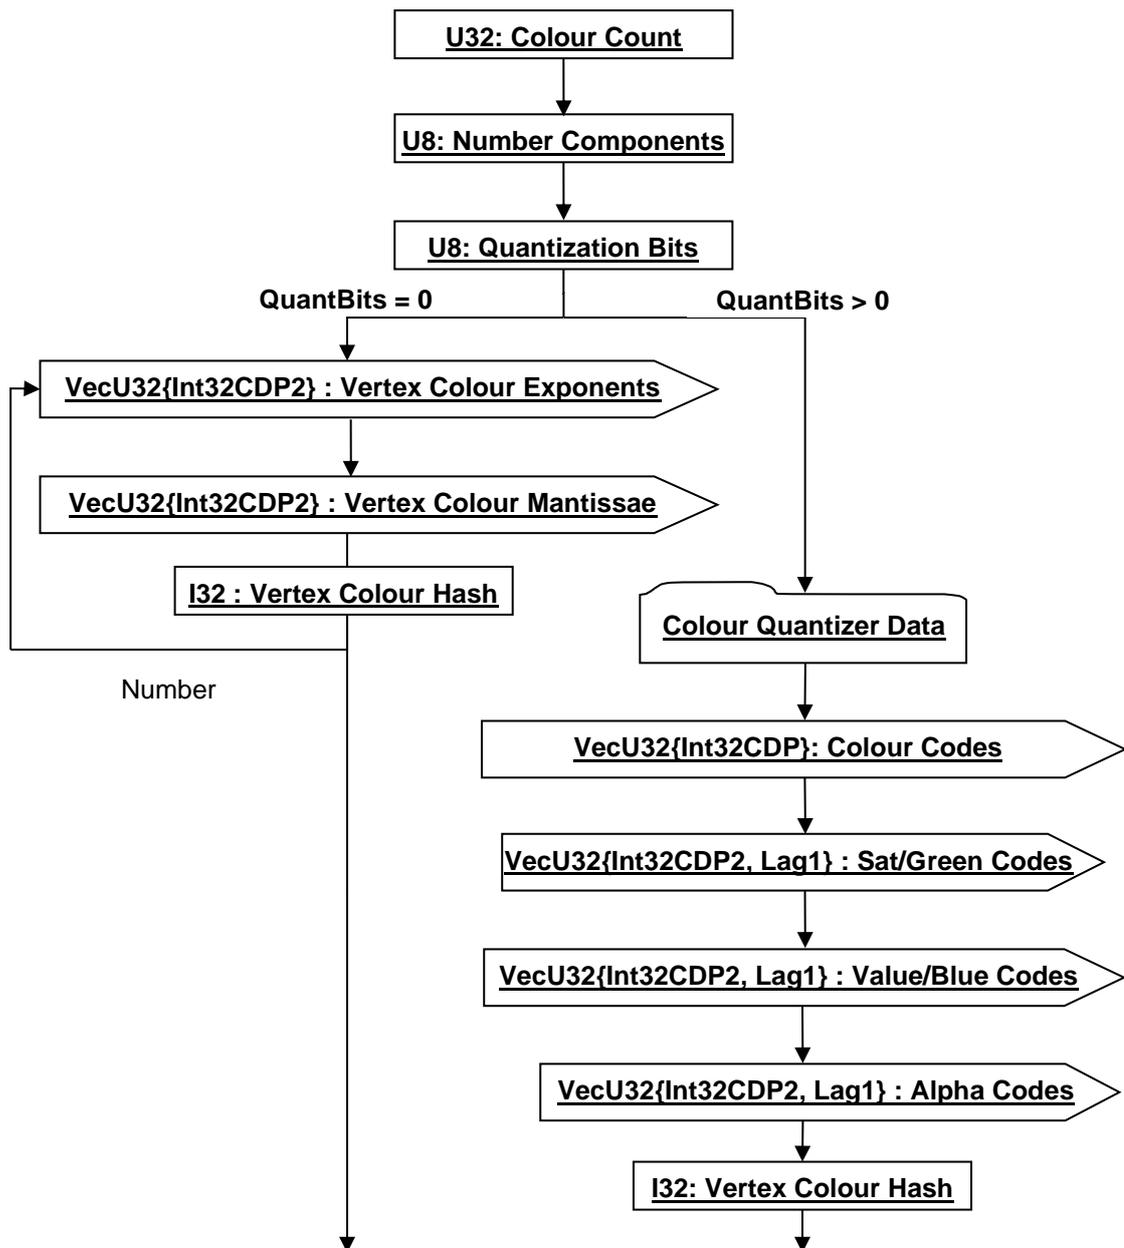


Figure R 132 — Compressed Vertex Colour Array data collection

Complete description for Colour Quantizer Data can be found in Colour Quantizer Data.

I32 : Colour Count

Colour count specifies the number of colour records. This number should equal the total number of vertex records.

U8 : Number Components

Number Components specifies the number of Colour components present for each vertex record in the set of vertex records.

U8 : Quantization Bits

Number of Bits specifies the quantized size (i.e. the number of bits of precision) for each of the 3 or 4 colour components. This value shall satisfy the following condition: “0 <= Number Of Bits <= 8”.

VecU32{Int32CDP2} : Vertex Colour Exponents

Vertex Colour Components is a vector of Floating Point Exponents for all the ith component values of a set of vertex coordinates. Vertex Colour Components uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2} : Vertex Colour Mantissae

Vertex Colour Components is a vector of Floating Point Mantissae for all the ith component values of a set of vertex coordinates. Vertex Colour Components uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2, Lag1} : Hue/Red Codes

Hue/Red Codes is a vector of quantizer “codes” for all the Hue/Red colour components of a set of vertex colours. Hue/Red Codes uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2, Lag1} : Sat/Green Codes

Sat/Green Codes is a vector of quantizer “codes” for all the Saturation/Green colour components of a set of vertex colours. Sat/Green Codes uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2, Lag1} : Value/Blue Codes

Value/Blue Codes is a vector of quantizer “codes” for all the Value/Blue colour components of a set of vertex colours. Value/Blue Codes uses the Int32 version of the CODEC to compress and encode data.

VecU32{Int32CDP2, Lag1} : Alpha Codes

Alpha Codes is a vector of quantizer “codes” for all the Alpha colour components of a set of vertex colours. Alpha Codes uses the Int32 version of the CODEC to compress and encode data.

U32 : Vertex Colour Hash

The Vertex Colour Hash is the combined hash of the vertex colours. If the number of quantization bits is equal to zero the hash value is equal to the combined hash of the vertex colour values for each of the component arrays. If the number of quantization bits is greater than 0 the hash value is equal to the combined hash of the Hue/Red, Sat/Green, Value/Blue, and Alpha Codes for all vertex records. Refer to section for a more detailed description on hashing.

```
UInt32 uHash      = 0;
uInt32 nVtxRec   = 0;
vecF32 vCol[nVtxRec][3];
vecU32 vHue, vSat, vVal, vAlp;
...
if ( uQuantBits == 0 ) {
    for ( int i=0 ; i<nComp ; i++ ) {
        for ( int j=0 ; j<nVtxRec ; j++ ) {
            uHash = hash32( (UInt32*)&vCol[j][i], nVtxRec, uHash );
        }
    }
} else {
    uHash = hash32( &vHue, nVtxRec, uHash );
    uHash = hash32( &vSat, nVtxRec, uHash );
    uHash = hash32( &vVal, nVtxRec, uHash );
    uHash = hash32( &vAlp, nVtxRec, uHash );
}
```

Compressed Vertex Flag Array

The Compressed Vertex Flag Array data collection contains the quantization data/representation for per vertex flags. Compressed Vertex Flag Array data collection is only present if previously read Vertex Flag Binding value is not equal to zero.

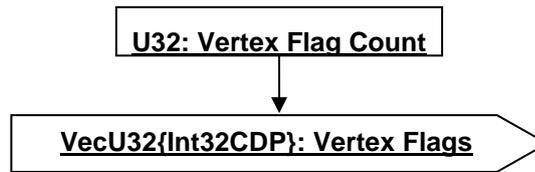


Figure R 133 — Compressed Vertex Flag Array data collection

I32 : Vertex Flag Count

Vertex flag count specifies the number of vertex flags. This number should be equal to the total number of vertex records.

VecU32{Int32CDP2} : Vertex Flags

Vertex Flags is a vector of per vertex bit flags encoded as integers with valid values of either 0 (false) or 1 (true). Vertex Flags uses the Int32 version of the CODEC to compress and encode data.

Point Quantizer Data – see core spec

Texture Quantizer Data – see core spec

Colour Quantizer Data – see core spec

Uniform Quantizer Data – see core spec

Compressed Entity List for Non-Trivial Knot Vector – see core spec

Compressed Control Point Weights Data – see core spec

Compressed Curve Data – see core spec

Compressed CAD Tag Data

The Compressed CAD Tag Data collection contains the persistent IDs, as defined in the CAD System, to uniquely identify individual CAD entities (e.g. Faces and Edges of a JT B-Rep, PMI, etc.). Exactly what CAD entity types have CAD Tags and what order they are stored in Compressed CAD Tag Data is defined by users of this data collection.

What constitutes a CAD Tag is outside the scope of the JT File format and is indeed part of the CAD system. The JT File format simply provides a way to store any kind of CAD Tag as provided by the CAD system which produced the CAD entity.

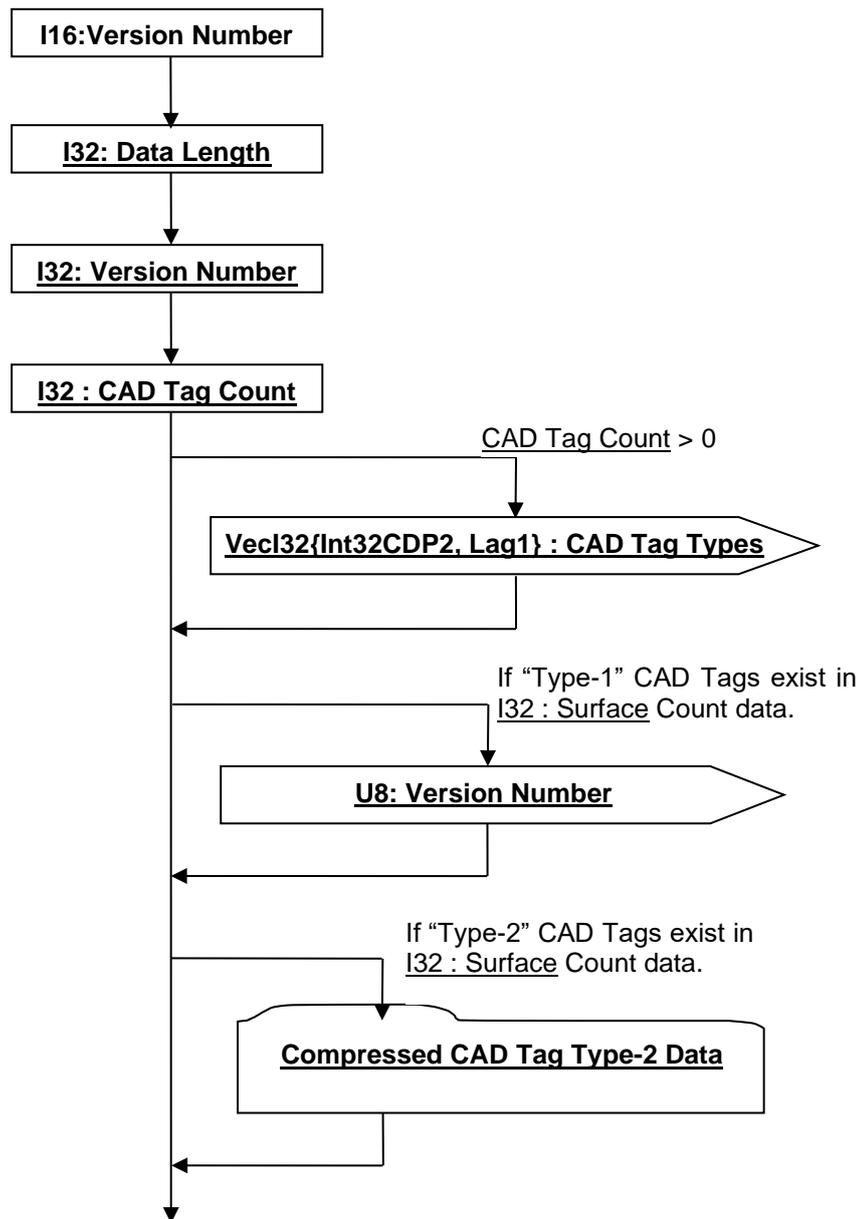


Figure R 134 — Compressed CAD Tag Data collection

I16:Version Number

Version Number is the version identifier for the CADTag element. For information on local version numbers see Common Data Conventions, Local version numbers.

I32 : Data Length

Data Length specifies the length in bytes of the Compressed CAD Tag Data collection. A JT file loader/reader may use this information to compute the end position of the Compressed CAD Tag Data within the JT file and thus skip reading the remaining Compressed CAD Tag Data.

I32 : Version Number

Version Number is the local version identifier for the Compressed CAD Tag Data. For information on local version numbers see best practice Local version numbers.

I32 : CAD Tag Count

CAD Tag Count specifies the number of CAD Tags.

VecI32{Int32CDP2, Lag1} : CAD Tag Types

CAD Tag Types is a vector of type identifiers for a list of CAD Tags (where each CAD Tag in the list has a type identifier value).

In an uncompressed/decoded form the CAD Tag type identifier values have the following meaning:

Table R 71 — Compressed CAD Tag Type values

= 1	32 Bit Integer CAD Tag Type
= 2	64 Bit Integer CAD Tag Type

CAD Tag Types uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP2, Lag1} : CAD Tags Type-1

CAD Tags Type-1 is a vector of the Type-1 (i.e. 32 Bit Integer Type) CAD Tags for a list of CAD Tags. CAD Tags Type-1 uses the Int32 version of the CODEC to compress and encode data. CAD Tags Type-1 is only present if there are Type-1 CAD Tags in the CAD Tag Types vector. Thus a loader/reader of JT file shall first uncompress/decode and evaluate the previously read CAD Tag Types to determine if there are any Type-1 CAD Tags and if so, then the CAD Tags Type-1 data vector is present.

Compressed CAD Tag Type-2 Data

Compressed CAD Tag Type-2 Data collection contains the Type-2 (i.e. 64 Bit integer Type) CAD Tag data for a list of CAD Tags.

The Compressed CAD Tag Type-2 Data collection is only present if there are Type-2 CAD Tags in the CAD Tag Types vector. Thus a loader/reader of JT file shall first uncompress/decode and evaluate the previously read CAD Tag Types vector to determine if there are any Type-2 CAD Tags and if so, then the Compressed CAD Tag Type-2 Data collection is present.

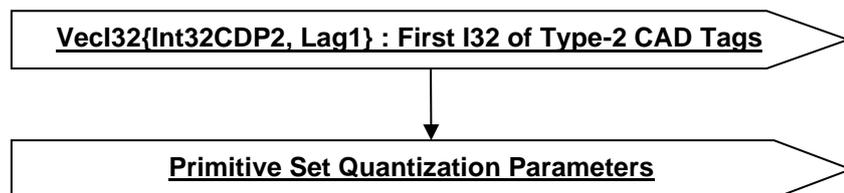


Figure R 135 — Compressed CAD Tag Type-2 Data collection

VecI32{Int32CDP2, Lag1} : First I32 of Type-2 CAD Tags

First I32 of Type-2 CAD Tags is a vector of the first 32 bits of each Type-2 CAD Tag in the list of CAD Tags. First I32 Of Type-2 CAD Tags uses the Int32 version of the CODEC to compress and encode data.

VecI32{Int32CDP2, Lag1} : Second I32 of Type-2 CAD Tags

Second I32 of Type-2 CAD Tags is a vector of the second 32 bits of each Type-2 CAD Tag in the list of CAD Tags. Second I32 of Type-2 CAD Tags uses the Int32 version of the CODEC to compress and encode data.

- R.2.7.5** Encoding Algorithms – see core spec
- R.2.7.6** Uniform Data Quantization – see core spec
- R.2.7.7** Bitlength CODEC – see core spec
- R.2.7.8** Arithmetic CODEC – see core spec
- R.2.7.9** Deering Normal CODEC – see core spec

R.2.8 zlib compression

Zlib compression is a lossless data compression algorithm and is essentially the same as that in gzip and Zip. Zlib's compression method, called deflation, creates compressed data as a sequence of blocks. The JT format uses the following functionality from Version 1.1.2 of the zlib compression library. These provide the basic interface to zlib compression functionality. A link to the web location for Version 1.1.2 of the zlib compression library source code can be found in the bibliography of this document.

- `zlibVersion()`;
- `deflate()`;
- `deflateReset()`;
- `deflateEnd()`;
- `inflateInit()`;
- `inflate()`;
- `inflateReset()`;
- `inflateEnd()`;
- `zlib_compress()`;
- `zlib_compress2()`.

Bibliography

OpenGL Architecture Review Board, Dave Shreiner, Mason Woo, Jackie Neider, and Tom Davis. OpenGL Programming Guide : The official guide to learning OpenGL Version 2, Fifth Edition. Addison-Wesley 2005.

Michael Deering. Geometry Compression, Computer Graphics, Proceedings SIGGRAPH '95. August 1995, pp. 13-20.

GNU C Library. Floating-Point Conversions. Available from World Wide Web: http://www.gnu.org/software/hello/manual/libc/Floating_002dPoint-Conversions.html#Floating_002dPoint-Conversions

Michael Deering, Craig Gotsman, Stefan Gumhold, Jarek Rossignac, and Gabriel Taubin. 3D Geometry Compression Course Notes for SIGGRAPH 2000, July 25, 2000.

C. M. Hoffmann. *Geometric and Solid Modeling: An Introduction*. Morgan Kaufmann Publishers, Inc., San Mateo, California, 1989.

Les Piegl and Wayne Tiller, *The NURBS Book*, Springer-Verlag, 1997.

Andrei Khodakovsky, Pierre Alliez, Mathieu Desbrun, and Peter Schröder, *Near-Optimal Connectivity Encoding of 2-Manifold Polygon Meshes*, Graphical Models, Vol. 64, No. 3-4, Pages: 147 - 168, 2002.

Greg Roelofs, Mark Adler, Jean-loup Gailly. zLib compression library. Available from World Wide Web: <http://www.zlib.net/>

JT Open Program (<http://www.jtopen.com>) --- A program to help members leverage the benefits of open collaboration across the extended enterprise through the adoption of the JT format, a technology that makes it possible to view and share product information throughout the product lifecycle. Membership in the JT Open Program provides access to the JT Open Toolkit library, which among other things, provides read and write access to JT data and enforces certain JT conventions to ensure data compatibility with other JT-enabled applications.

JT2Go download (<http://www.jt2go.com>) --- JT2Go is the no-charge 3D JT viewer from Siemens. JT2Go puts 3D data at your fingertips by allowing anyone to download the no-charge viewer. JT2Go also allows anyone to embed 3D JT data directly into Microsoft Office documents. JT2Go offers full 3D interactivity on parts, assemblies, and even 2D drawings (CGM & TIF).

Siemens: PLM Components: Parasolid: XT Pipeline (<http://www.ugs.com/products/open/parasolid/pipeline.shtml>) --- This web page provides information on the Parasolid precise boundary representation format (XT) and how this XT format fits within the Siemens vision of seamless exchange of digital product models across enterprises, between different disciplines, using their PLM applications of choice.

OpenGL Programming Guide : The official guide to learning OpenGL Version 2, Fifth Edition, by OpenGL Architecture Review Board, Dave Shreiner, Mason Woo, Jackie Neider, and Tom Davis (Addison-Wesley 2005) --- This book gives in-depth explanation of the OpenGL Specification and will provide further insight into the significance of some of the data (e.g. Materials, Textures) that can exist in a JT file. Information in this book may also serve as a guide for how one could process the data contained in a JT file to produce/render an image on the screen.

Michael Deering, *Geometry Compression*, Computer Graphics, Proceedings SIGGRAPH '95, August 1995, pp. 13-20.

Michael Deering, Craig Gotsman, Stefan Gumhold, Jarek Rossignac, and Gabriel Taubin, *3D Geometry Compression*, Course Notes for SIGGRAPH 2000, July 25, 2000.

OpenGL Shading Language Specification (<http://www.opengl.org/documentation/glsl/>) --- OpenGL Shading Language (GLSL) as defined by the OpenGL Architectural Review Board, the governing body of OpenGL.

K. Weiler. *Topological Structures for Geometric Modeling*, PhD thesis, Rensselaer Polytechnic Institute, Troy, NY, 1986.

C. M. Hoffmann. *Geometric and Solid Modeling: An Introduction*. Morgan Kaufmann Publishers, Inc., San Mateo, California, 1989.

Les Piegl and Wayne Tiller, *The NURBS Book*, Springer-Verlag, 1997.

Planetmath.org - Huffman Coding (<http://planetmath.org/encyclopedia/HuffmanCoding.html>) --- This web page provides a technical overview of Huffman coding which is one form of data encoding used within the JT format.

Michael Schindler, *Practical Huffman Coding* (<http://www.compressconsult.com/huffman/#encoding>) --
- This web page provides some coding hints for implementing Huffman coding which is one form of data encoding used within the JT format.

Glen G. Langdon Jr., *An Introduction to Arithmetic Coding*, IBM Journal of Research and Development, Volume 28, Number 2, March 1984, pp. 135-149.

Paul G. Howard and Jeffrey Scott Vitter, *Practical Implementation of Arithmetic Coding. Image and Text Compression*, ed. J. A. Storer, Kluwer Academic Publishers, April 1992, pp. 85-112.

zlib.net (<http://www.zlib.net/>) --- This web page provides (either directly or through links) complete detailed information on ZLIB compression including frequently asked questions, technical documentation, source code downloads, etc.

Andrei Khodakovsky, Pierre Alliez, Mathieu Desbrun, and Peter Schröder, *Near-Optimal Connectivity Encoding of 2-Manifold Polygon Meshes, Graphical Models*, Vol. 64, No. 3-4, Pages: 147 - 168, 2002.